

QUICKTRONIC® POWERSENSE® T5 Dimming UNV Systems

Fluorescent Controllable Lighting Systems



High Efficiency Series

POWERSENSE
T5 DIM

Lamp / Ballast Guide

28W T5 - PENTRON® lamps
Primary Lamp Type
Also operates:

Key System Features

- Industry's first ballast that combines dimming inputs from 0-10V and/ or two-wire AC dimming providing maximum flexibility
- POWERSENSE compatibility with low voltage and power line fluorescent dimmers
- **High Efficiency**
- Lamp Detection Technology
- Universal voltage (120-277V)
- 100-1% Dimming Range
- PROStart® programmed rapid start
- Anti-flash circuitry – turns on in dimmed mode
- Lightweight and low profile
- Operates at >42 kHz
- QUICKSENSE ballast technology (end-of-lamp-life sensing)
- QUICK 60+ ballast and lamp warranty
- RoHS compliant
- Lead-free solder and manufacturing process



Application Information

SYLVANIA QUICKTRONIC POWERSENSE ballasts

are ideally suited for:

- Occupancy sensors
- Daylight harvesting
- Energy management
- Load shedding
- Commercial
- Retail
- Hospitality
- Institutional
- Schools
- New construction
- Retrofit

SYLVANIA QUICKTRONIC High Efficiency POWERSENSE T5 electronic ballasts offer several advantages:

- **Wide Dimming Range:** operate linear fluorescent T5 PENTRON lamps over a 100-1% dimming range and provide true versatility in controls selection.
- **Industry's Most Adaptable Dimming Ballast:** ballasts feature micro-controller technology for compatibility with:
 - low voltage controls
 - power line fluorescent dimmers
 - any line voltage from 120V to 277V
- **Unmatched Performance with Patented Lamp Detection Technology:**
 - Eliminates variations in brightness from lamp-to-lamp
 - Provides uniform lighting throughout the dimming range
 - Eases installation and troubleshooting by recognizing failed lamps, faulty wiring or loose connections and shutting down.

System Information

QUICKTRONIC POWERSENSE ballasts operate from standard low voltage (0-10VDC) fluorescent controllers or compatible 2-wire power line fluorescent dimmers, making them ideal for individual office lighting or automated building applications, both in new construction and retrofit projects.

For the individual office or conference room, installation can be streamlined by using a 2-wire power line dimmer; eliminating the need for additional control wires.


For more advanced systems, such as daylight harvesting or building automation applications, standard low voltage devices (0-10VDC, Class 1 or 2) are used to control the lighting system. In this daylight harvesting example, each lighting fixture (or fixture row) is controlled by it's own photosensor; regulating the light output to compensate for changes in natural daylight. Depending upon the specific application, energy savings of up to



When the problem is corrected, the system restarts automatically.

RoHS Compliant: QUICKTRONIC POWERSENSE T5 ballasts are RoHS compliant and feature lead-free solder and manufacturing process.


QUICK 60+® Warranty: Setting the standard for quality, QUICKTRONIC POWERSENSE T5 ballasts are covered by a QUICK 60+® warranty, the first comprehensive system warranty in the industry.

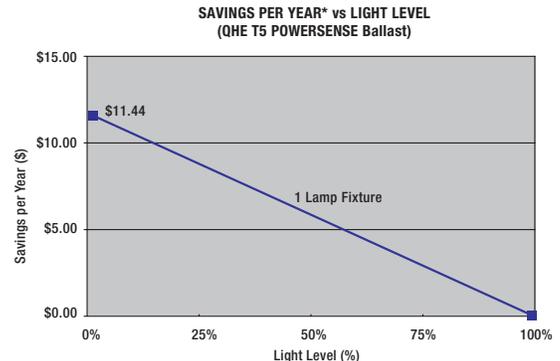

* FP28 lamps with QUICKTRONIC QHE T5 POWERSENSE ballast
* Based on 4000 hrs/yr, \$0.11/kWh, and 120V operation
* Savings per Year (@Light Level) = Cost of operation (100% Light Level) - Cost of operation (@Light Level)

60% compared to fixed output electronic systems can be realized.

All QUICKTRONIC POWERSENSE ballasts include a line voltage protection circuit, which protects the ballast in the event that line voltage is inadvertently applied to the low voltage control inputs.

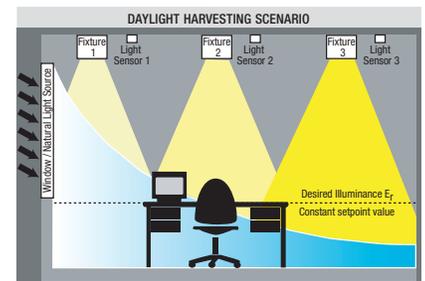

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		


POWERSENSE

High Efficiency


QUICKTRONIC® POWERSENSE® Dimming UNV – Dimming Control Wiring Examples

Industry's 1st Ballast That Allows POWERLINE Fluorescent Control **AND** 0-10Vdc Control Input Simultaneously

2-wire Powerline AND 0-10Vdc Control with POWERSENSE Ballasts

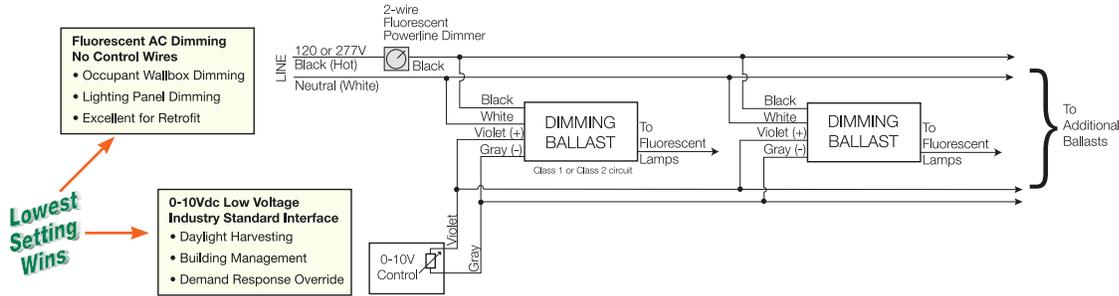

Wallbox Style 2-wire Powerline Control Wiring Example

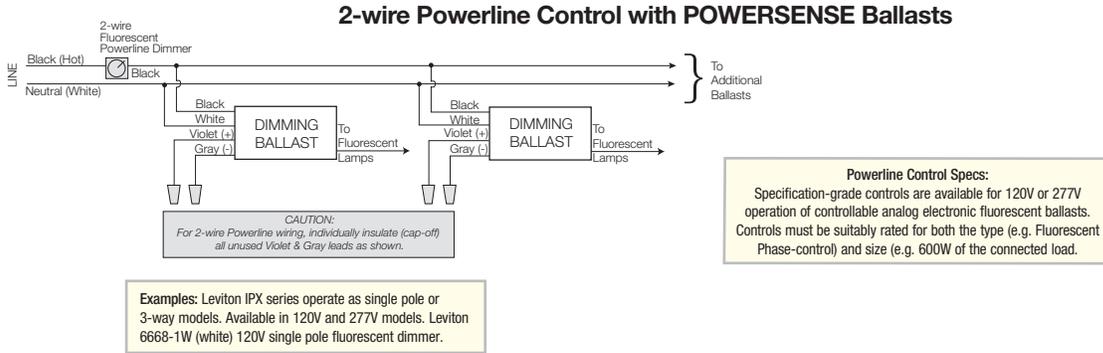

Wallbox Style 0-10V Control with Power Switch Wiring Example


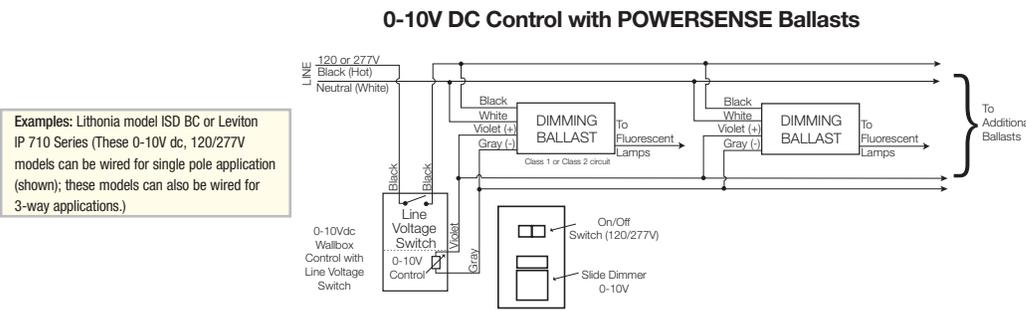


Photo Sensor 0-10V Wiring Example

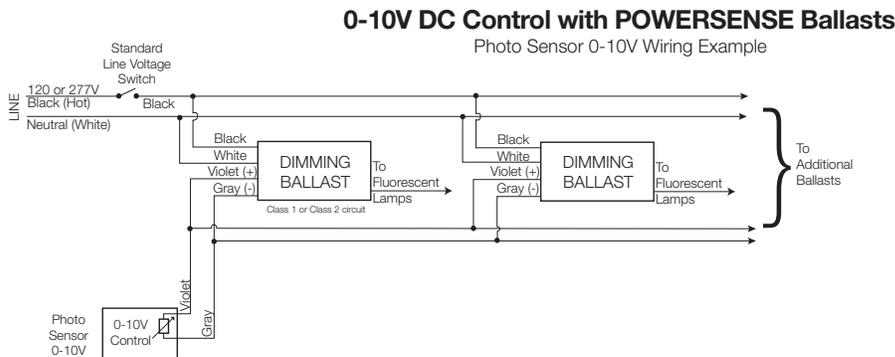

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

POWERSENSE
High Efficiency
Controls Guide

QUICKTRONIC® POWERSENSE® Controls Information



Controls Manufacturer	Fluorescent Powerline Controllers	0-10 VDC Controllers	Photo Cells	Occupancy Sensors	Building Management Systems
Acuity Brand Controls www.acuitybrandscontrols.com	X	X	X	X	X
Blue Ridge Technologies www.brnt.com	X	X	X	X	X
Cooper Greengate http://greengate.coopercontrol.com		X	X	X	X
Hunt Dimming www.huntdimming.com	X	X			X
Lehigh Electric Products www.lehighdim.com	X	X			X
Leviton www.leviton.com	X	X	X	X	
Sensor Switch www.sensorswitch.com			X	X	
Siemens Building Technology http://sbt.siemens.com					X
Starfield Controls www.starfieldcorp.com		X	X	X	X
Watt Stopper www.wattstopper.com	X	X	X	X	X

Contact the companies listed for their 2-wire Fluorescent/Powerline controls and/or 0-10V controls information.

T8 POWERSENSE Dimming Ballast*
50705 QHE 1x32T8/UNV DIM-TC
50707 QHE 2x32T8/UNV DIM-TC
50714 QHE 3x32T8/UNV DIM-TCL
50716 QHE 4x32T8/UNV DIM-TCL

T5 POWERSENSE Dimming Ballast
50725 QHE 1x28T5/UNV DIM-TC
50726 QHE 2x28T5/UNV DIM-TCL*

T5HO POWERSENSE Dimming Ballast
51468 QHE 1x54T5HO/UNV DIM-TC
51467 QHE 2x54T5HO/UNV DIM-TCL

* QHE formerly QTP models

WARNING:

Install and wire these ballast and controls in accordance with the National Electrical Code (NEC), all applicable Federal, State and local electrical codes, as well as the specific instructions provided with the compatible control that you purchased. Installation should be performed by qualified personnel only.

These instructions are guidelines only. Installation may vary for different controls/fixtures/applications. Be sure to follow the control instructions and all applicable codes and standards when installing dimming systems.

Please contact controls manufacturer listed in the OSRAM SYLVANIA Inc. controls cross reference for compatible controls and instruction wiring


NOTES: 1. Dimming ballasts source <0.5mA (0-10VDC control input).
2. Powerline controls must be rated for the type (e.g. Fluorescent Phase-control) and size (e.g. 600W, 1000W, 1500W & 2000W etc.) of the connected load. Do NOT use incandescent powerline controls; incandescent dimmers are not rated for fluorescent loads and are NOT compatible with POWERSENSE ballasts.

Please contact controls manufacturer to order/specify controls. For the latest controls list go to www.sylvania.com
Also, for more information, refer to the LCA (Lighting Controls Association) site: <http://lightingcontrolsassociation.org>

Dimensions:

TC enclosure
Overall: 9.5" L x 1.68" W x 1.0" H (241 x 43 x 25 mm)
Mounting: 8.90" (226 mm)
Weight: 1.1 lbs each (500 g)


Wiring:
Leads Only

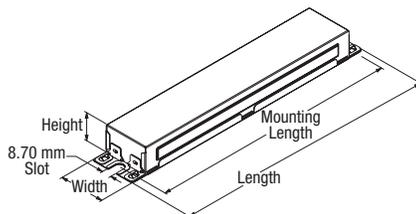

Dimensions:

TCL enclosure
Overall: 16.7" L x 1.68" W x 1.0" H (425mm x 43mm x 25mm)
Mounting: 16.2" (411 mm)
Weight: 2.1 lbs each (950 g)

Wiring:
Leads Only

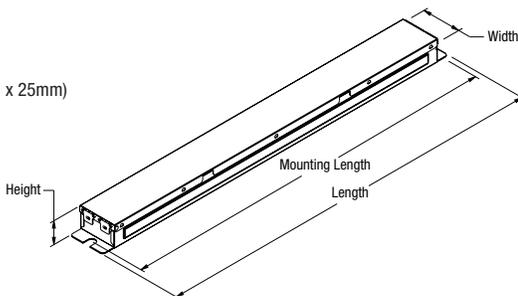

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Control Specifications/model numbers may change. Please consult manufacturers listed for their latest control models and to order their controls.



**POWERSENSE
CONTROLS**

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency Electronic T5 Fluorescent Controllable Lighting Systems



Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated ¹ Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Input ² Power (W) 120V 277V	System Efficacy (lm/W)	BEF ³
50725	QHE1x28T5/UNV DIM-TC	0.27/0.12	FP28T5	2900	1	1.00 0.01	2900 29	32 31 6 6	94	3.23
		0.34/0.14	FP35T5	3650	1	1.00 0.01	3650 37	41 40 6 6	91	2.50
		0.21/0.09	FP21T5	2100	1	1.00 0.01	2100 21	25 25 6 6	84	4.00
		0.14/0.06	FP14T5	1350	1	1.00 0.01	1350 14	17 17 5 5	79	5.88
50726	QHE2x28T5/UNV DIM-TCL*	0.53/0.23	FP28	2900	2	1.00 0.01	5800 58	64 62 10	91/93	1.61
		0.67/0.29	FP35	3650	2	1.00 0.01	7300 73	81 79 10	90/92	1.27
		0.40/0.18	FP21	2100	2	1.00 0.01	4200 42	49 9	86	2.04
		0.29/0.13	FP14	1350	2	1.00 0.01	2700 27	34 8	79	2.94

¹ At 35°C lamp ambient temperature.
² System Efficacy calculation based on lowest input power.
³ Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (note: calculation based on lowest wattage value)
 * Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.
 *Please note, item number 50726 was formerly QTP 2x28T5/UNV DIM-TCL

T5 POWERSENSE®

High Efficiency

Performance Guide

Data shown based upon SYLVANIA PENTRON® lamp(s). QUICKTRONIC® POWERSENSE ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications
Data based on FP28

Starting Method: Programmed Rapid Start
Circuit Type: Series
Lamp Frequency: >42 kHz
Lamp CCF: Less than 1.7
Starting Temp: 50°F/10°C minimum[®]
Input Voltage: 120-277V, ±10%
Input Frequency: 50/60 Hz
THD: <10% @ Full Output
Power Factor: >98% @ Full Output

UL Listed Class P, Type 1 Outdoor
 CSA or C/UL Certified
 70°C Max Case Temperature
 FCC 47CFR Part 18 Non-Consumer
 Class A Sound Rating
 RoHS Compliant*
 ANSI C62.41 Cat. A Transient Protection
 No Remote or Tandem Wiring
 4 Complies with European Union Restriction of Hazardous Substances Directive.
 5 FP14 lamp starting temperature 60°F (16°C)

POWERSENSE T5 DIM

Installation Notes

Output Wiring: Lamp wiring for dimming ballasts can differ significantly from non-dimming ballasts and from other manufacturers dimming ballasts. Take care to connect lamp lead wires as shown on the applicable ballast diagram.



Lamp Seasoning: For optimal performance, fluorescent lamps may require seasoning for up to 12 hours prior to low temperature starting & low level dimming. Refer to NEMA LSD 23-2002 Lighting Systems Division: Recommended Practice - Lamp Seasoning for Fluorescent Dimming Systems

Control Information



QUICKTRONIC POWERSENSE ballasts are compatible with a wide range of low voltage (0-10VDC) and power line fluorescent controllers available from various manufacturers.

Low Voltage Control Specs: Ballast will source up to 0.5mA for 0-10VDC control purposes. May be wired as a Class 1 or Class 2 circuit-consult Local and National Electrical Codes.

Power Line Control Specs: Specification-grade fluorescent controls are available for 120V or 277V operation of controllable analog electronic fluorescent ballasts. Controls must be suitably rated for both the type (e.g. Fluorescent Phase-control) and size (e.g. 600W) of the connected load.

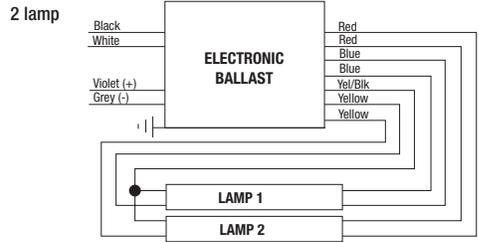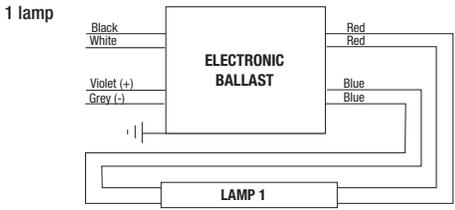

Input & Control Wiring Options:



System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA National Customer Service and Sales Center
 1-800-LIGHTBULB (1-800-544-4828)
 www.sylvania.com

Specifications subject to change without notice.

Item Number **50726 QHE 2 x 28T5 / UNV DIM-TCL** System Type - DIMMING/Case Size
 QUICKTRONIC High Efficiency Line Voltage (120-277V)
 Number of Lamps (2) Primary Lamp Wattage