

## Dri-Box<sup>®</sup> Adapters with Non-Metallic Cover and Base

This adapter will accept any wiring device and standard size wall plate. Colors: clear and textured/paintable white. UV rated plastic for long outdoor life.



DBPV1C

DBPV1/DBPV1C:  
VERTICAL MOUNT, SINGLE GANG

DBPH1/DBPH1C:  
HORIZONTAL MOUNT, SINGLE GANG

DBP2/DBP2C/DBP21D/DBP21DC:  
VERTICAL MOUNT, TWO GANG

**Note:** Meets 2014 NEC Section 406.9; for the protection of exterior outlets which require the use of an extra-duty weatherproof while-in-use cover for all outdoor 15 or 20 AMP receptacles.


CATALOG NUMBER	UPC/DCI/NAED MFG #018997	ORIENTATION/COVER COLOR	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
DBPV1*	17852	Vertical/White	1	4	6.313	3.375	2.940
DBPV1C*	17840	Vertical/Clear	1	4	6.313	3.375	2.940
DBPH1*	17853	Horizontal/White	1	4	4.000	5.685	2.940
DBPH1C*	17845	Horizontal/Clear	1	4	4.000	5.685	2.940
DBP2	17855	Vertical/White	1	4	6.313	5.250	2.940
DBP2C	17857	Vertical/Clear	1	4	6.313	5.250	2.940
DBP21D	17849	Vertical/White	1	4	6.313	5.250	4.175
DBP21DC	17848	Vertical/Clear	1	4	6.313	5.250	4.175

\*Includes (1) standard duplex and (1) GFCI face plate.

**PATENTED. ADDITIONAL PATENTS PENDING.**




**WEATHERPROOF-IN-USE**  
**EXTRA-DUTY**

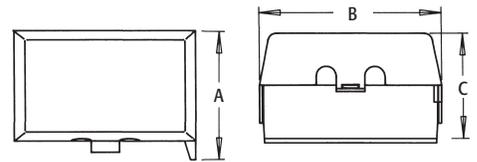

### Installation Instructions

Remove the cover by expanding ear tabs over the pivot pins. To replace the cover, simply snap over the pivot pins.

**NOTE:** It is not required to remove the cover for installation.

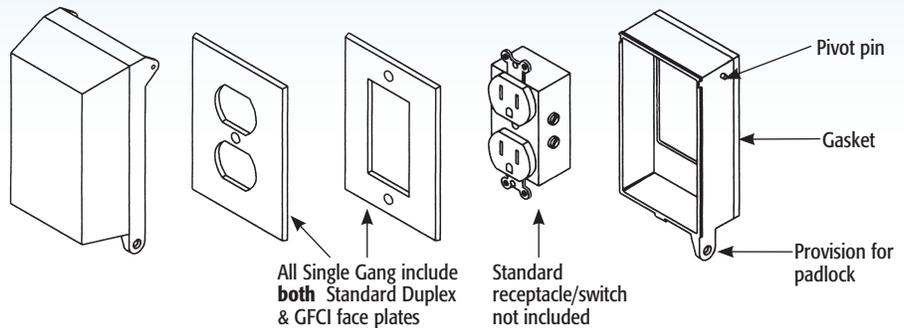

Arlington's DRI-BOX<sup>®</sup> Adapter comes with both standard duplex and GFCI plates for added convenience, but works with any standard plastic or metal wall plate. Our DRI-BOX<sup>®</sup> meets OSHA lockout/tagout requirements using a standard padlock.