



New!
Rebar to Wire
UL Listed and
CSA Certified
for Direct Burial

TYPE GAR


- Wire to Rebar
- Fence Post Grounding Connector
- Wire to Pipe



Wire to Rebar

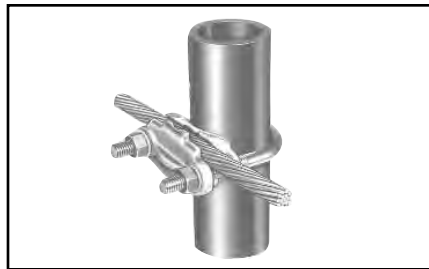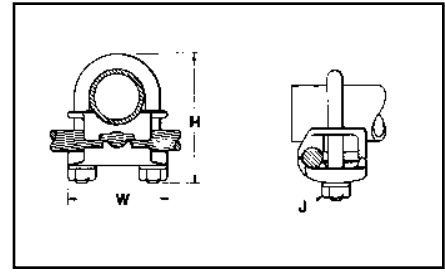

Wire at Right Angle to Pipe

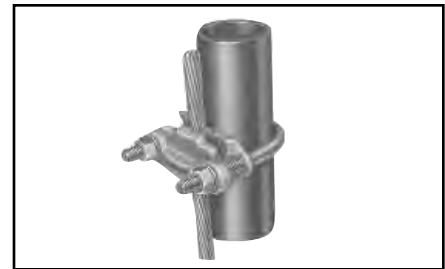

Wire Parallel to Pipe

For Parallel or 90° Copper Cable Connection to Rod or Pipe with the Same Connector

High copper alloy ground connector for joining a range of cable, parallel or at right angles to rod or tube. Especially good for fence posts. High copper alloy cast body with DURIMUM™ U-bolts, nuts and lockwashers, permit entire connection to be buried in ground or concrete without danger of corrosion.

- One-wrench installation.
- UL467 Listed.
- Acceptable for direct burial.



Catalog Number	Conductor				H	J	W
	Tube I.P.S.	Rod Size or O.D. Range	Rebar Size	Cable			
GAR114C	1/4	1/2	—	8 Sol. - 4 Str.	2-1/2	3/8	1-7/8
GAR1126				4 Sol. - 2/0 Str.			
GAR1129				2/0 Sol. - 250			
GAR644C	3/8	5/8 - 3/4	#5 (5/8") - #6 (3/4")	8 Sol. - 4 Str.	2-7/8	1/2	2-1/8
GAR6426				4 Sol. - 2/0 Str.			
GAR6429				2/0 Sol. - 250			
GAR6434	1/2 - 3/4	7/8 - 1	#7 (7/8") - #8 (1")	300 - 500	3-1/2	3/8	2-1/2
GAR144C				8 Sol. - 4 Str.			
GAR1426				4 Sol. - 2/0 Str.			
GAR1429	1	1-1/8 - 1-1/4	#9 (1-1/8") - #10 (1-1/4")	2/0 Sol. - 250	3	1/2	2-3/8
GAR1434				300 - 500			
GAR154C				8 Sol. - 4 Str.			
GAR1526	1-1/4	1-3/8 - 1-1/2	#11 (1-3/8")	4 Sol. - 2/0 Str.	3-3/4	3/8	3
GAR1529				2/0 Sol. - 250			
GAR1534				300 - 500			
GAR164C	1-1/2	1-5/8 - 1-7/8	—	8 Sol. - 4 Str.	4-1/4	1/2	3-3/8
GAR1626				4 Sol. - 2/0 Str.			
GAR1629				2/0 Sol. - 250			
GAR1634	2	2 - 2-3/8	—	300 - 500	4-1/4	3/8	3-1/4
GAR174C				8 Sol. - 4 Str.			
GAR1726				4 Sol. - 2/0 Str.			
GAR1729	2-1/2	2-1/2 - 2-7/8	—	2/0 Sol. - 250	4-1/2	1/2	4-1/8
GAR1734				300 - 500			
GAR184C				8 Sol. - 4 Str.			
GAR1826	2	2 - 2-3/8	—	4 Sol. - 2/0 Str.	5-1/4	3/8	4-1/4
GAR1829				2/0 Sol. - 250			
GAR1834				300 - 500			
GAR194C	2-1/2	2-1/2 - 2-7/8	—	8 Sol. - 4 Str.	5	1/2	4-5/8
GAR1926				4 Sol. - 2/0 Str.			
GAR1929				2/0 Sol. - 250			
GAR1934				300 - 500	5-5/8		

Blue highlighted items are industry standard and most frequently ordered.