



## Contents

Contents	Pages
<b>Section Overview</b> .....	2/2 - 2/5
<b>Product Overview</b> .....	2/6 - 2/7
<b>SIRIUS Contactors</b>	
3RT10 / 3RT20, 3-pole to 95A .....	2/8
3RT10, 3-pole to 500A .....	2/9
3RT12, 3-pole Vacuum to 500A .....	2/10
3RT13 / 3RT23, 4-pole with 4 NO .....	2/11
3RT14, 3-pole for Resistive Loads .....	2/12
3RT15 / 3RT25, 4-pole with 2 NO + 2 NC .....	2/13
3RT16, for Capacitor Switching .....	2/19
3RT20, Interface Coupling Contactors .....	2/20 - 2/21
3RT20 Motor Contactors for DC Operation .....	2/16 - 2/18
3RH21 Control Relays .....	2/14 - 2/15
3RA13 / 3RA23 Reversing Contactors .....	2/37 - 2/44
3RT, 3TF Safety Contactors and 3RH2, 3TH2 Safety Control Relays .....	2/22 - 2/23
Function Modules for Communications .....	2/24 - 2/36
3RA24, Wye-Delta Starting .....	2/45 - 2/48
Contactor Coil Codes .....	2/49
<b>SIRIUS Control Relays &amp; Coupling Relays</b>	
3RH2 Control Relays .....	2/50
3RH24 Latched Control Relays .....	2/51
Auxiliary Switches .....	2/51
3RH21 Coupling Relays .....	2/52
<b>Special Application Contactors (3TF6 / 3TB5 / 3TC)</b>	
3TF6 Vacuum Contactors up to 820A .....	2/53 - 2/54
3TC DC Switching Contactors .....	2/55 - 2/56
3TB5 Contactor Coils .....	2/87 - 2/88
<b>SIRIUS Contactor &amp; Relay Accessories</b>	
Overview .....	2/57 - 2/64
Auxiliary Switches .....	2/65 - 2/68
Auxiliary Time Delay and Latching Blocks .....	2/69 - 2/70
Surge and EMC Suppressors .....	2/71 - 2/72
Contactor Accessories .....	2/73 - 2/76
Reversing Accessories .....	2/77 - 2/79
Wye-delta Accessories .....	2/80
NEMA 1 Enclosures .....	2/81
<b>Special Application Contactor Accessories</b>	
Auxiliary Contacts .....	2/53
Box Terminals and Covers .....	2/54
Surge Suppressors for 3TB, 3TC, 3TF .....	2/54
<b>SIRIUS Contactor Spare Parts</b>	
Coils .....	2/82 - 2/85
Arc Chutes .....	2/86
Contact Kits .....	2/86
<b>Obsolete Contactor / Relay Spare Parts</b> .....	2/89 - 2/90

## Contents

## Pages

### Design / Function Overview

3RT10 / 3RT20 Contactors, S00 to S3 .....	2/91 - 2/92
3RT10 Contactors, S6 to S12 .....	2/93 - 2/94
WYE-Delta Starters .....	2/95 - 2/102
3RH2 Control Relays .....	2/103
3TF6 Vacuum Contactors up to 820A .....	2/104
3RT / 3RH Accessories .....	2/105 - 2/107

### Technical Data

3RT10 / 3RT20 Contactors .....	2/108 - 2/138
3RT12 Vacuum Contactors .....	2/114, 2/139 - 2/144
3RT14 Resistive Load Contactors .....	2/145 - 2/152
3RT13 / 23 4-pole Contactors 4 NO .....	2/153 - 2/154
3RT15 / 25 4-pole Contactors 2 NO & 2 NC .....	2/155 - 2/156
3RT16 Capacitor Switching Contactors .....	2/157
3RT20 Interface Relays .....	2/158
3TF6 Vacuum Contactors up to 820A .....	2/159 - 2/164
3TC DC Switching Contactors .....	2/165 - 2/168
Accessories .....	2/169 - 2/171
3RH2 Control and Latching Relays .....	2/172 - 2/175
3RH21 Coupling Relays .....	2/176

### Circuit Diagrams

3RT Contactors & Accessories .....	2/177 - 2/185
3RA13 / 23 Reversing Contactors .....	2/186
WYE-Delta Starters .....	2/187
3TF6 Vacuum Contactors up to 820A .....	2/188
3RH2 Control & Latching Relays .....	2/190
3RH21 Coupling Relays .....	2/189

### Position of Terminals

3RT Contactors and Accessories .....	2/190 - 2/194
3RT16 Capacitor Contactors .....	2/193
3TF6 Vacuum Contactors up to 820A .....	2/195
3RH2 Control Relays .....	2/190


### Dimensions

3RT, 3-pole Contactors S00 to S3 .....	2/196 - 2/199
3RT10, 3-pole Contactors S6 to S12 .....	2/200 - 2/201
3RT14, 3-pole Contactors for Resistive Loads .....	2/200 - 2/201
3RT12, 3-pole Vacuum Contactors .....	2/202
3RT13 / 23, 3RT15 / 25 4-pole Contactors .....	2/203
3RT16, Contactors for Capacitor Switching .....	2/204
3RA13 / 23 Reversing Contactors .....	2/205 - 2/207
3TF6 Vacuum Contactors up to 820A .....	2/208
Contactor Accessories .....	2/209 - 2/210
3RH2 Control and Coupling Relays .....	2/211



### Contactors for switching three-phase motors

#### Contactors for switching three-phase motors

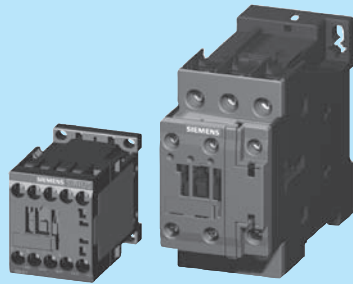

**3RT10 / 3RT20 Contactors, 3-pole**  
**3 to 75 HP**  
**Sizes S00 to S3**  
 with screw, spring or ring lug connections

<b>Selection and ordering data</b>	Page
• AC/DC operation	2/8
• Accessories	2/65
• Spare parts	2/82

Description	2/91
Technical data	2/108
Internal circuit diagrams	2/177
Position of terminals	2/190
Dimension drawings	2/196



**3RT10 contactors, 3-pole,**  
**100 to 400 HP,**  
**sizes S6, S10 and S12**

<b>Selection and ordering data</b>	Page
• AC/DC operation	2/9
• Accessories	2/65
• Spare parts	2/85

Description	2/93
Technical data	2/110
Internal circuit diagrams	2/183
Position of terminals	2/191
Dimension drawings	2/200




**3RT10 / 3RT20 NEMA Labeled**  
**Contactors,**  
**NEMA size 0 to 6**

<b>Selection and ordering data</b>	Page
• AC/DC operation	2/8, 2/9
• Accessories	2/65
• Spare parts	2/82

Description	2/91
Technical data	2/108
Internal circuit diagrams	2/177
Position of terminals	2/190
Dimension drawings	2/196


#### Contactor assemblies for switching three-phase motors

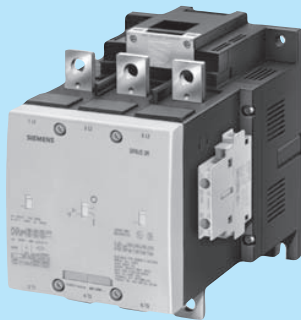

**3RT12 vacuum contactors, 3-pole,**  
**150 to 400 HP,**  
**sizes S10 and S12**

<b>Selection and ordering data</b>	Page
• AC/DC operation	2/10
• Accessories	2/65
• Spare parts	2/85


Description	2/93
Technical data	2/139
Internal circuit diagrams	2/183
Position of terminals	2/191
Dimension drawings	2/202

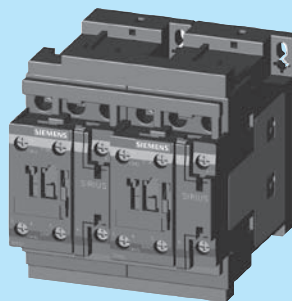

**3RA13 / 23 contactor assemblies**  
**for reversing,**  
**3 to 75 HP,**  
**sizes S00 to S3**  
 with screw or spring loaded connections

<b>Selection and ordering data</b>	Page
• AC and DC operation	2/40
• Accessories	2/77
• Spare parts	2/82

Overview	2/38
Description	2/37
Circuit diagram	2/186
Position of terminals	2/191
Dimension drawings	2/205

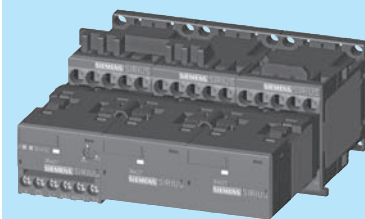


**Wye Delta for**  
**customer assembly of**  
**sizes S00 to S12**

<b>Selection and ordering data</b>	Page
• for wye-delta starting	2/47
• Accessories	2/80
• Spare parts	2/82

Overview	2/96
Description	2/95
Circuit diagrams	2/187



1  
2  
Contactors for special applications

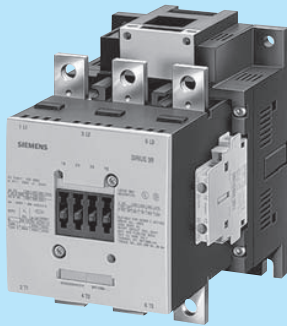


**3RT14 contactors,**  
**I<sub>e</sub>/AC-1: 140 to 690 A,**  
**3-pole, sizes S3 to S12,**  
with screw connections

Page

**Selection and ordering data**

- AC and DC operation 2/12
- Accessories 2/65
- Spare parts 2/84

Descriptions	2/12
Technical Data	2/145
Internal circuit diagrams	2/183
Position of terminals	2/191
Dimension drawings	2/198

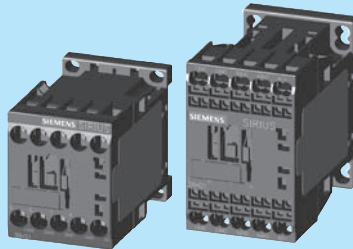

**3RT13 / 23 contactors, AC-1: 18**  
**to 140 A with 4 NO main contacts,**  
**sizes S00 to S3**


with screw or spring connections

Page

**Selection and ordering data**

- AC and DC operation 2/11
- Accessories 2/65
- Spare parts 2/82

Description	2/11
Technical Data	2/153
Internal circuit diagrams	2/178
Position of terminals	2/194
Dimension drawings	2/203

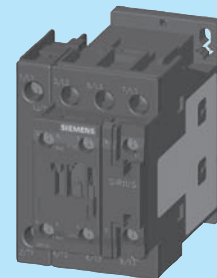

**3RT15 / 25 contactors,**  
**AC-3: 7.5-25 HP**  
**with 2 NO + 2 NC main contacts,**  
**sizes S00 to S2**


with screw or spring connections

Page

**Selection and ordering data**

- AC and DC operation 2/13
- Accessories 2/65
- Spare parts 2/82

Description	2/13
Technical Data	2/155
Internal circuit diagrams	2/177
Position of terminals	2/190
Dimension drawings	2/203

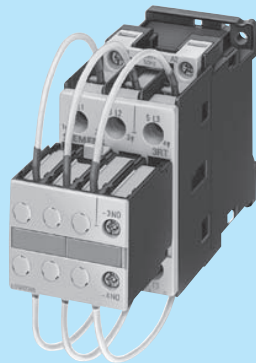

**3RT16 capacitor contactors**


up to 60 kvar  
sizes S00 to S3 with screw connections

Page

**Selection and ordering data**

- AC and DC operation 2/12
- Accessories 2/65
- Spare parts 2/83

Descriptions	2/12
Technical Data	2/157
Internal circuit diagrams	2/177
Position of terminals	2/193
Dimension drawings	2/204

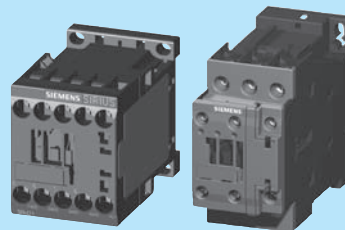

**3RT20 coupling relays up to 20 HP**  
**(interface,) 3-pole,**  
**for switching motors,**  
**sizes S00 and S0**


with screw or spring connections

Page

**Selection and ordering data**

- DC operation 2/20
- Accessories 2/65
- Spare parts 2/82

Description	2/20
Technical Data	2/158
Internal circuit diagrams	2/177
Position of terminals	2/190
Dimension drawings	2/196

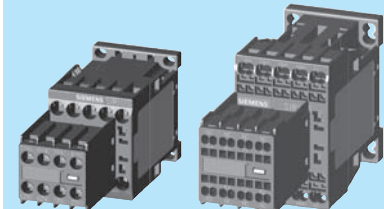

**3RT Safety Contactors and**  
**3RH Safety Control Relays**

Page

**Selection and ordering data**

- Safety with standard devices 2/22
- Safety with permanently mounted auxiliaries 2/23
- Accessories 2/71

Description	2/22
Technical Data	2/108



### Contactors for special application




**3TF68 and 3TF69 vacuum contactors, 500 to 700 HP; contactor assemblies**

Page

**Selection and ordering data**

- AC and DC operation 2/53
- Accessories 2/53
- Spare parts 2/53

- Descriptions 2/104
- Technical Data 2/159
- Internal circuit diagrams 2/188
- Position of terminals 2/195
- Dimension drawings 2/208

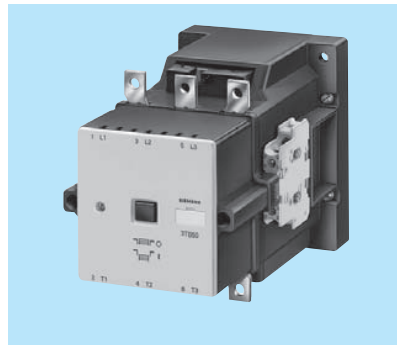


**3TB50 to 3TB56 contactors with DC solenoid system, 100 to 300 Hp**

Page

**Selection and ordering data**

- Spare parts 2/88

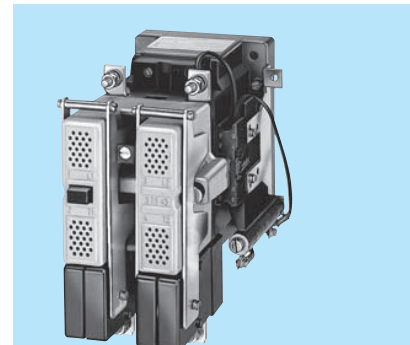

**3TC Contactors**

Page

**Selection and ordering data**

- DC operation 2/55
- Spare parts 2/55

- Technical Data 2/165

### 3RT1 SIRIUS Nomenclature

3RT1	0	3	5	1	A	B0	1
<b>SIRIUS Contactor</b>	<b>Application</b> 0 = 3 pole Standard 2 = 3 pole Vacuum 3 = 4 pole NO 4 = 3 pole resistive load 5 = 4 pole 2 NO + 2 NC 6 = 3 pole Capacitive	<b>Frame</b> 3 = S2 4 = S3 5 = S6 6 = S10 7 = S12	<b>Current</b> Designation  Choices = 3,4,5,6	<b>Terminal</b> 1 = Screw 2 = Spring Loaded 3 = Spring Loaded Coil only 6 = Busbar Terminal	<b>Coil Type</b> A = AC (S00-S3) A = AC/DC (S6-S12) B = DC (S00-S3) N = UC Solid state (S6-S12) P = UC Solid state with RLT (S6-S12)	<b>Coil Voltage</b> See Coil Selection Chart page 2/49	<b>Aux Contacts A)</b> 0 = None 1 = 1 NO (S00-S3) 2 = 1 NC (S00-S3) 4 = 2NO + 2NC (S00-S12) 5 = 1NO + 1 NC (S0-S12) 6 = 2 NO + 2 NC (S0-S12) A) per EN50012

### 3RT2 SIRIUS Innovations Nomenclature

3RT2	0	1	5	1	A	B0	1
<b>SIRIUS Innovations Contactor</b>	<b>Application</b> 0 = 3 pole Standard 3 = 4 pole NO 5 = 4 pole 2 NO + 2 NC	<b>Frame</b> 1 = S00 2 = S0	<b>Current</b> 3,4,5,6,7,8	<b>Terminal</b> 1 = Screw 2 = Spring Loaded 4 = Ring Lug	<b>Coil Type</b> A = AC (S00-S0) B = DC N = UC Electronic	<b>Coil Voltage</b> See Coil Selection Chart page 2/49	<b>Aux Contacts A)</b> 0 = 1NO + 1NC (S0) 1 = 1 NO (S00) 2 = 1 NC (S00) 4 = 2NO + 2NC (S00-S0) A) per EN50012


Note: MSPs and Contactors of the same frame size are made to easily fit together with the use of a link module or can be purchased pre-assembled as 3RA starter assemblies. See section 4.

Note: Contactors and Overloads of the frame size S00 - S3 are made to easily fit together without the use of accessories.

Note: This is only a guide to decode the model number. All possible combinations of these are not available.



#### SIRIUS contactor relays

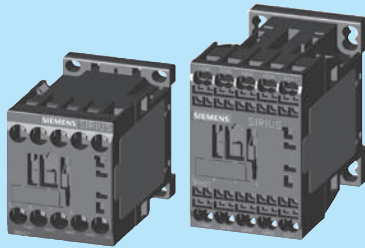


#### 3RH21, 3RH22 control relays 4- and 8-pole, size S00, AC and DC operation

Page

##### Selection and ordering data

- With screw connections 2/50
- With spring connections 2/50
- Accessories for 3RH2 2/51

Overview	2/14
Technical data	2/172
Terminal diagrams	2/189
Position of terminals	2/190
Dimension drawings	2/211



#### 3RH24 latched control relays, 4-pole, size S00, AC and DC operation


Page

##### Selection and ordering data

- With screw connections 2/51
- Accessories for 3RH2 2/51

Application	2/103
Technical data	2/172
Terminal diagrams	2/189
Position of terminals	2/190
Dimension drawings	2/211

#### SIRIUS coupling relays (interface)



#### 3RH21 coupling relays for switching auxiliary circuits, 4-pole, size S00, DC operation

Page

##### Selection and ordering data

- With screw connections 2/52
- with Cage Clamp connections 2/52

Application	2/52
Technical data	2/176
Terminal diagrams	2/189
Position of terminals	2/190
Dimension drawings	2/211

# IEC Power Control

## Contactors and Contactor Assemblies

### Overview



Type	S00 3RT20 1	S0 3RT20 2	S2 3RT10 3
<b>3RT10 / 3RT20 contactors</b>			
<b>AC/DC operation</b>	3RT2015 3RT2016 3RT2017 3RT2018	3RT2023 3RT2024 3RT2025 3RT2026 3RT2027 3RT2028	3RT1033 3RT1034 3RT1035 3RT1036
<b>Type</b>	page 2/8		page 2/8
<b>Maximum 3-phase horsepower ratings at 460V (UL and CSA listed values)</b>			
200 V	HP	1.5 2 3 3	2 3 5 7.5 10 10
230 V	HP	2 3 3 5	3 3 5 7.5 10 10
<b>460 V</b>	<b>HP</b>	<b>3 5 7.5 10</b>	<b>5 7.5 10 15 20 25</b>
575 V	HP	5 7.5 10 10	7.5 10 15 20 25 25
<b>AC-3</b>			
$I_e/AC-3/400V$	A	7 9 12 16	9 12 16 25 32 38
230 V	kW	2.2 3 3 4	3 3 4 5.5 7.5 7.5
<b>400 V</b>	<b>kW</b>	<b>3 4 5.5 7.5</b>	<b>4 5.5 7.5 11 15 18.5</b>
500 V	kW	3.5 4.5 5.5 7.5	4.5 7.5 10 11 18.5 18.5
690 V	kW	4 5.5 5.5 7.5	5.5 7.5 11 11 18.5 18.5
1000 V	kW	- - - -	- - - - - -
<b>AC-4 (at <math>I_a = 6 \times I_e</math>)</b>			
<b>400 V</b>	<b>kW</b>	<b>3 4 4 5.5</b>	<b>4 5.5 7.5 7.5 11 11</b>
200 V	kW	1.15 2 2 2.5	2 2.6 3.5 4.4 6 6
<b>AC-1 (40°C, ≤ 690V)</b>			
$I_e$	A	18 22 22 22	40 40 40 40 50 50

### Accessories for contactors

<b>Auxiliary switch blocks</b>	front lateral	3RH29 11 (p. 2/65) 3RH29 11 (p. 2/67)	3RH29 21 (p. 2/65) 3RH29 21 (p. 2/67)	3RT19 36-4EA2 (p. 2/76)
<b>Terminal covers</b>				
<b>Box terminals</b>				
<b>Surge suppressor</b>		3RT29 16 (p. 2/71)	3RT29 26 (p. 2/71)	3RT19 26/36 (p. 2/71)

### 3RU11/21 and 3RB2 / 3RB3 overload relays (Section 3)

<b>3RU21</b> , thermal, CLASS 10	3RU21 16 0.1-16A (p. 3/10)	3RU21 26 0.18-40A (p. 3/10)	3RU11 36 5.5-50A (p. 3/10)
<b>3RB30/31</b> , solid-state, CLASS 5, 10, 20 and 30	3RB30 16 0.1-16A (p. 3/22) 3RB31 16 (p. 3/23)	3RB30 26 3-40A (p. 3/22) 3RB31 26 (p. 3/23)	3RB20 36 6-50A (p. 3/22) 3RB21 36 (p. 3/23)
<b>3RB22/23</b> , solid-state, CLASS 5, 10, 20 and 30	3RB2.83+ 0.3-25A (p. 3/34) 3RB29 06		3RB2.83+ 10-100A (p. 3/34) 3RB29 06

### 3RV10 / 3RV20 circuit-breakers (Section 1)

<b>Type</b>	3RV20 11 0.18-16A (p. 1/4)	3RV20 21 11-40A (p. 1/4)	3RV10 31 22-50A (p. 1/5)
<b>Link modules</b>	3RA29 11 (p. 1/10)	3RA29 21 (p. 1/10)	3RA19 31 (p. 1/10)

### 3RA13 / 3RA23 Reversing contractor assemblies

Complete units	Type	3RA2315 3RA2316 3RA2317 3RA2318	3RA2324 3RA2325 3RA2326 3RA2327 3RA2328	3RA1333 3RA1334 3RA1335 3RA1336
		(page 2/40)	(page 2/42)	(page 2/43)
<b>460 V</b>	<b>HP</b>	<b>3 5 7.5 10</b>	<b>7.5 10 15 20 25</b>	<b>20 25 30 40</b>
<b>Installation kits / wiring connectors</b>		3RA29 13-2AA1 (p. 2/78)	3RA29 23-2AA1 (p. 2/78)	3RA19 33-2A (p. 2/78)
<b>Mechanical interlocks</b>		3RA29 12-2H (p. 2/79)	3RA29 22-2H (p. 2/79)	3RA19 24-2B (p. 2/77)



**S3**  
3RT1. 4



**S6**  
3RT1. 5



**S10**  
3RT1. 6



**S12**  
3RT1. 7



**14**  
3TF6

	<b>3RT10 44</b> (p. 2/8)	<b>3RT10 45</b>	<b>3RT10 46</b>	<b>3RT10 54</b> (p. 2/9)	<b>3RT10 55</b>	<b>3RT10 56</b>	<b>3RT10 64</b> (p. 2/9)	<b>3RT10 65</b>	<b>3RT10 66</b>	<b>3RT10 75</b> (p. 2/9)	<b>3RT10 76</b>	–		
	–			–			<b>3RT12 64</b> (p. 2/10)	<b>3RT12 65</b>	<b>3RT12 66</b>	<b>3RT12 75</b> (p. 2/10)	<b>3RT12 76</b>	<b>3TF68</b> (p. 2/53)	<b>3TF69</b>	
	20	25	30	40	50	60	60	75	100	125	150	200	290	
	25	30	30	50	60	75	75	100	125	150	200	250	350	
	<b>50</b>	<b>60</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>150</b>	<b>200</b>	<b>250</b>	<b>300</b>	<b>400</b>	<b>500</b>	<b>700</b>	
	60	75	100	125	150	200	200	250	300	400	500	650	860	
	65	80	95	115	150	185	225	265	300	400	500	630	820	
	<b>30</b>	<b>37</b>	<b>45</b>	<b>55</b>	<b>75</b>	<b>90</b>	<b>110</b>	<b>132</b>	<b>160</b>	<b>200</b>	<b>250</b>	<b>335</b>	<b>450</b>	
	18.5	22	22	37	45	55	55	75	90	132	160	200	260	
	37	45	55	75	90	110	160	160	200	250	355	434	600	
	45	55	55	110	132	160	200	250	250	400	400/500	600	800	
	30	37	37	75	90	90	90/315	132/355	132/400	250/560	250/710	600	800	
	<b>30</b>	<b>37</b>	<b>45</b>	<b>55</b>	<b>75</b>	<b>90</b>	<b>110</b>	<b>132</b>	<b>160</b>	<b>200</b>	<b>250</b>	<b>355</b>	<b>400</b>	
	15.1	17.9	22	29	38	45	54/78	66/93	71/112	84/140	98/161	168	191	
	<b>100</b>	<b>120</b>	<b>120</b>	<b>160</b>	<b>185</b>	<b>215</b>	<b>275/330</b>	<b>330</b>	<b>330</b>	<b>430/610</b>	<b>610</b>	<b>700</b>	<b>910</b>	
													–	
													<b>3TY7 561</b> (p. 2/53)	
	<b>3RT19 46-4EA1/2</b>	(p. 2/76)	<b>3RT19 56-4EA1/2/3</b>	(p. 2/76)	<b>3RT19 66-4EA1/2/3</b>	(p. 2/76)							<b>3TX7 686/696</b> (p. 2/54)	
	–			<b>3RT19 55/56-4G</b>	(p. 2/76)	<b>3RT19 66-4G</b>	(p. 2/76)							–
												<b>3RT19 56-1C</b> (RC element) (p. 2/71)		
													<b>3TX7 572</b> (p. 2/54)	
	<b>3RU11 46</b>	18 – 100 A	(p. 3/10)	–			–			–			–	
	<b>3RB20 46</b>	12.5 – 100 A	(p. 3/22)	<b>3RB20 56</b>	50 – 200 A	(p. 3/22)	<b>3RB20 66</b>	55 – 630 A	(p. 3/22)	<b>3RB20 66</b>	160 – 630 A	<b>3RB20 66</b>	160 – 630 A	
	<b>3RB21 46</b>		(p. 3/23)	<b>3RB21 56</b>		(p. 3/23)	<b>3RB21 66</b>		(p. 3/23)	<b>3RB21 66</b>		(p. 3/22)	<b>3RB21 66</b>	
				<b>3RB2.83 + 3RB29 56</b>	20 – 200 A	(p. 3/34)	<b>3RB2.83 + 3RB29 66</b>	63 – 630 A	(p. 3/34)					
	<b>3RV10 41</b>	45 – 100 A	(p. 1/5)	–			–			–			–	
	<b>3RA19 41</b>		(p. 1/10)	–			–			–			–	
	<b>3RA13 44</b>	<b>3RA13 45</b>	<b>3RA13 46</b>	–			–			–			–	
	(p. 2/44)			<b>50</b>	<b>60</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>150</b>	<b>200</b>	<b>250</b>	<b>300</b>	
				<b>500</b>	<b>700</b>									
	<b>3RA19 43-2A</b>	(p. 2/78)	<b>3RA19 53-2A</b>	(p. 2/78)	<b>3RA19 63-2A</b>	(p. 2/78)	<b>3RA19 73-2A</b>	(p. 2/78)	<b>3TX7 680-1A</b>					
				<b>3RA19 54-2A</b>	(p. 2/77)							<b>3TX7 686-1A</b>		

# IEC Power Control

## Contactors for Switching Motors

SIRIUS



**3RT contactors, 3-pole**  
Size S00 to S3

### Selection and ordering data




3RT201.-1A



3RT201.-2A...



3RT2028-1N...



3RT2025-2B...



3RT1034-1A...



3RT1044-1A...

Frame Size	Amp Ratings		Single-phase HP ratings			Three-phase HP ratings				Auxiliary contacts		Screw Terminals	Spring-Loaded Terminals	Weight approx. kg
	AC3	AC1	115V	208V	230V	208V	230V	460V	575V	NO	NC	Order No.	Order No.	
<b>3RT 3-pole contactors</b>														
S00	7	18	0.25	0.5	0.75	1.5	2	3	5	1	0	3RT2015-1□●●1	3RT2015-2□●●1	0.24/0.29
										0	1	3RT2015-1□●●2	3RT2015-2□●●2	
	9	22	0.33	1	1	2	3	5	7.5	1	0	3RT2016-1□●●1	3RT2016-2□●●1	
										0	1	3RT2016-1□●●2	3RT2016-2□●●2	
S0	12	22	0.5	1.5	2	3	3	7.5	10	1	0	3RT2017-1□●●1	3RT2017-2□●●1	0.42/0.60
										0	1	3RT2017-1□●●2	3RT2017-2□●●2	
	16	22	1	2	2	3	5	10	10	1	0	3RT2018-1□●●1	3RT2018-2□●●1	
										0	1	3RT2018-1□●●2	3RT2018-2□●●2	
	9	40	1	1	1	2	3	5	7.5	1	1	3RT2023-1□●●0	3RT2023-2□●●0	
S0	12	40	1	2	2	3	3	7.5	10	1	1	3RT2024-1□●●0	3RT2024-2□●●0	0.85/1.45
	16	40	1	2	3	5	5	10	15	1	1	3RT2025-1□●●0	3RT2025-2□●●0	
	25	40	2	3	3	7.5	7.5	15	20	1	1	3RT2026-1□●●0	3RT2026-2□●●0	
	32	50	2	5	5	10	10	20	25	1	1	3RT2027-1□●●0	3RT2027-2□●●0	
S2	38	50	3	5	5	10	10	25	25	1	1	3RT2028-1□●●0	3RT2028-2□●●0	1.8/2.8
	28	50	2	3	5	7.5	10	20	25	0	0	3RT1033-1□●●0	3RT1033-3□●●0	
	32	50	2	5	5	10	10	25	30	0	0	3RT1034-1□●●0	3RT1034-3□●●0	
	40	60	3	5	7.5	10	15	30	40	0	0	3RT1035-1□●●0	3RT1035-3□●●0	
S3	50	60	3	7.5	10	15	15	40	50	0	0	3RT1036-1□●●0	3RT1036-3□●●0	1.8/2.8
	65	100	5	10	15	20	25	50	60	0	0	3RT1044-1□●●0	3RT1044-3□●●0	
	80	120	7.5	15	15	25	30	60	75	0	0	3RT1045-1□●●0	3RT1045-3□●●0	
	95	120	10	15	20	30	30	75	100	0	0	3RT1046-1□●●0	3RT1046-3□●●0	

Size S0 only: UC Electronic with integrated varistor

□ AC Coil = A  
□ DC Coil = B  
□ UC Coil = N

NEMA Size	Amp Ratings	Single-phase HP ratings			Three-phase HP ratings				Auxiliary contacts		Screw Terminals with AC coil	Spring Terminals with 24 VDC coil	Weight approx. kg
		115V	208V	230V	208V	230V	460V	575V	NO	NC	Order No.	Order No.	
<b>NEMA Labeled Contactors</b>													
0	16	1	2	2	3	5	10	10	1	0	3RT2018-1A□●●1-0UA0	3RT2018-1BB41-0UA0	0.28
1	25	2	3	3	7.5	7.5	15	20	1	1	3RT2026-1A□●●0-0UA0	3RT2026-1BB40-0UA0	0.46 / 0.58
2	45	3	7.5	7.5	10	15	25	25	0	0	3RT1036-1A□●●0-0UA0	3RT1036-1BB40-0UA0	0.85 / 1.45
3	90	10	15	20	25	30	50	50	0	0	3RT1046-1A□●●0-0UA0	3RT1046-1BB40-0UA0	1.8 / 2.8

1 All terminals are spring loaded on frame sizes S00 & S0.  
Only the coil terminals are spring loaded on frame sizes S2 & S3.

Note: Ring lug terminals are also available in size S00 & S0 contactors, except contactors with communication interface or UC coil. Change the 8th digit of the order number to a "4", e. g. 3RT2015-4AK61.

For further coil voltages, see page 2/49.  
For auxiliaries and accessories, see page 2/65-2/80.  
For spare parts, see page 2/82-2/86.  
For technical data, see page 2/108-2/129.  
For description, see page 2/91-2/92.  
For int. circuit diagrams, see page 2/177-2/184.  
For dimension drawings, see page 2/196-2/199.

### AC coil selection for 3RT201 through 3RT104.-.□ = A

●●Coil Code	C2 <sup>2)</sup>	H2 <sup>3)</sup>	K6	P6	U6	V6	T6
60 Hz	24	48	120	240	277	480	600
50 Hz	24	48	110	220	—	—	—

<sup>2)</sup> Use code B0 for 3RT201 (S00)  
<sup>3)</sup> Use code H0 for 3RT201 (S00)

### DC coil selection for 3RT201 through 3RT104.-.□ = B

●●Coil Code	A4 <sup>4)</sup>	B4	W4	E4	F4	G4	M4
DC	12 V	24 V	48 V	60 V	110 V	125 V	220 V

<sup>4)</sup> For 3RT201 (S00) only

### UC coil selection for 3RT201 through 3RT104.-.□ = N

●●Coil Code	B3	F3	P3 <sup>5)</sup>
UC	21-28 V	95-130 V	200-280 V

<sup>5)</sup> At upper limit = 1.1 x U<sub>s</sub>



**Selection and ordering data**

- \* AC/DC Coils with built in surge suppressor
- \* Coil Types (40Hz to 60Hz, DC):
- \* Conventional Coil
- \* Solid-state operated coil with wider range and 24 V DC PLC input
- \* Solid-state operated coil with Remaining Lifetime Indication (RLT)
- \* Box terminals ordered separately



3RT1054-6A . . 6

3RT1065-6P . . 5

Frame Size	Amp Ratings		Single-phase HP ratings		Three-phase HP ratings				Auxiliary contacts		Screw Terminals on coil and aux.	Spring-type terminals on coil and aux. contacts	Weight approx. kg
	AC3	AC1	115V	230V	200V	230V	460V	575V	NO	NC	Order No.	Order No.	
<b>3RT 3-pole Contactors</b>													
S6	115	160	—	25	40	50	100	125	2	2	3RT1054-6□●●6	3RT1054-2□●●6	3.5
	150	185	—	30	50	60	125	150	2	2	3RT1055-6□●●6	3RT1055-2□●●6	
	185	215	—	30	60	75	150	200	2	2	3RT1056-6□●●6	3RT1056-2□●●6	
S10	225	275	—	—	60	75	150	200	2	2	3RT1064-6□●●6	3RT1064-2□●●6	6.7
	265	330	—	—	75	100	200	250	2	2	3RT1065-6□●●6	3RT1065-2□●●6	
	300	330	—	—	100	125	250	300	2	2	3RT1066-6□●●6	3RT1066-2□●●6	
S12	400	430	—	—	125	150	300	400	2	2	3RT1075-6□●●6	3RT1075-2□●●6	10.5
	500	610	—	—	150	200	400	500	2	2	3RT1076-6□●●6	3RT1076-2□●●6	
UC Coil = □ Solid State Operated Coil = A Solid State Operated Coil with RLT = N P●●5 —													

NEMA Size	Amp Ratings	Single-phase HP ratings		Three-phase HP ratings				Auxiliary contacts		Screw Terminals on coil and aux.	Spring-type terminals on coil and aux. contacts	Weight approx. kg
		115V	230V	208V	230V	460V	575V	NO	NC	Order No.	Order No.	
<b>NEMA Labeled Contactors</b>												
4	135	—	30	40	50	100	100	2	2	3RT1056-6A●●6-0UA0	—	3.5
5	300	—	—	100	125	250	300	2	2	3RT1066-6A●●6-0UA0	—	6.7
6	300	—	—	150	200	400	500	2	2	3RT1076-6A●●6-0UA0	—	10.5

All coil voltages are in the adjacent table.  
 For auxiliaries and accessories, see page 2/65-2/80.  
 For spare parts, see page 2/82-2/86.  
 For technical data, see page 2/130-2/138.  
 For description, see page 2/93-2/94.  
 For int. circuit diagrams, see page 2/183-2/185.  
 For dimension drawings, see page 2/200-2/201.

**Sizes S6 to S12 Coil Codes - UC operation (AC 50 to 60 Hz and DC)**

Conventional Coil		Solid-State Coil		
Rated control supply voltage Us Us min ... Us max <sup>1)</sup>	3RT1. 5.-.A 3RT1. 6.-.A 3RT1. 7.-.A	Rated control supply voltage Us Us min ... Us max <sup>1)</sup>	3RT1. 5.-.N 3RT1. 6.-.N 3RT1. 7.-.N	3RT1. 5.-.P 3RT1. 6.-.P 3RT1. 7.-.P
<b>Coil Codes</b>	●●	<b>Coil Codes</b>	●●	●●
23 ... 26 V AC/DC	B3	21 ... 27.3 V AC/DC	B3	—
42 ... 48 V AC/DC	D3	96 ... 127 V AC/DC	F3	F3
110 ... 127 V AC/DC	F3	200 ... 277 V AC/DC	P3	P3
200 ... 220 V AC/DC	M3			
220 ... 240 V AC/DC	P3			
240 ... 277 V AC/DC	U3			
380 ... 420 V AC/DC	V3			
440 ... 480 V AC/DC	R3			
500 ... 550 V AC/DC	S3			
575 ... 600 V AC/DC	T3			

1) Operating range:  
0.8 x Us min to 1.1 x Us max.



# Contactors and Contactor Assemblies

## Contactors for Switching Motors



### 3RT12 vacuum contactors, 3-pole

#### Selection and ordering data

- AC/DC operation (40 Hz ... 60 Hz, DC)
- Withdrawable coils
- Integrated coil circuit (varistor)
- Auxiliary and control conductors: screw connections
- Main conductor: bar connections

Size	Horsepower ratings and utilization categories					Auxiliary contacts, lateral			Rated control supply voltage $U_s$	Order No.	Weight approx.	
	AC-3 Maximum inductive current	Ratings of three-phase motors				AC-1 Maximum resistive current	NO	NC				AC/DC V
Amps	200 V	230 V	460 V	575 V	Amps	HP			HP	HP	HP	
<b>Conventional operating mechanism</b>												
3RT12 6.	<b>S10</b>	225	60	75	<b>150</b>	200	330	2	2	110 ... 127 220 ... 240	<b>3RT12 64-6AF36</b> <b>3RT12 64-6AP36</b>	6.4
		265	75	100	<b>200</b>	250	330	2	2	110 ... 127 220 ... 240	<b>3RT12 65-6AF36</b> <b>3RT12 65-6AP36</b>	
		300	100	125	<b>250</b>	300	330	2	2	110 ... 127 220 ... 240	<b>3RT12 66-6AF36</b> <b>3RT12 66-6AP36</b>	
3RT12 7.	<b>S12</b>	400	125	150	<b>300</b>	400	610	2	2	110 ... 127 220 ... 240	<b>3RT12 75-6AF36</b> <b>3RT12 75-6AP36</b>	9.6
		500	150	200	<b>400</b>	500	610	2	2	110 ... 127 220 ... 240	<b>3RT12 76-6AF36</b> <b>3RT12 76-6AP36</b>	
<b>Solid-state operating mechanism - for DC 24 V PLC output</b>												
3RT12 6.	<b>S10</b>	225	60	75	<b>150</b>	200	330	2	2	96 ... 127 200 ... 277	<b>3RT12 64-6NF36</b> <b>3RT12 64-6NP36</b>	6.4
		265	75	100	<b>200</b>	250	330	2	2	96 ... 127 200 ... 277	<b>3RT12 65-6NF36</b> <b>3RT12 65-6NP36</b>	
		300	100	125	<b>250</b>	300	330	2	2	96 ... 127 200 ... 277	<b>3RT12 66-6NF36</b> <b>3RT12 66-6NP36</b>	
3RT12 7.	<b>S12</b>	400	125	150	<b>300</b>	400	610	2	2	96 ... 127 200 ... 277	<b>3RT12 75-6NF36</b> <b>3RT12 75-6NP36</b>	9.6
		500	150	200	<b>400</b>	500	610	2	2	96 ... 127 200 ... 277	<b>3RT12 76-6NF36</b> <b>3RT12 76-6NP36</b>	



Universal Coil Selection for 3RT126 through 3RT127: Conventional Operation										
Coil Code	B3	D3	F3	M3	P3	U3	V3	R3	S3	T3
Volts AC/DC 40 - 60 Hz, DC	23 .. 26 V	42 .. 48 V	110 .. 127 V	200 .. 220 V	220 .. 240 V	240 .. 277 V	380 .. 420 V	440 .. 480 V	500 .. 550 V	575 .. 600 V

Solid State Selection for 3RT126 through 3RT127: Solid-State			
Coil Code	B3	F3	P3
Volts AC/DC 40 - 60 Hz, DC	21 .. 27.3 V	96 .. 127 V	200 .. 277 V

For further vacuum contactors, 500Hp and 700Hp (3TF68/69), see page 2/53.  
 For auxiliaries and accessories, see page 2/67 .  
 For spare parts, see page 2/85-2/86.  
 For technical data, see page 2/139-2/144.  
 For int. circuit diagrams, see page 2/183  
 For dimension drawings, see page 2/202.



3RT13 & 3RT23 contactors, 4-pole (4 NO contacts) for switching resistive loads (AC-1)

1

2

Standards

IEC 60947-1, EN 60947-1  
 IEC 60947-4-1, EN 60947-4-1  
 IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

Design

The contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106, Part 100. The accessories for the 3-pole SIRIUS contactors can also be used for the 4-pole designs.

Mountable auxiliary contacts

Size S00: 4 auxiliary contacts of which up to 3 can be NC.  
 Size S0: 4 additional auxiliary contacts up to 4 can be NC.  
 Sizes S2 and S3: Up to 4 auxiliary contacts (either laterally mounted or snapped onto the top).

Contactor assemblies with mechanical interlock

The 4-pole 3RT13 / 3RT23 contactors with 4 NO contacts as the main contacts are suitable for making contactor assemblies with a mechanical interlock, e.g. for system transfers.

**Size S00:** Contactor assemblies can be made using two 3RT231 contactors in conjunction with the mechanical interlock and two connecting clips (Order No. 3RA2912-2H, pack comprising 10 interlocking elements and 20 clips for 10 contactor assemblies, see accessories on page 2/72).

**Size S0:** In order to make 4-pole contactor assemblies using two 3RT232 contactors, the fourth pole of the left-hand contactor must always be moved to the left-hand side. The contactor assembly can then be made easily with the aid of the 3RA2922-2H mechanical interlock and connecting clip set fitted between the two contactors.

**Sizes S2 and S3:** Contactor assemblies can be made using two 3RT13 3 or 3RT13 4 contactors in conjunction with the laterally mountable 3RA19 24-2B mechanical interlock and the 3RA19 . 2-2G mechanical connectors. The mechanical interlock and the 3RA19 . 2-2G mechanical connectors. The mechanical interlock for fitting onto the front cannot be used for size S2 and S3 contactors.

Application

- Switching resistive loads
- Isolating systems with unearthed or poorly earthed neutral conductors
- System transfers when alternative AC power supplies are used
- As contactors which only carry current and do not have to switch in case of inductive loads – e.g. variable-speed operating mechanisms
- Switching mixed loads in distribution systems (e.g. for supplying heaters, lamps, motors, PC power supply units) with p.f. > 0.8 according to IEC 60947-4-1, test conditions for utilization category AC-1

Selection and ordering data

Rating data			Auxiliary contacts			Rated control supply voltage $U_s$ 50/60 Hz	AC Operation Screw Terminals <sup>1)</sup> Order No.	Rated control supply voltage $U_s$ V DC	DC Operation Screw Terminals <sup>1)</sup> Order No.
AC-1 Max resist. current $I_e$	Ratings of AC loads at 460 V, 40°C   60°C   60 Hz		Ident-ification No.	Version					
Amps	HP			NO	NC		V AC	V DC	

For screwing and stepping onto 35 mm mounting rail

3RT23 17-1AP60



**Size S00** – Auxiliary switches can be retrofitted

18	16	5	—	—	—	24 110/120 220/240	3RT23 16-1AB00 3RT23 16-1AK60 3RT23 16-1AP60	24 125 220	3RT23 16-1BB40 3RT23 16-1BG40 3RT23 16-1BM40
22	20	5	—	—	—	24 110/120 220/240	3RT23 17-1AB00 3RT23 17-1AK60 3RT23 17-1AP60	24 125 220	3RT23 17-1BB40 3RT23 17-1BG40 3RT23 17-1BM40

**Size S0** – Terminal designations according to EN 50012 —1 NO + 1 NC, identification number 11E

35 <sup>2)</sup>	30 <sup>2)</sup>	10	11E	1	1	24 110/120 220/240	3RT23 25-1AC20 3RT23 25-1AK60 3RT23 25-1AP60	24 125 220	3RT23 25-1BB40 3RT23 25-1BG40 3RT23 25-1BM40
40 <sup>2)</sup>	35 <sup>2)</sup>	10	11E	1	1	24 110/120 220/240	3RT23 26-1AC20 3RT23 26-1AK60 3RT23 26-1AP60	24 125 220	3RT23 26-1BB40 3RT23 26-1BG40 3RT23 26-1BM40
50 <sup>2)</sup>	42 <sup>2)</sup>	10	11E	1	1	24 110/120 220/240	3RT23 27-1AC20 3RT23 27-1AK60 3RT23 27-1AP60	24 125 220	3RT23 27-1BB40 3RT23 27-1BG40 3RT23 27-1BM40

Size S2

60	55	15	—	—	—	24 110/120 220/240	3RT13 36-1AC20 3RT13 36-1AK60 3RT13 36-1AP60	24 125 220	3RT13 36-1BB40 3RT13 36-1BG40 3RT13 36-1BM40
----	----	----	---	---	---	--------------------------	--	------------------	--

Size S3

110	100	—	—	—	—	24 110/120 220/240	3RT13 44-1AC20 3RT13 44-1AK60 3RT13 44-1AP60	24 125 220	3RT13 44-1BB40 3RT13 44-1BG40 3RT13 44-1BM40
140	120	—	—	—	—	24 110/120 220/240	3RT13 46-1AC20 3RT13 46-1AK60 3RT13 46-1AP60	24 125 220	3RT13 46-1BB40 3RT13 46-1BG40 3RT13 46-1BM40

3RT23 27-1AP60



3RT13 36-1AP60



1) Size S00 and S0 contactors are also available with spring-type terminals. Replace the 8th digit of the order no. with a "2" e.g. "3RT23 16-2AB00"

2) Minimum conductor cross-section 8 AWG.

For further voltages, see page 2/49.  
 For coil voltage tolerance, p. 2/49  
 For auxiliaries and accessories, see page 2/65-2/80.  
 For spare parts, see page 2/82-2/86.

For technical data, see page 2/153-2/154.  
 For in. circuit diagrams, see page 2/178-2/183.  
 For dimension drawings, see page 2/203.

# Contactors and Contactor Assemblies

## Contactors for Special Applications

SIRIUS



### 3RT14, 3-pole for switching resistive loads (AC-1)

#### Application

**AC and DC operation**  
(size S3)  
**UC operation (AC/DC)**  
(sizes S6 to S12)

IEC 60 947, EN 60 947  
(VDE 0660)

The contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106 Part 100.

3RT14 contactors are used for switching resistive loads.

(AC-1) or as contactors, for example in variable-speed drives which normally only have to carry the current.

The accessories for the SIRIUS 3RT10 contactors can also be used here.

#### Selection and ordering data

3RT14 46-1A..0



Ratings AC-1 utilization category,		UL Ratings			Rated control supply voltage $U_s$	Order No.	Weight approx.
Maximum current	IEC Ratings						
Amps	Rated power of three phase loads $\cos \phi = 0.95$ (@ 60°C)				Max Current		kg
	230V kW	400V kW	500V kW	690V kW			

**With screw connections · for screwing and snapping onto 35 mm and 75 mm standard mounting rails**

**Size S3** · (without auxiliary contacts)

#### • AC operation

140	50	86	107	148	140	15	30	40	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	3RT14 46-1AC2 0 3RT14 46-1AK6 0 3RT14 46-1AP6 0	1.8
-----	----	----	-----	-----	-----	----	----	----	--	---	-----

#### • DC operation · DC solenoid system

140	50	86	107	148	131	15	30	40	DC 24 V DC 48 V	3RT14 46-1BB4 0 3RT14 46-1BW40	2.7
-----	----	----	-----	-----	-----	----	----	----	--------------------	-----------------------------------	-----

- AC/DC operation (40 Hz ... 60 Hz, DC)
- Withdrawable coils
- Integrated coil circuit (varistor)
- Auxiliary and control conductors: screw connections

#### • Main conductor: bar connections

3RT14 6.



Size	Ratings AC-1 utilization category,		UL Rating				Auxiliary contacts, lateral		Rated control supply voltage $U_s$	Order No.	Weight approx.
	AC-1	Maximum resistive current	IEC Ratings				Max Current	NO			
Amps	Amps	Amps	Rated power of three phase loads $\cos \phi = 0.95$ (@ 60°C)						Amps		
			230V kW	400V kW	500V kW	690V kW					

#### Conventional operating mechanism

S6	275	95	165	205	285	210	2	2	110 ... 127 220 ... 240	3RT14 56-6AF36 3RT14 56-6AP36	3.1
S10	400	145	250	315	430	360	2	2	110 ... 127 220 ... 240	3RT14 66-6AF36 3RT14 66-6AP36	5.7
S12	690	245	430	535	740	580	2	2	110 ... 127 220 ... 240	3RT14 76-6AF36 3RT14 76-6AP36	9.1

#### Solid-state operating mechanism · for DC 24 V PLC output

S6	275	95	165	205	285	210	2	2	96 ... 127 200 ... 277	3RT14 56-6NF36 3RT14 56-6NP36	3.1
S10	400	145	250	315	430	360	2	2	96 ... 127 200 ... 277	3RT14 66-6NF36 3RT14 66-6NP36	5.7
S12	690	245	430	535	740	580	2	2	96 ... 127 200 ... 277	3RT14 76-6NF36 3RT14 76-6NP36	9.1

#### Solid-state operating mechanism · for DC 24 V PLC with remaining lifetime indication

S6	275	95	165	205	285	210	1	1	96 ... 127 200 ... 277	3RT14 56-6PF35 3RT14 56-6PP35	3.1
S10	400	145	250	315	430	360	1	1	200 ... 277	3RT14 66-6PP35	5.7
S12	690	245	430	535	740	580	1	1	200 ... 277	3RT14 76-6PP35	9.1

#### Universal Coil Selection for 3RT145 through 3RT147: Conventional Operation

Coil Code	B3	D3	F3	M3	P3	U3	V3	R3	S3	T3
Volts AC/DC 40 - 60 Hz, DC	23 .. 26 V	42 .. 48 V	110 .. 127 V	200 .. 220 V	220 .. 240 V	240 .. 277 V	380 .. 420 V	440 .. 480 V	500 .. 550 V	575 .. 600 V

#### Universal Coil Selection for 3RT145 through 3RT147: Solid-State

Coil Code	B3	F3	P3
Volts AC/DC 40 - 60 Hz, DC	21 .. 27.3 V	96 .. 127 V	200 .. 277 V

Note: B3 code not available for Remaining Lifetime Contactors.

For further coil voltages, see page 2/49.  
For auxiliaries and accessories, see page 2/65-2/80.  
For spare parts, see page 2/82-2/86.  
For technical data, see page 2/145-2/152.  
For int. circuit diagrams, see page 2/183.  
For dimension drawings, see page 2/198, 2/200-2/201.



#### AC and DC operation

IEC 60 947-4-1/EN 60 947-4-1  
(VDE 0660, Part 102)

#### Design

The contactors are suitable for use in any climate. They are safe to touch according to EN 50274. The accessories for the 3-pole SIRIUS contactors can also be used for the 4-pole designs.

#### Application

- Changing the polarity of hoisting gear motors
- Switching two separate loads from the same source

#### Mountable auxiliary contacts

##### Size S00 and S0:

4 auxiliary contacts, of which up to 2 can be NC contacts.

##### Size S2

Up to 4 auxiliary contacts (either laterally mounted or snapped onto the top; auxiliary switch blocks to EN 50 012 and EN 50 005)

#### Selection and ordering data


Rating data		AC-1 Max resistive current	Auxiliary contacts Version		Rated control supply voltage $U_s$	AC Operation <sup>2)</sup> Screw terminals Order No.	Rated control supply voltage $U_s$	DC Operation <sup>2)</sup> Screw terminals Order No.
AC-2/AC-3 $T_U$ : up to 60°C	Max Current $I_n$ at 400 V		Max motor HP at 460 V, 60 Hz	40°C				
	Amps	HP	Amps	NO	NC		V DC	

#### For screwing and stepping onto 35 mm standard mounting rail

3RT25 16-1AB00



**Size S00** <sup>3)</sup> - Auxiliary switches can be retrofitted




9	5	18	16	—	—	24	<b>3RT25 16-1AB00</b>	24	<b>3RT25 16-1BB40</b>
						110/120	<b>3RT25 16-1AK60</b>	125	<b>3RT25 16-1BG40</b>
						220/240	<b>3RT25 16-1AP60</b>	220	<b>3RT25 16-1BM40</b>
12	7.5 <sup>4)</sup>	22	20	—	—	24	<b>3RT25 17-1AB00</b>	24	<b>3RT25 17-1BB40</b>
						110/120	<b>3RT25 17-1AK60</b>	125	<b>3RT25 17-1BG40</b>
						220/240	<b>3RT25 17-1AP60</b>	220	<b>3RT25 17-1BM40</b>
16	10 <sup>4)</sup>	22	20	—	—	24	<b>3RT25 18-1AB00</b>	24	<b>3RT25 18-1BB40</b>
						110/120	<b>3RT25 18-1AK60</b>	125	<b>3RT25 18-1BG40</b>
						220/240	<b>3RT25 18-1AP60</b>	220	<b>3RT25 18-1BM40</b>

3RT25 26-1AC20



**Size S0** - Terminal designations according to EN 50012, 1 NO + 1 NC, identification number 11E




25	15	40	35	1	1	24	<b>3RT25 26-1AC20</b>	24	<b>3RT25 26-1BB40</b>
						110/120	<b>3RT25 26-1AK60</b>	125	<b>3RT25 26-1BG40</b>
						220/240	<b>3RT25 26-1AP60</b>	220	<b>3RT25 26-1BM40</b>

3RT15 35-1AC20



**Size S2**



40	25	55	50	—	—	24	<b>3RT15 35-1AC20</b>	24	<b>3RT15 35-1BB40</b>
						110/120	<b>3RT15 35-1AK60</b>	125	<b>3RT15 35-1BG40</b>
						220/240	<b>3RT15 35-1AP60</b>	220	<b>3RT15 35-1BM40</b>

For further voltages, see page 2/49.  
For auxiliaries and accessories, see page 2/65-2/80.  
For spare parts, see page 2/82-2/86.  
For technical data, see page 2/155-2/156.  
For int. circuit diagrams, see page 2/178-2/183.  
For dimension drawings, see page 2/203.

1) For changing polarity; not suitable for reversing.  
2) Size S00 and S0 contactors are also available with spring-type terminals. Replace the 8th digit of the order no. with a "2" e.g. "3RT25 16-2AB00"

3) Size S00:  
Coil voltage tolerance  
at 50 Hz: 0.8 ... 1.1 x  $U_s$   
at 60 Hz: 0.85 ... 1.1 x  $U_s$

4) The NC contact can switch up to 5 HP.

# Contactors and Contactor Assemblies

## 3RT, 3RH Contactors for Special Applications



### 3RH21 contactor relays

#### Overview

##### DC operation

IEC 60947-4-1, EN 60947-4-1, for requirements according to IEC 60077-1 and IEC 60077-2.

The contactor relays are finger-safe according to EN 50274. The size S00 contactor relays have spring-type connections for all terminals.

##### Ambient temperature

The permissible ambient temperature for operation of the contactor relays (across the full coil operating range) is -40 to +70 °C.

Uninterrupted duty at temperatures > +60 °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

##### Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from  $0.7$  to  $1.25 \times U_s$  and are fitted as standard with suppressor diodes to provide protection against overvoltage. The opening delay is consequently 2 to 5 ms longer than for standard contactors.

#### Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e. g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffer for longer operating times should the battery charging fail.

##### Contactor relays without series resistor

###### Control and auxiliary circuits

These contactor relays have an extended operating range from  $0.7$  to  $1.25 \times U_s$ ; the solenoid coils are fitted with a suppressor diode. An additional series resistor is not required.

###### Note:

*An additional auxiliary switch block cannot be mounted.*

###### Side-by-side mounting


A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C ≤ 70 °C.

##### Contactor relays with series resistor

###### Control and auxiliary circuits

The DC solenoid systems of the contactor relays are modified (to hold-in coil) by means of a series resistor.

The size S00 contactor relays are supplied prewired with a plug-on module containing the series resistor. The suppressor diode is integrated.

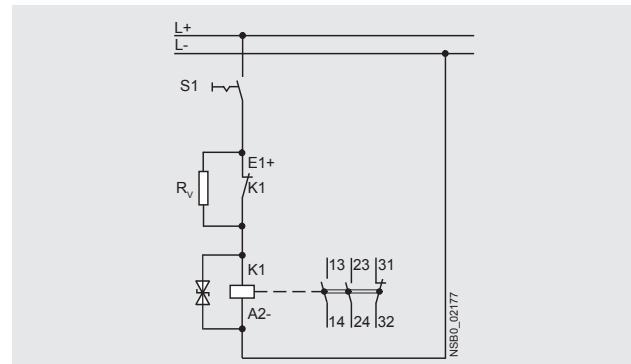

A 4-pole auxiliary switch block (according to EN 50005) can be fitted additionally.

###### Side-by-side mounting

Side-by-side mounting is permitted at ambient temperatures up to 70 °C.






**Selection and ordering data**

*DC operation · DC solenoid system*  
*Spring-type terminals*  
*For screw and snap-on mounting onto standard mounting rail*  
*Solenoid coil fitted with suppressor diode*



3RH21 22-2K.40



3RH21 22-2K.40-0LA0

Rated operational current $I_e/AC-15/AC-14$ $T_{ij}: 70\text{ °C at}$	Contacts	Rated control supply voltage $U_s$	Spring-type terminals	Weight approx.
230 V 400 V 500 V 690 V	Version			
A A A A	NO NC	V DC	Order No.	kg


**3RH21 contactor relays**

Size S00

**Without series resistor**

Terminal designations according to EN 50011

2 NO + 2 NC, identification number 22E




10 3 2 1 2 2<sup>1)</sup> 24 110

3RH21 22-2KB40 0.300  
3RH21 22-2KF40 0.300

**With series resistor**

Terminal designations according to EN 50005

2 NO + 1 NC, identification number 21E



10 3 2 1 2 1<sup>2)</sup> 24 110

3RH21 22-2KB40-0LA0 0.300  
3RH21 22-2KF40-0LA0 0.300

<sup>1)</sup> It is not possible to mount an auxiliary switch block.  
<sup>2)</sup> 4-pole auxiliary switch block according to EN 50005 can be mounted.

**More information**

Contactors	Type	3RH21 ..
<b>Upright mounting position</b>		
• Contactors with series resistor		Special version (on request)
• Contactors without series resistor		Special version (on request)
<b>Ambient temperature</b>		
• During operation	°C	-40 ... +70
• During storage	°C	-55 ... +80
<b>Solenoid coil operating range</b> DC		
		0.7 ... 1.25 x $U_s$
<b>Power consumption of the solenoid coils</b>		
		For cold coil and 1.0 x $U_s$
• Contactors with series resistor	- Closing	W 13
	- Closed	W 4
• Contactors without series resistor	- Closing	W 2.8
	- Closed	W 2.8

All specifications and technical specifications not mentioned here are identical to those of the standard contactor relays.

# Contactors and Contactor Assemblies

## 3RT, 3RH Contactors for Special Applications

SIRIUS



### 3RT20 motor contactors, 7.5 ... 25 HP

#### Overview

##### DC operation

IEC 60947-4-1, EN 60947-4-1, for requirements according to IEC 60077-1 and IEC 60077-2.

The contactors are finger-safe according to EN 50274. The contactors have spring-type connections as well as screw connections. The size S00 and S0 contactors have spring-type connections for all terminals.

##### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full coil operating range) is  $-40$  to  $+70$  °C.

Uninterrupted duty at temperatures  $> +60$  °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

##### Control and auxiliary circuits

The solenoid coils of the contactor relays have an extended coil operating range from  $0.7$  to  $1.25$  or  $1.3 \times U_s$  and are fitted as standard with suppressor diodes. The opening delay is consequently  $2$  to  $5$  ms longer than for standard contactors.

#### Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e. g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffer for longer operating times should the battery charging fail.

##### Contactors without series resistor

###### Control and auxiliary circuits

These contactors have an extended operating range from  $0.7$  to  $1.25 \times U_s$ ; on size S00 the coils are fitted with suppressor diodes, on size S0 with varistors. An additional series resistor is not required.

###### Note:

*An additional auxiliary switch block cannot be mounted.*

###### Side-by-side mounting


A clearance of  $10$  mm is required for side-by-side mounting at ambient temperatures  $> 60$  °C  $\leq 70$  °C.

##### 3RT20 1. contactors with series resistor

###### Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from  $0.7$  to  $1.25 \times U_s$  and are fitted as standard with suppressor diodes to provide protection against overvoltage.

The DC solenoid systems of the contactors are modified (to holding excitation) by means of a series resistor.

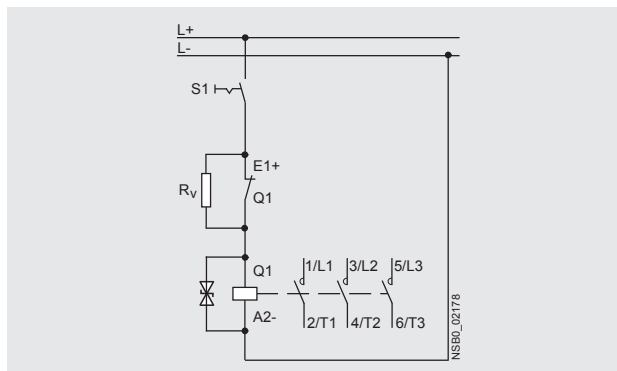

The size S00 contactors are supplied prewired with a plug-on module containing the series resistor. The suppressor diode is integrated. A 4-pole auxiliary switch block (according to EN 50005) can be fitted additionally.

A circuit diagram showing the terminals is labeled on each contactor. One NC of the auxiliary contacts is required for the series resistor function. The selection and ordering data shows the number of additional, unassigned auxiliary contacts. With size S00 it is possible to extend the number of auxiliary contacts.

###### Side-by-side mounting

At ambient temperatures up to  $70$  °C, the size S00 contactors and contactor relays are allowed to be mounted side by side.

##### 3RT20 2. contactors with solid-state operating mechanism, extended operating range

###### Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from  $0.7$  to  $1.3 \times U_s$  and are fitted as standard with varistors to provide protection against overvoltage.

The contactors are energized via upstream control electronics which ensure the coil operating range of  $0.7$  to  $1.3 \times U_s$  at an ambient temperature of  $70$  °C. They are supplied as complete units with integrated coil electronics. A varistor is integrated for damping opening surges in the coil.

The mounting possibilities for auxiliary switches correspond to those of the standard contactors for switching motors in the matching size (see page 2/58).

###### Side-by-side mounting

Side-by-side mounting is permitted at ambient temperatures up to  $70$  °C for these contactor versions in size S0.




**Selection and ordering data**

*DC operation · DC solenoid system  
Spring-type terminals  
For screw and snap-on mounting onto standard mounting rail  
Solenoid coil fitted with suppressor diode (S00)*



3RT20 1.-2K.4.



3RT20 1.-2K.42-0LA0

Rated data AC-3	Ratings of induction motors at				Auxiliary contacts	Rated control supply voltage $U_s$	<b>Spring-type terminals</b>	Weight approx.
Operational current $I_e$ at	200 V	230 V	<b>460 V</b>	575 V	Ident. No.	Version		
400 V	HP	HP	<b>HP</b>	HP			Order No.	
A	HP	HP	<b>HP</b>	HP				kg
					NO	NC		
						V DC		


**3RT20 contactors for switching motors**

*Size S00*


**Without series resistor<sup>4)</sup>**

Terminal designations according to EN 50012 or EN 50005

- 1 NO, identification number **10E**




- 1 NC, identification number **01**



12	--	3	<b>7.5</b>	10	<b>10E<sup>1)</sup></b>	1	--	24 125	<b>3RT20 17-2KB41</b> <b>3RT20 17-2KG41</b>	0.300 0.300
12	--	3	<b>7.5</b>	10	<b>01<sup>1)</sup></b>	--	1	24 125	<b>3RT20 17-2KB42</b> <b>3RT20 17-2KG42</b>	0.300 0.300

**With series resistor**



12	--	3	<b>7.5</b>	10	-- <sup>2)</sup>	--	1 <sup>3)</sup>	24 125	<b>3RT20 17-2KB42-0LA0</b> <b>3RT20 17-2KG42-0LA0</b>	0.300 0.300
16	--	5	<b>10</b>	10	-- <sup>2)</sup>	--	1 <sup>3)</sup>	24 125	<b>3RT20 18-2KB42-0LA0</b> <b>3RT20 18-2KG42-0LA0</b>	0.300 0.300

For accessories and spare parts, see page 2/65-2/68.

- It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.
- One 4-pole auxiliary switch block according to EN 50005 can be mounted; no distance required up to 70 °C.
- NC contact cannot be used because it is required for switching the series resistor.
- Versions available with screw terminals.

# Contactors and Contactor Assemblies

## 3RT, 3RH Contactors for Special Applications

SIRIUS



### 3RT20 motor contactors, 7.5 ... 25 HP

**DC operation · DC solenoid system**  
**Spring-type terminals**  
 For screw and snap-on mounting onto standard mounting rail  
 Solenoid coil fitted with varistor (S0)



3RT20 2.-2K.40



3RT20 2.-2X.40-0LA2


Rated data AC-3	Auxiliary contacts	Rated control supply voltage $U_s$	<b>Spring-type terminals</b>	Weight approx.
Operational current $I_e$ at	Ident. No.	Version		
400 V			Order No.	
Ratings of induction motors at				
200 V 230 V <b>460 V</b> 575 V				
A HP HP <b>HP</b> HP	NO NC	V DC		kg

### 3RT20 contactors for switching motors

#### Size S0

Terminal designations according to EN 50012

1 NO + 1 NC, identification number **11E**



Without series resistor<sup>1)</sup>

16	--	5	<b>10</b>	15	<b>11E</b>	1	1	24 125
25	--	7.5	<b>15</b>	20	<b>11E</b>	1	1	24 125
32	--	10	<b>20</b>	25	<b>11E</b>	1	1	24 125

With solid-state operating mechanism

16	--	5	<b>10</b>	15	<b>11E</b>	1	1	24 125
25	--	7.5	<b>15</b>	20	<b>11E</b>	1	1	24 125
32	--	10	<b>20</b>	25	<b>11E</b>	1	1	24 125
38	--	10	<b>25</b>	25	<b>11E</b>	1	1	24 125

<b>3RT20 25-2KB40</b>	0.600
<b>3RT20 25-2KG40</b>	0.600
<b>3RT20 26-2KB40</b>	0.600
<b>3RT20 26-2KG40</b>	0.600
<b>3RT20 27-2KB40</b>	0.600
<b>3RT20 27-2KG40</b>	0.600

<b>3RT20 25-2XB40-0LA2</b>	0.580
<b>3RT20 25-2XG40-0LA2</b>	0.580
<b>3RT20 26-2XB40-0LA2</b>	0.580
<b>3RT20 26-2XG40-0LA2</b>	0.580
<b>3RT20 27-2XB40-0LA2</b>	0.580
<b>3RT20 27-2XG40-0LA2</b>	0.580
<b>3RT20 28-2XB40-0LA2</b>	0.580
<b>3RT20 28-2XG40-0LA2</b>	0.580

For accessories and spare parts, see page 2/65-2/68.

<sup>1)</sup> It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

### More information

Contactors	Type		3RT20 17	3RT20 2.	3RT20 2.-2XB40-0LA2	3RT20 2.-2XF40-0LA2
<b>Ambient temperature</b>						
• During operation		°C	-40 ... +70			
• During storage		°C	-55 ... +80			
<b>Solenoid coil operating range</b>		DC	0.7 ... 1.25 x $U_s$		0.7 ... 1.3 x $U_s$	
<b>Power consumption of the solenoid coils</b>			For cold coil and 1.0 x $U_s$			
• Contactors with series resistor	- Closing	W	13	--	--	--
	- Closed	W	4	--	--	--
• Contactors without series resistor	- Closing	W	2.8	4.5	--	--
	- Closed	W	2.8	4.5	--	--
• Contactors with solid-state operating mechanism	- Closing	W	--	--	6.7	13.2
	- Closed	W	--	--	0.8	1.56

All specs and technical specs not mentioned here are identical to those of the standard contactors for switching motors.



#### AC operation

IEC 60 947, EN 60 947 (VDE 0660)

The contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106 Part 100.

The 3RT16 capacitor contactors are special variants of the size S00 to S3 SIRIUS contactors. The capacitors are precharged by means of the mounted leading NO contacts and resistors; only then do the main contacts close.

This prevents disturbances in the power system and welding of the contactors.

Only discharged capacitors are permitted to be switched on with capacitor contactors. Recommendation: use discharge chokes for parallel connection with the capacitors.

The capacitor contactors of size S00 comprise an NO contact and another unassigned NC contact in the auxiliary switch block fitted to the basic unit.

The auxiliary switch block which is snapped onto the capacitor contactor of sizes S0 and S3 contains the three leading NO contacts and one standard NO contact, which is unassigned. Size S00 also contains another unassigned NO contact in the basic unit.

The capacitor contactors of size S3 can be fitted additionally with a 2-pole auxiliary switch block (2 NO, 2 NC or 1 NO + 1 NC), type 3RH19 21-1EA.. for lateral mounting.

For the capacitor making and breaking capacity of the basic 3RT10 contactor variant, see the technical data.


#### Selection and ordering data

##### AC operation

AC-6b utilization category					Current	Auxiliary contacts, unassigned	Rated control supply voltage $U_s$ <sup>1)</sup>	Screw connection		Weight approx.
For switching three-phase capacitors at an ambient temperature of 60 °C <sup>2)</sup>								Order No.		
UL capacitor rating at operational voltage										
	200/208	230/240	460/480	575/600						
Phase	kvar	kvar	kvar	kvar		AC				kg

#### For screwing and snapping onto 35 mm standard mounting rail

3RT16 27-1A.01



• Size S00					Current	Auxiliary contacts, unassigned	Rated control supply voltage $U_s$ <sup>1)</sup>	Screw connection		Weight approx.
$1\emptyset$	3	4	8	10				Order No.		
$1\emptyset$	3	4	8	10	18A	2 NO	24 V, 50 Hz	3RT16 17-1AB0 3 3RT16 17-1AK6 3 3RT16 17-1AP6 3	0.24	
$3\emptyset$	6	7	15	18			120 V, 60 Hz			
							240 V, 60 Hz			

• Size S0					Current	Auxiliary contacts, unassigned	Rated control supply voltage $U_s$ <sup>1)</sup>	Screw connection		Weight approx.
$1\emptyset$	7	8	16	20				Order No.		
$1\emptyset$	7	8	16	20	36A	1 NO	24 V, 50/60 Hz	3RT16 27-1AC2 1 3RT16 27-1AK6 1 3RT16 27-1AP6 1	0.38	
$3\emptyset$	12.5	14	28.5	35			120 V, 60 Hz			
							240 V, 60 Hz			

3RT16 47-1A.01



• Size S3					Current	Auxiliary contacts, unassigned	Rated control supply voltage $U_s$ <sup>1)</sup>	Screw connection		Weight approx.
$1\emptyset$	15	17	35	43				Order No.		
$1\emptyset$	15	17	35	43	72A	1 NO	24 V, 50/60 Hz	3RT16 47-1AC2 1 3RT16 47-1AK6 1 3RT16 47-1AP6 1	1.93	
$3\emptyset$	26	30	60	75			120 V, 60 Hz			
							240 V, 60 Hz			

For further voltages, see page 2/49.

For auxiliaries and accessories, see page 2/65-2/80.

For technical data, see page 2/157.

For wiring diagram, see page 2/185.

For dimension drawings, see page 2/204.

1) Coil voltage tolerance: 0.85 ... 1.1 x  $U_s$ .

2) For size S3: 55 °C.



### 3RT20 coupling contactors (interface) for switching motors, 3-pole

#### AC and DC operation

IEC 60947, EN 60947.

The 3RT20 coupling contactors for switching motors are tailored to the special requirements of working with electronic controls.

The 3RT20 1 coupling contactors cannot be expanded with auxiliary switch blocks. Coupling contactors have a low power consumption and an extended solenoid coil operating range.


Depending on the version, the solenoid coils are supplied either without overvoltage damping or with a diode, suppressor diode or varistor connected as standard.

#### Selection and ordering data

##### DC operation



3RT2015-1HB41



3RT2015-2HB41

Surge suppressor	Ratings		Auxiliary contacts		Screw connection	Spring-type connection	Weight approx. (screw/spring)  kg
	Utilization category		Ident. no.	Design	Order No.	Order No.	
	AC-3						
	Maximum inductive current	Maximum <sup>1)</sup> horsepower ratings at 460 V					
	Amps	HP		NO NC			

#### For screwing and snapping onto 35 mm standard mounting rail

##### • Size S00

Terminal designations according to EN 50 012

Rated control supply voltage  $U_s$  = DC 24 V, coil voltage tolerance **0.7 to 1.25** ×  $U_s$

Power consumption of the coils **2.8 W** at 24 V (no auxiliary switch blocks can be mounted)

Diode, varistor or RC element can be mounted	7	3	10E 01	1 – – 1	3RT20 15-1HB41 3RT20 15-1HB42	3RT20 15-2HB41 3RT20 15-2HB42	0.28/0.30
Diode integrated	7	3	10E 01	1 – – 1	3RT20 15-1J B41 3RT20 15-1J B42	3RT20 15-2J B41 3RT20 15-2J B42	0.28/0.30
Suppressor diode integrated	7	3	10E 01	1 – – 1	3RT20 15-1KB41 3RT20 15-1KB42	3RT20 15-2KB41 3RT20 15-2KB42	0.28/0.30
Diode, varistor or RC element can be mounted	9	5	10E 01	1 – – 1	3RT20 16-1HB41 3RT20 16-1HB42	3RT20 16-2HB41 3RT20 16-2HB42	0.28/0.30
Diode integrated	9	5	10E 01	1 – – 1	3RT20 16-1J B41 3RT20 16-1J B42	3RT20 16-2J B41 3RT20 16-2J B42	0.28/0.30
Suppressor diode integrated	9	5	10E 01	1 – – 1	3RT20 16-1KB41 3RT20 16-1KB42	3RT20 16-2KB41 3RT20 16-2KB42	0.28/0.30
Diode, varistor or RC element can be mounted	12	7.5	10E 01	1 – – 1	3RT20 17-1HB41 3RT20 17-1HB42	3RT20 17-2HB41 3RT20 17-2HB42	0.28/0.30
Diode integrated	12	7.5	10E 01	1 – – 1	3RT20 17-1J B41 3RT20 17-1J B42	3RT20 17-2J B41 3RT20 17-2J B42	0.28/0.30
Suppressor diode integrated	12	7.5	10E 01	1 – – 1	3RT20 17-1KB41 3RT20 17-1KB42	3RT20 17-2KB41 3RT20 17-2KB42	0.28/0.30

For technical data, see page 2/158.

For int. circuit diagrams, see page 2/177-2/182.

For dimension drawings, see page 2/196.

1) Complete HP ratings on page 2/111



**Selection and ordering data**  
**DC operation**



3RT2015-1VB41



3RT2015-2VB41



3RT2024-1KB40

Surge suppressor	Ratings		Auxiliary contacts		Screw connection	Spring-type connection	Weight approx. (screw/spring)
	Utilization category	AC-3	Ident. no.	Design			
	AC-3				Order No.	Order No.	
	Maximum inductive current	Maximum horsepower ratings at 460 V					
	Amps	HP	NO	NC			kg

**For screwing and snapping onto 35 mm standard mounting rail**

• **Size S00**

Terminal designations according to EN 50 012

Rated control supply voltage  $U_s = DC 24 V$ , coil voltage tolerance  $0.85$  to  $1.85 \times U_s$

Power consumption of the coils **1.6 W** at 24 V (no auxiliary switch blocks can be mounted)

Diode, varistor or RC element can be mounted	7	3	10E01	1 -	3RT20 15-1MB41-0KT0 3RT20 15-1MB42-0KT0	3RT20 15-2MB41-0KT0 3RT20 15-2MB42-0KT0	0.28/0.30
Diode integrated	7	3	10E01	1 -	3RT20 15-1VB41 3RT20 15-1VB42	3RT20 15-2VB41 3RT20 15-2VB42	0.28/0.30
Suppressor diode integrated	7	3	10E01	1 -	3RT20 15-1SB41 3RT20 15-1SB42	3RT20 15-2SB41 3RT20 15-2SB42	0.28/0.30
Diode, varistor or RC element can be mounted	9	5	10E01	1 -	3RT20 16-1MB41-0KT0 3RT20 16-1MB42-0KT0	3RT20 16-2MB41-0KT0 3RT20 16-2MB42-0KT0	0.28/0.30
Diode integrated	9	5	10E01	1 -	3RT20 16-1VB41 3RT20 16-1VB42	3RT20 16-2VB41 3RT20 16-2VB42	0.28/0.30
Suppressor diode integrated	9	5	10E01	1 -	3RT20 16-1SB41 3RT20 16-1SB42	3RT20 16-2SB41 3RT20 16-2SB42	0.28/0.30
Diode, varistor or RC element can be mounted	12	7.5	10E01	1 -	3RT20 17-1MB41-0KT0 3RT20 17-1MB42-0KT0	3RT20 17-2MB41-0KT0 3RT20 17-2MB42-0KT0	0.28/0.30
Diode integrated	12	7.5	10E01	1 -	3RT20 17-1VB41 3RT20 17-1VB42	3RT20 17-2VB41 3RT20 17-2VB42	0.28/0.30
Suppressor diode integrated	12	7.5	10E01	1 -	3RT20 17-1SB41 3RT20 17-1SB42	3RT20 17-2SB41 3RT20 17-2SB42	0.28/0.30

• **Size S0**

Rated control supply voltage  $U_s = DC 24 V$ , coil voltage tolerance  $0.7$  to  $1.25 \times U_s$

Power consumption of the coils **4.5 W** at 24 V no auxiliary switch blocks can be mounted.

Varistor integrated	12	7.5	11E	1 1	3RT20 24-1KB40	3RT20 24-2KB40	0.58/0.60
	16	10	11E	1 1	3RT20 25-1KB40	3RT20 25-2KB40	0.58/0.60
	25	15	11E	1 1	3RT20 26-1KB40	3RT20 26-2KB40	0.58/0.60
	32	20	11E	1 1	3RT20 27-1KB40	3RT20 27-2KB40	0.58/0.60

For technical data, see page 2/158.

For int. circuit diagrams, see page 2/177-2/182.

For dimension drawings, see page 2/196.

# Contactors and Contactor Assemblies

## Contactors & Relays for Safety Applications

SIRIUS



3RT, 3TF safety contactors and 3RH2, 3TH2 safety control relays

### Applications

#### "Safety" Contactors

Safety rated contactors are required to have positively driven (mirror) contact construction according to IEC 60947-4 Annex F. A mirror contact is a Normally Closed (NC) auxiliary contact which can not be closed simultaneously with a Normally Open (NO) main contact.

In some industries, such as automotive, requirements have been established that a safety rated contactor must also have permanently mounted auxiliary contact blocks. See page 2/18 for Contactors with permanently mounted auxiliary contacts.

#### Siemens Contactors for "Safety" applications:

All Siemens standard 3RT, 3TF6, 40HN & 40PH Contactors are provided with positively driven (mirror) contacts which meet or exceed the criteria for "Safety Contactors" according to IEC 60947-4 Annex F which describes the requirements for mirror contact performance. When applying Safety Contactors in safety circuits, the NC auxiliary contacts must be wired in series or parallel and must be used as monitoring contacts with feedback to the safety evaluation device (i.e. safety relay or failsafe logic controller).


#### "Safety" Control Relays

Safety rated control relays are required to have positively driven contact elements according to IEC 60947-5-1 Annex L. Positively driven contact elements are a combination of NO auxiliary contacts and NC auxiliary contacts whose construction prevents them from being closed simultaneously.

In some industries, such as automotive, requirements have been established that a safety rated control relays must also have permanently mounted auxiliary contact blocks. See page 2/18 for Control Relays with permanently mounted auxiliary contacts.

#### Siemens Control Relays for "Safety" applications:

All SIRIUS 3RH control relays (with at least 1 NC contact) meet or exceed the criteria for "Safety Control Relays" according to IEC 60947-5-1 Annex L. This is true for the basic 3RH relay with or without an additional auxiliary contact block.

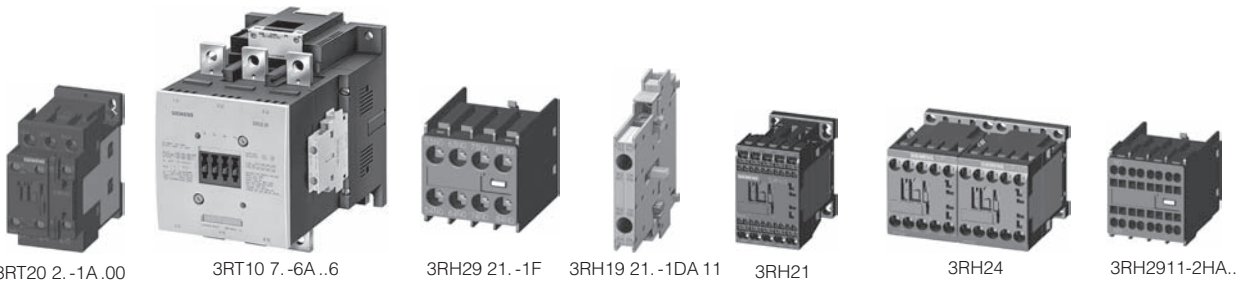

Frame size	Contactors	Auxiliary contact block
S00	3RT201	3RH2911
	3RT231	
	3RT251	
S0	3RT161	3RH1911
	3RT202	
	3RT232	
	3RT252	
S2	3RT162	3RH1921
	3RT103	
	3RT133	
S3	3RT153	3RH1921
	3RT104	
	3RT134	
S6	3RT144	3RH1921
	3RT164	
	3RT105	
S10	3RT145	3RH1921
	3RT106	
	3RT126	
S12	3RT146	3RH1921
	3RT107	
	3RT127	
	3RT147	
	3TF6	3TY7561-1UA00

Frame size	Contactors	Auxiliary contact block
S00	3RH21	3RH2911
	3RH24	
	3TH20	
		3TX44


For contactors, see pages 2/8-2/9.  
 For auxiliaries contact blocks, see pages 2/65-2/67.  
 For control relays, see pages 2/50-2/52.  
 For auxiliaries contact blocks, see page 2/65-2/67..



#### Application

#### "Safety" Contactors


Safety rated contactors are required to have mirrored contact construction according to IEC 60947-4 Annex F. A mirror contact is a Normally Closed (NC) auxiliary contact which can not be closed simultaneously with a Normally Open (NO) main contact. In some industries, such as Automotive, the auxiliary contact blocks are required to be permanently attached to meet the requirements of "unintentional misuse" as specified in IEC 60292, paragraph 3.12. Tested by SUVA.

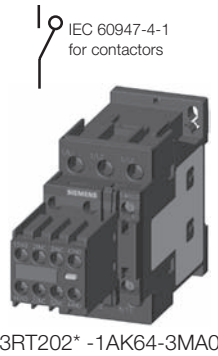

3RT202\* -1AK64-3MA0

#### "Safety" Control Relays

Safety rated control relays are required to have positively driven contact elements according to IEC 60947-5-1 Annex L. Positively driven contact elements are a combination of NO auxiliary contacts and NC auxiliary contacts whose construction prevents them from being closed simultaneously. In some industries, such as automotive, the auxiliary contact blocks are required to be permanently attached to meet the requirements of "unintentional misuse" as specified in IEC 60292, paragraph 3.12. Tested by SUVA.

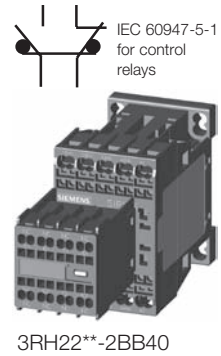

3RH22\*\* -2BB40

#### Application

Frame Size	Max. current		Single-phase HP ratings		Three-phase HP ratings				Auxiliary contacts			Screw Terminals	Spring-Type Terminals <sup>1)</sup>
	AC3	AC1	115V	230V	200V	230V	460V	575V	Ident. No.	NO	NC	Order No.	Order No.
<b>Contactors with permanently mounted auxiliary contact blocks</b>													
S00	7	18	¼	¾	1 ½	2	3	5	22E	2	2	3RT2015-1●●●4-3MA0	3RT2015-2●●●4-3MA0
	9	22	½	1	2	3	5	7 ½	22E	2	2	3RT2016-1●●●4-3MA0	3RT2016-2●●●4-3MA0
	12	22	½	2	3	3	7 ½	10	22E	2	2	3RT2017-1●●●4-3MA0	3RT2017-2●●●4-3MA0
	16	22	1	2	3	5	10	10	22E	2	2	3RT2018-1●●●4-3MA0	3RT2018-2●●●4-3MA0
S0	9	40	1	1	2	3	5	7 ½	22E	2	2	3RT2023-1●●●4-3MA0	3RT2023-2●●●4-3MA0
	12	40	1	2	3	3	7 ½	10	22E	2	2	3RT2024-1●●●4-3MA0	3RT2024-2●●●4-3MA0
	16	40	1	3	5	5	10	15	22E	2	2	3RT2025-1●●●4-3MA0	3RT2025-2●●●4-3MA0
	25	40	2	3	7 ½	7 ½	15	20	22E	2	2	3RT2026-1●●●4-3MA0	3RT2026-2●●●4-3MA0
S2	32	50	2	5	10	10	20	25	22E	2	2	3RT2027-1●●●4-3MA0	3RT2027-2●●●4-3MA0
	38	50	3	5	10	10	25	25	22E	2	2	3RT2028-1●●●4-3MA0	3RT2028-2●●●4-3MA0
	32	50	2	5	10	10	25	30	22E	2	2	3RT1034-1●●●4-3MA0	3RT1034-3●●●4-3MA0
	40	60	3	7 ½	10	15	30	40	22E	2	2	3RT1035-1●●●4-3MA0	3RT1035-3●●●4-3MA0
S3	50	60	3	10	15	15	40	50	22E	2	2	3RT1036-1●●●4-3MA0	3RT1036-3●●●4-3MA0
	65	100	5	15	20	25	50	60	22E	2	2	3RT1044-1●●●4-3MA0	3RT1044-3●●●4-3MA0
	80	120	7 ½	15	25	30	60	75	22E	2	2	3RT1045-1●●●4-3MA0	3RT1045-3●●●4-3MA0
S6	95	120	10	20	30	30	75	100	22E	2	2	3RT1046-1●●●4-3MA0	3RT1046-3●●●4-3MA0
	150	185	--	30	50	60	125	150	22E	2	2	3RT1055-1●●●6-3PA0	—
	185	215	--	30	60	75	150	200	22E	2	2	3RT1056-1●●●6-3PA0	—
S10	225	275	--	--	60	75	150	200	22E	2	2	3RT1064-1●●●6-3PA0	—
	265	330	--	--	75	100	200	250	22E	2	2	3RT1065-1●●●6-3PA0	—
	300	330	--	--	100	125	250	300	22E	2	2	3RT1066-1●●●6-3PA0	—

#### Control circuit coil options: Replace ●●● with the desired code

Frame Size S00 - S0	●●●	Frame Size S2 - S3	●●●	Frame Size S6 - S10	●●●
120 V AC	<b>AK6</b>	120 V AC	<b>AK6</b>	23 ... 26 V UC*, conventional coil	<b>AB3</b>
120 V AC, with varistor mounted	<b>CK6</b>	24 V DC	<b>BB4</b>	110 ... 127 V UC*, conventional coil	<b>AF3</b>
230 V AC	<b>AP0</b>	24 V DC, with zener diode	<b>QB4</b>		
24 V DC	<b>BB4</b>				
24 V DC, with integrated diode/diode assembly	<b>FB4</b>				

\*UC coil: accepts DC voltage or AC voltage, 40 to 60 Hz.

Frame Size	Max. current at 240 V <sup>2)</sup>	Rated control supply voltage U <sub>s</sub>	Auxiliary contacts			Screw Terminals <sup>3)</sup>	Spring Terminals <sup>3)</sup>
A			Ident. No.	NO	NC	Order No.	Order No.

#### Control relays with permanently mounted auxiliary contact blocks

<b>S00-S00</b>	<b>10</b>	110 V AC, 50 Hz / 120 V AC, 60 Hz	44E	4	4	3RH2244-1AK60	3RH2244-2AK60
	<b>10</b>	24 V DC	44E	4	4	3RH2244-1BB40	3RH2244-2BB40
	<b>10</b>	110 V AC, 50 Hz / 120 V AC, 60 Hz	62E	6	2	3RH2262-1AK60	3RH2262-2AK60
	<b>10</b>	24 V DC	62E	6	2	3RH2262-1BB40	3RH2262-2BB40

For other voltages see page 2/49.

For accessories, see pages 2/71-2/75.

For spare parts, see pages 2/82-2/84.

For technical data, see pages 2/108-2/129.

For description, see pages 2/91-2/92.

For int. circuit diagrams, see page 2/177-2/183.

For dimension drawings, see pages 2/196-2/202.

1) All terminals are spring loaded on frame size S00 and S0. Only the coil and auxiliary contact terminals are spring loaded on frame sizes S2, S3 & S6.

2) For AC-15/AC-14, max current for front mounted auxiliary contacts = 6 A.

3) The 3RH22 control relays are also available with ring lug terminals. Replace the 8th digit of the order number with a "4", e. g. 3RH2244-4AK60

# Contactors and Contactor Assemblies













## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### Introduction

#### Overview

The function modules for mounting onto contactors enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking, and can be connected to the control system by either parallel wiring or through IO-Link or AS-Interface.

Version	SIRIUS function modules for parallel wiring	SIRIUS function modules for IO-Link <sup>1)</sup>	SIRIUS function modules for AS-Interface <sup>1)</sup>
For direct-on-line starting	Timing relays: ON or OFF-delay with semiconductor output With screw or spring-type terminals 	With screw or spring-type terminals 	With screw or spring-type terminals 
For reversing starting	Wiring modules for sizes S00 and S0 With screw or spring-type terminals - (with screw terminals for main and control circuit) 	1 function module for size S00 and S0, screw and spring-type connection, plus the respective wiring modules <sup>1)</sup> 	1 function module for size S00 and S0, screw and spring-type connection, plus the respective wiring modules <sup>1)</sup> 
For wye-delta starting	1 function module for size S00 and S0, screw and spring-type connection of the contactors, plus the respective wiring modules <sup>2)</sup> 	For wye-delta starting: 1 function module for size S00 and S0, plus screw and spring-type connection, plus the respective wiring modules <sup>2)</sup> 	For wye-delta starting: 1 function module for size S00 and S0, plus screw and spring-type connection, plus the respective wiring modules <sup>2)</sup> 
Accessories	Sealable covers 	Operator panel for autonomous controlling of up to 4 starters Module connector for the grouping of starters Connection cable between the operator panel and the starter group Sealable covers 	AS-Interface addressing units Sealable covers 

<sup>1)</sup> Use of the communication-capable function modules for IO-Link or AS-Interface requires contactors with communication interface (see pages 2/26).

<sup>2)</sup> The modules for the control current wiring, which are included in the wiring kit, are not required.

**Note:**  
When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.





### Overview

Simply by being plugged in place, the SIRIUS function modules enable different functionalities required for the assembly of starters to be realized in the starter. The function modules and wiring kits help to reduce the wiring work within the starter practically to zero.

#### **SIRIUS function modules for direct-on-line starting**

All solid-state timing relays which can be mounted onto the contactor are designed for applications in the range from 24 to 240 V AC/DC (wide voltage range). Both the electrical and mechanical connection are made by simple snapping on and locking.

A protection circuit (varistor) is integrated in each module.

The solid-state timing relay with semiconductor output uses two contact limbs to actuate the contactor underneath by means of a semiconductor after the set time  $t$  has elapsed.

The switching state feedback is performed by a mechanical switching state indicator (plunger). In addition, the auxiliary switches in the contactors are freely accessible and can be used for feedbacks to the control system or for signal lamps.

A sealable cover is available to protect against careless adjustment of the set times.

#### **SIRIUS function modules for reversing starting**

The wiring kits for reversing starters enable the cost-effective assembly of contactor assemblies. They can be used for all applications with reversing duty up to 25 HP.

For a detailed description see page 2/37.

#### **SIRIUS function modules for wye-delta starting**

Both interlocking and timing functions are required for the assembly of wye-delta starters. With the function modules for wye-delta starting and the matching link modules for the main circuit, these starters can be assembled easily and with absolutely no errors.

The entire sequence in the control circuit is integrated in the snap-on modules. This covers:

- An adjustable wye time  $t$  from 0.5 to 60 s
- A non-adjustable dead interval of 50 ms
- Electrical contacting to the contactors by means of coil pick-off (contact legs)
- Feedback of the switching state at the contactor using a mechanical switch position indicator (plunger)
- Electrical interlocking between the contactors

These modules do not require their own terminals and can therefore be used for contactors with both screw and spring-type terminals in the two sizes S00 and S0. To start the wye-delta starter, only the first of the three contactors (line contactor) is actuated. All other functions then take place inside the individual modules.

This also offers advantages if the timing function was previously implemented in a controller, as it again results in a significant reduction in the number of PLC outputs, the programming work and the wiring outlay.

The kits for the main circuit include the mechanical interlock, the star jumper, the wiring modules at the top and at the bottom, and the required connecting clips.

A protection circuit (varistor) is integrated in the basic module.

### Application

The snap-on function modules for direct-on-line starting are used above all for realizing timing functions independently of the control system.

With the OFF-delay variant of the timing relay it is possible for example for the fan motor for cooling a main drive to be switched off with a delay so that sufficient cooling after operation is guaranteed even if the plant and its control system have already been switched off.

The ON-delay timing relays enable for example the time-delayed starting of several drives so that the summation starting current does not rise too high, which could result in voltage failure.

The function modules for wye-delta starting are mostly used where current-limiting measures for starting a drive are required, e.g. for large fans and ventilators, and a high level of availability is essential at the same time. This technology has been used with success for several decades and has the additional advantage of requiring relatively little know-how. Through the use of function modules, the assembly work with simple standard components is even easier and error-free.

### Benefits

The use of snap-on function modules for direct-on-line starting (timing relays) results in the following advantages:

- Reduction of control current wiring
- Prevention of wiring errors
- Reduction of testing costs
- Implementation of timing functions independently of the control system
- Less space required in the control cabinet compared to a separate timing relay
- No additive protection circuit required (varistor integrated)

The use of function modules for wye-delta starting results in the following advantages:

- Operation solely through the line contactor A1/A2 – no further wiring needed
- Reduction of the control current wiring inside the contactor assembly and to the higher-level control system where applicable
- Prevention of wiring errors
- Reduction of testing costs
- Integrated electrical interlocking saves costs and prevents errors
- Less space needed in the control cabinet compared to using a separate timing relay
- Adjustable starting in star mode from 0.5 to 60 s
- Independent of the contactor's control supply voltage (24 to 240 V AC/DC)
- Varistor integrated – no additive protection circuit required
- No control current wiring thanks to plug-in technology and connecting cables
- Mechanically coded assembly enables easy configuration and reliable wiring
- Fewer versions – one module kit for screw and spring-type connection and for the two sizes S00 and S0
- Mechanical interlocking (with wiring kit for the main circuit)

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS





### 3RT2 contactors, 3-pole Communication Contactors

#### Selection and ordering data

- Ideal for diagnostics to the automation controller
- Quickly locate and rectify faults
- Configuration available in Step 7 and TIA Portal
- Easy engineering of parameters
- For DOL, reversing and wye delta starters up to 25HP
- Manual starter operation with optional operation panel
- Reduces control wiring in the panel
- Available for 24VDC control systems
- Easily snap on IO-Link or AS-Interface modules onto contactors



Frame Size	Amp Ratings		Single-phase HP ratings		Three-phase HP ratings				Auxiliary contacts		Screw Terminals 24 V DC coil	Spring-type terminals 24 V DC coil	Weight approx. kg	
	AC3	AC1	115V	230V	208V	230V	460V	575V	NO	NC	Order No.	Order No.		
<b>3RT 3-pole Contactors</b>														
 3RT2018-1BB41-0CC0	S00	7	18	0.25	0.75	1.5	2	3	5	1	0	3RT2015-1BB41-0CC0	3RT2015-2BB41-0CC0	0.28
			0	1	3RT2015-1BB42-0CC0	3RT2015-2BB42-0CC0								
		9	22	0.33	1	2	3	5	7.5	1	0	3RT2016-1BB41-0CC0	3RT2016-2BB41-0CC0	
			0	1	3RT2016-1BB42-0CC0	3RT2016-2BB42-0CC0								
		12	22	0.5	2	3	3	7.5	10	1	0	3RT2017-1BB41-0CC0	3RT2017-2BB41-0CC0	
			0	1	3RT2017-1BB42-0CC0	3RT2017-2BB42-0CC0								
		16	22	1	2	3	5	10	10	1	0	3RT2018-1BB41-0CC0	3RT2018-2BB41-0CC0	
			0	1	3RT2018-1BB42-0CC0	3RT2018-2BB42-0CC0								
 3RT2028-1BB40-0CC0	S0	9	40	1	1	2	3	5	7.5	1	1	3RT2023-1BB40-0CC0	3RT2024-2BB40-0CC0	0.58
			1	2	3	3	7.5	10	1	1	3RT2024-1BB40-0CC0	3RT2024-2BB40-0CC0		
		12	40	1	2	3	3	7.5	10	1	1	3RT2025-1BB40-0CC0	3RT2025-2BB40-0CC0	
			1	3	5	5	10	15	1	1	3RT2026-1BB40-0CC0	3RT2026-2BB40-0CC0		
		16	40	2	3	7.5	7.5	15	20	1	1	3RT2027-1BB40-0CC0	3RT2027-2BB40-0CC0	
			2	5	10	10	20	25	1	1	3RT2028-1BB40-0CC0	3RT2028-2BB40-0CC0		
3	5	10	10	25	25	1	1	3RT2028-1BB40-0CC0	3RT2028-2BB40-0CC0					

1) All terminals are spring loaded

IO-Link is ideal for communicating sensors and actuators in and around the control cabinet.  
AS-Interface is best suited for distributed systems.

For reversing contactors with communication capability, see pages 2/39-2/43

For accessories, see page 2/27, 2/30, 2/34.


For technical data, see page 2/31, 2/35, 2/36

For description, see page 2/24.

For further information on IO-Link and AS-Interface, see page 2/28-2/29 and 2/32-2/33.



**Selection and ordering data**



3RA28 16-0EW20

3RA29 13-2AA1

3RA29 13-2BB2

For contactors	Rated control supply voltage $U_s$ <sup>1)</sup>	Time setting range $t$	Screw terminals	Weight approx.	Spring-type terminals	Weight approx.
Type	V	s	Order No.	kg	Order No.	kg

**Assembly kits for reversing starting**

<b>Assembly kits for making 3-pole contactor assemblies</b> The assembly kit contains: Mechanical interlock; 2 connecting clips for 2 contactors, wiring modules on the top and bottom						
3RT20 1.	• For size S00		<b>3RA29 13-2AA1</b>	0.001	<b>3RA29 13-2AA2</b>	0.001
3RT20 2.	• For size S0		<b>3RA29 23-2AA1</b>	0.001	<b>3RA29 23-2AA2</b>	0.001

**Assembly kits for wye-delta starting**

<b>Assembly kits for making 3-pole contactor assemblies</b> The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom						
3RT20 1.	• For size S00		<b>3RA29 13-2BB1</b>	0.001	<b>3RA29 13-2BB2</b>	0.001
3RT20 2.	• For size S0 (only main current for version with spring-type terminals)		<b>3RA29 23-2BB1</b>	0.001	<b>3RA29 23-2BB2</b>	0.001

**Function modules for wye-delta starting**

The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables.

<b>Wye-delta function (varistor integrated)</b>						
3RT20 1., 3RT20 2. <sup>2)</sup>	24 ... 240 AC/DC	0.5 ... 60 (10, 30, 60 selectable)	<b>3RA28 16-0EW20</b>	0.170	<b>3RA28 16-0EW20</b>	0.170
<b>Individual modules</b>						
	24 ... 240 AC/DC	Basic modules for wye-delta starting	<b>3RA29 12-0</b>	0.085	<b>3RA29 12-0</b>	0.085
	--	Coupling modules for wye-delta starting	<b>3RA29 11-0</b>	0.095	<b>3RA29 11-0</b>	0.095

**Accessories**

	<b>Sealable covers</b> for 3RA27, 3RA28, 3RA29		<b>3RA29 10-0</b>	0.002	<b>3RA29 10-0</b>	0.002
--	---	--	-------------------	-------	-------------------	-------


<sup>1)</sup> AC voltage values apply for 50 Hz and 60 Hz.  
<sup>2)</sup> Cannot be fitted onto coupling relays.

*Note:*  
 When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.

Function	Function charts
	▨ Timing relay energized ■ Contact closed □ Contact open

**2 NO contacts (internally connected)**

Wye-delta function (varistor integrated)  
 • 1 NO contact, delayed  
 • 1 NO contact, instantaneous



# Contactors and Contactor Assemblies

## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### SIRIUS function modules for IO-Link


#### Overview

The SIRIUS function modules for IO-Link enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking. The electrical and mechanical connection to the contactor is established by snapping on and locking. An additive protection circuit for the individual contactors can be dispensed with completely, and feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions. The starters are connected to the higher-level

control system through IO-Link, with the possibility of connecting up to four starters as a group to one port of the IO-Link master.

Through this type of connection to the control system, a maximum of wiring is saved. The following essential signals are transmitted:


- Availability of the starter in response to an indirect inquiry from the motor starter protector
- Starter operation
- Feedback concerning the switching state of the starter

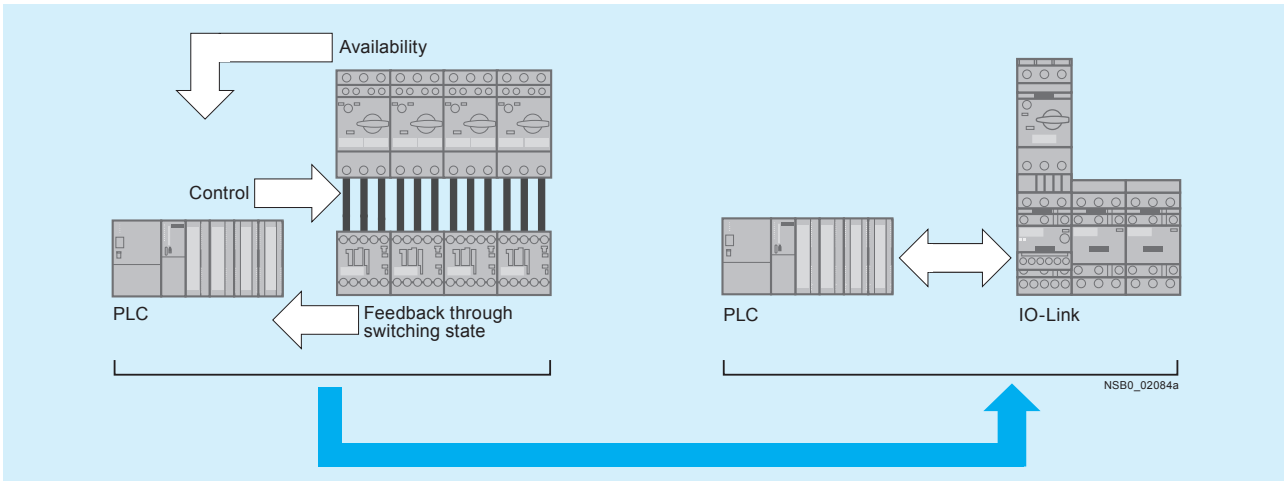

Signal transmission through IO-Link

The inquiry from the motor starter protector does not take place through additional wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input.

This requires the use of communication versions of the contactors with communication interface (see page 2/26).

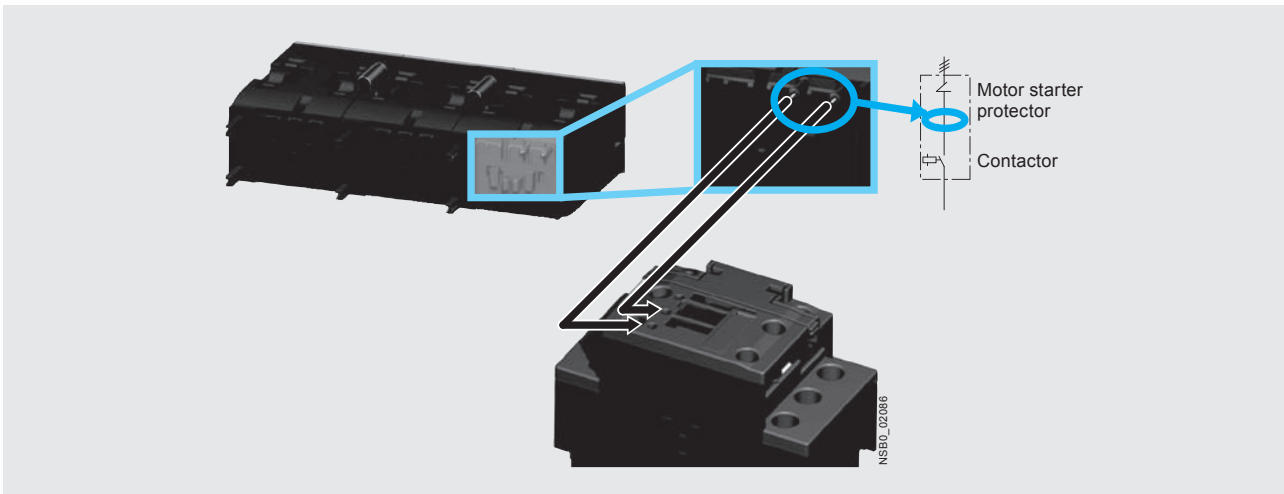


Availability signal through voltage pick-off



By grouping up to four starters it is possible to connect up to 16 starters to one master of the ET200S. All the signals of the individual controls are made available through only 3 individual wires per starter group directly in the process image. If the

potential at the master of the ET200S is the same as that of the controls, a further reduction in wiring is possible by providing the control supply voltage to the contactors by jumpering the corresponding communication wires.

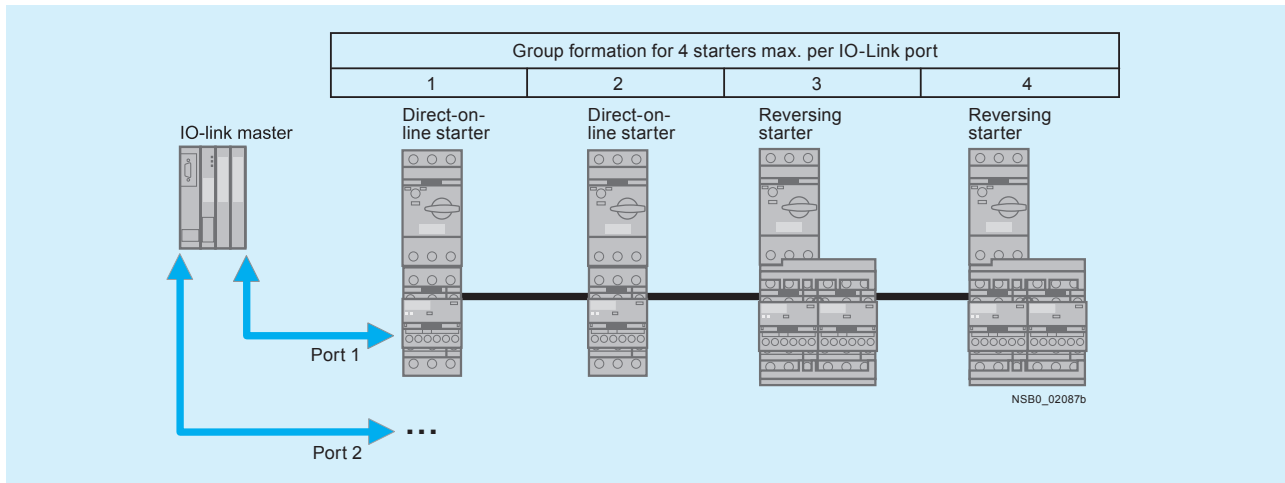

Group formation with IO-Link

In case of a malfunction, the corresponding error signals are also sent directly to the PLC in acyclic mode. This is in addition to transmission of the switching signals and status signals.

Possible error signals:

- Device defect
- No main voltage (motor starter protector tripped)
- No control supply voltage
- Limit position on the right / on the left
- Manual mode
- Process image fault

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example to a position switch. The input interrupts the voltage supply to the contactor coil directly, i. e. without going through the PLC. These terminals are jumpered in the as-delivered state.

Local manual operation of the complete starter group is also straight-forward using an operator panel. The latter is easily connected to the last starter and can be built into the front panel of the control cabinet if required. This offers significant advantages particularly for commissioning.

### Application

The use of SIRIUS function modules with IO-Link is recommended above all in machines and plants in which there are several motor starters in one control cabinet. Using IO-Link, the connection of these starters to the automation level is easy, quick and error-free. And with IO modules no longer needed, the width of the ET200S becomes far smaller.

### Benefits

- Reduction of the control current wiring to no more than one cable having three conductors for four starters
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Integration in TIA for clear diagnostics if a fault occurs
- Fewer IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additional control circuit required

Further information on the application and benefits of the SIRIUS function modules for connection to the control system through IO-Link can be found in Chapter 14 "Industrial Communication".









# Contactors and Contactor Assemblies

## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### SIRIUS function modules for IO-Link

#### Selection and ordering data

Version	Screw terminals 	Weight approx.	Spring-type terminals 	Weight approx.
	Order No.	kg	Order No.	kg
<b>Function modules for direct-on-line starting</b>				
 3RA27 11-1AA00   3RA27 11-2AA00	<b>IO-Link connection</b> Includes one module connector for assembling an IO-Link group	<b>3RA27 11-1AA00</b>  0.080	<b>3RA27 11-2AA00</b>  0.075	
<b>Function modules for reversing starting<sup>1)</sup></b>				
 3RA27 11-1BA00   3RA29 23-2AA1	<b>IO-Link connection,</b> comprising one basic and one coupling module and an additional module connector for assembling an IO-Link group	<b>3RA27 11-1BA00</b>  0.155	<b>3RA27 11-2BA00</b>  0.145	
<b>Assembly kits for making 3-pole contactor assemblies<sup>3)</sup></b>				
The assembly kit contains: mechanical interlock; 2 connecting clips for 2 contactors, wiring modules on the top and bottom				
<ul style="list-style-type: none"> <li>• For size S00</li> </ul>		<b>3RA29 13-2AA1</b>  0.001	<b>3RA29 13-2AA2</b>  0.001	
<ul style="list-style-type: none"> <li>• For size S0</li> <li>- For main, auxiliary and control circuit</li> <li>- Only for main current<sup>4)</sup></li> </ul>		<b>3RA29 23-2AA1</b>  0.001	--	
		--	<b>3RA29 23-2AA2</b>  0.001	
<b>Function modules for wye-delta starting<sup>2)</sup></b>				
 3RA27 11-1CA00   3RA29 23-2BB1	<b>IO-Link connection,</b> comprising one basic module and two coupling modules, plus an additional module connector for assembling an IO-Link group	<b>3RA27 11-1CA00</b>  0.190	<b>3RA27 11-2CA00</b>  0.185	
<b>Assembly kits for making 3-pole contactor assemblies<sup>3)</sup></b>				
The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom				
<ul style="list-style-type: none"> <li>• For size S00</li> </ul>		<b>3RA29 13-2BB1</b>  0.001	<b>3RA29 13-2BB2</b>  0.001	
<ul style="list-style-type: none"> <li>• For size S0</li> <li>- For main, auxiliary and control circuit</li> <li>- Only for main current<sup>4)</sup></li> </ul>		<b>3RA29 23-2BB1</b>  0.001	--	
		--	<b>3RA29 23-2BB2</b>  0.001	

Matching contactors with communication interface required (see page 2/26).

For matching IO-Link masters, routers and power supply units see Chapter 14 "Industrial Communication".

**Note:**

When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.

1) For prewired contactor assemblies for reversing starting with communication interface see pages 2/40 and 2/42. When these contactor assemblies are used, the assembly kit for the wiring is already integrated.




2) For complete contactor assemblies for wye-delta starting including function modules see pages 2/47 and 2/48.

3) When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required.

4) Version in size S0 with spring-type terminals:  
 Only the wiring modules for the main circuit are included.  
 No connectors are included for the auxiliary and control circuit.







Version	Order No.	Std. Pack Qty.	Weight approx. kg
<b>Accessories</b>			
 <p>3RA27 11-0EE0</p>	<p><b>Module connector sets</b>, comprising:</p> <ul style="list-style-type: none"> <li>• 2 module connectors, 14-pole, short + 2 interface covers</li> </ul>	3RA27 11-0EE01	1 unit 0.001
	<p><b>Module connectors</b>, 14-pole, 8 cm</p> <ul style="list-style-type: none"> <li>• For size jump S00-S0 + 1 space</li> </ul>	3RA27 11-0EE02	1 unit 0.001
	<p><b>Module connectors</b>, 14-pole, 21 cm</p> <ul style="list-style-type: none"> <li>• For diverse space combinations</li> </ul>	3RA27 11-0EE03	1 unit 0.001
	<p><b>Module connectors</b>, 10-pole, 8 cm</p> <ul style="list-style-type: none"> <li>• For separate auxiliary voltage supply within an IO-Link group</li> </ul>	3RA27 11-0EE04	1 unit 0.001
 <p>3RA29 10-0</p>	<p><b>Sealable covers</b> for 3RA27, 3RA28, 3RA29</p>	3RA29 10-0	5 units 0.002
<b>Operator panels<sup>1)</sup></b>			
 <p>3RA69 35-0A</p>	<p><b>Operator panels (set)</b></p> <ul style="list-style-type: none"> <li>• 1 x operator panel</li> <li>• 1 x enabling module</li> <li>• 1 x interface cover</li> <li>• 1 x fixing terminal</li> </ul>	3RA69 35-0A	1 unit 0.052
	<p><b>Connection cables</b>, length 2 m, 10- to 14-pole</p> <p>For connecting the operator panel to the communication module</p>	3RA27 11-0EE11	1 unit 0.001
	Enabling modules (replacement)	3RA69 36-0A	1 unit 0.002
	Interface covers (replacement)	3RA69 36-0B	5 units 0.001

<sup>1)</sup> Suitable only for communication through IO-Link.

**More information**

Type	3RA27 11		
<b>General data</b>			
<b>Suitable for IO-Link masters acc. to Specification</b>		1.0	
<b>Permissible ambient temperature</b>			
• During operation	Acc. to EN 60947-1	°C	-25 ... +60
• During storage	Acc. to EN 60721-3-1	°C	-40 ... +80
• During transport	Acc. to EN 60721-3-2	°C	-40 ... +80
<b>Degree of protection</b>		IP20	
<b>Operational voltage <math>U_{HI}</math></b>		V DC	24 ± 20 %
<b>Power consumption, max. at <math>U_{HI}</math></b>		A	2
<b>Max. length of the cables for the input Y1–Y2</b>		Acc. to EN 50295	m
<b>EMC interference immunity</b>			
• Electrostatic discharge	Acc. to EN 61000-4-2	kV	6/8
• Field-related interference	Acc. to EN 61000-4-3	V/m	10 (80 MHz ... 3 GHz)
• Burst	Acc. to EN 61000-4-4	kV	2/1
• Conductor-related interference	Acc. to EN 61000-4-5	kV	0.5/1
• High-frequency, asymmetric	Acc. to EN 61000-4-6	V rms	10 (150 kHz ... 80 MHz)
<b>Conductor cross-sections</b>			
Connection type		 <b>Screw terminals</b>	
• Solid	mm <sup>2</sup>	1 x (0.5 ... 4), 2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve	mm <sup>2</sup>	1 x (0.5 ... 2.5), 2 x (0.5 ... 1.5)	
• AWG cables	AWG	2 x (20 ... 14)	
• Terminal screws		M3 (for standard screwdriver Ø 6 mm or Pozidriv 2)	
• Tightening torque of the terminal screws	Nm	0.8 ... 1.2	
Connection type		 <b>Spring-type terminals</b>	
• Operating devices	mm	3.0 x 0.5	
• Solid	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• Finely stranded	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• AWG cables	AWG	2 x (24 ... 16)	

# Contactors and Contactor Assemblies

## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### SIRIUS function modules for AS-Interface

#### Overview


The SIRIUS function modules for AS-Interface enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular starter, e. g. timing and interlocking. The electrical and mechanical connection to the contactor is established by snapping on and locking. An additional control circuit for the individual contactors can be eliminated with completely because a varistor is integrated in the modules. Feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions. Connection of the starters to the higher-level control system takes place through AS-Interface with the Specification V2.1 in A/B technology. As the result, up to 62 starters can be con-

nected to one master and the address is entered in normal manner with an addressing unit.

Through the AS-Interface connection to the control system, a maximum of wiring is saved. The wiring outlay is reduced to the control supply voltage and the two individual wires for AS-Interface.

The following essential signals are transmitted:


- Availability of the starter in response to an indirect inquiry from the motor starter protector
- Starter operation
- Feedback concerning the switching state of the starter

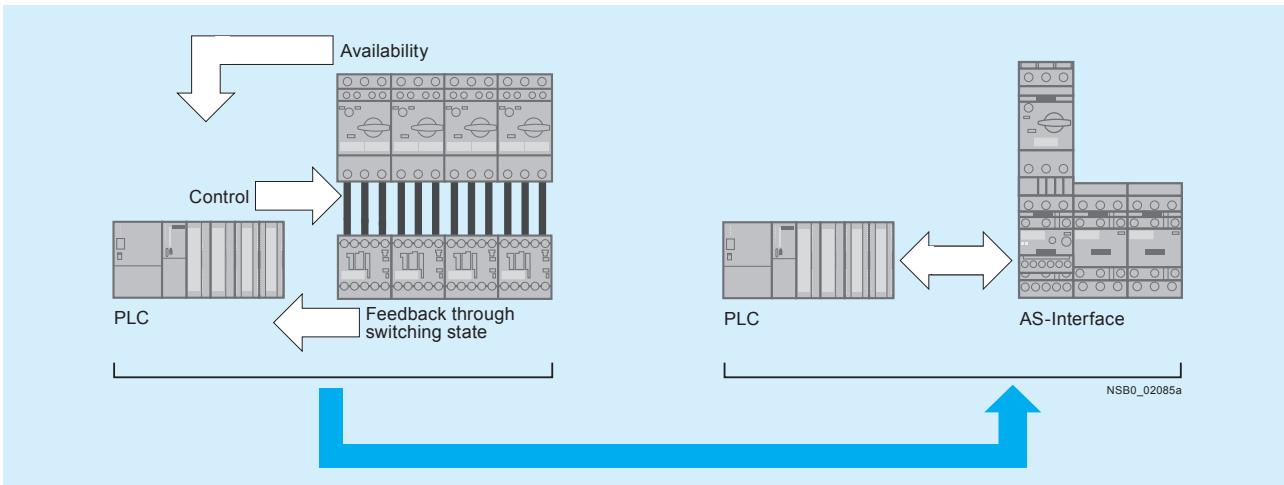


Signal transmission through AS-Interface

The inquiry from the motor starter protector does not take place through additional wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input.

This requires use of communication versions of the contactors with communication interface (see page 2/26).

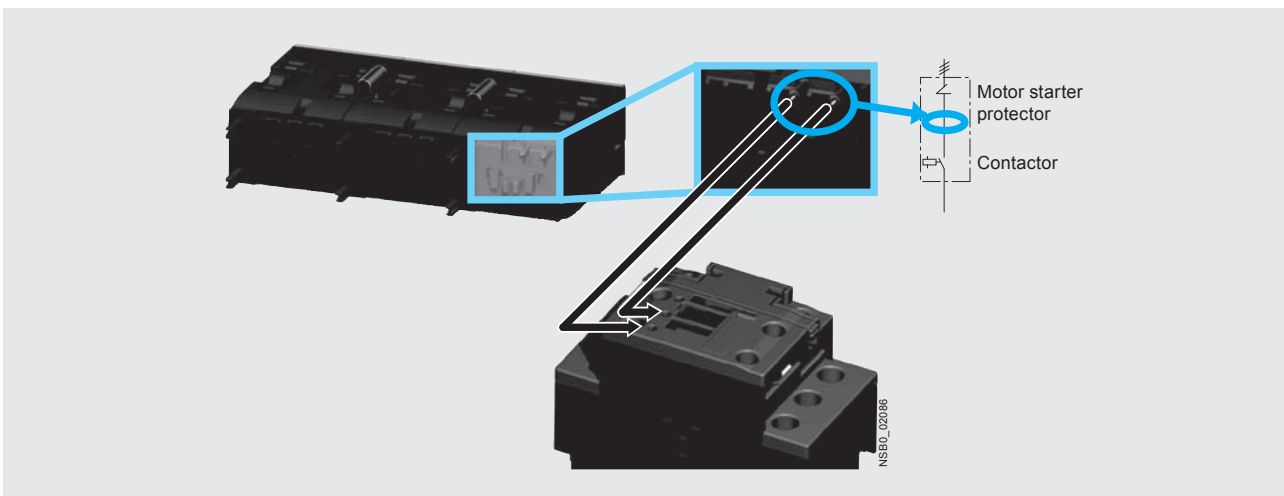

Availability signal through voltage pick-off

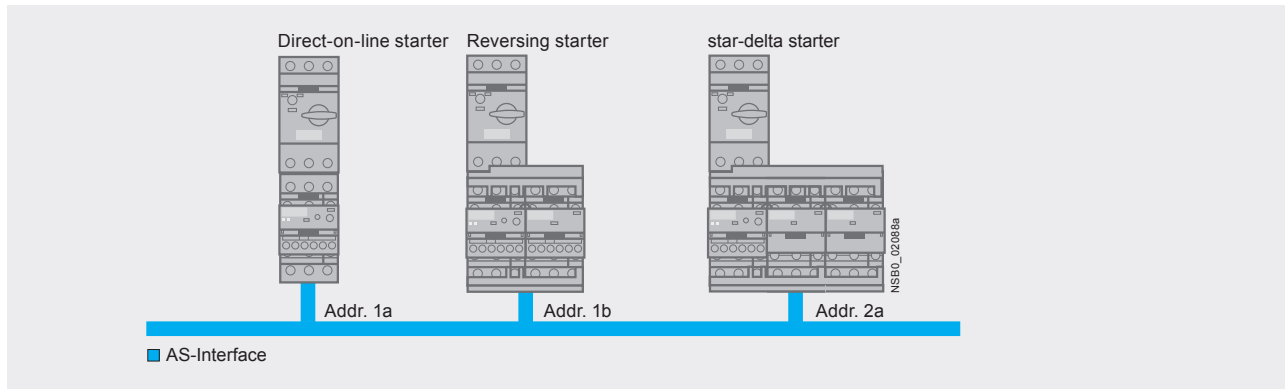

Topology with AS-Interface

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example,

to a position switch. The input interrupts the voltage supply to the contactor coil directly, i. e. without going through the PLC. These terminals are jumpered in the as-delivered state.

### Application

The use of SIRIUS function modules with AS-Interface is recommended above all in machines and plants requiring easy connection of several different sensors and actuators both inside and outside the control cabinet to the higher-level control system. And with IO modules no longer needed, the width of the ET200S is far smaller.

### Benefits

- Reduction of control current wiring
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Elimination of IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additional control circuit required









# Contactors and Contactor Assemblies

## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### SIRIUS function modules for AS-Interface

#### Selection and ordering data

Version	Screw terminals 	Weight approx.	Spring-type terminals 	Weight approx.
Order No.		kg	Order No.	kg
<b>Function modules for direct-on-line starting</b>				
 3RA27 12-1AA00   3RA27 12-2AA00	<b>AS-Interface connection</b> 3RA27 12-1AA00	0.075	3RA27 12-2AA00	0.075
<b>Function modules for reversing starting<sup>1)</sup></b>				
 3RA27 12-1BA00	<b>AS-Interface connection, comprising one basic and one coupling module</b> 3RA27 12-1BA00	0.150	3RA27 12-2BA00	0.145
 3RA29 23-2AA1	<b>Assembly kits for making 3-pole contactor assemblies</b> The assembly kit contains: mechanical interlock; 2 connecting clips for 2 contactors, wiring modules on the top and bottom • For size S00 • For size S0 - For main, auxiliary and control circuit - Only for main current	3RA29 13-2AA1 0.001 3RA29 23-2AA1 0.001 -- 3RA29 23-2AA2 0.001	3RA29 13-2AA2 0.001 -- 3RA29 23-2AA2 0.001	0.001 0.001 -- 0.001
<b>Function modules for wye-delta starting<sup>2)</sup></b>				
 3RA27 12-1CA00	<b>AS-Interface connection, comprising one basic module and two coupling modules</b> 3RA27 12-1CA00	0.185	3RA27 12-2CA00	0.185
 3RA29 23-2BB1	<b>Assembly kits for making 3-pole contactor assemblies</b> The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom • For size S00 • For size S0 - For main, auxiliary and control circuit - Only for main current	3RA29 13-2BB1 0.001 3RA29 23-2BB1 0.001 -- 3RA29 23-2BB2 0.001	3RA29 13-2BB2 0.001 -- 3RA29 23-2BB2 0.001	0.001 0.001 -- 0.001

Matching contactors with communication interface required (see page 2/26).

For matching AS-Interface masters, routers and power supply units see Chapter 14 "Industrial Communication".

**Note:**

When the function modules are used, no other auxiliary switches are allowed to be mounted on the basic units.

1) For prewired contactor assemblies for reversing starting with communication interface see pages 2/40 and 2/42. When these contactor assemblies are used, the assembly kit for the wiring is already integrated.

2) For complete contactor assemblies for wye-delta starting including function modules see pages 2/47 and 2/48.



Version	Order No.	Std. Pack Qty.	Weight approx.
			kg

**Accessories**



3RA29 10-0

**Sealable covers**  
for 3RA27, 3RA28, 3RA29

**3RA29 10-0**

1 5 units

0.002

**More information**

Type		<b>3RA27 12</b>	
<b>General data</b>			
<b>Slave type</b>		A/B slave	
<b>Suitable for AS-i masters acc. to Spec.</b>		2.1 or higher	
AS-i Slave Profile IO.ID.ID2		7.A.E	
ID1 Code (factory setting)		7	
<b>Permissible ambient temperature</b>			
• During operation	Acc. to EN 60947-1	°C	-25 ... +60
• During storage	Acc. to EN 60721-3-1	°C	-40 ... +80
• During transport	Acc. to EN 60721-3-2	°C	-40 ... +80
<b>Degree of protection</b>		IP20	
Operational voltage			
• AS-Interface		V	26.5 ... 31.6
• AUX PWR 24 V DC		V	24 ± 20 %
Power consumption, max.			
• AS-Interface		mA	30
• AUX PWR			
- Maximum pick-up/hold current	Size S00	mA	200
	Size S0	mA	300
<b>Max. length of the cables for the input Y1–Y2</b>	Acc. to EN 50295	m	30
<b>EMC interference immunity</b>			
• Electrostatic discharge	Acc. to EN 61000-4-2	kV	6/8
• Field-related interference	Acc. to EN 61000-4-3	V/m	10 (80 MHz ... 3 GHz)
• Burst	Acc. to EN 61000-4-4	kV	1/2
• Conductor-related interference	Acc. to EN 61000-4-5	kV	0.5/1
• High-frequency, asymmetric	Acc. to EN 61000-4-6	V rms	10 (150 kHz ... 80 MHz)
<b>Conductor cross-sections</b>			
Connection type		<b>Screw terminals</b>	
• Solid	mm <sup>2</sup>	1 x (0.5 ... 4), 2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve	mm <sup>2</sup>	1 x (0.5 ... 2.5), 2 x (0.5 ... 1.5)	
• AWG cables	AWG	2 x (20 ... 14)	
• Terminal screws		M3 (for standard screwdriver Ø 6 mm or Pozidriv 2)	
• Tightening torque of the terminal screws	Nm	0.8 ... 1.2	
Connection type		<b>Spring-type terminals</b>	
• Operating devices	mm	3.0 x 0.5	
• Solid	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• Finely stranded	mm <sup>2</sup>	2 x (0.25 ... 1.5)	
• AWG cables	AWG	2 x (24 ... 16)	

# Contactors and Contactor Assemblies

## Function Modules for Mounting onto SIRIUS 3RT2 Contactors



### SIRIUS function modules

#### More information

Type		3RA28 11 With ON-delay	3RA28 12 OFF-delay with auxiliary voltage	3RA28 16 Wye-delta function
<b>General data</b>				
<b>Rated insulation voltage <math>U_i</math></b> Pollution degree 3 Overvoltage category III	V AC	300		
<b>Operating range of excitation</b>		0.85 ... 1.1 x $U_N$ , 0.95 ... 1.05 times the rated frequency		
<b>Overvoltage protection</b>		Varistor integrated		
<b>Rated power</b>	W	1		1
• Power consumption at 230 V AC, 50 Hz	VA	1		2
<b>Rated operational currents <math>I_e</math></b>				
• AC-140	At 24 ... 240 V, 50 Hz	A	0.4	--
• DC-13	At 24 ... 240 V	A	0.4	--
• AC-15	At 24 ... 240 V, 50 Hz	A	--	3
• DC-13	- At 24 V	A	--	1
	- At 125 V	A	--	0.2
	- At 250 V	A	--	0.1
<b>DIAZED fuse</b>	Operational class gG	A	--	4
<b>Switching frequency for load</b>				
• With $I_e$ at 230 V AC		h <sup>-1</sup>	2500	--
• With 3RT2 contactor at 230 V AC		h <sup>-1</sup>	2500	--
<b>Recovery time</b>		ms	50	150
<b>Minimum ON period</b>		ms	--	35
<b>Residual current</b>	Max.	mA	5	--
<b>Voltage drop</b> With conducting output	Max.	VA	3.5	--
<b>Short-time loading capacity</b>	Up to 10 ms	A	10	--
<b>Setting accuracy</b> With reference to upper limit of scale	Typ.		±15 %	
<b>Repeat accuracy</b>	Max.		±1 %	
<b>Mechanical endurance</b>	Operat- ing cy- cles		100 x 10 <sup>6</sup>	10 x 10 <sup>6</sup>
<b>Permissible ambient temperature</b>				
• During operation	°C		-25 ... +60	
• During storage	°C		-40 ... +80	
<b>Degree of protection</b> acc. to EN 60947-1, Appendix C			IP20	
<b>Shock resistance</b> Half-sine acc. to IEC 60068-2-27	g/ms		15/11	
<b>Vibration resistance</b> Acc. to IEC 60068-2-6	Hz/mm		10 ... 55/0.35	
<b>Electromagnetic compatibility (EMC)</b>			IEC 61000-6-2, IEC 61000-6-4, IEC 61812-1	IEC 60947-4-1
<b>Permissible mounting position</b>			Any	
<b>Conductor cross-sections</b>				
Connection type			<b>Screw terminals</b>	
• Solid	mm <sup>2</sup>		1 x (0.5 ... 4), 2 x (0.5 ... 2.5)	--
• Finely stranded with end sleeve	mm <sup>2</sup>		1 x (0.5 ... 2.5), 2 x (0.5 ... 1.5)	--
• AWG cables, solid or stranded	AWG		2 x (20 ... 14)	--
• Terminal screws			M3 (for standard screw driver size 2 or Pozidriv 2)	--
• Tightening torque	Nm		0.8 ... 1.2	--
Connection type			<b>Spring-type terminals</b>	
• Operating devices	mm		3.0 x 0.5	--
• Solid	mm <sup>2</sup>		2 x (0.25 ... 1.5)	--
• Finely stranded with end sleeve	mm <sup>2</sup>		2 x (0.25 ... 1.5)	--
• Finely stranded	mm <sup>2</sup>		2 x (0.25 ... 1.5)	--
• AWG cables, solid or stranded	AWG		2 x (24 ... 16)	--





## Design

### Complete equipment assemblies

The fully wired reversing contactor assemblies are suitable for use in any climate. They are safe from touch to DIN VDE 106 Part 100.

The contactor assemblies each consist of two contactors with identical ratings and one NC contact in the basic unit. The contactors are mechanically and electrically interlocked (NC contact interlock). The main and control circuits are wired according to the circuit diagrams on page 2/161.

For motor protection, either 3RU11 overload relays for direct mounting or individual mounting or thermistor motor protection tripping units must be ordered separately.

### Components for customer assembly

Installation kits for all sizes are available for customer assembly of reversing contactor assemblies.

Contactors, overload relays, the mechanical interlock and — for momentary-contact operation — auxiliary switch blocks for latching must be ordered separately.

The following points should be noted:

#### Size S00

- For maintained-contact operation: use contactors with an NC contact in the basic unit for the electrical interlock.
- For momentary-contact operation: use contactors with an NC contact in the basic unit for the electrical interlock; in addition, an auxiliary switch block with at least one NO contact for latching is required per contactor.

#### Size S0

Contactors come equipped with integrated 1 NO and 1NC aux contacts in each contactor. Both electrical interlocking and latching are satisfied with the integrated auxiliaries.

#### Sizes S2 to S3

- For maintained-contact operation: the contactors have no auxiliary contact in the basic unit; NC contacts for the electrical interlock are therefore integrated in the mechanical interlock that can be mounted on the side of each contactor (one contact each for the left and right-hand contactors).
- For momentary-contact operation: the electrical interlock is the same as for maintained-contact operation; in addition, an auxiliary switch with one NO contact for latching is required per contactor. This contact can be snapped onto the top of the contactors. Alternatively, auxiliary switch blocks mounted on the side can be used; they must be fitted onto the outside of each contactor.

If the front-mounted mechanical interlock is used for size S2 to S3 contactors, two location holes for single-pole auxiliary switch blocks are provided on the front of each S2 contactor while three additional, single-pole auxiliary switch blocks can be snapped onto S3 contactors. The maximum auxiliary switch complements per contactor stated on page 2/12 must not be exceeded.

When size S2 and S3 contactors are combined with a front-mounted mechanical interlock, the 3RA19 33-2B and 3RA19 43-2B installation kits cannot be used.

#### Sizes S6 to S12

To insert the mechanical interlock, the prestamped location holes positioned opposite on the contactor must be knocked out. The internal auxiliary contacts (up to 1 NO + 1 NC per contactor) can be used for the electrical interlock and latching. The mechanical interlock itself does not contain any auxiliary contacts. Additional auxiliary contacts can be used on the outside and front (on the front in the case of 3RT10) of the reversing contactor assembly.

## Principle of operation

The operating times of the individual 3RT10 contactors are rated in such a way that no overlapping of the contact making and the arcing time between two contactors can occur on reversing, providing they are interlocked via their auxiliary switches (NC contact interlock) and the operating mechanisms. An additional dead interval of 50 ms is necessary on reversing if the individual contactors are used at voltages > 500 V. The operating times of the individual contactors are not affected by the mechanical interlock.

## Surge suppression

### Sizes S00 to S3

All contactor assemblies can be fitted with RC elements or varistors for damping opening surges in the coil.

As with the individual contactors, the surge suppressors can either be plugged onto the top of the contactors (S00) or fitted onto the coil terminals on the top or bottom (S0 to S3).

### Sizes S6 to S12

The contactors are fitted with varistors as standard.

# Contactors and Contactor Assemblies

## Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

SIRIUS



### 3RA13 and 3RA23 reversing contactor assemblies

#### Overview

The 3RA13 and 3RA23 reversing contactor assemblies can be ordered as follows:

#### Sizes S00 to S3

- Fully wired and tested, open type, with mechanical and electrical interlock. 1)

#### Sizes S00 to S12

- As components for customer assembly.

There is also a range of accessories (auxiliary switch blocks, surge suppressors, etc.) that must be ordered separately.

For overload relays for motor protection, see section 3.

The 3RA23 and 3RA13 contactor assemblies have screw connections and are available for screwing or snapping onto 35 mm standard mounting rails. The 3RA23 contactor assemblies are also available with spring-type terminals.

The Ⓢ and Ⓣ approvals only apply to the complete contactor assemblies and not to the components for customer assembly.

#### AC and DC operation

IEC 60 947, EN 60 947 (VDE 0660)

Maximum horsepower rating at 460 V AC	AC-3 maximum inductive current	Size	Order No.				Installation kit	Fully wired and tested contactor assembly
			Contactor	Mechanical interlock <sup>2)</sup>	Mechanical interlock <sup>3)</sup>	Mechanical interlock <sup>4)</sup>		
<b>HP</b>	<b>A</b>							
<b>3</b>	7	<b>S00</b>	3RT20 15	3RA29 13-2AA1 <sup>6)</sup>	–	–	3RA29 13-2AA1 <sup>6)</sup>	<b>3RA23 15-8XB30- ...</b>
<b>5</b>	9		3RT20 16					<b>3RA23 16-8XB30- ...</b>
<b>7.5</b>	12		3RT20 17					<b>3RA23 17-8XB30- ...</b>
<b>10</b>	16		3RT20 18					<b>3RA23 18-8XB30- ...</b>
<b>7.5</b>	12	<b>S0</b>	3RT20 24	3RA29 23-2AA1 <sup>6)</sup>	–	–	3RA29 23-2AA1 <sup>6)</sup>	<b>3RA23 24-8XB30- ...</b>
<b>10</b>	16		3RT20 25					<b>3RA23 25-8XB30- ...</b>
<b>15</b>	25		3RT20 26					<b>3RA23 26-8XB30- ...</b>
<b>20</b>	32		3RT20 27					<b>3RA23 27-8XB30- ...</b>
<b>25</b>	38		3RT20 28					<b>3RA23 28-8XB30- ...</b>
<b>20</b>	28	<b>S2</b>	3RT10 33	3RA19 24-2B	3RA19 24-1A	–	3RA19 33-2A <sup>7)</sup>	<b>3RA13 33-8XB30-1 ..</b>
<b>25</b>	32		3RT10 34					<b>3RA13 34-8XB30-1 ..</b>
<b>30</b>	40		3RT10 35					<b>3RA13 35-8XB30-1 ..</b>
<b>40</b>	50		3RT10 36					<b>3RA13 36-8XB30-1 ..</b>
<b>50</b>	65	<b>S3</b>	3RT10 44	3RA19 24-2B	3RA19 24-1A	–	3RA19 43-2A <sup>8)</sup>	<b>3RA13 44-8XB30-1 ..</b>
<b>60</b>	80		3RT10 45					<b>3RA13 45-8XB30-1 ..</b>
<b>75</b>	95		3RT10 46					<b>3RA13 46-8XB30-1 ..</b>
<b>100</b>	115	<b>S6</b>	3RT10 54	–	–	3RA19 54-2A	3RA19 53-2A <sup>9)</sup>	–
<b>125</b>	150		3RT10 55					
<b>150</b>	185		3RT10 56					
<b>150</b>	225	<b>S10</b>	3RT10 64	–	–	3RA19 54-2A	3RA19 63-2A <sup>9)</sup>	–
<b>200</b>	265		3RT10 65					
<b>250</b>	300		3RT10 66					
<b>300</b>	400	<b>S12</b>	3RT10 75	–	–	3RA19 54-2A	3RA19 73-2A <sup>9)</sup>	–
<b>400</b>	500		3RT10 76					

For accessories, see page 2/77-2/80.  
For circuit diagrams, see page 2/186.  
For dimension drawings, see page 2/205-2/207.


- 1) An additional dead interval of 50 ms is necessary on reversing at voltages > 500 V.
- 2) Laterally mountable with one auxiliary contact.
- 3) For front mounting with one auxiliary contact.
- 4) Laterally mountable without auxiliary contact.
- 5) Interlock must be ordered with installation kit.
- 6) Installation kit contains: mechanical interlock; 2 connecting clips for 2 contactors; wiring connectors on the top and bottom.
- 7) Installation kit contains: 2 connecting clips for 2 contactors; wiring connectors on the top and bottom.
- 8) Installation kit contains: 2 connecting clips for 2 contactors; wiring connectors on the top and bottom.
- 9) Installation kit contains: wiring connector on the top and bottom.



#### Selection and ordering data

Fully wired and tested contactor assemblies · Size S00 · Up to 10 HP

The figure shows the version with screw terminals

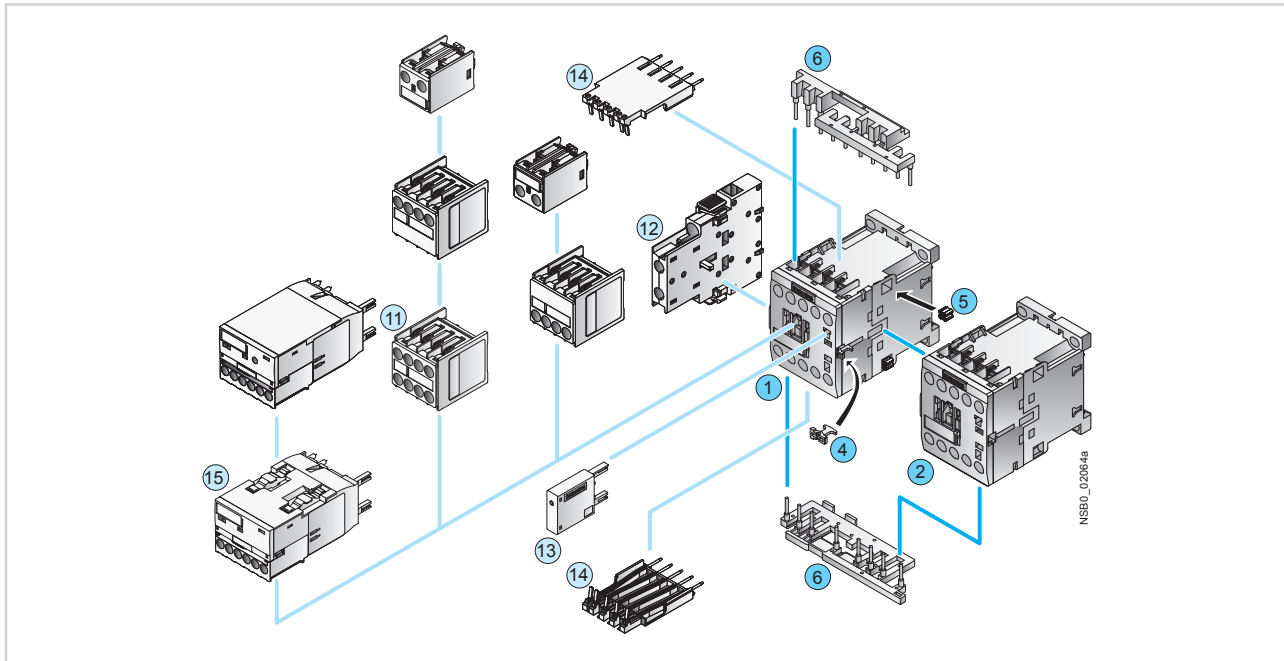

#### Mountable accessories

Accessories	Order No.	Page
⑪ Auxiliary switch block, front <sup>1)</sup>	3RH29 11-1...	2/65
⑫ Auxiliary switch block, lateral	3RH29 21-1DA..	2/67
⑬ Surge suppressor	3RT29 16-1...	2/71
⑭ Solder pin adapter	3RT19 16-4KA1	2/75
⑮ Function module for connection to the control system	3RT27 1.-1BA00	2/30

#### Fully wired and tested contactor assemblies

Individual parts	Order No.	Page
① ② Contactor, 3 HP	3RT20 15	2/8
① ② Contactor, 5 HP	3RT20 16	2/8
① ② Contactor, 7.5 HP	3RT20 17	2/8
① ② Contactor, 10 HP	3RT20 18	2/8
④ ⑤ ⑥ Assembly kit comprising:	3RA29 13-2AA1	2/78
④ Mechanical interlocks		
⑤ 2 connecting clips for 2 contactors		
⑥ Wiring modules on the top and bottom for connecting the main current paths, electrical interlock included <sup>2)</sup> , interruptible (NC contact interlock)		

<sup>1)</sup> Auxiliary switch block according to EN 50005 must be used.

<sup>2)</sup> 3RT20 1.. contactors with one NC contact in the basic unit are required for the electrical interlock.

# Contactors and Contactor Assemblies


## Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies


#### 3RA23 reversing contactor assemblies




Fully wired and tested contactor assemblies<sup>2)</sup> · Size S00 · Up to 10 HP



3RA23 18-8XE30-1BB4



3RA23 1.-8XB30-1A..



3RA23 1.-8XB30-2A..

AC data		UL data					Rated control supply voltage $U_s$ at 50/60 Hz		Auxiliary contacts		Screw terminals		Weight approx.
Amp ratings	AC2/AC3	Single-phase HP ratings		Three-phase HP ratings			NO	NC	Spring-type terminals	Order No.	kg		
		115 V	230 V	200 V	230 V	460 V	575 V						
<b>AC operation, 50/60 Hz</b>													
<i>Size S0<sup>1)</sup></i>													
7		1/4	3/4	1 1/2	2	3	5	24 AC	0	2	3RA23 15-8XB30-□AB0	0.46/0.50	
7		1/4	3/4	1 1/2	2	3	5	110/120 AC	0	2	3RA23 15-8XB30-□AK6	0.46/0.50	
7		1/4	3/4	1 1/2	2	3	5	220/240 AC	0	2	3RA23 15-8XB30-□AP6	0.46/0.50	
9		1/3	1	2	3	5	7 1/2	24 AC	0	2	3RA23 16-8XB30-□AB0	0.46/0.50	
9		1/3	1	2	3	5	7 1/2	110/120 AC	0	2	3RA23 16-8XB30-□AK6	0.46/0.50	
9		1/3	1	2	3	5	7 1/2	220/240 AC	0	2	3RA23 16-8XB30-□AP6	0.46/0.50	
12		1/2	2	3	3	7 1/2	10	24 AC	0	2	3RA23 17-8XB30-□AB0	0.46/0.50	
12		1/2	2	3	3	7 1/2	10	110/120 AC	0	2	3RA23 17-8XB30-□AK6	0.46/0.50	
12		1/2	2	3	3	7 1/2	10	220/240 AC	0	2	3RA23 17-8XB30-□AP6	0.46/0.50	
16		1	2	3	5	10	10	24 AC	0	2	3RA23 18-8XB30-□AB0	0.46/0.50	
16		1	2	3	5	10	10	110/120 AC	0	2	3RA23 18-8XB30-□AK6	0.46/0.50	
16		1	2	3	5	10	10	220/240 AC	0	2	3RA23 18-8XB30-□AP6	0.46/0.50	
<b>DC operation</b>													
7		1/4	3/4	1 1/2	2	3	5	24 DC	0	2	3RA23 15-8XB30-□BB4	0.58/0.62	
9		1/3	1	2	3	5	7 1/2	24 DC	0	2	3RA23 16-8XB30-□BB4	0.58/0.62	
12		1/2	2	3	3	7 1/2	10	24 DC	0	2	3RA23 17-8XB30-□BB4	0.58/0.62	
16		1	2	3	5	10	10	24 DC	0	2	3RA23 18-8XB30-□BB4	0.58/0.62	
<b>With communication interface<sup>3)</sup></b>													
7		1/4	3/4	1 1/2	2	3	5	24 DC	0	2	3RA23 15-8XE30-□BB4	0.58/0.62	
9		1/3	1	2	3	5	7 1/2	24 DC	0	2	3RA23 16-8XE30-□BB4	0.58/0.62	
12		1/2	2	3	3	7 1/2	10	24 DC	0	2	3RA23 17-8XE30-□BB4	0.58/0.62	
16		1	2	3	5	10	10	24 DC	0	2	3RA23 18-8XE30-□BB4	0.58/0.62	

Screw terminals  
Spring-loaded terminals

1  
2

For other voltages see page 2/49


For accessories and spare parts, see page 2/65-2/80.

- 1) For coil operating range, see page 2/49.
- 2) The contactors integrated in the contactor assemblies have no unassigned auxiliary contacts.
- 3) For use with 3RA27 and 3RA28 communication modules. See pages 2/24 to 2/31.



Fully wired and tested contactor assemblies · Size S0 · Up to 25 HP

The figure shows the version with screw terminals

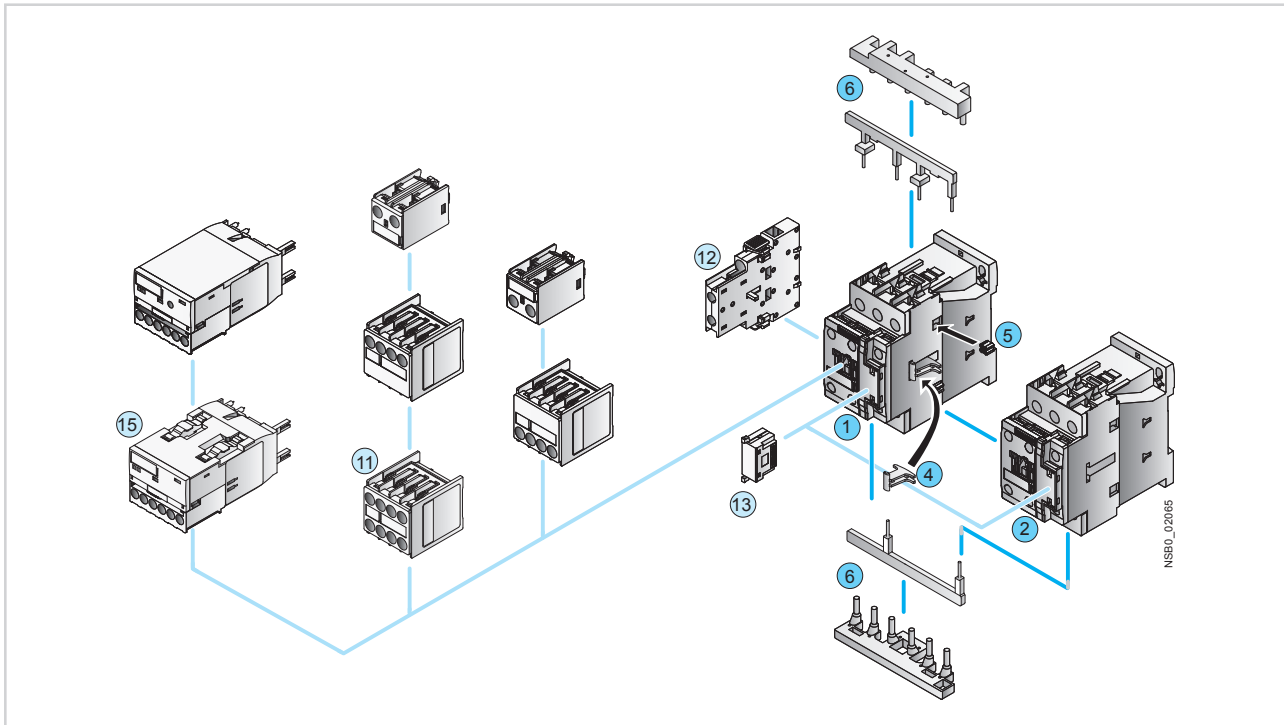

#### Mountable accessories

Individual parts	Order No.	Page
⑪ Auxiliary switch block, front	3RH29 21-1...	2/65
⑫ Auxiliary switch block, lateral	3RH29 21-1DA..	2/67
⑬ Surge suppressor	3RT29 26-1....	2/71
⑮ Function module for connection to the control system	3RT27 1.-1BA00	2/30

#### Fully wired and tested contactor assemblies

Individual parts	Order No.	Q11	Q12	Page
① ② Contactor, 7.5 HP	3RT20 24	3RT20 24	2/8	
① ② Contactor, 10 HP	3RT20 25	3RT20 25	2/8	
① ② Contactor, 15 HP	3RT20 26	3RT20 26	2/8	
① ② Contactor, 20 HP	3RT20 27	3RT20 27	2/8	
① ② Contactor, 25 HP	3RT20 28	3RT20 28	2/8	
④ ⑤ ⑥ Assembly kit comprising:	3RA29 23-2AA1		2/78	
④ Mechanical interlocks				
⑤ 2 connecting clips for 2 contactors				
⑥ Wiring modules on the top and bottom for connecting the main current paths, electrical interlock included (NC contact interlock)				


# Contactors and Contactor Assemblies

## Contactors Assemblies for Switching Motors




### 3RA23 reversing contactor assemblies


Fully wired and tested contactor assemblies · Size S0 · up to 25 HP



3RA23 24-8XE30-1BB4



3RA23 2.-8XB30-1A..



3RA23 2.-8XB30-2A..

AC data		UL data					Rated control supply voltage $U_s$ at 50/60 Hz V	Auxiliary contacts		Screw terminals		Weight approx. kg
Amp ratings AC2/AC3	Single-phase HP ratings 115 V   230 V	Three-phase HP ratings 200 V   230 V   <b>460 V</b>   575 V				NO		NC	Spring-type terminals		Order No.	

#### AC operation, 50/60 Hz

Size S0<sup>1)</sup>

AC2/AC3	HP	HP	HP	HP	HP	HP	HP	Rated control supply voltage $U_s$ at 50/60 Hz V	NO	NC	Order No.	Weight approx. kg
12	1	2	3	3	7 1/2	10	24 AC	2	2	3RA23 24-8XB30-□AC2	0.84/0.94	
12	1	2	3	3	7 1/2	10	110/120 AC	2	2	3RA23 24-8XB30-□AK6	0.84/0.94	
12	1	2	3	3	7 1/2	10	220/240 AC	2	2	3RA23 24-8XB30-□AP6	0.84/0.94	
16	1	3	5	5	10	15	24 AC	2	2	3RA23 25-8XB30-□AC2	0.84/0.94	
16	1	3	5	5	10	15	110/120 AC	2	2	3RA23 25-8XB30-□AK6	0.84/0.94	
16	1	3	5	5	10	15	220/240 AC	2	2	3RA23 25-8XB30-□AP6	0.84/0.94	
25	2	3	7 1/2	7 1/2	15	20	24 AC	2	2	3RA23 26-8XB30-□AC2	0.84/0.94	
25	2	3	7 1/2	7 1/2	15	20	110/120 AC	2	2	3RA23 26-8XB30-□AK6	0.84/0.94	
25	2	3	7 1/2	7 1/2	15	20	220/240 AC	2	2	3RA23 26-8XB30-□AP6	0.84/0.94	
32	2	5	10	10	20	25	24 AC	2	2	3RA23 27-8XB30-□AC2	0.84/0.94	
32	2	5	10	10	20	25	110/120 AC	2	2	3RA23 27-8XB30-□AK6	0.84/0.94	
32	2	5	10	10	20	25	220/240 AC	2	2	3RA23 27-8XB30-□AP6	0.84/0.94	
38	3	5	10	10	25	25	24 AC	2	2	3RA23 28-8XB30-□AC2	0.84/0.94	
38	3	5	10	10	25	25	110/120 AC	2	2	3RA23 28-8XB30-□AK6	0.84/0.94	
38	3	5	10	10	25	25	220/240 AC	2	2	3RA23 28-8XB30-□AP6	0.84/0.94	

#### DC operation

AC2/AC3	HP	HP	HP	HP	HP	HP	HP	Rated control supply voltage $U_s$ at 50/60 Hz V	NO	NC	Order No.	Weight approx. kg
12	1	2	3	3	7 1/2	10	24 DC	2	2	3RA23 24-8XB30-□BB4	1.22/1.32	
16	1	3	5	5	10	15	24 DC	2	2	3RA23 25-8XB30-□BB4	1.22/1.32	
25	2	3	7 1/2	7 1/2	15	20	24 DC	2	2	3RA23 26-8XB30-□BB4	1.22/1.32	
32	2	5	10	10	20	25	24 DC	2	2	3RA23 27-8XB30-□BB4	1.22/1.32	
38	3	5	10	10	25	25	24 DC	2	2	3RA23 28-8XB30-□BB4	1.22/1.32	

#### With communication interface<sup>3)</sup>

AC2/AC3	HP	HP	HP	HP	HP	HP	HP	Rated control supply voltage $U_s$ at 50/60 Hz V	NO	NC	Order No.	Weight approx. kg
12	1	2	3	3	7 1/2	10	24 DC	2	2	3RA23 24-8XE30-□BB4	1.22/1.32	
16	1	3	5	5	10	15	24 DC	2	2	3RA23 25-8XE30-□BB4	1.22/1.32	
25	2	3	7 1/2	7 1/2	15	20	24 DC	2	2	3RA23 26-8XE30-□BB4	1.22/1.32	
32	2	5	10	10	20	25	24 DC	2	2	3RA23 27-8XE30-□BB4	1.22/1.32	
38	3	5	10	10	25	25	24 DC	2	2	3RA23 28-8XE30-□BB4	1.22/1.32	

1 Screw terminals  
2 Spring-loaded terminals

For other voltages see page 2/49.

For accessories and spare parts, see page 2/65-2/80.

1) For coil operating range, see page 2/49.

2) For use with 3RA27 and 3RA28 communication modules. See pages 2/24 to 2/31.





**Selection and ordering data**


**Size S2 · up to 40 HP**

AC data Amp ratings AC2/AC3	UL data Single-phase HP ratings		Three-phase HP ratings				Rated control supply voltage <sup>1)</sup>	Auxiliary contacts		Fully wired and tested contactor assembly Order No.	Weight approx. kg
	115 V	230 V	200 V	230 V	460 V	575 V		NO	NC		
A	HP	HP	HP	HP	HP	HP					
<b>AC operation</b>											
28	2	5	7.5	10	20	25	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 0 0	2 2 2	3RA1333-8XB30-1AC2 3RA1333-8XB30-1AK6 3RA1333-8XB30-1AP6	1.8
32	2	5	10	10	25	30	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 0 0	2 2 2	3RA1334-8XB30-1AC2 3RA1334-8XB30-1AK6 3RA1334-8XB30-1AP6	1.8
40	3	7.5	10	15	30	40	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 0 0	2 2 2	3RA1335-8XB30-1AC2 3RA1335-8XB30-1AK6 3RA1335-8XB30-1AP6	1.8
50	3	10	15	15	40	50	24 V, 50/60 Hz 120 V, 60 Hz 240 V, 60 Hz	0 0 0	2 2 2	3RA1336-8XB30-1AC2 3RA1336-8XB30-1AK6 3RA1336-8XB30-1AP6	1.8
<b>DC operation</b>											
28	2	5	7.5	10	20	25	24 V DC	0	2	3RA1333-8XB30-1BB4	2.84
32	2	5	10	10	25	30	24 V DC	0	2	3RA1334-8XB30-1BB4	
40	3	7.5	10	15	30	40	24 V DC	0	2	3RA1335-8XB30-1BB4	
50	3	10	15	15	40	50	24 V DC	0	2	3RA1336-8XB30-1BB4	



**Mountable accessories (to be ordered separately):**

**The fully wired and tested contactor assembly includes the following components:**

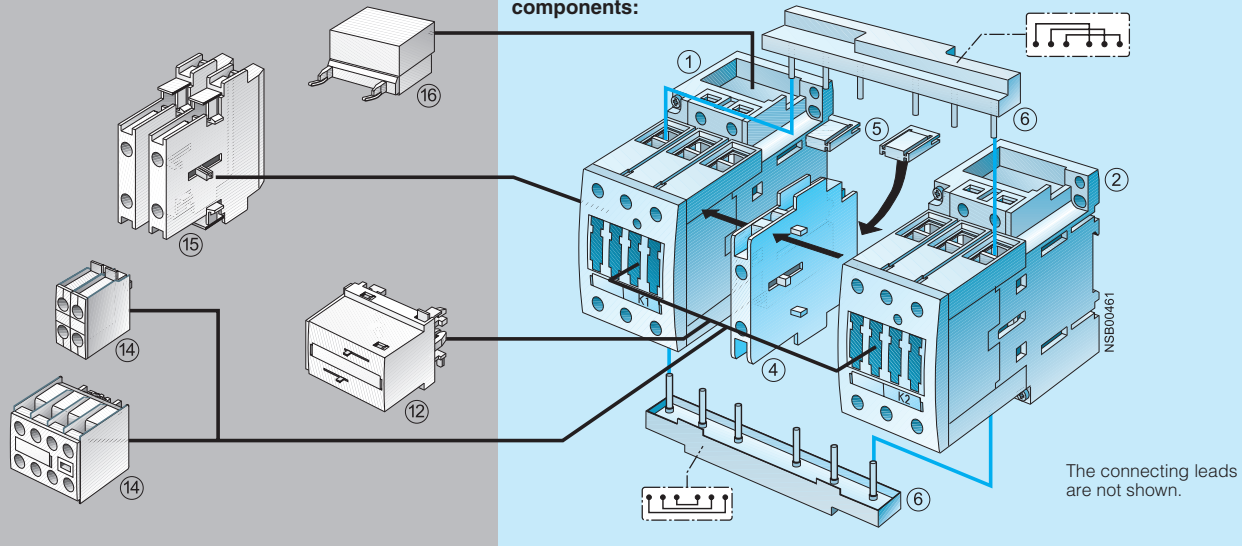

The connecting leads are not shown.

Accessory	Order No.	Page	Components	Order No.		Page
				K1	K2	
12 Mechanical interlock, mountable on the front	3RA1924-1A	2/77	1,2 Contactors, 20 HP	3RT1033	3RT1033	2/8
14 Auxiliary switch block, mountable on the front	3RH1921-1CA..	2/65	1,2 Contactors, 25 HP	3RT1034	3RT1034	2/8
15 Auxiliary switch block, laterally mountable	3RH1921-1EA..	2/67	1,2 Contactors, 30 HP	3RT1035	3RT1035	2/8
16 Surge suppressor	3RT1926-1.... 3RT1936-1....	2/71	1,2 Contactors, 40 HP	3RT1036	3RT1036	2/8
			4 Mechanical interlock, laterally mountable	3RA1924-2B		2/78
			5,6 Installation kit	3RA1933-2A		2/78

The installation kit contains:

- 5 2 connecting clips for 2 contactors with a clearance of 10 mm
- 6 Wiring connectors on the top and bottom for connecting the main conducting paths

For further voltages, see page 2/49.  
 For overview, see page 2/37-2/38.  
 For accessories, see page 2/65-2/80.  
 For circuit diagrams, see page 2/187.  
 For dimension drawings, see page 2/205.

# Contactors and Contactor Assemblies

## Contactor Assemblies for Switching Motors

SIRIUS



### 3RA13 reversing contactor assemblies


#### Selection and ordering data

#### Size S3 · up to 75 HP


AC data Amp ratings AC2/AC3	UL data Single-phase HP ratings		Three-phase HP ratings				Rated control supply voltage <sup>1)</sup>	Auxiliary contacts		Fully wired and tested contactor assembly Order No.	Weight approx. kg
	115 V	230 V	200 V	230 V	460 V	575 V		NO	NC		
A	HP	HP	HP	HP	HP	HP					
<b>AC operation</b>											
65	5	15	20	25	<b>50</b>	60	24 V, 50/60 Hz	0	2	<b>3RA1344-8XB30-1AC2</b>	3.9
							120 V, 60 Hz	0	2	<b>3RA1344-8XB30-1AK6</b>	
							240 V, 60 Hz	0	2	<b>3RA1344-8XB30-1AP6</b>	
80	7.5	15	25	30	<b>60</b>	75	24 V, 50/60 Hz	0	2	<b>3RA1345-8XB30-1AC2</b>	3.9
							120 V, 60 Hz	0	2	<b>3RA1345-8XB30-1AK6</b>	
							240 V, 60 Hz	0	2	<b>3RA1345-8XB30-1AP6</b>	
95	10	20	30	30	<b>75</b>	100	24 V, 50/60 Hz	0	2	<b>3RA1346-8XB30-1AC2</b>	3.9
							120 V, 60 Hz	0	2	<b>3RA1346-8XB30-1AK6</b>	
							240 V, 60 Hz	0	2	<b>3RA1346-8XB30-1AP6</b>	
<b>DC operation</b>											
65	5	15	20	25	<b>50</b>	60	24 V DC	0	2	<b>3RA1344-8XB30-1BB4</b>	5.7
80	7.5	15	25	30	<b>60</b>	75	24 V DC	0	2	<b>3RA1345-8XB30-1BB4</b>	
95	10	20	30	30	<b>75</b>	100	24 V DC	0	2	<b>3RA1346-8XB30-1BB4</b>	



#### Mountable accessories (to be ordered separately):

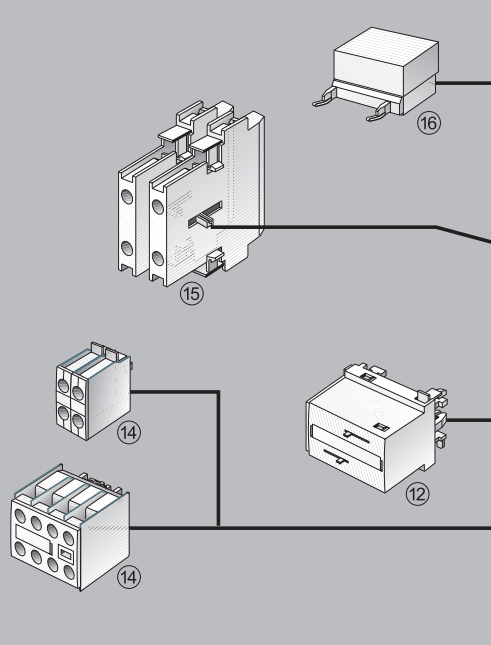

#### The fully wired and tested contactor assembly includes the following components:

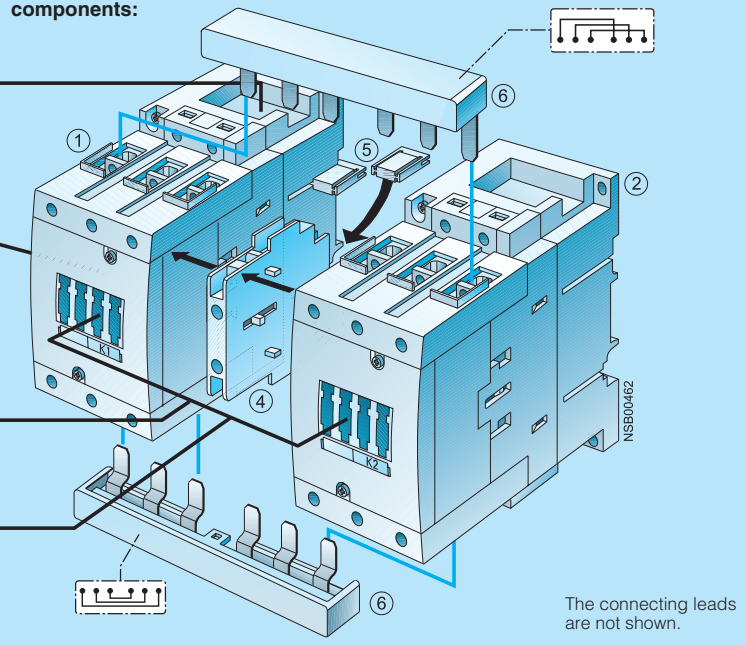

The connecting leads are not shown.

Accessory	Order No.	Page	Components	Order No.		Page
				K1	K2	
12 Mechanical interlock, mountable on the front	3RA1924-1A	2/77	1 2 Contactors, 50 HP	3RT1044	3RT1044	2/8
14 Auxiliary switch block, mountable on the front	3RH1921-1CA..	2/65	1 2 Contactors, 60 HP	3RT1045	3RT1045	2/8
15 Auxiliary switch block, laterally mountable	3RH1921-1EA..	2/67	1 2 Contactors, 75 HP	3RT1046	3RT1046	2/8
16 Surge suppressor	3RT1926-1.... 3RT1936-1....	2/71	4 Mechanical interlock, laterally mountable	3RA1924-2B		2/77
			5 6 Installation kit	3RA1943-2A		2/78

The installation kit contains:

- 5 2 connecting clips for 2 contactors with a clearance of 10 mm
- 6 Wiring connectors on the top and bottom

For further voltages, see page 2/49.  
 For overview, see page 2/37-2/38.  
 For accessories, see page 2/65-2/80.  
 For circuit diagrams, see page 2/187.  
 For dimension drawings, see page 2/205.

1) Coil voltage tolerance  
 at 50 Hz: 0.8 ... 1.1 x U<sub>s</sub>  
 at 60 Hz: 0.85 ... 1.1 x U<sub>s</sub>



### Overview

These 3RA24 contactor assemblies for wye-delta starting are designed for standard applications.

#### Note:

*Contactor assemblies for wye-delta starting in special applications such as very heavy starting or wye-delta starting of special motors must be customized. Help with designing such special applications is available from Technical Assistance.*

The 3RA24 contactor assemblies for wye-delta starting can be ordered as follows:

#### Sizes S00 and S0

- Fully wired and tested, with electrical and mechanical interlock.
- As individual parts for customer assembly.

A dead interval of 50 ms on reversing is already integrated in the function module for wye-delta starting.

There is also a range of accessories (lateral auxiliary switch blocks, etc.) that must be ordered separately.

For overload relays for motor protection see Chapter 3 "Overload Relays" --> "3RB3 Solid-State Overload Relays".

The 3RA24 contactor assemblies have screw or spring-type terminals and are suitable for screwing or snapping onto TH 35 standard mounting rails.

With the fully wired and tested 3RA24 contactor assemblies, the auxiliary contacts included in the basic devices are unassigned.

### Motor protection

Overload relays or thermistor motor protection releases can be used for overload protection.

The overload relay can be either mounted onto the line contactor or separately fitted. It must be set to 0.58 times the rated motor current.

### Surge suppression

#### Sizes S00 and S0

Surge suppression (varistor) is included in the function modules for wye-delta starting.

### Function modules for wye-delta starting

The 3RA28 16-0EW20 wye-delta function module (see page 2/27) replaces the complete wiring in the control circuit and can be used in the voltage range from 24 to 240 V AC/DC. It is snapped onto the front of the contactor assembly size S00 or S0.

One function module comprises a complete module kit:

- One 3RA29 12-0 basic module with integrated control logic and time setting,
- And two 3RA29 11-0 coupling modules with related connecting cables.

The scope of supply comprises a complete module kit for one contactor assembly for wye-delta starting size S00 or S0, regardless of the connection method.

### Screw terminals

Rated data at AC 50 Hz 400 V			Size			
Power kW	Operational current $I_e$ A	Motor current A		Line/delta contactor	Star contactor	Order No. complete
5.5	12	9.5 ... 13.8	<b>S00-S00-S00</b>	3RT20 15-1	3RT20 15-1	<b>3RA24 15-8XF31-1...</b>
7.5	16	12.1 ... 17		3RT20 17-1	3RT20 15-1	<b>3RA24 16-8XF31-1...</b>
11	25	19 ... 25		3RT20 18-1	3RT20 16-1	<b>3RA24 17-8XF31-1...</b>
11	25	19 ... 25	<b>S0-S0-S0</b>	3RT20 24-1	3RT20 24-1	<b>3RA24 23-8XF32-1...</b>
15	32	24.1 ... 34		3RT20 26-1	3RT20 24-1	<b>3RA24 25-8XF32-1...</b>
18.5	40	34.5 ... 40		3RT20 26-1	3RT20 24-1	<b>3RA24 25-8XF32-1...</b>
22	50	31 ... 43		3RT20 27-1	3RT20 26-1	<b>3RA24 26-8XF32-1...</b>

### Spring-type terminals

Rated data at AC 50 Hz 400 V			Size			
Power kW	Operational current $I_e$ A	Motor current A		Line/delta contactor	Star contactor	Order No. complete
5.5	12	9.5 ... 13.8	<b>S00-S00-S00</b>	3RT20 15-2	3RT20 15-2	<b>3RA24 15-8XF31-2...</b>
7.5	16	12.1 ... 17		3RT20 17-2	3RT20 15-2	<b>3RA24 16-8XF31-2...</b>
11	25	19 ... 25		3RT20 18-2	3RT20 16-2	<b>3RA24 17-8XF31-2...</b>
11	25	19 ... 25	<b>S0-S0-S0</b>	3RT20 24-2	3RT20 24-2	<b>3RA24 23-8XF32-2...</b>
15	32	24.1 ... 34		3RT20 26-2	3RT20 24-2	<b>3RA24 25-8XF32-2...</b>
18.5	40	34.5 ... 40		3RT20 26-2	3RT20 24-2	<b>3RA24 25-8XF32-2...</b>
25	50	31 ... 43		3RT20 27-2	3RT20 26-2	<b>3RA24 26-8XF32-2...</b>

#### Note:

The selection of contactor types refers to fused configurations.

# Contactor and Contactor Assemblies

## 3RA24 Contactor Assemblies for Wye-Delta Starting

SIRIUS



3RA24 complete units, 5.5 ... 22 kW

### Components for customer assembly

Assembly kits with wiring modules and mechanical connectors are available for contactor assemblies for wye-delta starting. Contactors, overload relays, function modules for wye-delta starting or wye-delta timing relays, auxiliary switches for electrical interlock – if required also feeder terminals and base plates – must be ordered separately.

The wiring kits for sizes S00 and S0 contain the top and bottom main conducting path connections between the line and delta

### Screw terminals

Power kW	Accessories for customer assembly			Overload relay, thermal (trip class CLASS 10)		Overload relay, solid-state (trip class CLASS 10)	
	Function modules for wye-delta starting	Assembly kit B, for single infeed	Star jumper	Setting range	Order No.	Setting range	Order No.
5.5	3RA28 16-0EW20	3RA29 13-2BB1 <sup>1)</sup>	3RT29 16-4BA31	5.5 ... 8	3RU21 16-1HB0	4 ... 16	3RB30 16-1TB0
7.5				7 ... 10	3RU21 16-1JB0		
11				11 ... 16	3RU21 16-4AB0		
11	3RA28 16-0EW20	3RA29 23-2BB2 <sup>2)</sup>	3RT29 26-4BA31	11 ... 16	3RU21 26-4AB0	6 ... 25	3RB30 26-1QB0
15				14 ... 20	3RU21 26-4BB0		
18.5				20 ... 25	3RU21 26-4DB0		
22				20 ... 25	3RU21 26-4DB0		

### Spring-type terminals

Power kW	Accessories for customer assembly			Overload relay, thermal (trip class CLASS 10)		Overload relay, solid-state (trip class CLASS 10)	
	Function modules for wye-delta starting	Assembly kit B, for single infeed	Star jumper	Setting range	Order No.	Setting range	Order No.
5.5	3RA28 16-0EW20	3RA29 13-2BB2 <sup>1)</sup>	3RT29 16-4BA32	5.5 ... 8	3RU21 16-1HC0	4 ... 16	3RB30 16-1TE0
7.5				7 ... 10	3RU21 16-1JC0		
11				11 ... 16	3RU21 16-4AC0		
11	3RA28 16-0EW20	3RA29 23-2BB2 <sup>2)</sup>	3RT29 26-4BA32	11 ... 16	3RU21 26-4AC0	6 ... 25	3RB30 26-1QE0
15				14 ... 20	3RU21 26-4BC0		
18.5				20 ... 25	3RU21 26-4DC0		
22				20 ... 25	3RU21 26-4DC0		

<sup>1)</sup> The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper and auxiliary circuit wiring.


<sup>2)</sup> The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper.

### Order No. scheme


Digit of the Order No.	1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.	13.	14.	15.	16.
SIRIUS contactor assemblies	3	R	A													
2nd generation				2												
Device type (e. g. 4 = contactor assembly for wye-delta starting)				4												
Contactor size (1 = S00, 2 = S0)																
Power dependent on size (e. g. 25 = 15 kW)																
Type of overload relay (8X = without)																
Assembly (F = ready-assembled, E, H = ready-assembled with communication)																
Interlock (3 = mechanical and electrical)																
Free auxiliary switches (e. g. S00: 1 = 3 NO total, S0: 2 = 3 NO + 3 NC total)																
Connection type (1 = screw, 2 = spring)																
Operating range / solenoid coil circuit (e. g. A = AC standard / without)																
Rated control supply voltage (e. g. K6 = 110/120 V, 50/60 Hz)																
Example	3	R	A	2	4	2	5	-	8	X	F	3	2	-	1	A
																K
																6




Fully wired and tested contactor assemblies · Size S00-S00-S00 · Up to 11 kW

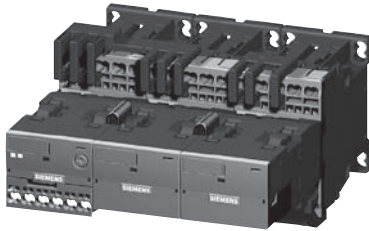

3RA24 1.-8XE31-2BB4

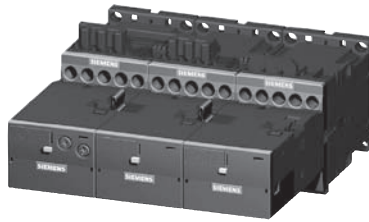

3RA24 1.-8XF31-1A.0

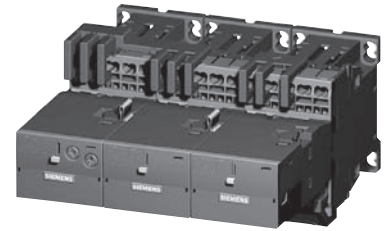

3RA24 1.-8XF31-2A.0

Rated data AC-3						Rated control supply voltage $U_s^{1)}$ at 50/60 Hz	Screw terminals		Weight approx. kg	Spring-type terminals		Weight approx. kg
Operational current $I_e$ up to	Ratings of induction motors at 50 Hz and				Order No.		Order No.					
400 V	230 V	400 V	500 V	690 V								
A	kW	kW	kW	kW	V							
<b>AC operation, 50/60 Hz</b>												
12	3.3	<b>5.5</b>	7.2	9.2	24 AC 110/120 AC 220/240 AC	<b>3RA24 15-8XF31-1AB0</b> <b>3RA24 15-8XF31-1AK6</b> <b>3RA24 15-8XF31-1AP6</b>	0.910 0.850 0.850	<b>3RA24 15-8XF31-2AB0</b> <b>3RA24 15-8XF31-2AK6</b> <b>3RA24 15-8XF31-2AP6</b>	0.910 0.910 0.910			
16	4.7	<b>7.5</b>	10.3	9.2	24 AC 110/120 AC 220/240 AC	<b>3RA24 16-8XF31-1AB0</b> <b>3RA24 16-8XF31-1AK6</b> <b>3RA24 16-8XF31-1AP6</b>	0.910 0.850 0.850	<b>3RA24 16-8XF31-2AB0</b> <b>3RA24 16-8XF31-2AK6</b> <b>3RA24 16-8XF31-2AP6</b>	0.910 0.910 0.910			
25	5.5	<b>11</b>	11	11	24 AC 110/120 AC 220/240 AC	<b>3RA24 17-8XF31-1AB0</b> <b>3RA24 17-8XF31-1AK6</b> <b>3RA24 17-8XF31-1AP6</b>	0.850 0.850 0.850	<b>3RA24 17-8XF31-2AB0</b> <b>3RA24 17-8XF31-2AK6</b> <b>3RA24 17-8XF31-2AP6</b>	0.910 0.910 0.910			
<b>DC operation</b>												
12	3.3	<b>5.5</b>	7.2	9.2	24 DC	<b>3RA24 15-8XF31-1BB4</b>	0.910	<b>3RA24 15-8XF31-2BB4</b>	0.910			
16	4.7	<b>7.5</b>	10.3	9.2	24 DC	<b>3RA24 16-8XF31-1BB4</b>	0.910	<b>3RA24 16-8XF31-2BB4</b>	0.910			
25	5.5	<b>11</b>	11	11	24 DC	<b>3RA24 17-8XF31-1BB4</b>	1.030	<b>3RA24 17-8XF31-2BB4</b>	1.090			
<b>For IO-Link connection</b>												
12	3.3	<b>5.5</b>	7.2	9.2	24 DC	<b>3RA24 15-8XE31-1BB4</b>	1.030	<b>3RA24 15-8XE31-2BB4</b>	1.090			
16	4.7	<b>7.5</b>	10.3	9.2	24 DC	<b>3RA24 16-8XE31-1BB4</b>	1.030	<b>3RA24 16-8XE31-2BB4</b>	1.090			
25	5.5	<b>11</b>	11	11	24 DC	<b>3RA24 17-8XE31-1BB4</b>	1.030	<b>3RA24 17-8XE31-2BB4</b>	1.090			
<b>For AS-Interface connection</b>												
12	3.3	<b>5.5</b>	7.2	9.2	24 DC	<b>3RA24 15-8XH31-1BB4</b>	1.050	<b>3RA24 15-8XH31-2BB4</b>	1.110			
16	4.7	<b>7.5</b>	10.3	9.2	24 DC	<b>3RA24 16-8XH31-1BB4</b>	1.050	<b>3RA24 16-8XH31-2BB4</b>	1.110			
25	5.5	<b>11</b>	11	11	24 DC	<b>3RA24 17-8XH31-1BB4</b>	1.050	<b>3RA24 17-8XH31-2BB4</b>	1.110			

The wye-delta starters listed here are assembled from individual contactors which are UL Listed. The overall assembly Catalog Number is not UL Listed.

<sup>1)</sup> Coil operating range at 50 Hz: 0.8 ... 1.1 x  $U_s$ ; at 60 Hz: 0.85 ... 1.1 x  $U_s$ .

For other voltages see page 2/49.



# Contactors and Contactor Assemblies




## 3RA24 Contactor Assemblies for Wye-Delta Starting

SIRIUS



3RA24 complete units, 5.5 ... 22 kW

Fully wired and tested contactor assemblies · Size S0-S0-S0 · Up to 22 kW

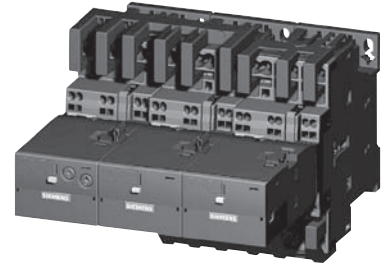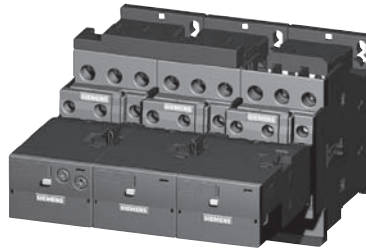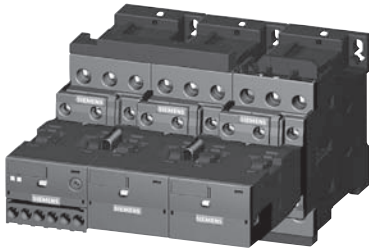

3RA24 2.-8XE32-1BB4

3RA24 2.-8XF32-1A.2

3RA24 2.-8XF32-2A.2

Rated data AC-3						Rated control supply voltage $U_s$ <sup>1)</sup> at 50/60 Hz	Screw terminals		Weight approx.	Spring-type terminals		Weight approx.
Operational current $I_e$ up to	Ratings of induction motors at 50 Hz and				Order No.		Order No.					
400 V	230 V	400 V	500 V	690 V								
A	kW	kW	kW	kW	V			kg			kg	
<b>AC operation, 50/60 Hz</b>												
25	7.1	11	15.6	19	24 AC	3RA24 23-8XF32-1AC2	1.370	3RA24 23-8XF32-2AC2	1.530			
					110/220 AC	3RA24 23-8XF32-1AK6	1.370	3RA24 23-8XF32-2AK6	1.530			
					220/240 AC	3RA24 23-8XF32-1AP6	1.370	3RA24 23-8XF32-2AP6	1.530			
32 / 40	11.4	15 / 18.5	19	19	24 AC	3RA24 25-8XF32-1AC2	1.370	3RA24 25-8XF32-2AC2	1.530			
					110/220 AC	3RA24 25-8XF32-1AK6	1.370	3RA24 25-8XF32-2AK6	1.530			
					220/240 AC	3RA24 25-8XF32-1AP6	1.370	3RA24 25-8XF32-2AP6	1.530			
50	--	22	19	19	24 AC	3RA24 26-8XF32-1AC2	1.390	3RA24 26-8XF32-2AC2	1.550			
					110/220 AC	3RA24 26-8XF32-1AK6	1.390	3RA24 26-8XF32-2AK6	1.550			
					220/240 AC	3RA24 26-8XF32-1AP6	1.390	3RA24 26-8XF32-2AP6	1.550			
<b>DC operation</b>												
25	7.1	11	15.6	19	24 DC	3RA24 23-8XF32-1BB4	1.940	3RA24 23-8XF32-2BB4	2.100			
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XF32-1BB4	1.940	3RA24 25-8XF32-2BB4	2.100			
50	--	22	19	19	24 DC	3RA24 26-8XF32-1BB4	1.960	3RA24 26-8XF32-2BB4	2.120			
<b>For IO-Link connection</b>												
25	7.1	11	15.6	19	24 DC	3RA24 23-8XE32-1BB4	1.940	3RA24 23-8XE32-2BB4	2.100			
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XE32-1BB4	1.940	3RA24 25-8XE32-2BB4	2.100			
50	--	22	19	19	24 DC	3RA24 26-8XE32-1BB4	1.960	3RA24 26-8XE32-2BB4	2.120			
<b>For AS-Interface connection</b>												
25	7.1	11	15.6	19	24 DC	3RA24 23-8XH32-1BB4	1.960	3RA24 23-8XH32-2BB4	2.120			
32 / 40	11.4	15 / 18.5	19	19	24 DC	3RA24 25-8XH32-1BB4	1.960	3RA24 25-8XH32-2BB4	2.120			
50	--	22	19	19	24 DC	3RA24 26-8XH32-1BB4	1.980	3RA24 26-8XH32-2BB4	2.140			

The wye-delta starters listed here are assembled from individual contactors which are UL Listed. The overall assembly Catalog Number is not UL Listed.

<sup>1)</sup> Coil operating range at 50 Hz: 0.8 ... 1.1 x  $U_s$ ; at 60 Hz: 0.85 ... 1.1 x  $U_s$ .

For other voltages see page 2/49 .





## Selection and ordering data

Contactor type Rated control supply voltage $U_s$	3RT201 3RA211	3RT231 3RT251	3RT202 3RA212	3RT232 3RT252	3RT1617 3RT1627 3RT1647	3RT103 3RA113	3RT133 3RT134 3RT153	3RT104 3RT134 3RT144 3RA114
	S00	S00	S0	S0	S00-S3	S2	S2	S3

## Rated control supply voltages (changes to 10th and 11th positions of the Order No.)

AC Operation<sup>1)</sup>

<b>Coils for 50 Hz</b> (exception: size S00: 50 and 60 Hz <sup>2)</sup> )	<b>24 V AC</b>	B0	B0	B0	B0	B0	B0	B0	B0
	<b>42 V AC</b>	D0	D0	D0	--	--	D0	--	D0
	<b>48 V AC</b>	H0	H0	H0	--	--	H0	--	H0
	<b>110 V AC</b>	F0	F0	F0	F0	F0	F0	F0	F0
	<b>230 V AC</b>	P0	P0	P0	P0	P0	P0	P0	P0
	<b>400 V AC</b>	V0	V0	V0	V0	V0	V0	V0	V0
<b>Coils for 50 and 60 Hz <sup>2)</sup></b>	<b>24 V AC</b>	B0	B0	C2	C2	C2	C2	C2	C2
	<b>42 V AC</b>	D0	D0	D2	D2	--	D2	D2	D2
	<b>48 V AC</b>	H0	H0	H2	H2	--	H2	H2	H2
	<b>110 V AC</b>	F0	F0	G2	G2	G2	G2	G2	G2
	<b>208 V AC</b>	M2	M2	M2	M2	M2	M2	M2	M2
	<b>220 V AC</b>	N2	N2	N2	N2	N2	N2	N2	N2
	<b>230 V AC</b>	P0	P0	L2	L2	L2	L2	L2	L2
	<b>240 V AC</b>	P2	P2	P2	P2	P2	P2	P2	P2
<b>For USA and Canada <sup>3)</sup></b>	50 Hz:	60 Hz:							
	<b>110 V AC</b>	<b>120 V AC</b>	K6	K6	K6	K6	K6	K6	K6
	<b>220 V AC</b>	<b>240 V AC</b>	P6	P6	P6	P6	P6	P6	P6
		<b>277 V AC</b>	—	—	—	—	U6	U6	U6
		<b>480 V AC</b>	—	—	—	—	V6	V6	V6
	<b>600 V AC</b>	—	—	—	—	T6	T6	T6	
<b>For Japan</b>	50/60 Hz <sup>4)</sup> :	60 Hz <sup>5)</sup> :							
	<b>100 V AC</b>	<b>110 V AC</b>	G6	G6	G6	G6	G6	G6	G6
	<b>200 V AC</b>	<b>220 V AC</b>	N6	N6	N6	N6	N6	N6	N6
	<b>400 V AC</b>	<b>440 V AC</b>	R6	R6	R6	R6	R6	R6	R6

DC Operation<sup>1)</sup>

<b>12 V DC</b>	A4	A4	—	—	—	—	—	—
<b>24 V DC</b>	B4	B4	B4	B4	—	B4	B4	B4
<b>42 V DC</b>	D4	D4	D4	D4	—	D4	D4	D4
<b>48 V DC</b>	W4	W4	W4	—	—	W4	—	W4
<b>60 V DC</b>	E4	E4	E4	E4	—	E4	—	E4
<b>72 V DC</b>	J8	J8	J8	J8	—	J8	J8	J8
<b>80 V DC</b>	—	—	—	—	—	E8	—	E8
<b>110 V DC</b>	F4	F4	F4	F4	—	F4	F4	F4
<b>125 V DC</b>	G4	G4	G4	G4	—	G4	G4	G4
<b>220 V DC</b>	M4	M4	M4	M4	—	M4	M4	M4
<b>230 V DC</b>	P4	P4	P4	—	—	P4	—	P4

Coil codes for frame sizes S6-S12 can be found on page 2/9.  
Further voltages on request

1) The SITOP power DC 24 V power supply unit with extended-range input (AC 93 ... 264 V; DC 30 ... 264 V) can be used for energizing the coil. For more SITOP information see section 15.

2) Coil voltage tolerance at 50 Hz:  $0.8 \dots 1.1 \times U_s$   
at 60 Hz:  $0.85 \dots 1.1 \times U_s$

3) Coil voltage tolerance  
Size S00: at 50 Hz:  $0.8 \dots 1.1 \times U_s$   
at 60 Hz:  $0.85 \dots 1.1 \times U_s$   
Sizes S0 ... S3: at 50/60 Hz:  $0.8 \dots 1.1 \times U_s$

4) Coil voltage tolerance  
Size S00: at 50/60 Hz:  $0.85 \dots 1.1 \times U_s$   
Size S0 ... S3: at 50 Hz:  $0.8 \dots 1.1 \times U_s$   
at 60 Hz:  $0.85 \dots 1.1 \times U_s$

5) Coil voltage tolerance at 60 Hz:  $0.8 \dots 1.1 \times U_s$

6) Coil voltage tolerance:  $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

# Contactors and Contactor Assemblies

## Control Relays, Coupling Relays

SIRIUS



### 3RH21 control relays, 4-pole

Selection and ordering data  
AC and DC operation



3RH11...-1...



3RH11...-2...

**Size S00** – Terminal designations according to EN 50011

Rated current at 240 V NEMA A600/Q600 Amps	Auxiliary contacts		Rated control supply voltage $U_s$ V AC 50/60 Hz <sup>3)</sup>	AC Operation Screw Terminals <sup>1)2)</sup> Order No.	Rated control supply voltage $U_s$ V DC	DC Operation Screw Terminals <sup>1)2)</sup> Order No.
	Ident- ification No.	Version     NO NC				

#### For screw and snap-on mounting onto TH 35 standard mounting rail

	10	40E	4	—	24 110/120 220/240	<b>3RH2140-1AB00</b> <b>3RH2140-1AK60</b> <b>3RH2140-1AP60</b>	24 110 220	<b>3RH2140-1BB40</b> <b>3RH2140-1BF40</b> <b>3RH2140-1BM40</b>
	10	31E	3	1	24 110/120 220/240	<b>3RH2131-1AB00</b> <b>3RH2131-1AK60</b> <b>3RH2131-1AP60</b>	24 110 220	<b>3RH2131-1BB40</b> <b>3RH2131-1BF40</b> <b>3RH2131-1BM40</b>
	10	22E	2	2	24 110/120 220/240	<b>3RH2122-1AB00</b> <b>3RH2122-1AK60</b> <b>3RH2122-1AP60</b>	24 110 220	<b>3RH2122-1BB40</b> <b>3RH2122-1BF40</b> <b>3RH2122-1BM40</b>

**Notes:**

- For further voltages, see page 2/49.
- For accessories, see pages 2/65-2/74.
- For technical data, see pages 2/172-2/175.
- For overview, see page 2/103.
- For position terminals, see page 2/189-2/190.
- For dimension drawings, see page 2/111.

- 1) The 3RH21 contactor relays are also available with spring-type terminals. Replace the 8th digit of the order number with a "2" e.g. "3RH2140-2AB00"
- 2) The 3RH21 contactor relays are also available with ring lug terminals. Replace the 8th digit of the order number with a "4" e.g. "3RH2140-4AB00"
- 3) AC coil operating range at 50 Hz: 0.8 to 1.1 x  $U_s$  at 60 Hz: 0.85 to 1.1 x  $U_s$
- 4) For AC-15/AC-14 the following applies:  $I_e = 6A$  for mounted auxiliary contacts.



Overview





The contactor coil and the coil of the release solenoid are both designed for uninterrupted duty.

RC elements, varistors diodes or diode assemblies can be fitted to both coils from the front for damping opening surges in the coil.

The number of auxiliary contacts can be extended by means of front auxiliary switch blocks (up to 4 poles).

Selection and ordering data

Size S00 – Terminal designations according to EN 5001

Rated current at 240 V AC-14, AC-15 NEMA A600/Q600 Amps	Aux. contacts		Rated control supply voltage $U_s$ V AC	AC Operation Screw Terminals <sup>1)</sup> Order No.	Rated control supply voltage $U_s$ V DC	DC Operation Screw Terminals Order No.	
	Ident. No.	Version					
		NO   NC					
<b>For screw and snap-on mounting onto TH 35 standard mounting rail</b>							
 3RH2422-1BB40		10	40E	4 —	24, 50/60 Hz 110, 50 Hz/120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2440-1AB00 24 3RH2440-1AK60 110 3RH2440-1AP60 125 3RH2440-1AP00 220	3RH2440-1BB40 3RH2440-1BF40 3RH2440-1BG40 3RH2440-1BM40
		10	31E	3 1	24, 50/60 Hz 110, 50 Hz / 120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2431-1AB00 24 3RH2431-1AK60 110 3RH2431-1AP60 125 3RH2431-1AP00 220	3RH2431-1BB40 3RH2431-1BF40 3RH2431-1BG40 3RH2431-1BM40
		10	22E	2 2	24, 50/60 Hz 110, 50 Hz / 120, 60 Hz 220, 50 Hz / 240, 60 Hz 230, 50/60 Hz	3RH2422-1AB00 24 3RH2422-1AK60 110 3RH2422-1AP60 125 3RH2422-1AP00 220	3RH2422-1BB40 3RH2422-1BF40 3RH2422-1BG40 3RH2422-1BM40








For accessories for 3RH24, see below and page 2/65-2/74  
 For technical data, see page 2/172-2/175.  
 For overview, see page 2/103.

For position of terminals, see page 2/189-2/190.  
 For dimension drawings, see page 2/211.

Auxiliary switch blocks for 3RH21, 3RH24 control relays

Size S00 – For assembling to control relays to have 8 contacts

For contactor type	HS Block Ident. No.	Contacts		Weight approx. kg.	Screw Terminals <sup>2)</sup> Order No.	Screw Terminals <sup>2)</sup> Order No.
		NO	NC			

<b>Auxiliary switch blocks for snapping onto the front according to EN 50011</b>						
 3RH2911-1GA40		3RH2140, 3RH2440, Ident. No. 40 E	80E	4 —	0.050	3RH2911-1GA40 3RH2911-2GA40
		3RH2140, 3RH2440, Ident. No. 40 E	71E	3 1	0.050	3RH2911-1GA31 3RH2911-2GA31
 3RH2911-2GA40		3RH2140, 3RH2440, Ident. No. 40 E	62E	2 2	0.050	3RH2911-1GA22 3RH2911-2GA22
		3RH2140, 3RH2440, Ident. No. 40 E	53E	1 3	0.050	3RH2911-1GA13 3RH2911-2GA13
		3RH2140, 3RH2440, Ident. No. 40 E	44E	— 4	0.050	3RH2911-1GA04 3RH2911-2GA04

1) Coil voltage tolerance  
 at 50 Hz: 0.8 to 1.1 x  $U_s$   
 at 60 Hz: 0.85 to 1.1 x  $U_s$

For further accessories see pages 2/65-2/74

# Contactors and Contactor Assemblies

## Coupling Relays

### 3RH21 coupling relays for switching auxiliary circuits, 4 pole

SIRIUS



#### Application

##### DC operation

IEC 60 947 and EN 60 947

The 3RH21 coupling relays for switching auxiliary circuits are tailored to the special requirements of working with electronic controls.

The 3RH21 coupling relays cannot be extended with auxiliary switch blocks.

Coupling relays have a low power consumption, an extended coil voltage tolerance and an integrated surge suppressor for damping opening surges on select versions

#### Selection and ordering data

##### DC operation

**Size S00** – Terminal designations according to EN 50 011

Surge suppressor	Rated current	Auxiliary contacts		Screw Terminals <sup>1)</sup> Order No.	Spring Terminals <sup>1)</sup> Order No.	Weight approx. kg.
	at 240 V NEMA A600/Q600	Ident-ification No.	Version			
	Amps		NO NC			

##### For screw and snap-on mounting onto TH 35 standard mounting rail

Rated control supply voltage  $U_s = 24$  V DC, coil voltage tolerance **0.7 to 1.25 x  $U_s$**   
Power consumption of the coils **2.8 W** at 24 V (no auxiliary switch blocks can be mounted)



3RH2140-1HB40

Diode, varistor, or RC element can be mounted	10	<b>40E</b>	4	—	<b>3RH2140-1HB40</b>	<b>3RH2140-2HB40</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1HB40</b>	<b>3RH2131-2HB40</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1HB40</b>	<b>3RH2122-2HB40</b>	0.300
Diode integrated	10	<b>40E</b>	4	—	<b>3RH2140-1JB40</b>	<b>3RH2140-2JB40</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1JB40</b>	<b>3RH2131-2JB40</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1JB40</b>	<b>3RH2122-2JB40</b>	0.300
Suppressor diode integrated	10	<b>40E</b>	4	—	<b>3RH2140-1KB40</b>	<b>3RH2140-2KB40</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1KB40</b>	<b>3RH2131-2KB40</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1KB40</b>	<b>3RH2122-2KB40</b>	0.300

Rated control supply voltage  $U_s = 24$  V DC, coil voltage tolerance **0.85 to 1.85 x  $U_s$**   
Power consumption of the coils **1.6 W** at 24 V (no auxiliary switch blocks can be mounted)



3RH2140-2SB40

Diode, varistor, or RC element can be mounted	10	<b>40E</b>	4	—	<b>3RH2140-1MB40-0KT0</b>	<b>3RH2140-2MB40-0KT0</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1MB40-0KT0</b>	<b>3RH2131-2MB40-0KT0</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1MB40-0KT0</b>	<b>3RH2122-2MB40-0KT0</b>	0.300
Diode integrated	10	<b>40E</b>	4	—	<b>3RH2140-1VB40</b>	<b>3RH2140-2VB40</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1VB40</b>	<b>3RH2131-2VB40</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1VB40</b>	<b>3RH2122-2VB40</b>	0.300
Suppressor diode integrated	10	<b>40E</b>	4	—	<b>3RH2140-1SB40</b>	<b>3RH2140-2SB40</b>	0.300
	10	<b>31E</b>	3	1	<b>3RH2131-1SB40</b>	<b>3RH2131-2SB40</b>	0.300
	10	<b>22E</b>	2	2	<b>3RH2122-1SB40</b>	<b>3RH2122-2SB40</b>	0.300


For technical data, see 2/176.

For position of terminals, see 2/189-2/190.

For dimension drawings, see 2/211.

<sup>1)</sup> Ring lug terminals are also available.

Replace the 8th digit of the order number with a "4", e.g. 3RH2140-4HB40

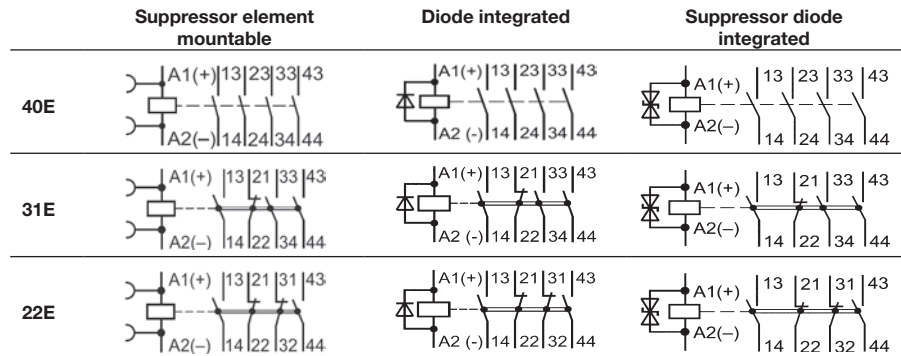



Selection and ordering data

Maximum inductive current AC-3	Maximum power ratings					Max. resistive current AC-1	Auxiliary contacts		Rated control supply voltage <sup>1)</sup>	Order No.	Weight approx. kg
	UL Ratings		IEC ratings				NO	NC			
A	HP	HP	<b>HP</b>	HP	<b>kW</b>	A		V			

AC operation <sup>2) 3)</sup>

3TF68



**Size 14**  
**Auxiliary and control conductors: screw terminals**  
**Main conductor: bar connections**  
**• AC Operation**

630	200	250	<b>500</b>	600	600	700	4	4	110-132, 50/60 Hz	<b>3TF6844-■CF7</b>	15
630	200	250	<b>500</b>	600	600	700	4	4	200-240, 50/60 Hz	<b>3TF6844-■CM7</b>	15
820	290	350	<b>700</b>	860	800	910	4	4	110-132, 50/60 Hz	<b>3TF6944-■CF7</b>	19
820	290	350	<b>700</b>	860	800	910	4	4	200-240, 50/60 Hz	<b>3TF6944-■CM7</b>	19

UL ratings shown in above table: ■=0  
 For IEC use only up to 1000 V: ■=8

**• DC Operation**

630	200	250	<b>500</b>	600	600	700	3	3	24 V DC	<b>3TF6833-■DB4</b>	16.9
820	290	350	<b>700</b>	860	800	910	3	3	24 V DC	<b>3TF6933-■DB4</b>	20.9

UL ratings shown in above table: ■=1  
 For IEC use only up to 1000 V: ■=8

Accessories and Spare parts for 3TF68 and 3TF69 vacuum contactors

Selection and ordering data

Details	For contactor type	Order No.	Weight approx. kg
---------	--------------------	-----------	-------------------

Coils



3TY7

**AC Operation**

The coils are fitted with varistors for damping surges as standard; the coil is supplied with the closing electronics included.

3TF68  
3TF69

**3TY7683-0C●●●**  
**3TY7693-0C●●●**

0.65

**DC Operation**

Reversing contactors are required for size 14 contactors:

Contact type	Reversing contactor type	
3TF68 and 3TF69:	3TC44 (70 mm wide, 85 mm high)	3TF68 3TF69

3TF68  
3TF69

**3TY7683-0D●●●**  
**3TY7693-0D●●●**

0.56

The coils are supplied without a reversing contactor.

●● For rated control supply voltages, see page 2/89.

Vacuum interrupters

**In order to ensure reliable operation of the contactors, only Siemens original replacement interrupters should be used.**  
 3 vacuum interrupters with mounting parts per set.


3TF68  
3TF69

**3TY7680-0B**  
**3TY7690-0B**

3.2

3.5

Auxiliary switch blocks with screw terminals



3TY7561-1.

1 NO and 1 NC	First auxiliary switch block, left or right. Replacement type for: 3TY7561-1A, -1B	3TF68 / 3TF69	<b>3TY7561-1AA00</b>	0.042
1 NO and 1 NC	First auxiliary switch block, left or right late break	3TF68 / 3TF69	<b>3TY7561-1EA00</b>	0.042
1 NO and 1 NC	Second auxiliary switch block, left or right. Replacement type for: 3TY7 561-1K, -1L	3TF68 / 3TF69	<b>3TY7561-1KA00</b>	0.042
<b>Auxiliary switches for coil reconnection, for DC economy circuit with screw connections</b>				
1 NC	Auxiliary switch block late break	3TF68 / 3TF69	<b>3TY7681-1G</b>	0.042
<b>Solid-state compatible auxiliary switch block with screw terminals</b>				
	For mounting onto the side of contactors. For use in dusty atmosphere and electronic circuits with rated operational currents I <sub>e</sub> AC-14 and DC-13 from 1 mA to 300 mA at 3 V to 60 V.	3TF68 / 3TF69	<b>3TY7561-1UA00</b>	0.042

For accessories, see page 2/53-2/54.  
 For technical data, see page 2/159-2/164.  
 For description, see page 2/104.  
 For internal circuit diagrams, see page 2/198.  
 For position of terminals, see page 2/195  
 For dimension drawings, see page 2/208.

1) For further voltages, see page 2/89.  
 2) Surge suppression integrated: fitted with varistor.  
 3) For EMC, see description on page 2/104.  
 3TF68/69 vacuum contactors are supplied with integrated surge suppression for the main conducting paths (for description, see page 2/104). In operation in circuits with DC choppers, frequency converters, variable-speed drives, for example, this protective circuitry is not required. It might be damaged by voltage peaks and harmonics generated, possibly followed by phase-to-phase shortcircuits. For this reason, the contactors can be supplied without overvoltage damping. To order these versions add a "-Z" and the order code "A02".

# Contactors and Contactor Assemblies






## Contactors for Switching Motors

SIRIUS



Accessories and Spare parts for  
3TF68 and 3TF69 vacuum contactors

### Selection and ordering data


For contactor		Design	Order No.	Weight approx. kg	Std. Pack Qty
Size	Type				
<b>Interface for control by PLC</b>					
3TX7 090-0D		Coil voltage tolerance: DC 17 V to 30 V Power consumption: 0.5 W at DC 24 V Fitted with varistor For technical data, see Part 7.			
	14	3TF68 and 3TF69	For snapping onto the side of auxiliary switch blocks, with surge suppression	<b>3TX7 090-0D</b>	0.1 1
<b>Terminal covers</b>					
3TX7 686-0A				(Order No. and price per set)	
	14	3TF68	for protection against inadvertent contact with the exposed busbar connections (DIN VDE 0106 Part 100)*	<b>3TX7 686-0A</b>	0.17 1 set = 2 units
		3TF69		<b>3TX7 696-0A</b>	
<b>Link for paralleling (star jumper) · 3-pole, without terminal <sup>1)</sup></b>					
3TX7 680-0D	14	3TF68		<b>3TX7 680-0D</b>	0.26 1
					
	14	3TF68	• <b>Cover plate for paralleling link</b> A cover plate must be used in order to protect against inadvertent contact (DIN VDE 0106 Part 100).	<b>3TX7 680-0E</b>	0.18 1
<b>Box terminals for laminated copper bars</b>					
3TX7570-1E					
	14	3TF68	• <b>Without auxiliary conductor terminal</b> With single covers for protection against inadvertent contact (EN 50274)	<b>3TX7 570-1E</b>	0.6 1
	14	3TF69	• <b>With auxiliary conductor terminal</b> Conductor cross-sections for auxiliary conductors: Solid: 2 × (0.75 ... 2.5) mm <sup>2</sup> Finely stranded with end sleeve: 2 × (0.5 ... 2.5) mm <sup>2</sup> Solid or stranded: 2 × (18 ... 12) AWG Tightening torque: 0.8 Nm ... 1.4 Nm (7 ... 12 lb.in)	<b>3TX7 690-1F</b>	2.0 1
<b>Surge suppressors — Varistors</b>					
3TX7 572-3G					
	14	3TF68 and 3TF69	For DC economy circuit; for lateral snapping onto auxiliary switches	<i>Rated control supply voltage, V<sub>DC</sub></i> 24 ... 48 48 ... 127 127 ... 240	<b>3TX7 572-3G</b> <b>3TX7 572-3H</b> <b>3TX7 572-3J</b>
			The varistor is included in the scope of supply of the 3TF68 and 3TF69 contactors with AC operation.		0.09 1 0.09 1 0.09 1
			Includes the peak value of the alternating voltage on the DC side.		

1) The link for paralleling can be reduced by one pole.





**Ordering information**

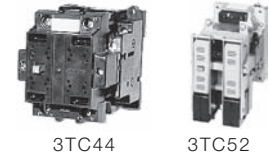
- Select Contactor from table below.
- Complete catalog number replace the two daggers (††) with appropriate coil voltage suffix. See corresponding coil voltage suffix table below.
- Technical Data [see page 2/165-2/168](#).
- Dimensions [see page 2/208](#).



Frame Size	Ampere Rating		2 Pole DC HP Ratings (DC-3, DC-5)				Auxiliary contacts		AC-Operated Order No.	DC-Operated Order No.
	Open	Enclosed	115 V	230 V	500 V	575 V	NO	NC		
<b>3TC DC Contactors</b>										
2	40	40	5	10	15	15	2	2	<b>3TC4417-0B††</b>	<b>3TC4417-0A††</b>
4	75	68	8	18	40	45	2	2	<b>3TC4817-0B††</b>	<b>3TC4817-0A††</b>
8	220	200	25	50	100	100	2	2	<b>3TC5217-0B††</b>	<b>3TC5217-0A††</b>
12	330	300	40	75	150	150	2	2	<b>3TC5617-0B††</b>	<b>3TC5617-0A††</b>

Device	Frame Size	Catalog Number						
<b>Coils, AC</b>		<b>24V AC</b>	<b>120V AC</b>	<b>220/240V AC</b>	<b>277V AC</b>	<b>480V AC</b>	<b>600V AC</b>	
	3TC	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	
		3TY6483-0AC1	3TY6483-0AK6	3TY6483-0AP6	3TY6483-0AP0	3TY6483-0AV0	3TY6483-0AS0	
			3TY6523-0AK6	3TY6523-0AP6	3TY6523-0AP0	3TY6523-0AV0		
			3TY6566-0AK6		3TY6566-0AP0	3TY6566-0AV0	3TY6566-0AS0	

Device	Frame Size	Catalog Number				
<b>Coils, DC</b>		<b>24V DC</b>	<b>48V DC</b>	<b>110V DC</b>	<b>125V DC</b>	<b>230V DC</b>
	3TC	3TY6443-0BB4		3TY6443-0BF4	3TY6443-0BG4	
		3TY6483-0BB4	3TY6483-0BW4	3TY6483-0BF4	3TY6483-0BG4	
		3TY6523-0BB4		3TY6523-0BF4	3TY6523-0BG4	3TY6523-0BP4
		3TY6563-0BB4		3TY6563-0BF4	3TY6563-0BG4	3TY6563-0BP4

Frame size	Contact type	Mounting position	Solid state	Order No.	
<b>Auxiliary Contact Blocks with 1 NO + 1 NC contacts <sup>2)</sup></b>					
	2, 4	3TC44 or 3TC48	1st block, left or right	—	<b>3TY6501-1AA00</b>
			2nd block, left or right	Yes <sup>3)</sup>	<b>3TY7561-1UA00</b>
	4	3TC48	2nd block, left <sup>5)</sup>	—	<b>3TY6501-1K</b>
			2nd block, right <sup>5)</sup>	—	<b>3TY6501-1L</b>
	8, 12	3TC52 or 3TC56	1st block, left	—	<b>3TY6561-1A</b>
			1st block, right	—	<b>3TY6561-1B</b>
2nd block, left <sup>5)</sup>			—	<b>3TY6561-1K</b>	
		2nd block, right <sup>5)</sup>	—	<b>3TY6561-1L</b>	

**Coil Suffix Table ††**

Replace †† in the contactor Order No. with a coil code from the table below.

V AC 50/60 Hz	Code	V DC	Code
24	C1	24	B4
120	K1*	36	V4
240	P1	48	W4
460	V0	60	E4
600	S0	72	J8
		110	F4
		125	G4
		220	M4
		230	P4


<sup>1)</sup> Main contact kits for size 3TC48 and larger include springs. Smaller sizes do not.


<sup>2)</sup> On DC operated contactors the maximum number of auxiliary contacts is 2 NO, 2 NC.

<sup>3)</sup> For use in dusty atmosphere and electronic circuits with rated operational currents I<sub>e</sub> AC-14 and DC-13 from 1 mA to 300 mA at 3V to 60V. With 1 changeover contact.

<sup>4)</sup> Discount Code: DC Contactors

<sup>5)</sup> Can only be mounted on AC-operated contactors.

Device Type	Frame Size	Catalog Number
<b>Main Contacts <sup>1)</sup></b>		
	3TC44	<b>3TY2440-0A</b>
	3TC48	<b>3TY2480-0A</b>
	3TC52	<b>3TY2520-0A</b>
	3TC56	<b>3TY2560-0A</b>

Device Type	Frame Size	Catalog Number
<b>Arc Chutes</b>		
	3TC44	<b>3TY2442-0A</b>
	3TC48	<b>3TY2482-0A</b>
	3TC52	<b>3TY2522-0A</b>
	3TC56	<b>3TY2562-0A</b>









# DC Power Controls

## DC Contactor Replacement Parts

SIRIUS




### General Purpose - Type 3TC

For contactors		Version	Rated control supply voltage $U_s$		Order No.	Std. Pack Qty	
Size	Type		V AC	V DC			
<b>Surge suppressors · Varistors</b>							
 <p>3TX7 402-3.</p>	2	3TC44 <sup>1)</sup>	<b>Varistors<sup>2)</sup></b> with line spacer, for mounting onto the coil terminal	24 ... 48	24 ... 70	<b>3TX7 402-3G</b>	1
				48 ... 127	70 ... 150	<b>3TX7 402-3H</b>	1
				127 ... 240	150 ... 250	<b>3TX7 402-3J</b>	1
				240 ... 400		<b>3TX7 402-3K</b>	1
				400 ... 600		<b>3TX7 402-3L</b>	1
 <p>3TX7 462-3.</p>	4	3TC48	<b>Varistors<sup>2)</sup></b> for sticking onto the contactor base or for mounting separately	24 ... 48	24 ... 70	<b>3TX7 462-3G</b>	1
				48 ... 127	70 ... 150	<b>3TX7 462-3H</b>	1
				127 ... 240	150 ... 250	<b>3TX7 462-3J</b>	1
				240 ... 400		<b>3TX7 462-3K</b>	1
				400 ... 600		<b>3TX7 462-3L</b>	1
 <p>3TX7 522-3.</p>	8 and 12	3TC52, 3TC56	<b>Varistor</b> for sticking onto the contactor base or for mounting separately	24 ... 48		<b>3TX7 462-3G</b>	1
				48 ... 127		<b>3TX7 462-3H</b>	1
				127 ... 240		<b>3TX7 462-3J</b>	1
				240 ... 400		<b>3TX7 462-3K</b>	1
				400 ... 600		<b>3TX7 462-3L</b>	1
	8 and 12	3TC52, 3TC56	<b>Varistors<sup>2)</sup></b> for separate screw connection or snapping onto TH 35 standard mounting rail		24 ... 70	<b>3TX7 522-3G</b>	1
					70 ... 150	<b>3TX7 522-3H</b>	1
					150 ... 250	<b>3TX7 522-3J</b>	1
<b>Surge suppressors · RC elements</b>							
 <p>3TX7 462-3., 3TX7 522-3.</p>	4	3TC48	<b>RC elements</b> For lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 ... 48	24 ... 70	<b>3TX7 462-3R</b>	
				48 ... 127	70 ... 150	<b>3TX7 462-3S</b>	
				127 ... 240	150 ... 250	<b>3TX7 462-3T</b>	
				240 ... 400		<b>3TX7 462-3U</b>	
				400 ... 600		<b>3TX7 462-3V</b>	
	8 and 12	3TC52, 3TC56	<b>RC elements</b> For lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 ... 48		<b>3TX7 522-3R</b>	
				48 ... 127		<b>3TX7 522-3S</b>	
				127 ... 240		<b>3TX7 522-3T</b>	
				240 ... 400		<b>3TX7 522-3U</b>	
				400 ... 600		<b>3TX7 522-3V</b>	
<b>Surge suppressors · Diodes</b>							
 <p>3TX7 462-3.</p>	4 to 12	3TC48, 3TC52, 3TC56	<b>Diode assemblies<sup>3)</sup></b> (diode and Zener diode) for DC solenoid system, for sticking onto the contactor base or for mounting separately		24 ... 250	<b>3TX7 462-3D</b>	
<b>Terminal covers</b>							
 <p>3TX6 506-3B</p>	6	3TC48	For protection against inadvertent contact with exposed busbar connections. Can be screwed on free screw end. Covers one busbar connection			<b>3TX6 506-3B</b>	1 set= 6 units
				10 and 14	3TC52, 3TC56		

<sup>1)</sup> The connection piece for mounting the surge suppressor must be bent slightly.

<sup>2)</sup> Includes the peak value of the alternating voltage on the DC side.

<sup>3)</sup> Not for DC economy circuit.

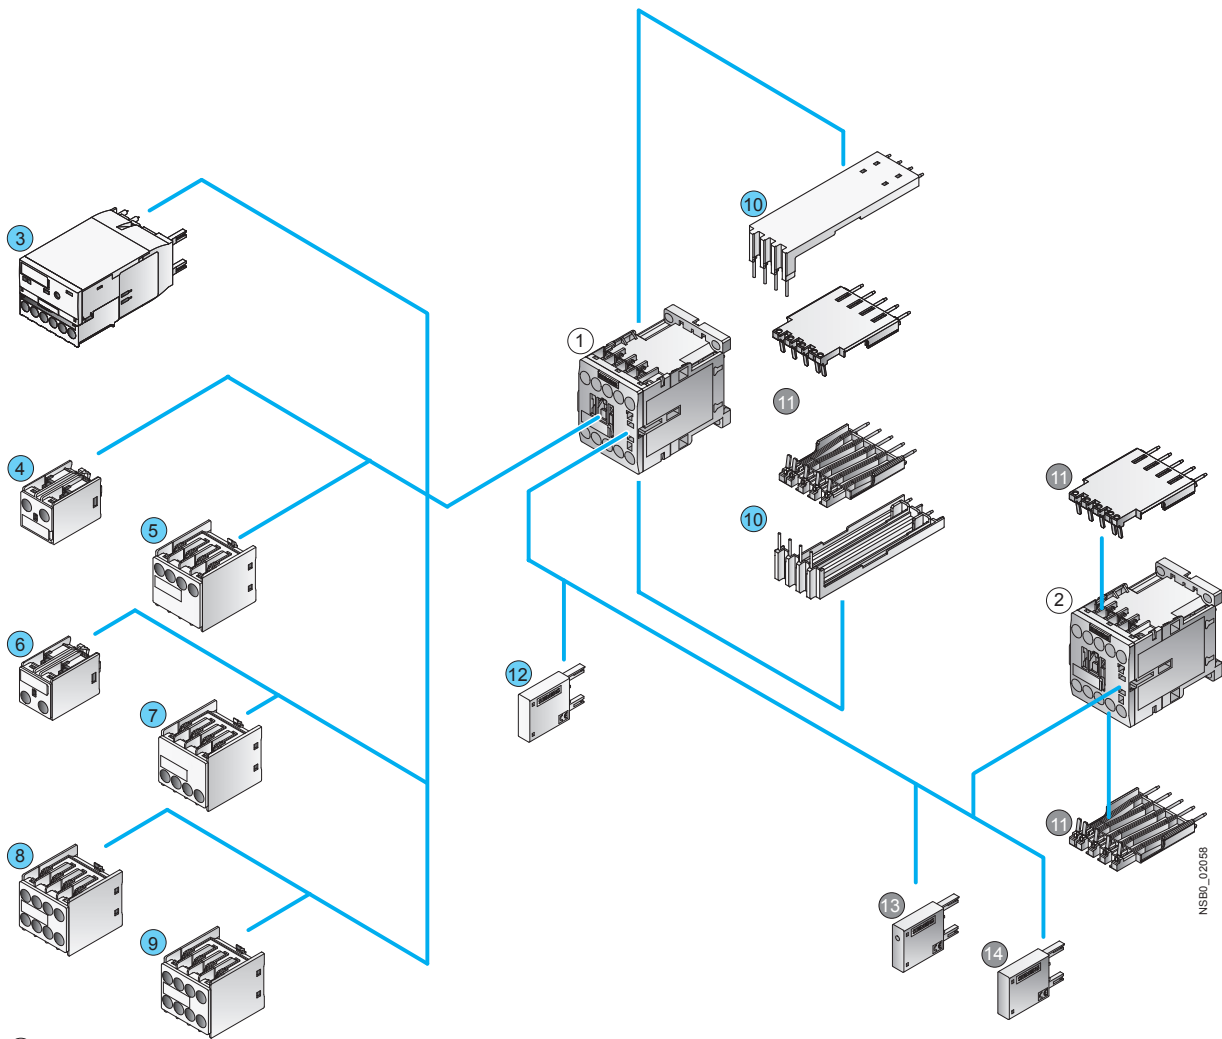

NSB0\_02058


- ① Contactor relay
- ② Coupling relay for auxiliary circuits
- ③ Solid-state timing relay block
- ④ 1-pole auxiliary switch block, cable entry from the top
- ⑤ 2-pole auxiliary switch block, cable entry from the top
- ⑥ 1-pole auxiliary switch block, cable entry from the bottom
- ⑦ 2-pole auxiliary switch block, cable entry from the bottom
- ⑧ 4-pole auxiliary switch block  
(terminal designations according to EN 50011 or EN 50005)
- ⑨ 2-pole auxiliary switch block, solid-state compatible version  
(terminal designations according to EN 50005)
- ⑩ Solder pin adapter for contactor relays with 4-pole auxiliary switch block
- ⑪ Solder pin adapter for contactor and coupling relays
- ⑫ Additional load module for increasing the permissible residual current
- ⑬ Surge suppressor with LED
- ⑭ Surge suppressor without LED

## 3RT2 contactors and coupling relays Size S00 with mountable accessories

### Overview

#### The SIRIUS family of controls

The SIRIUS modular system with its components for the switching, starting, protection and monitoring of motors and industrial systems stands for the fast, flexible and space-saving construction of control cabinets.

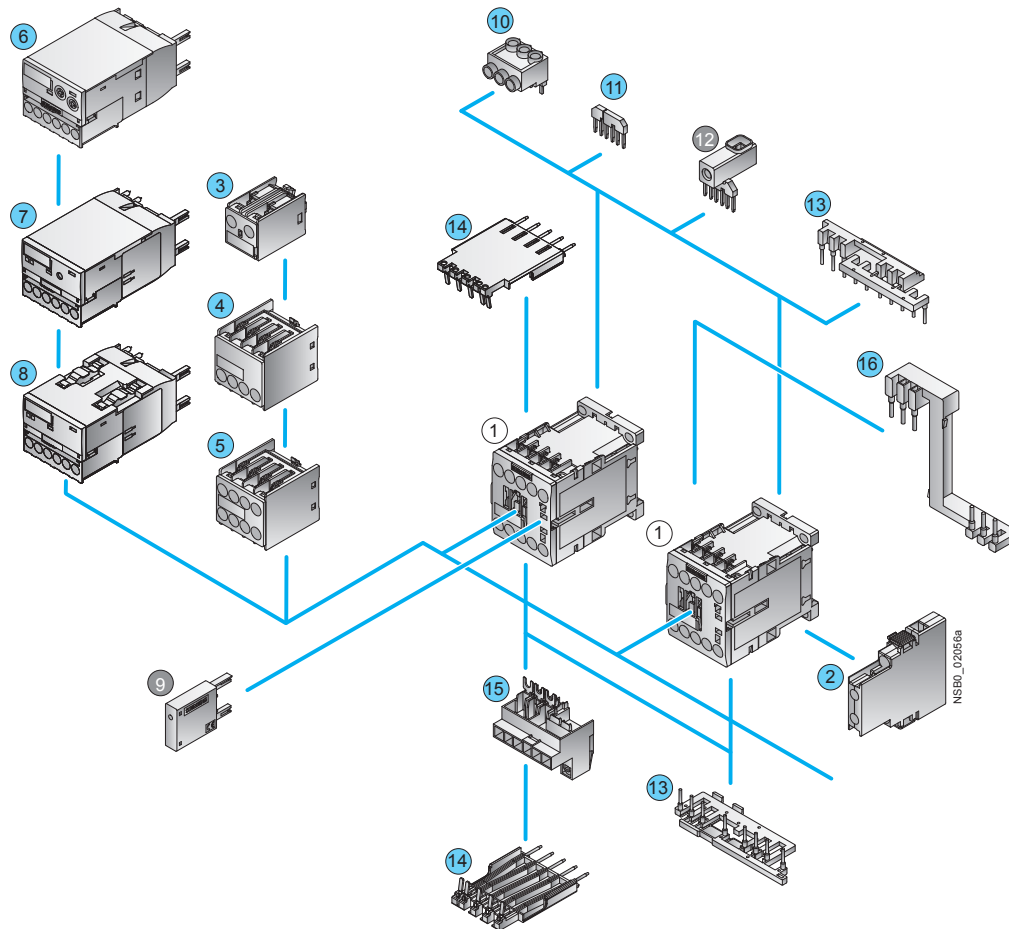

① Contactor size S00

- ② 1-pole auxiliary switch block, laterally mountable
- ③ 1-pole auxiliary switch block, for snapping onto the front Cable entry from the top
- ④ 2-pole auxiliary switch block, for snapping onto the front Cable entry from the bottom
- ⑤ 4-pole auxiliary switch block, for snapping onto the front
- ⑥ 3RA28 function module
- ⑦ 3RA27 function module for AS-Interface, direct starting
- ⑧ 3RA27 function module for IO-Link, direct starting
- ⑨ Surge suppressor with/without LED
- ⑩ Three-phase feeder terminal

- ⑪ Star jumper, 3-pole, without connecting terminal
- ⑫ Link for paralleling, 3-pole, with connecting terminal
- ⑬ Wiring modules, on the top and bottom (reversing duty)
- ⑭ Solder pin adapter
- ⑮ Connection module (adapter and connector) for contactors with screw-type connection
- ⑯ Safety main current connector for two contactors

- For contactors
- For contactors and coupling contactors (interface)


For accessories see [pages 2/65 to 2/80](#).

For contactor assemblies see [pages 2/40 to 2/47](#).

For assembly kit for reversing contactor assemblies (mech. interlocking, wiring modules) see [page 2/78](#).

For mountable overload relays see [Chapter 3, Overload Relays](#)


For Motor Starters see [Chapter 4, Combination Starters](#)

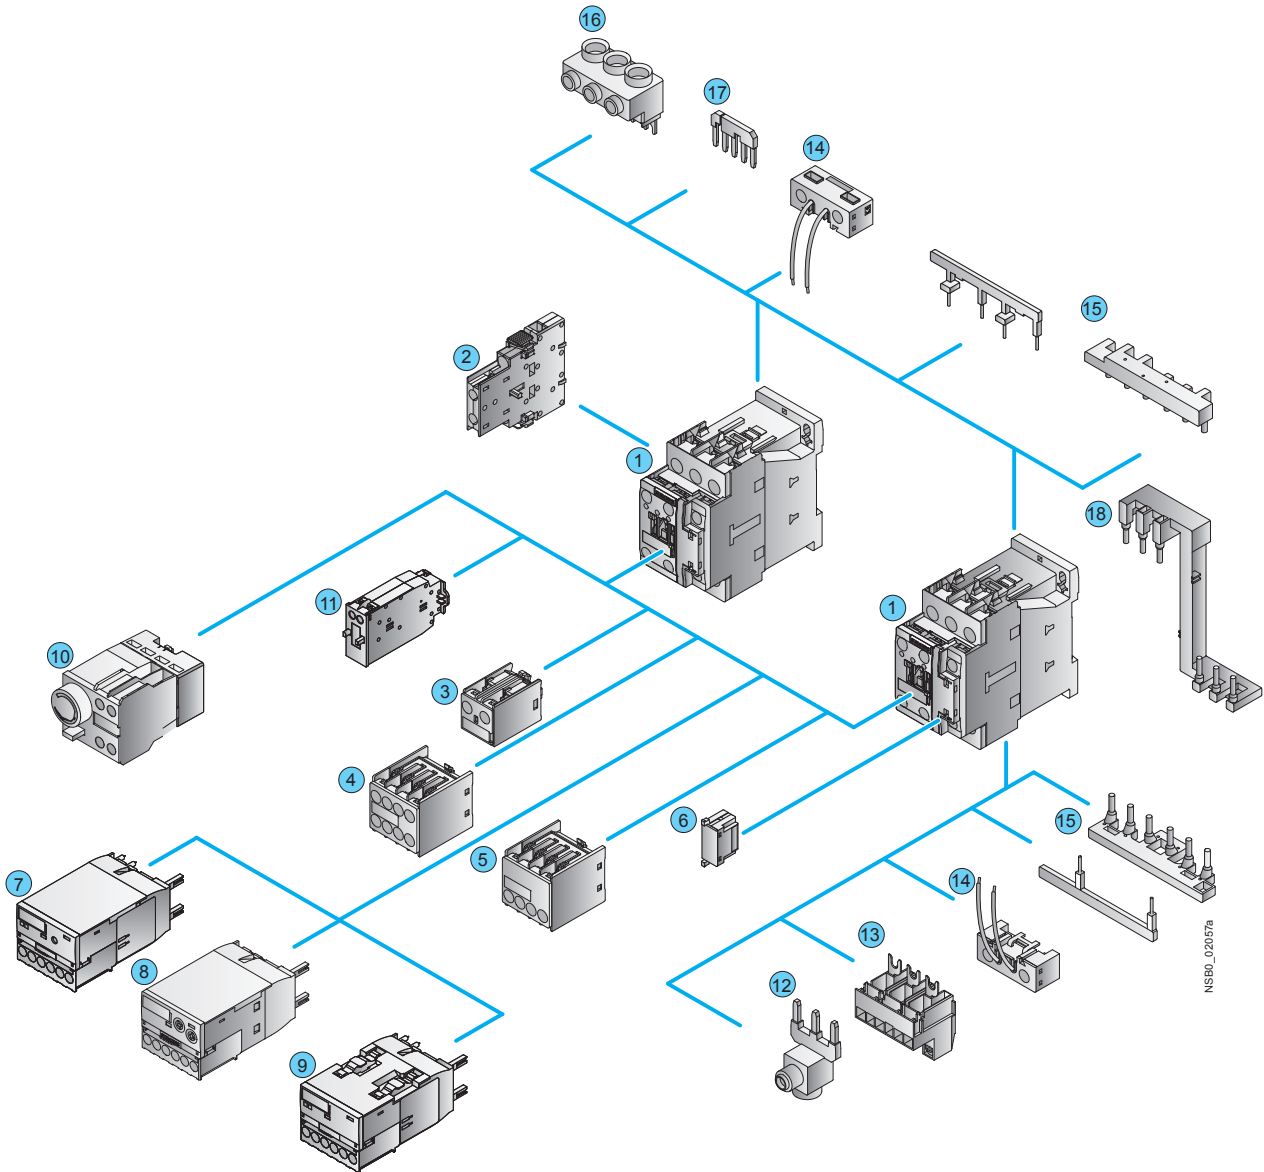

- ① Contactor size S0
- ② 1-pole auxiliary switch block, laterally mountable
- ③ 1-pole auxiliary switch block, for snapping onto the front Cable entry from the top
- ④ 4-pole auxiliary switch block, for snapping onto the front Cable entry from the bottom
- ⑤ 2-pole auxiliary switch block, for snapping onto the front Cable entry from the bottom
- ⑥ Surge suppressor with/without LED
- ⑦ 3RA27 function module for AS-Interface, direct starting
- ⑧ 3RA28 function module
- ⑨ 3RA27 function module for IO-Link, direct starting
- ⑩ Pneumatic delay block
- ⑪ Mechanical latching block
- ⑫ Link for paralleling, 3-pole, with connecting terminal
- ⑬ Connection module (adapter and plug) for contactors with screw-type connection
- ⑭ Coil terminal module, on the top and bottom
- ⑮ Wiring modules, on the top and bottom (reversing duty)
- ⑯ Three-phase feeder terminal
- ⑰ Link for paralleling (star jumper), 3-pole, without connecting terminal
- ⑱ Safety main current connector for two contactors

For accessories see pages 2/65 to 2/80.

## 3RT1 contactors Sizes S2 and S3 with mountable accessories

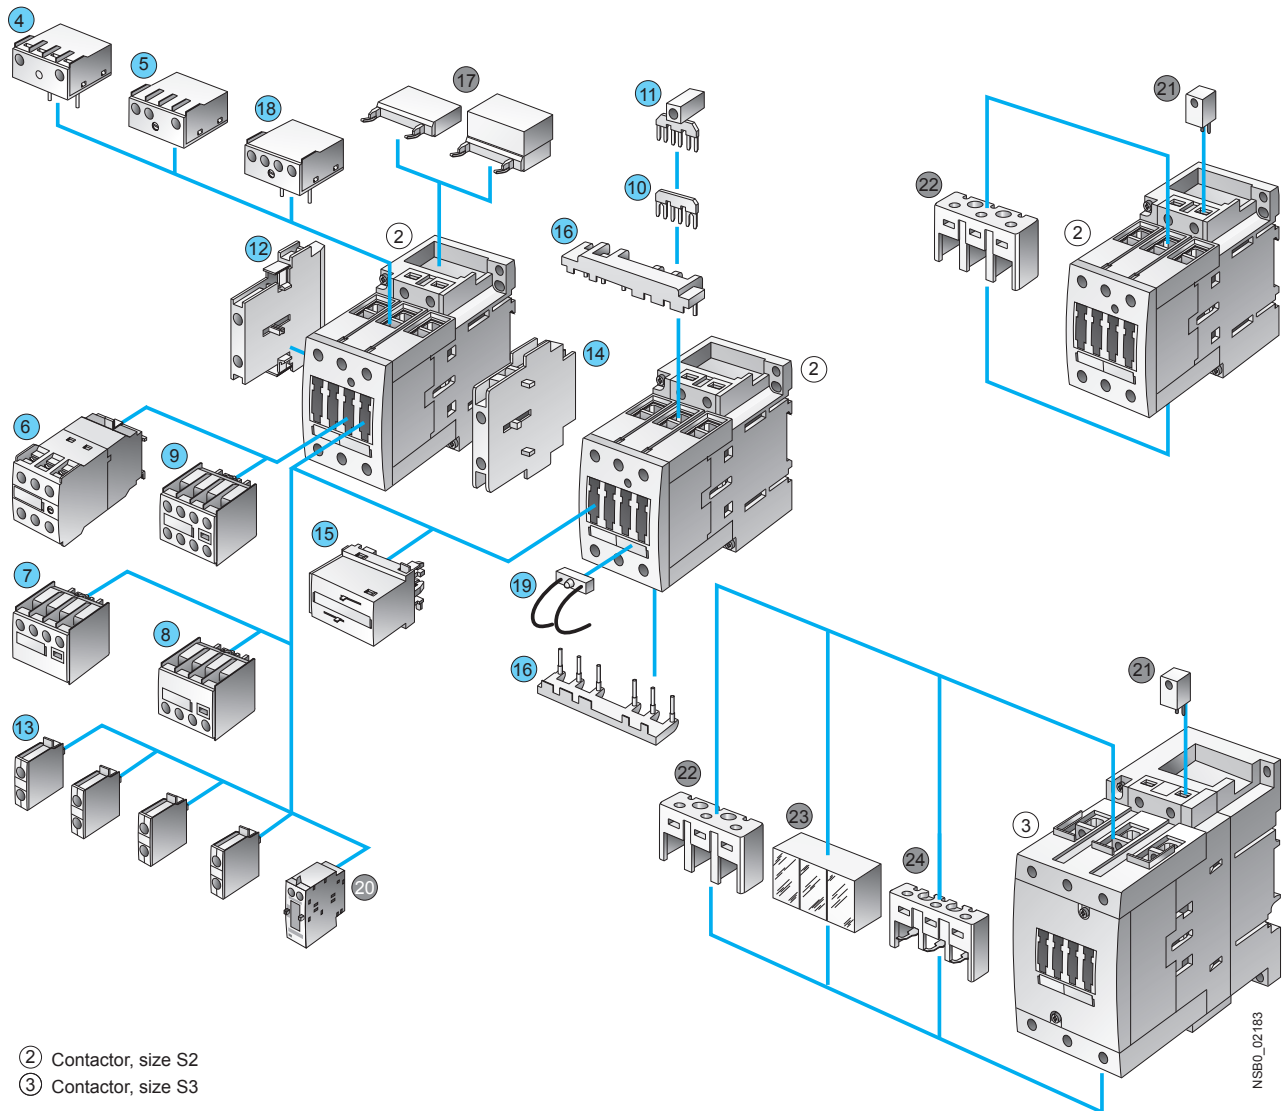

- ② Contactor, size S2
- ③ Contactor, size S3

### For sizes S2 and S3:

- ④ Solid-state time-delay block, ON-delay
- ⑤ Solid-state time-delay block, OFF-delay
- ⑥ Auxiliary switch block, solid-state time-delay (ON or OFF-delay or wye-delta function)
- ⑦ 2-pole auxiliary switch block, cable entry from above
- ⑧ 2-pole auxiliary switch block, cable entry from below
- ⑨ 4-pole auxiliary switch block (terminal designations according to EN 50012 or EN 50005)
- ⑩ Link for paralleling (star jumper), 3-pole, without connecting terminal
- ⑪ Link for paralleling, 3-pole, with connecting terminal
- ⑫ 2-pole auxiliary switch block, laterally mountable left or right (terminal designations according to EN 50012 or EN 50005)
- ⑬ Single-pole auxiliary switch block (up to 4 can be snapped on)
- ⑭ Mechanical interlock, laterally mountable
- ⑮ Mechanical interlock, mountable to the front
- ⑯ Wiring connectors on the top and bottom (reversing duty)

- ⑰ Surge suppressor (varistor, RC element, diode assembly), can be mounted on the top or bottom
- ⑱ Mechanical latching interface for mounting directly onto contactor coil
- ⑲ LED module for indicating contactor operation

### Only for size S2:

- ⑳ Mechanical latching

### Only for sizes S2 and S3:

- ㉑ Coil repeat terminal for making contactor assemblies
- ㉒ Terminal cover for box terminal


### Only for size S3:

- ㉓ Terminal cover for cable lug and bar connection
- ㉔ Auxiliary conductor terminal, 3-pole

- Accessories identical for sizes S2 and S3
- Accessories differ according to size

For accessories see pages 2/65 to 2/80.

(illustration for basic unit)

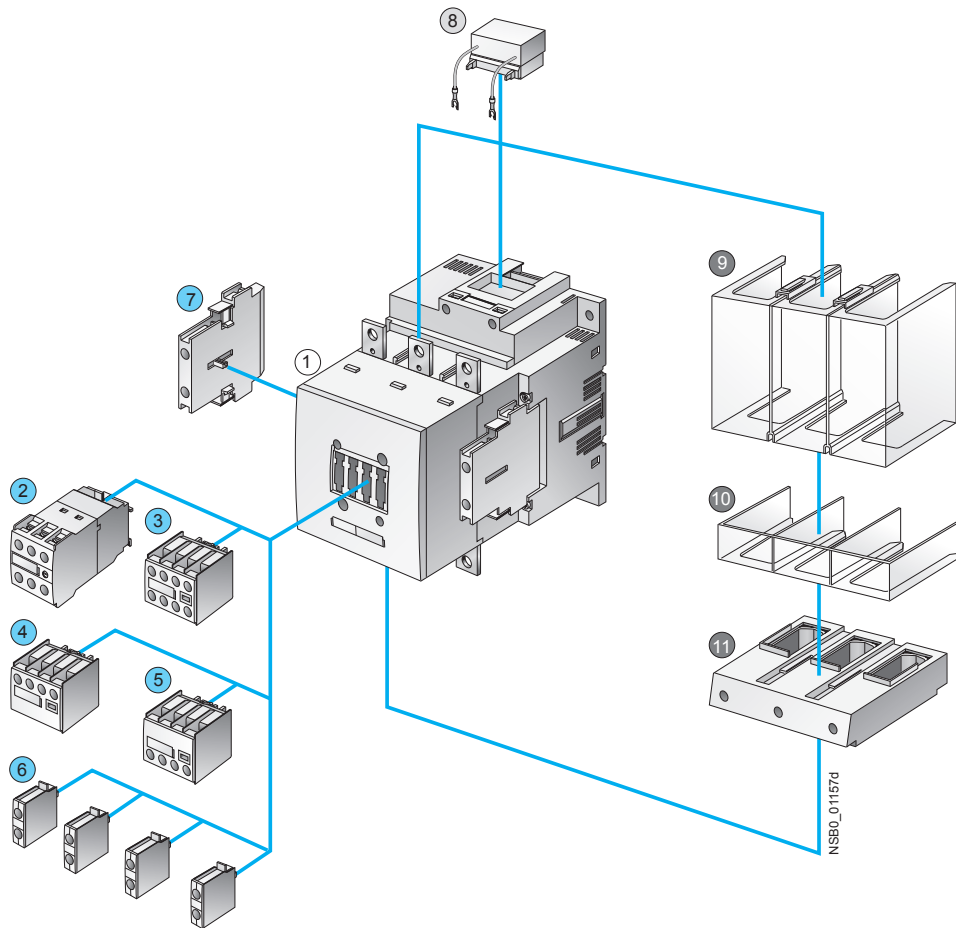


- ① 3RT10 and 3RT14 air-break contactors, sizes S6, S10 and S12
  - ② Auxiliary switch block, solid-state time-delay (ON or OFF-delay or wye-delta function)
  - ③ 4-pole auxiliary switch block (terminal designations according to EN 50012 or EN 50005)
  - ④ 2-pole auxiliary switch block, cable entry from above
  - ⑤ 2-pole auxiliary switch block, cable entry from below
  - ⑥ Single-pole auxiliary switch block (up to 4 can be snapped on)
  - ⑦ 2-pole auxiliary switch block, laterally mountable left or right (terminal designations according to EN 50012 or EN 50005) (identical for S0 to S12)
  - ⑧ Surge suppressor (RC element) for plugging into top of withdrawable coil
  - ⑨ Terminal cover for cable lug and busbar connection, different for sizes S6 and S10/S12
  - ⑩ Terminal cover for box terminal, different for sizes S6 and S10/S12
  - ⑪ Box terminal block, different for sizes S6 and S10/S12
- Accessories identical for sizes S0 to S12  
 ● Accessories identical for sizes S6 to S12  
 ● Accessories differ according to size

For accessories see pages 2/65 to 2/80.

For mountable overload relays see Chapter 3, "Overload Relays".

## 3RT1 contactors Size S6 with accessories

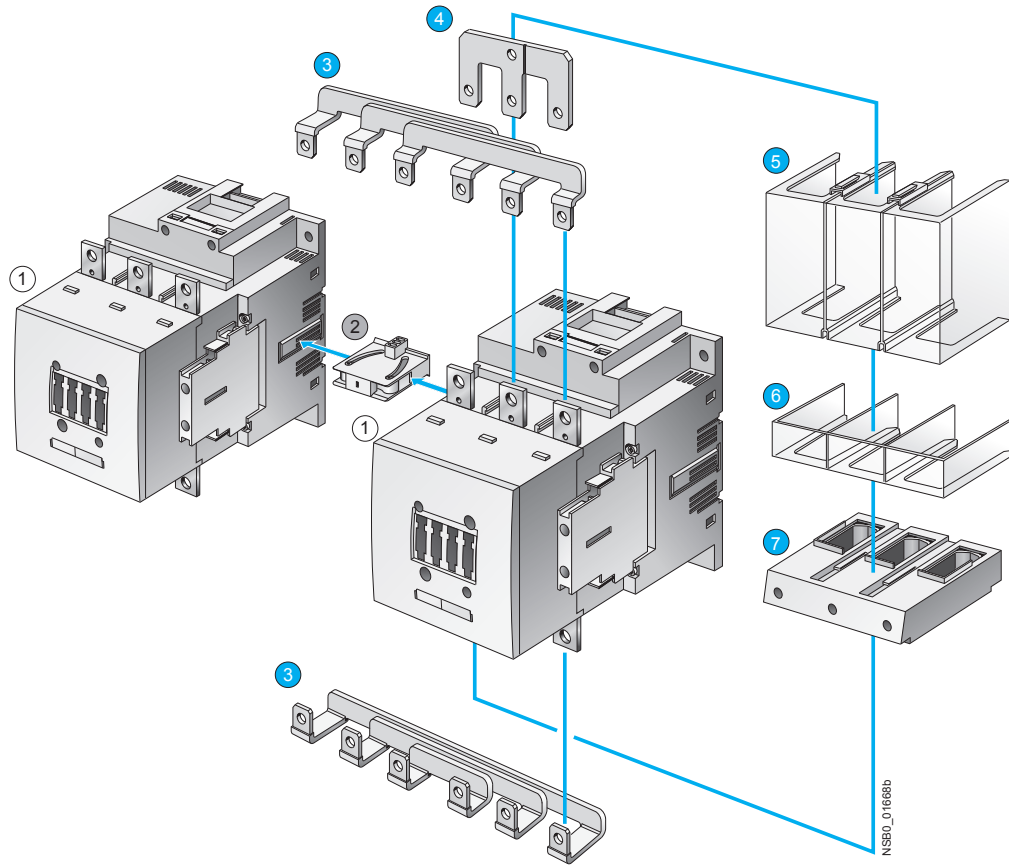

① 3RT10 and 3RT14 air-break contactor, size S6

② Mechanical interlock, laterally mountable

③ Wiring modules on the top and bottom 3RA1953-2A

④ Link for paralleling (star jumper), 3-pole, with through-hole, 3RT1956-4BA31

⑤ Terminal cover for cable lug and bar connection different for sizes S6 and S10/S12

⑥ Terminal cover for box terminal different for sizes S6 and S10/S12

⑦ Box terminal block, different for sizes S6 and S10/S12


● Accessories identical for sizes S6 to S12

● Accessories differ according to size

For accessories see pages 2/65-2/80.

Mountable overload relays see Chapter 3, "Overload Relays".



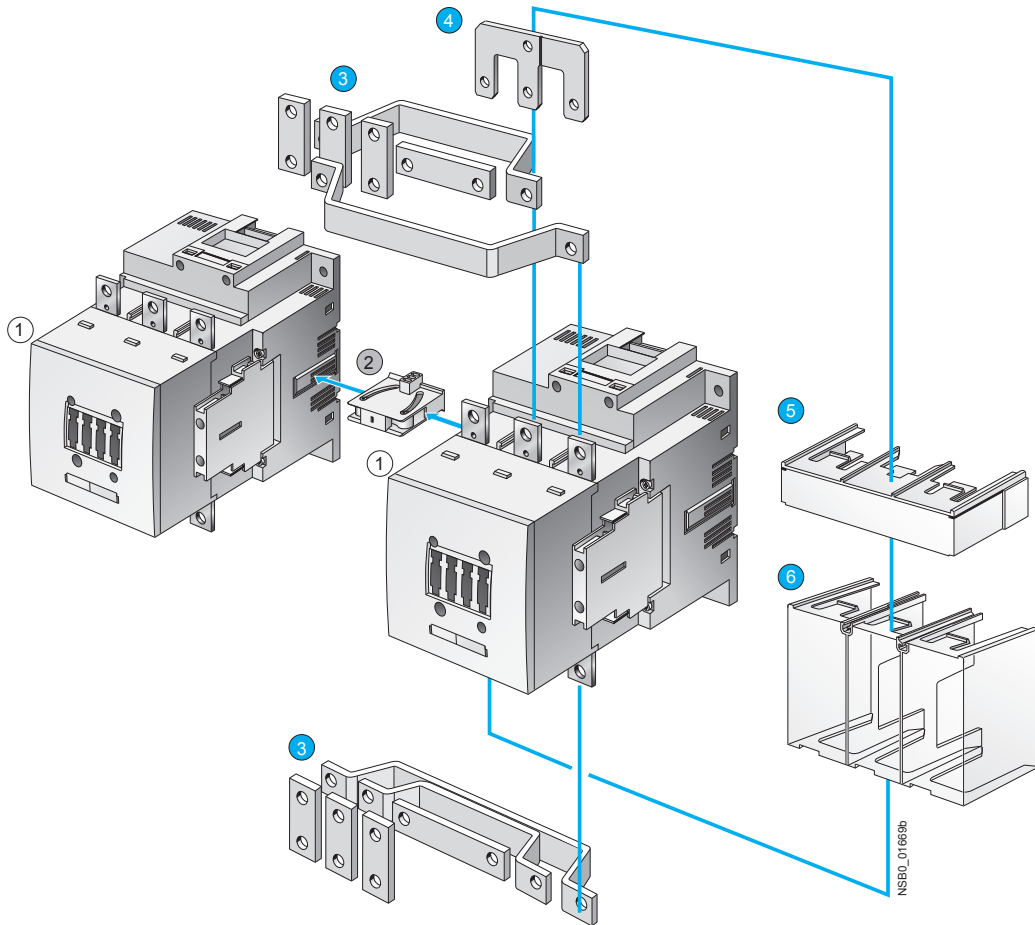

① 3RT10 and 3RT14 air-break contactor, sizes S6, S10 and S12 or 3RT12 vacuum contactor, sizes S10 and S12

② Mechanical interlock, laterally mountable

③ Wiring modules on the top and bottom, 3RA19

④ Link for paralleling (star jumper), 3-pole, with through-hole, 3RT19 56-4BA31

⑤ Terminal cover for box terminal, different for sizes S6 and S10/S12

⑥ Terminal cover for cable lug and busbar connection, different for sizes S6 and S10/S12


● Accessories identical for sizes S6 to S12

● Accessories different according to size

For accessories [see pages 2/65-2/80](#).

For mountable overload relays [see Chapter 3, "Overload Relays"](#).

## 3RT1 contactors Sizes S6 to S12 with accessories

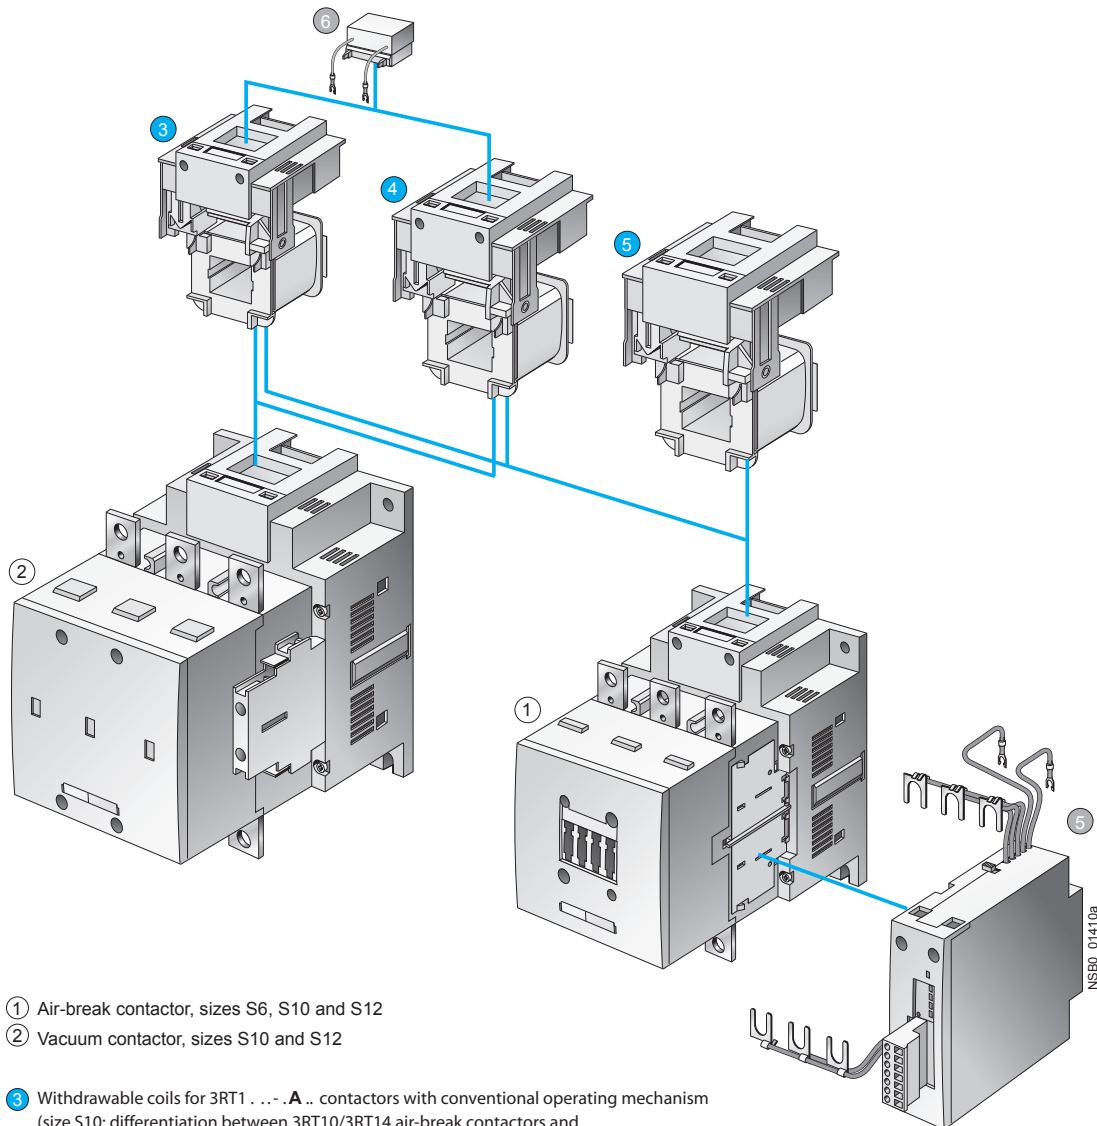

- ① Air-break contactor, sizes S6, S10 and S12
- ② Vacuum contactor, sizes S10 and S12
- ③ Withdrawable coils for 3RT1 . . . .A.. contactors with conventional operating mechanism  
(size S10: differentiation between 3RT10/3RT14 air-break contactors and 3RT12 vacuum contactors)  
(size S12: the same for air-break and vacuum contactors)
- ④ Withdrawable coils for 3RT1 . . . .N.. contactors with solid-state operating mechanism.  
(size S10: differentiation between 3RT10/3RT14 air-break contactors and 3RT12 vacuum contactors)  
(size S12: the same for air-break and vacuum contactors)
- ⑤ Withdrawable coils and laterally mountable module (plug-on) for 3RT1 . . . .P..air-break contactors with solid-state operating mechanism and remaining lifetime indicator
- ⑥ Surge suppressor (RC element), plug-mountable on withdrawable coils
  - 3RT1. . . .A.. with conventional operating mechanism
  - 3RT1. . . .N.. with solid-state operating mechanism

- Identical for sizes S6 to S12
- Different according to size

For surge suppressors [see page 2/71](#),  
withdrawable coils [see page 2/85](#).

For mountable overload relays [see Chapter 3, "Overload Relays"](#).



Selection and ordering data




3RH2911-1HA01



3RH2911-2HA01



3RH19 21-1HA . .



3RH19 21-2HA . .

For contactors/ control relays	Rated operational Current <sup>4)</sup> 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Connections position	Auxiliary contacts				Screw Terminals <sup>1)</sup>  Order No.	Spring Terminals <sup>1)</sup>  Order No.
				Version					
Type				NO	NC	NO	NC		

Auxiliary switch blocks for snapping onto the front according to EN 50012  
(also compliant with the requirements according to EN 50005)

Size S00 <sup>2)</sup>

For assembling contactors with 2, 3, 4, or 5 auxiliary contacts

3RT201., Ident. No. 10E	<b>11E</b>	—	1	—	—	<b>3RH2911-1HA01</b>	<b>3RH2911-2HA01</b>
3RT231.	<b>12E</b>	—	2	—	—	<b>3RH2911-1HA02</b>	<b>3RH2911-2HA02</b>
3RT251.	<b>13E</b>	—	3	—	—	<b>3RH2911-1HA03</b>	<b>3RH2911-2HA03</b>
	<b>21E</b>	1	—	—	—	<b>3RH2911-1HA10</b>	<b>3RH2911-2HA10</b>
	<b>21E</b>	1	1	—	—	<b>3RH2911-1HA11</b>	<b>3RH2911-2HA11</b>
	<b>22E</b>	1	2	—	—	<b>3RH2911-1HA12</b>	<b>3RH2911-2HA12</b>
	<b>23E</b>	1	3	—	—	<b>3RH2911-1HA13</b>	<b>3RH2911-2HA13</b>
	<b>31E</b>	2	—	—	—	<b>3RH2911-1HA20</b>	<b>3RH2911-2HA20</b>
	<b>31E</b>	2	1	—	—	<b>3RH2911-1HA21</b>	<b>3RH2911-2HA21</b>
	<b>32E</b>	2	2	—	—	<b>3RH2911-1HA22</b>	<b>3RH2911-2HA22</b>
	<b>41E</b>	3	—	—	—	<b>3RH2911-1HA30</b>	<b>3RH2911-2HA30</b>
	<b>41E</b>	3	1	—	—	<b>3RH2911-1HA31</b>	<b>3RH2911-2HA31</b>

Size S0

For assembling contactors with 3, 4, or 5 auxiliary contacts

3RT202., Ident. No. 11E	<b>12E</b>	—	1	—	—	<b>3RH2911-1HA01</b>	<b>3RH2911-2HA01</b>
3RT232.	<b>13E</b>	—	2	—	—	<b>3RH2911-1HA02</b>	<b>3RH2911-2HA02</b>
3RT252.	<b>21E</b>	1	—	—	—	<b>3RH2911-1HA10</b>	<b>3RH2911-2HA10</b>
	<b>22E</b>	1	1	—	—	<b>3RH2911-1HA11</b>	<b>3RH2911-2HA11</b>
	<b>23E</b>	1	2	—	—	<b>3RH2911-1HA12</b>	<b>3RH2911-2HA12</b>
	<b>31E</b>	2	—	—	—	<b>3RH2911-1HA20</b>	<b>3RH2911-2HA20</b>
	<b>32E</b>	2	1	—	—	<b>3RH2911-1HA21</b>	<b>3RH2911-2HA21</b>
	<b>41E</b>	3	—	—	—	<b>3RH2911-1HA30</b>	<b>3RH2911-2HA30</b>

Auxiliary switch blocks for snapping onto the front according to EN 50012 <sup>3)</sup>

Sizes S2 to S12

4-pole

3RT1. 3 to	<b>31</b>	3	1	—	—	<b>3RH1921-1HA31</b>	<b>3RH1921-2HA31</b>
3RT1. 7,	<b>22</b>	2	2	—	—	<b>3RH1921-1HA22</b>	<b>3RH1921-2HA22</b>
3RT11.	<b>13</b>	1	3	—	—	<b>3RH1921-1HA13</b>	<b>3RH1921-2HA13</b>
	<b>22</b>	2	2	—	—	<b>3RH1921-1XA22-0MA0</b>	<b>3RH1921-2XA22-0MA0</b>

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.

For position of the terminals see pages 2/189-2/193.

For int. circuit diagrams see page 2/177.

3RH29 aux blocks are not intended for use with 3RT1 or 3RH1 contactors and relays.

3RH19 aux blocks are not intended for use with 3RT2 or 3RH2 contactors and relays.

For auxiliary switch blocks for 3RH2140 and 3RH2440 see page 2/51.

1) The 3RH2911-.HA.. aux. switches are available with ring-lug terminals. Replace the 8th digit of the Order No. with a "4".

2) Size S00 can be mounted according to EN 50012 only on basic units which have no integrated NC contact.

3) Exception: 3RT16

4) UL ratings: See appendix page 19/7

# Contactors and Contactor Assemblies

## Accessories for 3RT contactors / 3RH control relays



### Auxiliary switch blocks

#### Selection and ordering data



3RH2911-1FA40



3RH2911-2FA40



3RH19 21-1C...



3RH19 21-2C...



3RH19 21-1LA...



3RH19 21-1MA..

For contactors/ control relays	Rated operational Current <sup>4)</sup> 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Connections position	Auxiliary contacts				Screw Terminals <sup>1)</sup>  Order No.	Spring Terminals <sup>1)</sup>  Order No.
				Version					
Type				NO	NC	NO	NC		

#### Auxiliary switch blocks for snapping onto the front according to EN 50005

##### Sizes S00 and S0

2- or 4-pole auxiliary switch blocks for assembling contactors with 3 and 5 or 4 and 6 auxiliary contacts

3RT2. 1.,	40	4	—	—	—	3RH2911-1FA40	3RH2911-2FA40
3RT2. 2.,	22	2	2	—	—	3RH2911-1FA22	3RH2911-2FA22
3RH21 ...,	04 <sup>1)</sup>	—	4	—	—	3RH2911-1FA04	3RH2911-2FA04
3RH24 ..	11 <sup>2)</sup>	—	—	1	1	3RH2911-1FB11	3RH2911-2FB11
	22 <sup>2)</sup>	1	1	1	1	3RH2911-1FB22	3RH2911-2FB22
	22 <sup>2)</sup>	—	—	2	2	3RH2911-1FC22	3RH2911-2FC22

##### 1- and 2- pole auxiliary switch blocks, cable entry from above or below

3RT2. 1.,	10	Top	1	—	—	3RH2911-1AA10	—
3RT2. 2.,		Bottom	1	—	—	3RH2911-1BA10	—
3RH21 ...,	01	Top	—	1	—	3RH2911-1AA01	—
3RH24 ..		Bottom	—	1	—	3RH2911-1BA01	—
	11	Top	1	1	—	3RH2911-1LA11	—
		Bottom	1	1	—	3RH2911-1MA11	—
	20	Top	2	—	—	3RH2911-1LA20	—
		Bottom	2	—	—	3RH2911-1MA20	—

##### Sizes S2 to S12 <sup>3)</sup>

##### 4-pole auxiliary switch blocks

3RT1. 3 to	40	4	—	—	—	3RH1921-1FA40	3RH1921-2FA40
3RT1. 7,	31	3	1	—	—	3RH1921-1FA31	3RH1921-2FA31
3RT11	22	2	2	—	—	3RH1921-1FA22	3RH1921-2FA22
	04	—	4	—	—	3RH1921-1FA04	3RH1921-2FA04
	22 U	—	—	2	2	3RH1921-1FC22	3RH1921-2FC22

##### Single-pole auxiliary switch blocks (also compliant with EN 5001<sup>2)</sup>)

3RT1. 3 to	—	1	—	—	—	3RH1921-1CA10	3RH1921-2CA10
3RT1. 7,	—	—	1	—	—	3RH1921-1CA01	3RH1921-2CA01
3RT11	—	—	—	1	—	3RH1921-1CD10	—
	—	—	—	—	1	3RH1921-1CD01	—

##### 2-pole auxiliary switch blocks with cable entry from one side

3RT1. 3 to	—	Top	1	1	—	—	3RH19 21-1LA11
3RT1. 7,	—	Bottom	1	1	—	—	3RH19 21-1MA11
3RT11	—	Top	2	—	—	—	3RH19 21-1LA20
	—	Bottom	2	—	—	—	3RH19 21-1MA20
	—	Top	—	2	—	—	3RH19 21-1LA02
	—	Bottom	—	2	—	—	3RH19 21-1MA02

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.  
For position of the terminals see pages 2/189-2/193.  
For int. circuit diagrams see page 2/177.

1) Mounting is permitted only on basic units which have no integrated NC contact.


2) Version with early make and delayed break contacts

3) Exception: 3RT16

4) UL ratings: See appendix page 19/7



Selection and ordering data

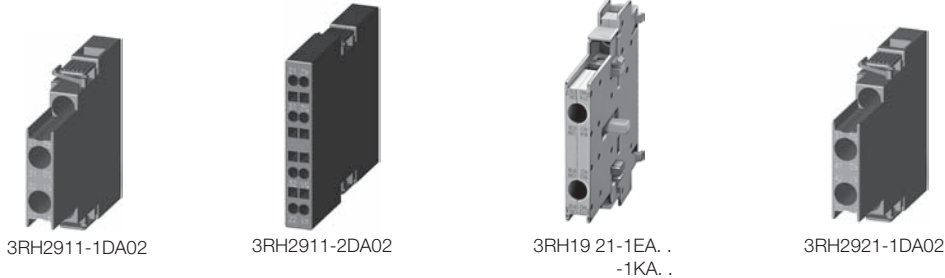

For contactors/ control relays	Rated operational Current <sup>4)</sup> 6A NEMA A600/Q600	Contactor with HS block Ident. No.	Mountable to contactor/ contactor relay side	Auxiliary contacts		Screw Terminals <sup>1)</sup>  Order No.	Spring Terminals <sup>1)</sup>  Order No.
				Version			
Type				NO	NC		

Laterally mountable auxiliary switch blocks according to EN 50012

Laterally mountable auxiliary switch block, 2-pole

Size S00 <sup>1) 2)</sup>

3RT201. Ident. No. 10E	A600/Q600 A600/Q600	<b>12E</b> <b>21E</b>	right right	— 1	2 1	<b>3RH2911-1DA02</b> <b>3RH2911-1DA11</b>	<b>3RH2911-2DA02</b> <b>3RH2911-2DA11</b>
---------------------------	------------------------	--------------------------	----------------	--------	--------	--	--

Size S0

3RT202. Ident. No. 11E	A600/Q600 A600/Q600	<b>13E</b> <b>22E</b>	right right	— 1	2 1	<b>3RH2921-1DA02</b> <b>3RH2921-1DA11</b>	<b>3RH2921-2DA02</b> <b>3RH2921-2DA11</b>
3RT232. 3RT252	A600/Q600	<b>31E</b>	right	2	—	<b>3RH2921-1DA20</b>	<b>3RH2921-2DA20</b>

Sizes S2 to S12

3RT1. 3 to 3RT1. 7	A600/Q600		right or left	1	1	<b>3RH1921-1DA11</b>	<b>3RH1921-2DA11</b>
--------------------	-----------	--	---------------	---	---	----------------------	----------------------

Second laterally mountable auxiliary switch block, 2-pole

Sizes S3 to S12

3RT1. 4 to 3RT1. 7	A300/Q300		right or left	1	1	<b>3RH1921-1JA11</b>	<b>3RH1921-2JA11</b>
--------------------	-----------	--	---------------	---	---	----------------------	----------------------

Laterally mountable auxiliary switch blocks according to EN 50005

First laterally mountable auxiliary switch block, 2-pole

Sizes S00 <sup>1) 2)</sup>

3RT201., Ident. No. 10E	A600/Q600 A600/Q600	<b>02</b> <b>11</b>	right or left right or left	— 1	2 1	<b>3RH2911-1DA02</b> <b>3RH2911-1DA11</b>	<b>3RH2911-2DA02</b> <b>3RH2911-2DA11</b>
3RT232. 3RT252.	A600/Q600	<b>20</b>	right or left	2	—	<b>3RH2911-1DA20</b>	<b>3RH2911-2DA20</b>

Sizes S0

3RT20 2., 3RT23 2. <sup>3)</sup>	A600/Q600 A600/Q600	<b>02</b> <b>11</b>	right or left right or left	— 1	2 1	<b>3RH2921-1DA02</b> <b>3RH2921-1DA11</b>	<b>3RH2921-2DA02</b> <b>3RH2921-2DA11</b>
3RT25 2. <sup>3)</sup>	A600/Q600	<b>20</b>	right or left	2	—	<b>3RH2921-1DA20</b>	<b>3RH2921-2DA20</b>

Sizes S2 to S12

3RT1. 3 to 3RT1. 7	A300/Q300 A300/Q300		right or left right or left	— 1	2 1	<b>3RH1921-1EA02</b> <b>3RH1921-1EA11</b>	<b>3RH1921-2EA02</b> —
	A300/Q300		right or left	2	—	<b>3RH1921-1EA20</b>	<b>3RH1921-2EA20</b>

Second laterally mountable auxiliary switch block, 2-pole

Sizes S3 to S12

3RT1. 4 to 3RT1. 7	A300/Q300 A300/Q300		right or left right or left	— 1	2 1	<b>3RH1921-1KA02</b> <b>3RH1921-1KA11</b>	<b>3RH1921-2KA02</b> —
	A300/Q300		right or left	2	—	<b>3RH1921-1KA20</b>	<b>3RH1921-2KA20</b>

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.  
For position of the terminals see pages 2/189-2/193.  
For int. circuit diagrams see pages 2/177-2/182.

1) With size S00, mounting according to EN 50012 is permitted only on basic units which have no NC contact integrated.

2) Ident. No. 41, 32 and 23 according to EN 50012 is also possible. Please note the corresponding circuit diagrams for mounting 3RH29 11-1DA.. on the left.

3) With 3RT23 2., 3RT25. 2. mountable only on the right.

4) UL ratings: See appendix page 19/7

# Contactors and Contactor Assemblies

## Accessories for 3RT contactors / 3RH control relays

SIRIUS



### Solid-state auxiliary switch blocks

#### Selection and ordering data

- Operation in dusty atmospheres
- Solid-state circuits with rated operational currents  $I_e$ /AC-14 and DC-13 from 1 ... 300 mA at 3 ... 60 V
- Hard gold-plated contacts
- Mirror contacts according to EN 60947-4-1, Appendix F, for laterally mountable auxiliary switches

#### Selection and ordering data



3RH2911-1NF02



3RH2911-2NF02



3RH2911-2DE11



3RH1921-2DE11



3RH19 21-2DE11

For contactors/ control relays	Contactor with HS block Ident. No.	Mountable to contactor/ contactor relay side	Auxiliary contacts				Screw Terminals <sup>1)</sup>	Spring Terminals <sup>1)</sup>
			Version					
							Order No.	Order No.
Type			NO	NC	NO	NC		

#### Solid-state compatible auxiliary switch blocks for snapping onto the front according to EN 50005<sup>1)</sup>

##### Sizes S00 and S0

3RT2. 1., Ident. No. 10E	<b>02</b>	—	—	—	2	<b>3RH2911-1NF02</b> <b>3RH2911-1NF11</b> <b>3RH2911-1NF20</b>	<b>3RH2911-2NF02</b> <b>3RH2911-2NF11</b> <b>3RH2911-2NF20</b>
3RT2. 2., Ident. No. 10E	<b>11</b>	1	—	—	1		
3RH21 .., 3RH24 ..	<b>20</b>	2	—	—	—		

##### Sizes S2 to S12

3RT1. 3 to 3RT1. 7	—	—	1	1	1	1	<b>3RH1921-1FE22</b>	<b>3RH19 21-2FE22</b> <b>3RH1921-2FJ22</b>
-----------------------	---	---	---	---	---	---	----------------------	---

#### Solid-state compatible auxiliary switch blocks, laterally mountable, according to EN 50012

##### First laterally mountable auxiliary switch block, 2-pole

##### Size S00<sup>2)</sup>

3RT2. 1., Ident. No. 10E	<b>21E</b>	right	1	—	—	1	—	<b>3RH2911-2DE11</b>
-----------------------------	------------	-------	---	---	---	---	---	----------------------

##### Size S0

3RT2. 1., Ident. No. 10E	<b>22E</b>	right	1	—	—	1	—	<b>3RH2921-2DE11</b>
-----------------------------	------------	-------	---	---	---	---	---	----------------------

##### Sizes S2 to S12

3RT1. 3 to 3RT1. 7	—	right or left	1	—	—	1	—	<b>3RH1921-2DE11</b>
-----------------------	---	---------------	---	---	---	---	---	----------------------

##### Second laterally mountable auxiliary switch block, 2-pole

##### Sizes S3 to S12

3RT1. 4 to 3RT1. 7	—	right or left	1	—	—	1	—	<b>3RH1921-2JE11</b>
-----------------------	---	---------------	---	---	---	---	---	----------------------

#### Solid-state compatible auxiliary switch blocks, laterally mountable, according to EN 50005

##### Size S00

3RT2. 1., Ident. No. 10E	<b>11</b>	right or left	1	—	—	1	—	<b>3RH2911-2DE11</b>
-----------------------------	-----------	---------------	---	---	---	---	---	----------------------

##### Size S0

3RT2. 2.	<b>11</b>	right or left	1	—	—	1	—	<b>3RH2921-2DE11</b>
----------	-----------	---------------	---	---	---	---	---	----------------------

EN50005 and EN50012 designate the markings of the auxiliary terminal numbers.  
For position of the terminals see pages 2/189 -2/193.  
For int. circuit diagrams see pages 2/177-2/182.



1) The 3RH29 11-.NF.. auxiliary switches are also available with ring lug terminal connection. The 8th digit of the order number must be replaced with "4", e. g.: 3RH2911-1NF11 -> 3RH2911-4NF11

2) Size S00 can be mounted according to EN 50012 only on basic units which have no integrated NC contact.





Selection and ordering data

	For contactors	Rated control supply voltage $U_s^{1)}$	Time setting range $t$	Output / auxiliary contacts	Screw Terminals Order No.	Spring Terminals Order No.
	Type	V	Sec			
<b>Time-delay, solid-state auxiliary switch blocks for snapping onto the front according to DIN 46199-5</b>						
The electrical connection between the solid-state time-delay auxiliary switch and the contactor underneath is established automatically when it is snapped on and locked into place.						
<b>Sizes S00 and S0</b>						
 <p>3RA2813-1AW10</p>	3RT2., 3RH21 <sup>2)</sup> 3RH24	<b>ON-delay (varistor integrated)</b>				
		24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA2813-1AW10 3RA2813-1FW10	3RA2813-2AW10 3RA2813-2FW10
		<b>OFF-delay with auxiliary voltage (varistor integrated)</b>				
		24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA28 14-1AW10 3RA28 14-1FW10	3RA28 14-2AW10 3RA28 14-2FW10
		<b>OFF-delay without auxiliary voltage<sup>3)</sup> (varistor integrated)</b>				
		24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	1 CO 1 NO + 1 NC	3RA2815-1AW10 3RA2815-1FW10	3RA2815-2AW10 3RA2815-2FW10
<b>Sizes S2 to S12</b>						
 <p>3RT1926-2FJ11</p>	3RT10, 3RT13, 3RT14, 3RT15	<b>ON-delay (varistor integrated)</b>				
		24 AC/DC <sup>4)</sup>	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2EJ11 3RT19 26-2EJ21 3RT19 26-2EJ31	— — —
		100 ... 127 AC <sup>4)</sup>	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2EC11 3RT19 26-2EC21 3RT19 26-2EC31	— — —
	200 ... 240 AC <sup>4)</sup>	0.05 ... 1 0.5 ... 10 5 ... 100	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2ED11 3RT19 26-2ED21 3RT19 26-2ED31	— — —	
	<b>OFF-delay without auxiliary voltage <sup>5)</sup></b>					
	24 AC/DC <sup>4)</sup>	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FJ11 3RT19 26-2FJ21 3RT19 26-2FJ31	— — —	
	100 ... 127 AC <sup>4)</sup>	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FK11 3RT19 26-2FK21 3RT19 26-2FK31	— — —	
	200 ... 240 AC <sup>4)</sup>	0.05 ... 100 (1, 10, 100, selectable)	1 NO + 1 NC 1 NO + 1 NC 1 NO + 1 NC	3RT19 26-2FL11 3RT19 26-2FL21 3RT19 26-2FL31	— — —	
	<b>WYE-delta function</b>					
	24 AC/DC <sup>4)</sup>	1.5 ... 30	each have: 1 NO delayed	3RT19 26-2GJ51	—	
	100 ... 127 AC <sup>4)</sup>	1.5 ... 30	1 NO instant	3RT19 26-2GC51	—	
	200 ... 240 AC <sup>4)</sup>	1.5 ... 30	interval 50ms	3RT19 26-2GD51	—	

For technical data, see pages 2/169-2/170.  
 For int. circuit diagrams, see page 2/185.  
 For position of terminals, see page 2/193.

When the solid-state time-delay auxiliary switches are used, no other auxiliary switches are allowed to be mounted on the basic units.

1) AC voltage values apply for 50 Hz and 60 Hz.

2) Cannot be fitted onto coupling relays.

3) Setting of output contacts in as-supplied state not defined (bistable relay). Application of the control supply voltage once results in contact change-over to the correct setting.

4) Terminals A1 and A2 for the rated control supply voltage of the solid-state time-delay auxiliary switch must be connected to the associated contactor by means of connecting leads.

5) Position of the output contacts not defined in the as-delivered state (bistable relay). Applying the control voltage once results in the contacts switching to the correct position.

# Contactors and Contactor Assemblies

## Accessories for 3RT contactors / 3RH control relays

SIRIUS



Function modules, delay blocks,  
and mechanical latching blocks

### Selection and ordering data





	For contactors	Rated control supply voltage $U_s$ 1)	Time setting range $t$	Screw Terminals 2) Order No.	Weight approx. kg
	Type	V	sec		
<b>Solid-state time-delay blocks with semiconductor output</b>					
	<b>Sizes S00 and S0</b> For mounting on the front of the contactors <i>The electrical connection between the timing relay and the contactor underneath is established automatically when it is snapped on and locked in place.</i> <b>ON-delay (two wire version, varistor integrated)</b> 3RT20 1., 3RT20 2., 3RH21 3), 3RH24	24 ... 240 AC/DC	0.05 ... 100 (1, 10, 100, selectable)	3RA2811-1CW10	0.070
				<b>OFF-delay with auxiliary voltage (varistor integrated)</b> 3RT20 1., 3RT20 2., 3RH21 3), 3RH24	3RA2812-1DW10
	<b>Sizes S2 and S3</b> For mounting on the terminals on top of the contactors <b>ON-delay (varistor integrated)</b> 3RT103, 3RT104, 3RT13 5), 3RT15	24 ... 66 AC/DC	0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2CG11	0.035
				90 ... 240 AC/DC 0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2CG21
	<b>OFF-delay with auxiliary voltage (varistor integrated)</b> 3RT103, 3RT104, 3RT13 5), 3RT15	24 ... 66 AC/DC	0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2CH11	0.035
				90 ... 240 AC/DC 0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2CH21
	<b>OFF-delay with auxiliary voltage (varistor integrated)</b> 3RT103, 3RT104, 3RT13 5), 3RT15	24 ... 66 AC/DC	0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DG11	0.037
				90 ... 240 AC/DC 0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DG21
	<b>OFF-delay with auxiliary voltage (varistor integrated)</b> 3RT103, 3RT104, 3RT13 5), 3RT15	24 ... 66 AC/DC	0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DG31	0.037
				90 ... 240 AC/DC 0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DH11
	<b>OFF-delay with auxiliary voltage (varistor integrated)</b> 3RT103, 3RT104, 3RT13 5), 3RT15	24 ... 66 AC/DC	0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DH21	0.037
				90 ... 240 AC/DC 0.05 ... 1 0.5 ... 10 5 ... 100	3RT1926-2DH31
<b>Off-delay device</b>					
	<b>Sizes S00 and S0</b> <b>For contactors with DC operation. Non-adjustable delay time</b> 3RT2. 1, 3RT2. 2, 3RH2. ...-1BF40	110 AC/DC	S00: > 0.1 S0: > 0.08	3RT2916-2BK01	0.150
			3RT2. 1, 3RT2. 2, 3RH2. ...-1BM40	220 ... 230 AC/DC	S00: > 0.5 S0: > 0.3
	3RT2. 1, 3RT2. 2, 3RH2. ...-1BB40	24 DC	S00: > 0.2 S0: > 0.1	3RT2916-2BE01	0.150
			<b>Sizes S2 and S3</b> 3RT1. 3, 3RT1. 4	24 DC	S2: 90 fixed S3: 70 fixed
<b>Pneumatic delay blocks, terminal designation according to EN 50005 4)</b>					
	<b>Size S0</b> <b>For snapping onto the front of contactors 5) Auxiliary contacts 1 NO and 1 NC</b> <b>With ON-delay</b>	—	0.1 ... 30 1 ... 60	3RT2926-2PA01	0.080
			<b>With OFF-delay</b>	0.1 ... 30 1 ... 60	3RT2926-2PA11
	<b>With OFF-delay</b>	—	0.1 ... 30 1 ... 60	3RT2926-2PR01	0.080
			3RT2. 2	1 ... 60	3RT2926-2PR11
<b>Mechanical latching blocks</b>					
	<b>For mounting onto the front of contactors</b> <b>The contactor remains in the energized state even after voltage failure</b> <b>Size S0</b>	24 AC/DC	—	3RT2926-3AB31	0.100
		3RT2. 2	110 AC/DC	—	3RT2926-3AF31
	<b>Size S2</b>	24 AC/DC	—	3RT2926-3AP31	0.100
		3RT2. 2	110 AC/DC	—	3RT1926-3AB31
	3RT2. 2	110 AC/DC	—	3RT1926-3AF31	0.130
		230 AC/DC	—	3RT1926-3AP31	0.130

For description, see page 2/106.  
For technical data, see page 2/169.  
For circuit diagrams, see page 2/185.

- 1) AC voltage ratings apply for 50 and 60 Hz.
- 2) The 3RA28 time-delay blocks are available with spring-type terminals. Replace the 8th digit of the order number with a "2".
- 3) Cannot be fitted onto coupling relays
- 4) Versions according to DIN VDE 0116 on request.
- 5) In addition to these, no other auxiliary contacts are permitted.



Selection and ordering data

	For contactors	Version	Rated control supply voltage $U_s$ <sup>1)</sup>		Order No. <sup>2)</sup>	Weight approx. kg	
			AC operation	DC operation			
	Type		V AC	V DC			
<b>Surge suppressors without LED (also for spring-type terminals)</b>							
		<b>Size S00</b>	<b>For plugging onto the front side of the contactors (with and without auxiliary switch block)</b>				
 <p>3RT2916-1B.00</p>	3RT2.1, 3RH2.	<b>Varistor</b>	24 ... 48	24 ... 70	<b>3RT2916-1BB00</b>	0.010	
			48 ... 127	70 ... 150	<b>3RT2916-1BC00</b>	0.010	
			127 ... 240	150 ... 250	<b>3RT2916-1BD00</b>	0.010	
			240 ... 400	—	<b>3RT2916-1BE00</b>	0.010	
			400 ... 600	—	<b>3RT2916-1BF00</b>	0.010	
	3RT2.1, 3RH2.	<b>RC element</b>	24 ... 48	24 ... 70	<b>3RT2916-1CB00</b>	0.010	
			48 ... 127	70 ... 150	<b>3RT2916-1CC00</b>	0.010	
			127 ... 240	150 ... 250	<b>3RT2916-1CD00</b>	0.010	
			240 ... 400	—	<b>3RT2916-1CE00</b>	0.010	
			400 ... 600	—	<b>3RT2916-1CF00</b>	0.010	
3RT2.1, 3RH2.	<b>Noise suppression diode</b>	—	12 ... 250	<b>3RT2916-1DG00</b>	0.010		
3RT2.1, 3RH2.	<b>Diode assembly</b> (diode and Zener diode) for DC operation	—	12 ... 250	<b>3RT2916-1EH00</b>	0.010		
		<b>Size S0</b>	<b>For plugging onto the front side of the contactors (prior to mounting of the auxiliary switch block)</b>				
 <p>3RT2926-1B.00</p>	3RT2. 2	<b>Varistor</b>	24 ... 48	24 ... 70	<b>3RT2926-1BB00</b>	0.010	
			48 ... 127	70 ... 150	<b>3RT2926-1BC00</b>	0.010	
			127 ... 240	150 ... 250	<b>3RT2926-1BD00</b>	0.010	
			240 ... 400	—	<b>3RT2926-1BE00</b>	0.010	
			400 ... 600	—	<b>3RT2926-1BF00</b>	0.010	
	3RT2. 2	<b>RC element</b>	24 ... 48	24 ... 70	<b>3RT2926-1CB00</b>	0.010	
			48 ... 127	70 ... 150	<b>3RT2926-1CC00</b>	0.010	
			127 ... 240	150 ... 250	<b>3RT2926-1CD00</b>	0.010	
			240 ... 400	—	<b>3RT2926-1CE00</b>	0.010	
			400 ... 600	—	<b>3RT2926-1CF00</b>	0.010	
3RT2. 2	<b>Diode assembly</b> for DC operation	—	24	<b>3RT2926-1ER00</b>	0.010		
		—	30 ... 250	<b>3RT2926-1ES00</b>			
		<b>Sizes S2 and S3</b>	<b>For plugging onto coil terminals on the top or bottom</b>				
 <p>3RT1926-1B.00</p>	3RT1. 3, 3RT1. 4	<b>Varistor</b>	24 ... 48	24 ... 70	<b>3RT1926-1BB00</b>	0.01	
			48 ... 127	70 ... 150	<b>3RT1926-1BC00</b>	0.01	
			127 ... 240	150 ... 250	<b>3RT1926-1BD00</b>	0.01	
			240 ... 400	—	<b>3RT1926-1BE00</b>	0.01	
			400 ... 600	—	<b>3RT1926-1BF00</b>	0.01	
	3RT1. 3, 3RT1. 4	<b>RC element</b>	24 ... 48	24 ... 70	<b>3RT1936-1CB00</b>	0.01	
			48 ... 127	70 ... 150	<b>3RT1936-1CC00</b>	0.01	
			127 ... 240	150 ... 250	<b>3RT1936-1CD00</b>	0.01	
			240 ... 400	—	<b>3RT1936-1CE00</b>	0.01	
			400 ... 600	—	<b>3RT1936-1CF00</b>	0.01	
	3RT1. 3, 3RT1. 4	<b>Diode assembly</b> for DC operation	<ul style="list-style-type: none"> <li>• For plugging onto top (e. g. for contactors with overload relay)</li> <li>• For plugging onto bottom (e. g. for fuseless motor starters)</li> </ul>	—	24	<b>3RT1936-1ER00</b>	0.01
				—	30 ... 250	<b>3RT1936-1ES00</b>	0.01
				—	24	<b>3RT1936-1TR00</b>	0.01
				—	30 ... 250	<b>3RT1936-1TS00</b>	0.01
				—	—		
		<b>Sizes S6, S10, S12</b>	<b>For plugging onto the conventional or solid-state coil</b>				
 <p>3RT1936-1C.00</p>	3RT1. 5, 3RT1. 6, 3RT1. 7	<b>RC element</b>	24 ... 48	24 ... 70	<b>3RT1956-1CB00</b>	0.03	
			48 ... 127	70 ... 150	<b>3RT1956-1CC00</b>	0.03	
			127 ... 240	150 ... 250	<b>3RT1956-1CD00</b>	0.03	
			240 ... 400	—	<b>3RT1956-1CE00</b>	0.03	
			400 ... 600	—	<b>3RT1956-1CF00</b>	0.03	

1) Can be used for AC operation for 50/60 Hz. Please inquire about further voltages.

2) For packs of 5 or 10 units, "-Z" and order code "X90" must be added to the Order No.

# Contactors and Contactor Assemblies



## Accessories for 3RT contactors / 3RH control relays

SIRIUS



### Surge suppressors and other function blocks


#### Selection and ordering data

Type	For contactors	Version	Rated control supply voltage $U_s$ <sup>1)</sup>		Order No. <sup>2)</sup>	Weight approx. kg				
			V AC	V DC						
<b>Surge suppressors with LED (also for spring-type terminals)</b>										
	3RT2.1, 3RH2.	<b>Size S00</b>	<b>For plugging onto the front side of the contactors (with and without auxiliary switch block)</b>							
			<b>Varistor</b>	24 ... 48	12 ... 24			10 ... 120	<b>3RT2916-1JJ00</b>	0.010
				48 ... 127	24 ... 70			20 ... 470	<b>3RT2916-1JK00</b>	0.010
				127 ... 240	70 ... 150			50 ... 700	<b>3RT2916-1JL00</b>	0.010
				—	150 ... 250			160 ... 950	<b>3RT2916-1JP00</b>	0.010
<b>Noise suppression diode</b>	—	24 ... 70	20 ... 470	<b>3RT2916-1LM00</b>	0.010					
	—	50 ... 150	50 ... 700	<b>3RT2916-1LN00</b>	0.010					
	—	150 ... 250	160 ... 950	<b>3RT2916-1LP00</b>	0.010					
	3RT2. 2	<b>Size S0</b>	<b>For plugging onto the front side of the contactors (prior to mounting of the auxiliary switch block)</b>							
			<b>Varistor</b>	24 ... 48	12 ... 24			10 ... 120	<b>3RT2926-1JJ00</b>	0.010
				48 ... 127	24 ... 70			20 ... 470	<b>3RT2926-1JK00</b>	0.010
				127 ... 240	70 ... 150			50 ... 700	<b>3RT2926-1JL00</b>	0.010
			<b>Diode assembly</b>	—	24			20 ... 470	<b>3RT2926-1MR00</b>	0.010


#### Main conducting path surge suppression module for 3RT12 vacuum contactors

<b>Sizes S10 and S12</b>	For damping overvoltages and protecting the motor windings against multiple reignition when switching off three-phase motors. For connection on the contactor feeder side (2-T1/4-T2/6-T3). For separate installation. Rated operational voltage $U_o \geq 500$ V AC ... $\leq 690$ V AC. Rated operational voltage $U_o \leq 1000$ V AC.	<b>3RT1966-1PV3</b> <b>3RT1966-1PV4</b>	0.18 0.36
--------------------------	---	--	--------------

#### EMC suppression modules; three-phase $\leq 7.5$ HP

	3RT201	<b>Size S00</b>	<b>For contactors with AC or DC operation</b>					
			<b>RC element (3 x 220 <math>\Omega</math>/0.22 <math>\mu</math>F) - with screw terminals</b>	Up to 400 V			<b>3RT2916-1PA1</b>	0.01
				Up to 575 V			<b>3RT2916-1PA2</b>	0.01
				Up to 690 V			<b>3RT2916-1PA3</b>	0.01
<b>Varistor</b>	Up to 400 V	<b>3RT2916-1PB1</b>	0.010					
	Up to 575 V	<b>3RT2916-1PB2</b>	0.010					
	Up to 690 V	<b>3RT2916-1PB3</b>	0.010					

#### Additional load modules

	3RT2. 1, 3RH2.	<b>Size S0</b>	<b>For plugging onto the front side of the contactors with and without auxiliary switch block <sup>3)</sup></b>		<b>3RT2916-1GA00</b>	0.010
			For increasing the permissible residual current and for limiting the residual voltage. It ensures safe opening of contactors with direct control via 230 V AC semiconductor outputs of SIMATIC controllers and acts simultaneously as a surge suppressor. Rated voltage: AC 50/60 Hz, 180 to 255 V. Operating range: 0.8 to 1.1 x $U_s$ .			








1) Can be used for AC operation for 50/60 Hz. Please inquire about further voltages.

2) For packs of 5 or 10 units, "-Z" and order code "X90" must be added to the Order No.

3) For packs of 10 units, "-Z" and order code "X90" must be added to the Order No.



Selection and ordering data

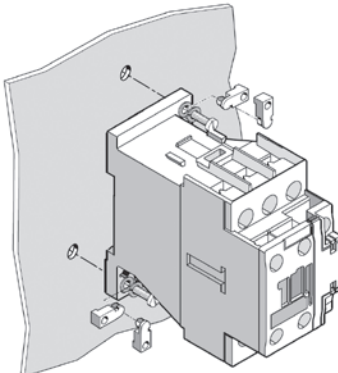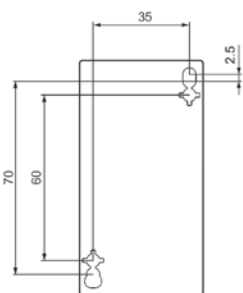For contactors Type	Version	Order No. <sup>2)</sup>	Weight approx. kg
<b>LED modules for indicating contactor operation</b>			
3RT2926-1QT00 	<b>Size S0</b> 3RT2. 2	For snapping into the location hole of an inscription label on the front of a contactor either directly on the contactor (S0-S3) or on the front auxiliary switch (S0). The LED module is connected to coil terminals A1 and A2 of the contactor and indicates its energized state. Yellow LED. Rated Voltage: 24 ... 240 V AC/DC, polarized	<b>3RT2926-1QT00</b> *std. pkg. qty. = 5  <b>3RH1926-1QT00</b> *std. pkg. qty. = 5
	<b>Sizes S2 and S3</b> 3RT1. 3 3RT1. 4		
<b>Coupling links for control by PLC</b>			
3RH2924-1GP11 	<b>Size S00</b> 3RT2. 2	<b>For mounting onto the coil terminals of the contactors</b> With LED for indicating switching state. With integrated varistor for limiting the opening surges. Operating range: 17 ... 30 V DC Power consumption: 0.5 W at 24 V DC Permissible residual current of the electronics (with 0 signal): 2.5 mA Rated operational current $I_{eS}$ : <ul style="list-style-type: none"> <li>• AC-15/AC-14 at 230 V: 3 A</li> <li>• DC-13 at 230 V: 0.1 A</li> </ul>	<b>3RH2924-1GP11</b>  <b>3RH1924-1GP11</b>
	<b>Sizes S2 and S3</b> 3RT1. 3 3RT1. 4		
<b>Control kits</b>			
3RT2916-4MC00 	<b>Size S00</b> 3RT2. 1, 3RH2.	For manual operation of the contactor contacts for start up and service. (yellow in color)	<b>3RT2916-4MC00</b>  <b>3RT2926-4MC00</b>
	<b>Size S0</b> 3RT2. 2		
<b>Auxiliary conductor terminal, 3-pole</b>			
3RT1946-4F 	<b>Size S3</b> 3RT104.	For connecting auxiliary and control leads to the main conductor terminals (for one side).	<b>3RT1946-4F</b>
<b>Screw adapters for mounting contactor</b>			
	<b>Size S0</b> 3RT2. 2	Screw adapters for easier screw fixing. Two units are required per contactor. (1 pack contains 10 sets for 10 contactors)	<b>3RT1926-4P</b> *std. pkg. qty. = 10 pairs
			

# Contactors and Contactor Assemblies

## Accessories for 3RT contactors / 3RH control relays

SIRIUS



### Terminals, covers, adapters, connectors

#### Selection and ordering data

For contactors	Version	Order No.	Standard Package Quantity	Weight approx.
Type				kg
<b>Sealable covers</b>				
<i>Sizes S00 and S0<sup>1)</sup></i>				
	3RT2. 1, 3RT2. 2, 3RH2.	Sealable covers for preventing manual operation	<b>3RT29 16-4MA10</b>	5 units 0.010
3RT29 16-4MA10				
<b>Connection modules for contactors with screw terminals</b>				
<i>Sizes S00 and S0</i>				
	3RT2. 1, 3RH2.	<b>Adapters for contactors</b> Ambient temperature $T_{U \max} = 60 \text{ }^\circ\text{C}$ Size S00, rated operational current $I_e$ at AC-3/460 V: 20 A	<b>Screw terminals</b> 	
3RT19 26-4RD01	3RT2. 2	Size S0, rated operational current $I_e$ at AC-3/460 V: 21 A	<b>3RT19 16-4RD01</b>	1 unit 0.020
	3RT2. 1, 3RT2. 2, 3RH2.	<b>Plugs for contactors</b> Size S00, S0	<b>3RT19 26-4RD01</b>	1 unit 0.200
3RT19 00-4RE01			<b>3RT19 00-4RE01</b>	1 unit 0.025
<b>Coil terminal modules</b>				
<i>Size S0</i>				
	3RT2. 2	Connection from top Connection from below Connection diagonally	<b>3RT29 26-4RA11</b> <b>3RT29 26-4RB11</b> <b>3RT29 26-4RC11</b>	1 unit 1 unit 1 unit 0.010 0.010 0.010
3RT29 26-4RA11			<b>Spring-type terminals</b> 	
	3RT2. 2	Connection from top Connection from below	<b>3RT29 26-4RA12</b> <b>3RT29 26-4RB12</b>	1 unit 1 unit 0.010 0.010
<b>Covers for contactors with ring lug terminal connection</b>				
<i>Size S00</i>				
	3RT2. 1, 3RH2.	<b>Covers for ring lug terminal connections</b> Single covers	<b>Ring lug terminal connection</b> 	
3RT29 16-4EA13			<b>3RT29 16-4EA13</b>	10 units 0.001
	3RT2. 2	<b>Covers for ring lug terminal connections</b> Set for one device, comprising 4 single covers	<b>3RT29 26-4EB13</b>	1 unit 0.005
3RT29 26-4EB13				
<b>Coil terminal modules</b>				
		<b>Covers for ring lug terminal</b> 20 mm x 7 mm, pastel turquoise PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systems, Inc. www.murrplastik.com	<b>3RT19 00- 1SB20</b>	340 units 0.200
3RT19 00- 1SB20				

<sup>1)</sup> Exception: contactors and contactor relays with auxiliary switch block mounted onto the front.







Selection and ordering data

For contactors Type	Version	Screw Terminals Order No.	Standard package quantity	Weight approx. kg
---------------------	---------	---------------------------	---------------------------	-------------------


Solder pin adaptors for contactors up to 7.5 HP / 12A

3RT1916-4KA1 	<b>Size S00</b> 3RT2. 1, 3RH21	Assembly kit for soldering contactors onto a printed circuit board.  For 1 contactor, 1 set is required.	<b>3RT1916-4KA1</b>	4 units 0.030
---	--------------------------------------	--	---------------------	---------------

Solder pin adaptors for contactors up to 7.5 HP / 12 A (AC-1/AC-3) with mounted 4-pole auxiliary switch block

3RT1916-4KA2 	<b>Size S00</b> 3RT2. 1, 3RH21	Assembly kit for soldering contactors with an auxiliary switch block onto a printed circuit board.  For 1 contactor, 1 set is required.	<b>3RT1916-4KA2</b>	4 units 0.070
---	--------------------------------------	---	---------------------	---------------

Safety main circuit connectors for 2 contactors

3RA2916-1A 	<b>Size S00</b> 3RT2. 1	For series connection of 2 contactors	<b>3RA2916-1A</b>	1 unit
	<b>Size S0</b> 3RT2. 2	For series connection of 2 contactors	<b>3RA2926-1A</b>	1 unit


Links for paralleling



3RT1916-4BB31



3RT1916-4BB41



3RT1936-4BB31



3RT1956-4BA31

Size	For contactors Type	Maximum resistive current Ie/AC-1 (at 60 °C) of contactors A	Max. conductor cross sections	Screw Terminals Order No.	Standard package quantity	Weight approx. kg
S00	3RT201.	3-pole, with terminal 1), 2)	4 AWG, stranded	<b>3RT1916-4BB31</b>		0.015
S0	3RT202.		0 AWG, stranded	<b>3RT2926-4BB31</b>		0.042
S2	3RT103.		95 mm <sup>2</sup>	<b>3RT19 36-4BB31</b>		0.139
S3	3RT104.	3-pole, with through hole	185 mm <sup>2</sup>	<b>3RT19 46-4BB31</b>		0.205
S6	3RT1. 5	(WYE jumpers) 1), 2)	—	<b>3RT19 56-4BA31</b>		0.159
S10/S12	3RT1. 6 3RT1. 7		—	<b>3RT19 66-4BA31</b>		0.541
S00	3RT231. 3RT251.	4-pole, with terminal 1), 2)	4 AWG, stranded	<b>3RT19 16-4BB41</b>		0.016

1) The links for paralleling can be reduced by one pole.

2) Sizes S00 to S2: The links for paralleling are insulated.

Size S3: A cover plate is supplied separately packed for shock-hazard protection.  
(Can only be used when the box terminal is removed.)

Sizes S6 to S12: The 3RT19 56-4EA1 (with S6) or 3RT19 66-4EA1 (with S10 and S12) cover can be used for shock-hazard protection.

# Contactors and Contactor Assemblies

## Accessories for 3RT contactors / 3RH control relays

SIRIUS



### Terminals, covers, accessories

#### Selection and ordering data

For contactors	Design	Order No.	List Price \$	Weight approx.
Size	Type		1 unit	kg

#### Box terminal block for contactors with screw connections

3RT19 5. -4G



		For circular conductors and ribbon cables For connectable cross-sections, see technical data of contactors, page 2/99		
<b>S3</b>	3RT1. 4	16 mm <sup>2</sup> / 10 AWG (solid), 70 mm <sup>2</sup> / 0 AWG (stranded)	<b>3RT19 46-4G</b>	
<b>S6</b>	3RT1. 5 (3RB205)	up to 70 mm <sup>2</sup> / 2/0 AWG up to 120 mm <sup>2</sup> / 4/0 AWG	<b>3RT19 55-4G</b> <b>3RT19 56-4G</b>	0.23 0.26
<b>S10,</b> <b>S12</b>	3RT1. 6, 3RT1. 7 (3RB206)	240 mm <sup>2</sup> - 500 mm <sup>2</sup> / 500 MCM - 750 MCM with auxiliary conductor connection	<b>3RT19 66-4G</b>	0.64

#### Covers for contactors with screw connections

3RT19 36-4EA2



		Terminal cover for box terminals		
<b>S2</b>	3RT10 3	Additional shock-hazard protection for mounting on the box terminals (2 units required per contactor)	<b>3RT19 36-4EA2</b>	0.012
<b>S3</b>	3RT10 4, 3RT14 4		<b>3RT19 46-4EA2</b>	
<b>S6</b>	3RT1. 5	Length: 25 mm	<b>3RT19 56-4EA2</b>	0.016
<b>S10,</b> <b>S12</b>	3RT1. 6, 3RT1. 7	Length: 30 mm	<b>3RT19 66-4EA2</b>	

3RT19 46-4EA1



		Terminal cover for cable lug and busbar connection		
<b>S3</b>	3RT10 4, 3RT14 4	For complying with the phase clearances and as shock-hazard protection in the case of a distant box terminal <sup>1)</sup> (2 units required per contactor)	<b>3RT19 46-4EA1</b>	0.028
<b>S6</b>	3RT1. 5	Length: 100 mm	<b>3RT19 56-4EA1</b>	0.05
<b>S10,</b> <b>S12</b>	3RT1. 6, 3RT1. 7	Length: 120 mm	<b>3RT19 66-4EA1</b>	
<b>S6</b>	3RT1. 5	Length: 27 mm	<b>3RT19 56-4EA3</b>	0.018
<b>S10,</b> <b>S12</b>	3RT1. 6, 3RT1. 7	Length: 42 mm	<b>3RT19 66-4EA3</b>	

Design	Order No.	Package quantity	Weight approx.
			kg

#### Insulation stop for securely holding back the conductor insulation on conductors up to 1 mm<sup>2</sup> (17 AWG)

3RT1916-4JA02



	Insulation stop strips can be inserted in cable entry of the spring terminal (2 strips per contactor required)			
	• For basic devices S00 (3RT201. or 3RH2. ), removable individually	<b>3RT2916-4JA02</b>	20 strips	0.005
	• For auxiliary and control circuit on basic devices size S0 (3RT202. ) and for mountable 3RH29 auxiliary switches, removable in pairs	<b>3RT1916-4JA02</b>	20 strips	0.010

#### Tool for opening spring-type terminals

3RA2908-1A








<b>Screwdriver</b>	for all SIRIUS devices with spring-type terminals Length: approx. 200 mm, 3,0 mm x 0,5 mm, titanium gray/black, partially insulated	<b>3RA2908-1A</b>	1 unit	0.045
--------------------	--	-------------------	--------	-------

1) Refer to the note on page 2/129, conductor cross-sections.



Accessories

	For contactors Type	Size	Design	Order No.	Weight approx. kg
<b>Mechanical interlocks</b>					
<p>3RA19 24-2B</p> 	3RT10 3, 3RT10 4;	<b>S2, S3;</b>	<b>laterally mountable</b> each with one auxiliary contact (1 NC) per contactor (can only couple contactors of max. 1 level different size. The mounting depth of the smaller contactor has to be adapted.) Interlock width: 10 mm	<b>3RA19 24-2B</b>	0.05
	3RT13 3, 3RT13 4	<b>S2, S3,</b>			
	3RT10 3, 3RT10 4;	<b>S2, S3;</b>	<b>front mountable</b> on contactors of sizes S2, S3 (for contactors of the same size respectively)  Note: Sizes S2 and S3: Use 3RA19 32-2C mechanical connectors.	<b>3RA19 24-1A</b>	0.04
<p>3RA19 54-2C</p> 	3RT104 to 3RT105	<b>S3 to S6</b>	<b>adapter to mechanically</b> interlock a 3RT104 with a 3RT105  includes the adapter and QTY 2 - 3RA1942-2G mechanical connectors  requires the 3RA1954 - 2A to be ordered separately  Note: Fits 3RT104 AC coil versions only. Does not fit 3RT104 DC coil versions.	<b>3RA19 54-2C</b>	
<p>3RA19 54-2A</p> 	3RT1. 5 to 3RT1. 7	<b>S6, S10, S12</b>	<b>laterally mountable</b> without auxiliary contacts; size S6, S10 and S12 contactors can be interlocked with each other as required; no adaptation of mounting depth is necessary. Contactor clearance 10 mm.	<b>3RA19 54-2A</b>	0.02
<b>Repeat coil terminal</b>				1 set	
<p>3RA19 23-3B</p> 	3RT10 3, 3RT10 4	<b>S2, S3</b>	for coil terminals A1 and A2 for reversing starters of size S2 and S3 contactors. 2 x A1 and 1 x A2 are required per assembly. (1 set contains 2 x A1 and 1 x A2)	<b>3RA19 23-3B</b>	0.02
<b>Baseplates</b>				1 unit	
<p>3RA1972-2A</p> 	3RT10 5	<b>S6</b>	for customer mounting of contactor assemblies for reversing	<b>3RA19 52-2A</b>	1.3
	3RT1. 6	<b>S10</b>		<b>3RA19 62-2A</b>	2.4
	3RT1. 7	<b>S12</b>		<b>3RA19 72-2A</b>	2.6

1) Can also be used for size S2 and S3 4-pole contactors.







# Contactors and Contactor Assemblies

## Contactor Assemblies for Switching Motors



### 3RA13, 3RA23 reversing contactor assemblies





#### Accessories

	For contactors Type	Size	Details	Screw Terminals Order No.	Spring Terminals Order No.	Pkg. qty.
<b>Assembly kits for making 3-pole contactor assemblies</b>						
	3RT201	<b>S00</b>	The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, Wiring modules on the top and bottom <ul style="list-style-type: none"> <li>For main, auxiliary and control circuits</li> </ul>	<b>3RA2913-2AA1</b>	<b>3RA2913-2AA2</b>	1 kit
	3RT202	<b>S0</b>	The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, Wiring modules on the top and bottom <ul style="list-style-type: none"> <li>For main, auxiliary and control circuits</li> <li>Only for main circuit <sup>1)</sup></li> </ul>	<b>3RA2923-2AA1</b> —	— <b>3RA2923-2AA2</b>	1 kit 1 kit
	3RT103	<b>S2</b>	The installation kit contains: 2 connecting clips for 2 contactors, Wiring modules on the top and bottom	<b>3RA1933-2A</b>	—	1 kit
	3RT104	<b>S3</b>	The installation kit contains: 2 connecting clips for 2 contactors, Wiring modules on the top and bottom	<b>3RA1943-2A</b>	—	1 kit
	3RT105	<b>S6</b>	The installation kit contains: Wiring modules on the top and bottom (for connection with box terminal)	<b>3RA19 53-2A</b>	—	1 kit
	3RT105 3RT1. 6 3RT1. 7	<b>S6</b> <b>S10</b> <b>S12</b>	The installation kit contains: Wiring modules on the top and bottom (for connection without box terminals)	<b>3RA1953-2M</b> <b>3RA1963-2A</b> <b>3RA1973-2A</b>		1 kit





1) Version in size S0 with spring-type terminals: Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit.



Accessories

	For contactors	Size	Contactor gap for interlock	Version	Screw Terminals Order No.	Spring Terminals Order No.	Pkg. qty.
<b>Wiring modules</b>							
 3RA2913-3DA1	3RT201	<b>S00-S00</b>	0 mm	Top (in-phase) Bottom (phase reversal)	<b>3RA2913-3DA1</b> <b>3RA2913-3EA1</b>	<b>3RA2913-3DA2</b> <b>3RA2913-3EA2</b>	1 1
	3RT202	<b>S0-S0</b>	0 mm	Top (in-phase) Bottom (phase reversal)	<b>3RA2923-3DA1</b> <b>3RA2923-3EA1</b>	<b>3RA2923-3DA2</b> <b>3RA2923-3EA2</b>	1 1
 3RA2913-3EA1	3RT103	<b>S2-S2</b>	10 mm	Top (in-phase) Bottom (phase reversal)	<b>3RA1933-3D</b> <b>3RA1933-3E</b>	— —	1 1
	3RT104	<b>S3-S3</b>	10 mm	Top (in-phase) Bottom (phase reversal)	<b>3RA1943-3D</b> <b>3RA1943-3E</b>	— —	1 1
 3RA1953-3D	3RT105	<b>S6-S6</b>	10 mm	Top (in-phase, for connection with box terminal)	<b>3RA1953-3D</b>	—	1
 3RA1953-3P				Top (with phase reversal, for connection without box terminal)	<b>3RA1953-3P</b>	—	1

For contactors	Size	Contactor gap for interlock	Interlock Type	Version	Order No.	Pkg. qty.
----------------	------	-----------------------------	----------------	---------	-----------	-----------

<b>Mechanical connectors<sup>1)</sup></b>							
 3RA29. 2-2H	3RT201	<b>S00-S00</b>	0 mm	Laterally mountable	For 3-pole contactors and 4-pole contactors	<b>3RA2912-2H</b>	1 set
	3RT202	<b>S0-S0</b>	0 mm	Laterally mountable	For 3-pole contactors and 4-pole contactors	<b>3RA2922-2H</b>	1 set
 3RA1932-2C	3RT1. 3	<b>S2-S2</b>	0 mm	Mountable on front	For 3-pole contactors	<b>3RA1932-2C</b>	5 sets
				Laterally mountable	For 3-pole contactors	<b>3RA1932-2D</b>	5 sets
					For 4-pole contactors	<b>3RA1932-2G</b>	5 sets
 3RA1932-2G	3RT1. 4	<b>S3-S3</b>	0 mm	Mountable on front	For 3-pole contactors	<b>3RA1932-2C</b>	5 sets
				Laterally mountable	For 3-pole contactors	<b>3RA1932-2D</b>	5 sets
 3RA1932-2G	3RT1. 5	<b>S6-S6</b>	10 mm	Laterally mountable	For 4-pole contactors	<b>3RA1942-2G</b>	5 sets
				Top (with phase reversal, for connection without box terminal)		<b>3RA1932-2D</b>	5 sets

**Note:** Standard package quantities may change. Check Industry Mall for current package quantities.

1) 1 set for 1 contactor. Size S00 & S0: 1 set includes 2 connectors and 1 interlock. Size S2-S6: 1 set includes 2 connectors; one connector for top and one connector for bottom.

# Contactors and Contactor Assemblies








## Contactors Assemblies for Switching Motors

SIRIUS



### WYE-delta accessories

#### Accessories

Design	Sizes	Order No.	Weight approx. kg
<b>Installation kits<sup>1) 2)</sup></b>			
	The installation kit contains: Mechanical interlock, 4 connecting clips, WYE jumper, Wiring connectors on the top and bottom.- For main, auxiliary, and control circuits <sup>3)</sup>	<b>S00-S00-S00</b>	<b>3RA29 13-2BB1</b> 1 set 0.05
	The installation kit contains: mechanical interlock, 4 connecting clips, WYE jumper, wiring connectors on the top and and bottom - For main, auxiliary, and control circuits <sup>3)</sup>	<b>S0-S0-S0</b>	<b>3RA29 23-2BB1</b> 1 set 0.10
 <p>3RA19 53-2B</p> <p>(The wiring connector on the top is not included in the scope of supply. A double infeed between the line contactor and the delta contactor is recommended.)</p> <p>3RA19 53-2N, 3RA19 63-2B, 3RA19 73-2B</p>	The installation kit contains: WYE jumper on the top Wiring jumper on the bottom	<b>S2-S2-S0</b> <b>S2-S2-S2</b>	<b>3RA19 33-2C</b> 1 set 0.16 <b>3RA19 33-2B</b> 0.16
		<b>S3-S3-S2</b> <b>S3-S3-S3</b>	<b>3RA19 43-2C</b> 0.33 <b>3RA19 43-2B</b> 0.16
		<b>S6-S6-S6</b>	<b>3RA19 53-2B</b> 0.85
		<b>S6-S6-S6</b>	<b>3RA19 53-2N</b> 0.60
		<b>S10-S10-S10</b>	<b>3RA19 63-2B</b> 1.80
		<b>S12-S12-S12</b>	<b>3RA19 73-2B</b> 2.20
<b>3-phase feeder terminal</b>			
Feeder terminal block for the line contactor for large conductor cross-sections			1 unit
Conductor cross-section: 6 mm <sup>2</sup> , 10 AWG	<b>S00</b>	<b>3RA29 13-3K</b>	0.02
Conductor cross-section: 13 mm <sup>2</sup> , 6 AWG	<b>S0</b>	<b>3RV29 25-5AB</b>	0.04
Conductor cross-section: 50 mm <sup>2</sup> , 1 AWG	<b>S2</b>	<b>3RV19 35-5A</b>	0.10
<b>1-phase feeder terminals</b>			
Conductor cross-section: 95 mm <sup>2</sup>	<b>S3</b>	<b>3RA19 43-3L</b>	0.280
<b>3-phase busbar</b>			
For in-phase bridging of all input terminals of the line contactor (K1) and the delta contactor (K3)	<b>S0</b> <b>S2</b>	<b>3RV19 15-1AB</b> <b>3RV19 35-1A</b>	1 unit 0.03 0.15
<b>Link for paralleling, 3-pole (WYE jumpers)</b>			
3RT19 26-4BA31	Without terminal (the links for paralleling can be reduced by one pole)	<b>S00<sup>1)</sup></b> <b>S0<sup>1)</sup></b> <b>S2</b> <b>S3</b> <b>S6<sup>4)</sup></b> <b>S10, S12<sup>4)</sup></b>	<b>3RT19 16-4BA31</b> 1 unit 0.010 <b>3RT19 26-4BA31</b> 0.020 <b>3RT19 36-4BA31</b> 0.02 <b>3RT19 46-4BA31</b> 0.02 <b>3RT19 56-4BA31</b> 0.15 <b>3RT19 66-4BA31</b>
<b>Baseplates</b>			
For customer assembly of WYE-delta contactor assemblies with a <b>laterally mounted</b> time-delay			1 unit
Side-by-side mounting		<b>3RA19 32-2E</b>	0.45
10 mm clearance between K3 and K2		<b>3RA19 32-2F</b>	0.48
Side-by-side mounting		<b>3RA19 42-2E</b>	0.72
10 mm clearance between K1, K3 and K2	 <b>S6 S6 S3</b> <b>S6 S6 S6</b> <b>S10 S10 S6</b> <b>S10 S10 S10</b> <b>S12 S12 S10</b> <b>S12 S12 S12</b>	<b>3RA19 52-2E</b> <b>3RA19 52-2F</b> <b>3RA19 62-2E</b> <b>3RA19 62-2F</b> <b>3RA19 72-2E</b> <b>3RA19 72-2F</b>	1 unit 2.0 2.1
For customer assembly of WYE-delta contactor assemblies with <b>front-mounted</b> time-delay relay 10 mm clearance between K1, K3 and K2	 <b>S2 S2 S0</b> <b>S2 S2 S2</b> <b>S3 S3 S2</b>	<b>3RA19 32-2B</b> <b>3RA19 32-2B</b> <b>3RA19 42-2B</b>	1 unit 0.45 0.45 0.70

1) Size S00 and S0 installation kits, size S00 and S0 links for paralleling are available in spring-type terminals. Change the last digit of the order number to a "2".

2) When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required. See page 2/45 for more information.

3) Also requires quantity (1) 3RA2816-0EW20 function module set for all control functions. See page 2/45.

4) The 3RT19 56-4EA1 (S6) or 3RT19 66-4EA1 (S10, S12) cover can be used for shock-hazard protection.





**Selection and ordering data**

- \* NEMA Type 1 Enclosures
- \* Lift off cover
- \* Accepts SIRIUS power control components
  - \* Non-reversing contactors
  - \* Reversing contactors
  - \* Starters with thermal overload relays
  - \* Starters with solid-state overload relays

**Application**

The 49EC14\*B separate enclosures are designed for field assembly of a wide range of Siemens SIRIUS open style control components and field modification kits as listed in the charts below. Note that certain components require the addition of a DIN Rail kit for proper mounting in the enclosure.



49EC14EB110705R

**NEMA 1 Enclosures**

Max. current	Contactor		Max. current	Overload relay		Required DIN rail kit	NEMA 1 Enclosure
A	Non-reversing	Reversing	A	Thermal	Solid-state	Order No.	Order No.
12	3RT101		12	3RU1116	3RB2016	<b>MTR5</b>	<b>49EC14EB110705R</b>
25	3RT102		25	3RU1126	3RB2026	<b>MTR5</b>	
50	3RT103		50	3RU1136	3RB2036	—	<b>49EC14GB140807R</b>
12		3RA131	12	3RU1116	3RB2016	<b>MTR5</b>	
25		3RA132	25	3RU1126	3RB2026	<b>MTR5</b>	
50		3RA133	50	3RU1136	3RB2036	—	
95	3RT104		100	3RU1146	3RB2046	—	<b>49EC14IB201208R</b>
95		3RA134	100	3RU1146	3RB2046	—	

**Accessories for NEMA 1 Enclosures**



49SBPB5



49SBSB1



49SBLBF

Accessory type	Description	Marking	Voltage	Order No.
Push button		Start-stop		<b>49SBPB5</b>
		Reset (blue)		<b>49MBRS</b>
Selector switch	2 position	Off-on		<b>49SBSB4</b>
		Hand-off-auto		<b>49SBSB1</b>
		For-off-rev		<b>49SBSB2</b>
Pilot light	3 position	High-off-low		<b>49SBSB3</b>
		High-off-low		
Pilot light	Lens colors: red, green, amber	Legends: ON, RUN, OFF, OL TRIPPED, FORWARD, REVERSE, LOW HIGH	24 V AC	<b>49SBLBJ</b>
			120 V AC	<b>49SBLBF</b>
			208, 240, 277 V AC	<b>49SBLBG</b>
			480 V AC	<b>49SBLBH</b>
			600 V AC	<b>49SBLBE</b>

For 3RT10 contactors, see page 2/8.  
 For 3RA contactors, see pages 2/37.  
 For thermal overloads, see page 3/10.  
 For solidstate overloads, see pages 3/22.  
 For enclosure dimensions, see figures 1, 2, and 3 on page 9/150.

# Contactors and Contactor Assemblies

## 3RT Contactors


SIRIUS



### Spare parts for 3RT2 contactors

#### Selection and ordering data

For screw, spring-type and ring lug terminal connection



3RT29 24-5A.01

For contactors		Rated control supply voltage $U_s$			Order No.	Weight approx. kg	
Size	Type	50 Hz V	50/60 Hz V	60 Hz V			
<b>Solenoid coils • AC operation</b>							
<b>S0</b>	3RT20 23,	24	--	--	<b>3RT29 24-5AB01</b>	0.100	
	3RT20 24,	42	--	--	<b>3RT29 24-5AD01</b>	0.100	
	3RT20 25	48	--	--	<b>3RT29 24-5AH01</b>	0.100	
		110	--	--	<b>3RT29 24-5AF01</b>	0.100	
		230	--	--	<b>3RT29 24-5AP01</b>	0.100	
		400	--	--	<b>3RT29 24-5AV01</b>	0.100	
		--	24	--	<b>3RT29 24-5AC21</b>	0.100	
		--	42	--	<b>3RT29 24-5AD21</b>	0.100	
		--	48	--	<b>3RT29 24-5AH21</b>	0.100	
		--	110	--	<b>3RT29 24-5AG21</b>	0.100	
		--	220	--	<b>3RT29 24-5AN21</b>	0.100	
		--	230	--	<b>3RT29 24-5AL21</b>	0.100	
		110	--	120	<b>3RT29 24-5AK61</b>	0.100	
		220	--	240	<b>3RT29 24-5AP61</b>	0.100	
		--	100	110	<b>3RT29 24-5AG61</b>	0.100	
		--	200	220	<b>3RT29 24-5AN61</b>	0.100	
		--	400	440	<b>3RT29 24-5AR61</b>	0.100	
	<b>S0</b>	3RT20 26,	24	--	--	<b>3RT29 26-5AB01</b>	0.100
		3RT20 27,	42	--	--	<b>3RT29 26-5AD01</b>	0.100
		3RT20 28	48	--	--	<b>3RT29 26-5AH01</b>	0.100
3RT23 25,		110	--	--	<b>3RT29 26-5AF01</b>	0.100	
3RT23 26,		230	--	--	<b>3RT29 26-5AP01</b>	0.100	
3RT23 27		400	--	--	<b>3RT29 26-5AV01</b>	0.100	
3RT25 26		--	24	--	<b>3RT29 26-5AC21</b>	0.100	
		--	42	--	<b>3RT29 26-5AD21</b>	0.100	
		--	48	--	<b>3RT29 26-5AH21</b>	0.100	
		--	110	--	<b>3RT29 26-5AG21</b>	0.100	
		--	208	--	<b>3RT29 26-5AM21</b>	0.100	
		--	220	--	<b>3RT29 26-5AN21</b>	0.100	
		--	230	--	<b>3RT29 26-5AL21</b>	0.100	
		110	--	120	<b>3RT29 26-5AK61</b>	0.100	
		220	--	240	<b>3RT29 26-5AP61</b>	0.100	
		--	100	110	<b>3RT29 26-5AG61</b>	0.100	
		--	200	220	<b>3RT29 26-5AN61</b>	0.100	
		--	400	440	<b>3RT29 26-5AR61</b>	0.100	
		500	--	--	<b>3RT29 26-5AQ21</b>	0.100	
			277	--	<b>3RT29 26-5AU61</b>	0.100	
		480	--	<b>3RT29 26-5AV61</b>	0.100		
		600	--	<b>3RT29 26-5AT61</b>	0.100		



Selection and ordering data

For contactor	Rated control supply voltage $U_s$	Screw connection	Spring-type connection	Weight approx.
		Order No.	Order No.	
Size	Type			kg

Coils - AC operation

3RT19 24-5A . 01



<b>S0</b>	3RT10 2., 3RT13 2., 3RT15 2.	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz	<b>3RT19 24-5AB01</b> <b>3RT19 24-5AD01</b> <b>3RT19 24-5AH01</b> <b>3RT19 24-5AF01</b> <b>3RT19 24-5AP01</b> <b>3RT19 24-5AV01</b> <b>3RT19 24-5AC21</b> <b>3RT19 24-5AD21</b> <b>3RT19 24-5AH21</b> <b>3RT19 24-5AG21</b> <b>3RT19 24-5AM21</b> <b>3RT19 24-5AN21</b> <b>3RT19 24-5AL21</b> <b>3RT19 24-5AK61</b> <b>3RT19 24-5AP61</b> <b>3RT19 24-5AU61</b> <b>3RT19 24-5AV61</b> <b>3RT19 24-5AT61</b> <b>3RT19 24-5AG61</b> <b>3RT19 24-5AN61</b> <b>3RT19 24-5AR61</b>	<b>3RT19 24-5AB02</b> <b>3RT19 24-5AD02</b> <b>3RT19 24-5AH02</b> <b>3RT19 24-5AF02</b> <b>3RT19 24-5AP02</b> <b>3RT19 24-5AV02</b> <b>3RT19 24-5AC22</b> <b>3RT19 24-5AD22</b> <b>3RT19 24-5AH22</b> <b>3RT19 24-5AG22</b> <b>3RT19 24-5AM22</b> <b>3RT19 24-5AN22</b> <b>3RT19 24-5AL22</b> <b>3RT19 24-5AK62</b> <b>3RT19 24-5AP62</b> <b>3RT19 24-5AU62</b> <b>3RT19 24-5AV62</b> <b>3RT19 24-5AT62</b> <b>3RT19 24-5AG62</b> <b>3RT19 24-5AN62</b> <b>3RT19 24-5AR62</b>	0.069
		24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 v, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz			

3RT19 24-5A . 02



<b>S2</b>	3RT10 33 3RT10 34	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz	<b>3RT19 34-5AB01</b> <b>3RT19 34-5AD01</b> <b>3RT19 34-5AH01</b> <b>3RT19 34-5AF01</b> <b>3RT19 34-5AP01</b> <b>3RT19 34-5AV01</b> <b>3RT19 34-5AD21</b> <b>3RT19 34-5AH21</b> <b>3RT19 34-5AC21</b> <b>3RT19 34-5AG21</b> <b>3RT19 34-5AM21</b> <b>3RT19 34-5AN21</b> <b>3RT19 34-5AL21</b> <b>3RT19 34-5AK61</b> <b>3RT19 34-5AP61</b> <b>3RT19 34-5AU61</b> <b>3RT19 34-5AV61</b> <b>3RT19 34-5AT61</b> <b>3RT19 34-5AG61</b> <b>3RT19 34-5AN61</b> <b>3RT19 34-5AR61</b>	<b>3RT19 34-5AB02</b> <b>3RT19 34-5AD02</b> <b>3RT19 34-5AH02</b> <b>3RT19 34-5AF02</b> <b>3RT19 34-5AP02</b> <b>3RT19 34-5AV02</b> <b>3RT19 34-5AD22</b> <b>3RT19 34-5AH22</b> <b>3RT19 34-5AC22</b> <b>3RT19 34-5AG22</b> <b>3RT19 34-5AM22</b> <b>3RT19 34-5AN22</b> <b>3RT19 34-5AL22</b> <b>3RT19 34-5AK62</b> <b>3RT19 34-5AP62</b> <b>3RT19 34-5AU62</b> <b>3RT19 34-5AV62</b> <b>3RT19 34-5AT62</b> <b>3RT19 34-5AG62</b> <b>3RT19 34-5AN62</b> <b>3RT19 34-5AR62</b>	0.088
		24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz			

3RT19 34-5A . 01



	3RT10 35, 3RT10 36, 3RT13 3., 3RT15 3.	24 V, 50 Hz 42 V, 50 Hz 48 V, 50 Hz 110 V, 50 Hz 230 V, 50 Hz 400 V, 50 Hz	<b>3RT19 35-5AB01</b> <b>3RT19 35-5AD01</b> <b>3RT19 35-5AH01</b> <b>3RT19 35-5AF01</b> <b>3RT19 35-5AP01</b> <b>3RT19 35-5AV01</b> <b>3RT19 35-5AC21</b> <b>3RT19 35-5AD21</b> <b>3RT19 35-5AH21</b> <b>3RT19 35-5AG21</b> <b>3RT19 35-5AM21</b> <b>3RT19 35-5AN21</b> <b>3RT19 35-5AL21</b> <b>3RT19 35-5AK61</b> <b>3RT19 35-5AP61</b> <b>3RT19 35-5AU61</b> <b>3RT19 35-5AV61</b> <b>3RT19 35-5AT61</b> <b>3RT19 35-5AG61</b> <b>3RT19 35-5AN61</b> <b>3RT19 35-5AR61</b>	<b>3RT19 35-5AB02</b> <b>3RT19 35-5AD02</b> <b>3RT19 35-5AH02</b> <b>3RT19 35-5AF02</b> <b>3RT19 35-5AP02</b> <b>3RT19 35-5AV02</b> <b>3RT19 35-5AC22</b> <b>3RT19 35-5AD22</b> <b>3RT19 35-5AH22</b> <b>3RT19 35-5AG22</b> <b>3RT19 35-5AM22</b> <b>3RT19 35-5AN22</b> <b>3RT19 35-5AL22</b> <b>3RT19 35-5AK62</b> <b>3RT19 35-5AP62</b> <b>3RT19 35-5AU62</b> <b>3RT19 35-5AV62</b> <b>3RT19 35-5AT62</b> <b>3RT19 35-5AG62</b> <b>3RT19 35-5AN62</b> <b>3RT19 35-5AR62</b>	0.088
		24 V, 50/60 Hz 42 V, 50/60 Hz 48 V, 50/60 Hz 110 V, 50/60 Hz 208 V, 50/60 Hz 220 V, 50/60 Hz 230 V, 50/60 Hz 110 V, 50 Hz/120 V, 60 Hz 220 V, 50 Hz/240 V, 60 Hz 277 V, 60 Hz 480 V, 60 Hz 600 V, 60 Hz 100 V, 50/60 Hz/110 V, 60 Hz 200 V, 50/60 Hz/220 V, 60 Hz 400 V, 50/60 Hz/440 V, 60 Hz			

# Contactors and Contactor Assemblies





## 3RT Contactors

SIRIUS



### Spare parts for 3RT1 contactors

#### Selection and ordering data

For contactor		Rated control supply voltage $U_s$	Screw connection	Spring-type connection	Weight approx.							
Size	Type		Order No.	Order No.	kg							
<b>Coils · AC operation</b>												
	3RT19 44-5A .01	S3	3RT10 44	24 V, 50 Hz	3RT19 44-5AB01	3RT19 44-5AB02	0.130					
				42 V, 50 Hz	3RT19 44-5AD01	3RT19 44-5AD02						
				48 V, 50 Hz	3RT19 44-5AH01	3RT19 44-5AH02						
				110 V, 50 Hz	3RT19 44-5AF01	3RT19 44-5AF02						
				230 V, 50 Hz	3RT19 44-5AP01	3RT19 44-5AP02						
				400 V, 50 Hz	3RT19 44-5AV01	3RT19 44-5AV02						
				24 V, 50/60 Hz	3RT19 44-5AC21	3RT19 44-5AC22						
				42 V, 50/60 Hz	3RT19 44-5AD21	3RT19 44-5AD22						
				48 V, 50/60 Hz	3RT19 44-5AH21	3RT19 44-5AH22						
				110 V, 50/60 Hz	3RT19 44-5AG21	3RT19 44-5AG22						
				208 V, 50/60 Hz	3RT19 44-5AM21	3RT19 44-5AM22						
				220 V, 50/60 Hz	3RT19 44-5AN21	3RT19 44-5AN22						
230 V, 50/60 Hz	3RT19 44-5AL21	3RT19 44-5AL22										
110 V, 50 Hz/120 V, 60 Hz	3RT19 44-5AK61	3RT19 44-5AK62										
220 V, 50 Hz/240 V, 60 Hz	3RT19 44-5AP61	3RT19 44-5AP62										
277 V, 60 Hz	3RT19 44-5AU61	3RT19 44-5AU62										
480 V, 60 Hz	3RT19 44-5AV61	3RT19 44-5AV62										
600 V, 60 Hz	3RT19 44-5AT61	3RT19 44-5AT62										
100 V, 50/60 Hz/110 V, 60 Hz	3RT19 44-5AG61	3RT19 44-5AG62										
200 V, 50/60 Hz/220 V, 60 Hz	3RT19 44-5AN61	3RT19 44-5AN62										
400 V, 50/60 Hz/440 V, 60 Hz	3RT19 44-5AR61	3RT19 44-5AR62										
	3RT19 45-5A .01	S3	3RT10 45, 3RT10 46, 3RT13 4., 3RT14 46	24 V, 50 Hz	3RT19 45-5AB01	3RT19 45-5AB02	0.130					
				42 V, 50 Hz	3RT19 45-5AD01	3RT19 45-5AD02						
				48 V, 50 Hz	3RT19 45-5AH01	3RT19 45-5AH02						
				110 V, 50 Hz	3RT19 45-5AF01	3RT19 45-5AF02						
				230 V, 50 Hz	3RT19 45-5AP01	3RT19 45-5AP02						
				400 V, 50 Hz	3RT19 45-5AV01	3RT19 45-5AV02						
				24 V, 50/60 Hz	3RT19 45-5AC21	3RT19 45-5AC22						
				42 V, 50/60 Hz	3RT19 45-5AD21	3RT19 45-5AD22						
				48 V, 50/60 Hz	3RT19 45-5AH21	3RT19 45-5AH22						
				110 V, 50/60 Hz	3RT19 45-5AG21	3RT19 45-5AG22						
				208 V, 50/60 Hz	3RT19 45-5AM21	3RT19 45-5AM22						
				220 V, 50/60 Hz	3RT19 45-5AN21	3RT19 45-5AN22						
230 V, 50/60 Hz	3RT19 45-5AL21	3RT19 45-5AL22										
110 V, 50 Hz/120 V, 60 Hz	3RT19 45-5AK61	3RT19 45-5AK62										
220 V, 50 Hz/240 V, 60 Hz	3RT19 45-5AP61	3RT19 45-5AP62										
277 V, 60 Hz	3RT19 45-5AU61	3RT19 45-5AU62										
480 V, 60 Hz	3RT19 45-5AV61	3RT19 45-5AV62										
600 V, 60 Hz	3RT19 45-5AT61	3RT19 45-5AT62										
100 V, 50/60 Hz/110 V, 60 Hz	3RT19 45-5AG61	3RT19 45-5AG62										
200 V, 50/60 Hz/220 V, 60 Hz	3RT19 45-5AN61	3RT19 45-5AN62										
400 V, 50/60 Hz/440 V, 60 Hz	3RT19 45-5AR61	3RT19 45-5AR62										
	3RT19 45-5AP02	S3	3RT10 45, 3RT10 46, 3RT13 4., 3RT14 46	24 V, 50 Hz	3RT19 45-5AB01	3RT19 45-5AB02	0.130					
				42 V, 50 Hz	3RT19 45-5AD01	3RT19 45-5AD02						
				48 V, 50 Hz	3RT19 45-5AH01	3RT19 45-5AH02						
				110 V, 50 Hz	3RT19 45-5AF01	3RT19 45-5AF02						
				230 V, 50 Hz	3RT19 45-5AP01	3RT19 45-5AP02						
				400 V, 50 Hz	3RT19 45-5AV01	3RT19 45-5AV02						
				24 V, 50/60 Hz	3RT19 45-5AC21	3RT19 45-5AC22						
				42 V, 50/60 Hz	3RT19 45-5AD21	3RT19 45-5AD22						
				48 V, 50/60 Hz	3RT19 45-5AH21	3RT19 45-5AH22						
				110 V, 50/60 Hz	3RT19 45-5AG21	3RT19 45-5AG22						
				208 V, 50/60 Hz	3RT19 45-5AM21	3RT19 45-5AM22						
				220 V, 50/60 Hz	3RT19 45-5AN21	3RT19 45-5AN22						
230 V, 50/60 Hz	3RT19 45-5AL21	3RT19 45-5AL22										
110 V, 50 Hz/120 V, 60 Hz	3RT19 45-5AK61	3RT19 45-5AK62										
220 V, 50 Hz/240 V, 60 Hz	3RT19 45-5AP61	3RT19 45-5AP62										
277 V, 60 Hz	3RT19 45-5AU61	3RT19 45-5AU62										
480 V, 60 Hz	3RT19 45-5AV61	3RT19 45-5AV62										
600 V, 60 Hz	3RT19 45-5AT61	3RT19 45-5AT62										
100 V, 50/60 Hz/110 V, 60 Hz	3RT19 45-5AG61	3RT19 45-5AG62										
200 V, 50/60 Hz/220 V, 60 Hz	3RT19 45-5AN61	3RT19 45-5AN62										
400 V, 50/60 Hz/440 V, 60 Hz	3RT19 45-5AR61	3RT19 45-5AR62										
<b>Coils · DC operation</b>												
	3RT19 44-5BM42	S2	3RT10 3., 3RT13 3., 3RT15 3.	24 V	3RT19 34-5BB41	3RT19 34-5BB42	0.558					
				42 V	3RT19 34-5BD41	3RT19 34-5BD42						
				48 V	3RT19 34-5BW41	3RT19 34-5BW42						
				60 V	3RT19 34-5BE41	3RT19 34-5BE42						
				110 V	3RT19 34-5BF41	3RT19 34-5BF42						
				125 V	3RT19 34-5BG41	3RT19 34-5BG42						
				220 V	3RT19 34-5BM41	3RT19 34-5BM42						
				230 V	3RT19 34-5BP41	3RT19 34-5BP42						
				S3	3RT10 4., 3RT13 4., 3RT14 4.	S3		3RT10 4., 3RT13 4., 3RT14 4.	24 V	3RT19 44-5BB41	3RT19 44-5BB42	0.916
									42 V	3RT19 44-5BD41	3RT19 44-5BD42	
									48 V	3RT19 44-5BW41	3RT19 44-5BW42	
									60 V	3RT19 44-5BE41	3RT19 44-5BE42	
110 V	3RT19 44-5BF41	3RT19 44-5BF42										
125 V	3RT19 44-5BG41	3RT19 44-5BG42										
220 V	3RT19 44-5BM41	3RT19 44-5BM42										
230 V	3RT19 44-5BP41	3RT19 44-5BP42										



## Selection and ordering data

For contactor	Rated control supply voltage $U_{s \min}$ to $U_{s \max}$	Order No.	Weight approx. kg
Size    Type	AC/DC V		

## Withdrawable coils

3RT19 55-5A...



## Conventional operating mechanism

<b>S6</b>	3RT10 5, 3RT14 5	23 ... 26	<b>3RT19 55-5AB31</b> <b>3RT19 55-5AD31</b> <b>3RT19 55-5AF31</b> <b>3RT19 55-5AM31</b> <b>3RT19 55-5AP31</b> <b>3RT19 55-5AU31</b> <b>3RT19 55-5AV31</b> <b>3RT19 55-5AR31</b> <b>3RT19 55-5AS31</b> <b>3RT19 55-5AT31</b>	0.49
		42 ... 48		
	110 ... 127			
	200 ... 220			
	220 ... 240			
	240 ... 277			
	380 ... 420			
	440 ... 480			
	500 ... 550			
	575 ... 600			
<b>S10</b>	3RT10 6, 3RT14 6	23 ... 26	<b>3RT19 65-5AB31</b> <b>3RT19 65-5AD31</b> <b>3RT19 65-5AF31</b> <b>3RT19 65-5AM31</b> <b>3RT19 65-5AP31</b> <b>3RT19 65-5AU31</b> <b>3RT19 65-5AV31</b> <b>3RT19 65-5AR31</b> <b>3RT19 65-5AS31</b> <b>3RT19 65-5AT31</b>	0.65
		42 ... 48		
	110 ... 127			
	200 ... 220			
	220 ... 240			
	240 ... 277			
	380 ... 420			
	440 ... 480			
	500 ... 550			
	575 ... 600			
	3RT12 6 Vacuum contactor	23 ... 26	<b>3RT19 66-5AB31</b> <b>3RT19 66-5AD31</b> <b>3RT19 66-5AF31</b> <b>3RT19 66-5AM31</b> <b>3RT19 66-5AP31</b> <b>3RT19 66-5AU31</b> <b>3RT19 66-5AV31</b> <b>3RT19 66-5AR31</b> <b>3RT19 66-5AS31</b> <b>3RT19 66-5AT31</b>	
		42 ... 48		
	110 ... 127			
	200 ... 220			
	220 ... 240			
	240 ... 277			
	380 ... 420			
	440 ... 480			
	500 ... 550			
	575 ... 600			
<b>S12</b>	3RT10 7, 3RT14 7,	23 ... 26	<b>3RT19 75-5AB31</b> <b>3RT19 75-5AD31</b> <b>3RT19 75-5AF31</b> <b>3RT19 75-5AM31</b> <b>3RT19 75-5AP31</b> <b>3RT19 75-5AU31</b> <b>3RT19 75-5AV31</b> <b>3RT19 75-5AR31</b> <b>3RT19 75-5AS31</b> <b>3RT19 75-5AT31</b>	1.1
		42 ... 48		
	110 ... 127			
	200 ... 220			
	220 ... 240			
	240 ... 277			
	380 ... 420			
	440 ... 480			
	500 ... 550			
	575 ... 600			
	3RT12 7 Vacuum contactor	23 ... 26		
		42 ... 48		

## Withdrawable coils

3RT19 55-5N...



## Solid-state operating mechanism · for DC 24 V PLC output

<b>S6</b>	3RT10 5, 3RT14 5	21 ... 27.3	<b>3RT19 55-5NB31</b> <b>3RT19 55-5NF31</b> <b>3RT19 55-5NP31</b>	0.49	
		96 ... 127			
		200 ... 277			
<b>S10</b>	3RT10 6, 3RT14 6	21 ... 27.3	<b>3RT19 65-5NB31</b> <b>3RT19 65-5NF31</b> <b>3RT19 65-5NP31</b>	0.65	
		96 ... 127			
		200 ... 277			
	3RT12 6 Vacuum contactor	21 ... 27.3	<b>3RT19 66-5NB31</b> <b>3RT19 66-5NF31</b> <b>3RT19 66-5NP31</b>		
		96 ... 127			
		200 ... 277			
<b>S12</b>	3RT10 7, 3RT14 7,	21 ... 27.3	<b>3RT19 75-5NB31</b> <b>3RT19 75-5NF31</b> <b>3RT19 75-5NP31</b>	1.1	
		96 ... 127			
	3RT12 7 Vacuum contactor	200 ... 277			
		200 ... 277			

Solid-state operating mechanism · for DC 24 V PLC output/PLC relay output, with remaining lifetime indication  
(withdrawable coil with lateral electronics module)

<b>S6</b>	3RT10 5, 3RT14 5	96 ... 127	<b>3RT19 55-5PF31</b> <b>3RT19 55-5PP31</b>	1.1
		200 ... 277		
<b>S10</b>	3RT10 6, 3RT14 6	96 ... 127	<b>3RT19 65-5PF31</b> <b>3RT19 65-5PP31</b>	1.1
		200 ... 277		
<b>S12</b>	3RT10 7, 3RT14 7	96 ... 127	<b>3RT19 75-5PF31</b> <b>3RT19 75-5PP31</b>	1.1
		200 ... 277		

# Contactors and Contactor Assemblies

## 3RT Contactors

SIRIUS



### Spare parts for 3RT1 contactors

#### Selection and ordering data

For contactor		Design	Order No.	Weight approx.	Pack.
Size	Type			kg	

#### Arc chutes

<b>S2</b>	3RT10 3 .	1 arc chute, 3-pole	<b>3RT19 36-7A</b>		1 unit
<b>S3</b>	3RT10 4 ., 3RT14 46		<b>3RT19 46-7A</b>		
<b>S6</b>	3RT10 54 3RT10 55 3RT10 56		<b>3RT19 54-7A</b> <b>3RT19 55-7A</b> <b>3RT19 56-7A</b>	0.72	
<b>S10</b>	3RT10 64 3RT10 65 3RT10 66		<b>3RT19 64-7A</b> <b>3RT19 65-7A</b> <b>3RT19 66-7A</b>	1.24	
<b>S12</b>	3RT10 75 3RT10 76		<b>3RT19 75-7A</b> <b>3RT19 76-7A</b>	1.4	
<b>S6</b>	3RT14 56		<b>3RT19 56-7B</b>	0.72	
<b>S10</b>	3RT14 66		<b>3RT19 66-7B</b>	1.24	
<b>S12</b>	3RT14 76		<b>3RT19 76-7B</b>	1.4	

#### Contacts with fixing parts

##### • for contactors with 3 main contacts

<b>S2</b>	3RT10 33 3RT10 34 3RT10 35 3RT10 36	Main contacts (3 NO) for AC-3 utilization category (1 set = 3 moving and 6 fixed contacts with fixing parts)	<b>3RT19 34-6A</b> <b>3RT19 35-6A</b> <b>3RT19 36-6A</b>		1 set
<b>S3</b>	3RT10 44 3RT10 45 3RT10 46		<b>3RT19 44-6A</b> <b>3RT19 45-6A</b> <b>3RT19 46-6A</b>		
<b>S6</b>	3RT10 54 3RT10 55 3RT10 56		<b>3RT19 54-6A</b> <b>3RT19 55-6A</b> <b>3RT19 56-6A</b>	0.28	
<b>S10</b>	3RT10 64 3RT10 65 3RT10 66		<b>3RT19 64-6A</b> <b>3RT19 65-6A</b> <b>3RT19 66-6A</b>	0.48	
<b>S12</b>	3RT10 75 3RT10 76		<b>3RT19 75-6A</b> <b>3RT19 76-6A</b>	0.9	
<b>S3</b>	3RT14 46	Main contacts (3 NO) for AC-1 utilization category (1 set = 3 moving and 6 fixed contacts with fixing parts)	<b>3RT19 46-6D</b>		
<b>S6</b>	3RT14 56		<b>3RT19 56-6D</b>	0.28	
<b>S10</b>	3RT14 66		<b>3RT19 66-6D</b>	0.48	
<b>S12</b>	3RT14 76		<b>3RT19 76-6D</b>	0.9	

##### • for 3RT12 vacuum contactors

<b>S10</b>	3RT12 64 3RT12 65 3RT12 66	3 vacuum interrupters with fixing parts	<b>3RT19 64-6V</b> <b>3RT19 65-6V</b> <b>3RT19 66-6V</b>	1.4	1 set
<b>S12</b>	3RT12 75 3RT12 76		<b>3RT19 75-6V</b> <b>3RT19 76-6V</b>	1.5	

##### • for contactors with 4 main contacts

<b>S2</b>	3RT13 26	Main contacts (4 NO contacts) for utilization category AC-1	<b>3RT19 36-6E</b>		1 set
<b>S3</b>	3RT13 44 3RT13 46	(1 set = 4 moving and 8 fixed contacts with fixing parts)	<b>3RT19 44-6E</b> <b>3RT19 46-6E</b>		





**Selection and ordering data**

Coil type		3TY6 503-0A..	3TB50	3TY7 683-0C..	3TF68	
Rated control supply voltage $U_s$	Control supply voltage at	3TY6 523-0A..	3TB52	3TY7 693-0C..	3TF69	
		3TY6 543-0A..	3TB54			
		3TY6 566-0A..	3TB56			

**Rated control supply voltages (changes to 10th and 11th positions of the Order No.)**

**AC operation**

<b>Coils for 50 Hz</b>					
50 Hz	60 Hz				
AC 24 V	AC 39 V	B0		—	
AC 32 V	AC 28 V	—		—	
AC 36 V	AC 42 V	G0		—	
AC 42 V	AC 50 V	D0		—	
AC 48 V	AC 58 V	H0		—	
AC 60 V	AC 72 V	E0		—	
AC 110 V	AC 132 V	F0		—	
AC 125/127 V	AC 150/152 V	L0		—	
AC 230/220 V	AC 277 V	P0 <sup>1)</sup>		—	
AC 240 V	AC 288 V	U0		—	
AC 400/380 V	AC 480/460 V	V0 <sup>1)</sup>		—	
AC 415 V	AC 500 V	R0		—	
AC 500 V	AC 600 V	S0		—	
<b>Coils for 50/60 Hz</b>					
AC 110 V ... 132 V		—		F7	
AC 200 V ... 240 V		—		M7	
AC 230 V ... 277 V		—		P7 <sup>2)</sup>	
AC 380 V ... 460 V		—		Q7	
AC 500 V ... 600 V		—		S7	

Coil type		3TY6 503-0B..	3TB50	3TY7 683-0D..	3TF68	
Rated control supply voltage $U_s$		3TY6 523-0B..	3TB52	3TY7 693-0D..	3TF69	
		3TY6 543-0B..	3TB54			
		3TY6 563-0B..	3TB56			

**Rated control supply voltages (changes to 10th and 11th positions of the Order No.)**

**DC operation**

DC 24 V	B4		B4		
DC 30 V	C4		—		
DC 36 V	V4		—		
DC 42 V	D4		—		
DC 48 V	W4		—		
DC 60 V	E4		—		
DC 110 V	F4		F4		
DC 125 V	G4		G4		
DC 180 V	K4		—		
DC 220 V	M4		M4		
DC 230 V	P4		P4		

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1) Coil voltage tolerance at 220 V or 380 V:  
0.85 to 1.15 x  $U_s$ ;  
lower tolerance range limit acc. to IEC 60 947.

2) Lower tolerance range limit at 220 V:  
0.85 x  $U_s$  acc. to IEC 60 947.

# Contactors and Contactor Assemblies

## 3TB World Series Contactors

SIRIUS



### Spare parts

#### Coils, AC<sup>1)</sup>



3TY6463-0AK6

Frame Size	Catalog No							
	24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC	
3TB40-44	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	
3TB47-48	3TY6483-0AC1	3TY6483-0AK6	3TY6483-0AM1	3TY6483-0AP6	3TY6483-0AP0	3TY6483-0AV0	3TY6483-0AS0	
3TB52	—	3TY6523-0AK6	3TY6523-0AM1	3TY6523-0AP6	3TY6523-0AP0	3TY6523-0AV0	—	
3TB56	—	—	—	—	3TY6566-0AP0	3TY6566-0AV0	3TY6566-0AS0	

#### Coils, DC



3TY6483-0BB4

Frame Size	Catalog No							
	12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC	
3TB40-43	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4	
3TB44	3TY6443-0BA4	3TY6443-0BB4	3TY6443-0BD4	3TY6443-0BW4	3TY6443-0BF4	3TY6443-0BG4	3TY6443-0BQ4	
3TB46	—	—	3TY6463-0BD4	3TY6463-0BW4	3TY6463-0BF4	—	3TY6463-0BQ4	
3TB47-48	—	3TY6483-0BB4	3TY6483-0BD4	3TY6483-0BW4	3TY6483-0BF4	3TY6483-0BG4	—	
3TB50	—	3TY6503-0BB4	3TY6503-0BD4	3TY6503-0BW4	3TY6503-0BF4	3TY6503-0BG4	3TY6503-0BQ4	
3TB52	—	3TY6523-0BB4	3TY6523-0BD4	—	3TY6523-0BF4	3TY6523-0BG4	—	
3TB54	—	3TY6543-0BB4	3TY6543-0BD4	3TY6543-0BW4	3TY6543-0BF4	—	3TY6543-0BQ4	
3TB56	—	3TY6563-0BB4	3TY6563-0BD4	—	3TY6563-0BF4	3TY6563-0BG4	3TY6563-0BQ4	
3TB58	—	—	—	—	—	—	—	

obsolete

#### Main Contacts (Includes 3 Moving and 6 Fixed Contacts)<sup>2)</sup>



3TY6500-0A

Frame Size	Catalog No
3TB40-43	Not Replaceable
3TB44	3TY6440-0A
3TB46	3TY6460-0A
3TB47	3TY6470-0A
3TB48	3TY6480-0A
3TB50	3TY6500-0A
3TB52	3TY6520-0A
3TB54	3TY6540-0A
3TB56	3TY6560-0A
3TB58	3TY6580-0A

#### Select Complete Catalog Number From Above<sup>1)</sup>

Old Number	New Number
3TY6465-0A ††	3TY6463-0A ††
3TY6485-0A ††	3TY6483-0A ††
3TY6505-0A ††	3TY6503-0A ††
3TY6525-0A ††	3TY6523-0A ††
3TY6545-0A ††	3TY6543-0A ††
3TY6565-0A ††	3TY6566-0A ††

#### Coil Voltages

Old Number	New Number
A8	K6
B8	M1
C8	P6
D8	Q0
E8	S0
F8	C1
G8	P0

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1)Some old 3TB coil catalog numbers have been superceded. Cross to current catalog number from these tables.

2)Main contact kits for size 3TB47 and larger include springs. Smaller sizes do not.



Coils, AC Type 3TF and CRLtF



3TY7403-0AK6



3TY7483-0AK6

Frame Size	Catalog No							
	24V AC, 60Hz 24V AC, 50Hz	120V AC, 60Hz 110V AC, 50Hz	208V AC, 60Hz 173V AC, 50Hz	240V AC, 60Hz 220V AC, 50Hz	277V AC, 60Hz 220V AC, 50Hz	460V AC, 60Hz 380V AC, 50Hz	600V AC, 60Hz 500V AC, 50Hz	
3TF40-43	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	
3TF34-35, 3TF44-45	3TY7443-0AC2	3TY7443-0AK6	3TY7443-0AM1	3TY7443-0AP6	3TY7443-0AU1	3TY7443-0AV0	3TY7443-0AS0	
3TF46-47	3TY7463-0AC2	3TY7463-0AK6	3TY7463-0AM1	3TY7463-0AP6	3TY7463-0AU1	3TY7463-0AV0	3TY7463-0AS0	
3TF48-49	3TY7483-0AC2	3TY7483-0AK6	3TY7483-0AM1	3TY7483-0AP6	3TY7483-0AU1	3TY7483-0AV0	3TY7483-0AS0	
3TF50-51	3TY7503-0AC2	3TY7503-0AK6	3TY7503-0AM1	3TY7503-0AP6	3TY7503-0AU1	3TY7503-0AV0	3TY7503-0AS0	
3TF52-53	3TY7523-0AC2	3TY7523-0AK6	3TY7523-0AM1	3TY7523-0AP6	3TY7523-0AU1	3TY7523-0AV0	3TY7523-0AS0	
3TF54-55	3TY7543-0AC2	3TY7543-0AK6	3TY7543-0AM1	3TY7543-0AP6	3TY7543-0AU1	3TY7543-0AV0	3TY7543-0AS0	
3TF56	3TY7563-0AC2	3TY7563-0AK6	3TY7563-0AM1	3TY7563-0AP6	3TY7563-0AU1	3TY7563-0AV0	3TY7563-0AS0	
3TF57	—	3TY7573-0CF7	—	3TY7573-0CM7	—	3TY7573-0CQ7	—	
3TF68	—	3TY7683-0CF7	—	3TY7683-0CM7	—	3TY7683-0CQ7	3TY7683-0CS7	
3TF69	—	3TY7693-0CF7	—	3TY7693-0CM7	—	3TY7693-0CQ7	3TY7693-0CS7	

Coils, DC Type 3TF and CRLtF



3TY4803-0BB4

Frame Size	Catalog No							
	12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC	
DC Solenoid 3TF30-33 3TF40-43	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4	
3TF34-35, 3TF44-45	3TY7443-0BA4	3TY7443-0BB4	3TY7443-0BD4	3TY7443-0BW4	3TY7443-0BF4	3TY7443-0BG4	—	
3TF46-47	—	3TY7463-0BB4	3TY7463-0BD4	3TY7463-0BW4	—	3TY7463-0BG4	3TY7463-0BQ4	
DC Economy Circuit (Replacement coils only. Does not include interlock or interposing relay.)								
3TF46-47	—	3TY7463-0DB4	3TY7463-0DD4	3TY7463-0DW4	3TY7463-0DF4	3TY7463-0DG4	3TY7463-0DQ4	
3TF48-49	—	—	3TY7483-0DD4	3TY7483-0DW4	3TY7483-0DF4	3TY7483-0DG4	3TY7483-0DQ4	
3TF50-51	—	3TY7503-0DB4	3TY7503-0DD4	3TY7503-0DW4	3TY7503-0DF4	3TY7503-0DG4	3TY7503-0DQ4	
3TF52-53	—	3TY7523-0DB4	3TY7523-0DD4	3TY7523-0DW4	3TY7523-0DF4	3TY7523-0DG4	3TY7523-0DQ4	
3TF54-55	—	—	3TY7543-0DD4	3TY7543-0DW4	3TY7543-0DF4	3TY7543-0DG4	3TY7543-0DQ4	
3TF56	—	3TY7563-0DB4	3TY7563-0DD4	3TY7563-0DW4	—	3TY7563-0DG4	3TY7563-0DQ4	
3TF57	—	3TY7573-0DB4	3TY7573-0DD4	3TY7573-0DW4	3TY7573-0DF4	3TY7573-0DG4	3TY7573-0DQ4	
3TF68	—	3TY7683-0DB4	—	—	3TY7683-0DF4	—	—	

Main Contacts (Includes 3 Moving and 6 Fixed Contacts)



3TY7460-0A

Frame Size	Catalog No	List Price \$
3TF30-35	Not Replaceable	
3TF40-43	Not Replaceable	
3TF44	3TY7440-0A	
3TF45	3TY7450-0A	
3TF46	3TY7460-0A	
3TF47	3TY7470-0A	
3TF48	3TY7480-0A	
3TF49	3TY7490-0A	
3TF50	3TY7500-0A	
3TF51	3TY7510-0A	
3TF52	3TY7520-0A	
3TF53	3TY7530-0A	
3TF54	3TY7540-0A	
3TF55	3TY7550-0A	
3TF56	3TY7560-0A	
3TF57	3TY7570-0A	
3TF68	3TY7680-0B <sup>1)</sup>	
3TF69	3TY7690-0B <sup>1)</sup>	

Arc Chutes



3TY7482-0A

Frame Size	Catalog No
3TF30-35	Not Replaceable
3TF40-43	Not Replaceable
3TF44	3TY7442-0A
3TF45	3TY7452-0A
3TF46	3TY7462-0A
3TF47	3TY7472-0A
3TF48	3TY7482-0A
3TF50	3TY7502-0A
3TF51	3TY7512-0A
3TF52	3TY7522-0A
3TF53	3TY7532-0A
3TF54	3TY7542-0A
3TF55	3TY7552-0A
3TF56	3TY7562-0A
3TF57	3TY7572-0A
3TF68	Not Available
3TF69	Not Available

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1) Vacuum bottles with mounting hardware.

# Contactors and Contactor Assemblies



## 3TF Contactors and 3TH Control Relays

SIRIUS



### Spare parts

#### Auxiliary Contact Blocks

Illustration	Frame Size	Auxiliary Contacts		NO/Early Make	NC/Early Break	Auxiliary Contact Mounting Position	Position	Block Location	Obsolete Catalog No	Current Catalog
		NO	NC							
	3TF30 to 3TF35, 3TH3	1	—	—	—		—	Top	—	3TX4010-2A
		—	1	—	—		—	Top	—	3TX4001-2A
		—	—	1	—		—	Top	—	3TX4010-4A
		—	—	—	1		—	Top	—	3TX4001-4A
	3TF40 to 3TF43		Not Replaceable							
	3TF44 to 3TF68	1	1	—	—		1	Left	3TY7561-1A	3TY7561-1AA00
		1	1	—	—		2	Right	3TY7561-1B	3TY7561-1AA00
		1	—	—	1		4	Right	3TY7561-1K	3TY7561-1EA00
	3TF46 to 3TF68 2nd Aux Contact Block	1	1	—	—		3	Left	3TY7561-1K	3TY7561-1KA00
		1	1	—	—		4	Right	3TY7561-1L	3TY7561-1KA00
3TF46 to 3TF68 For Electronic Circuits	1	1	—	—		3	Left	3TY7561-1U	3TY7561-1UA00	
	1	1	—	—		4	Right	3TY7561-1V	3TY7561-1UA00	


#### Mechanical Interlocks



3TX7466-1A

Frame Size	Catalog No	List Price \$	Frame Size	Catalog No
3TF42-43, 3TB42-43	24177000906		3TF44-54	3TX7466-1A

#### Arc Chutes



3TY6462-0A

Type	Frame Size	Catalog No	List Price \$	Frame Size	Catalog No
3TB	3TB40-43	Not Replaceable		3TB50	3TY6502-0A
	3TB44	—		3TB52	3TY6522-0A
	3TB46	—		3TB54	3TY6542-0A
	3TB47	—		3TB56	3TY6562-0A
	3TB48	3TY6482-0A		3TB58	—

#### Control Relays, Type 3TH3, 3TH4 Coils, AC



3TY7403-0AK6

Type	Frame Size	Catalog No							
		24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC	
3TH	3TH30-33 3TH40-43	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	

#### Coils, DC

Type	Frame Size	Catalog No							
		12V DC	24V DC	42V DC	48V DC	110V DC	125V DC	240V DC	
3TH	3TH30-33 3TH40-43	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4	

#### Auxiliary Contact Blocks<sup>1)</sup>

Type	Frame Size	Auxiliary Contacts		Normally Open/ Early Make	Normally Closed/ Late Break	Block Location	Catalog No
		NO	NC				
3TH	3TH3	1	—	—	—	Top	3TX4010-2A
		—	1	—	—	Top	3TX4001-2A
		—	—	1	—	Top	3TX4010-4A
		—	—	—	1	Top	3TX4001-4A

#### Control Relays, Type 3TH8 Coils, AC

Type	Frame Size	Catalog No							
		24V AC	120V AC	208V AC	220/240V AC	277V AC	480V AC	600V AC	
3TH	3TH80-83	3TY7403-0AC2	3TY7403-0AK6	3TY7403-0AM1	3TY7403-0AP6	3TY7403-0AU1	3TY7403-0AV0	3TY7403-0AS0	

#### Coils, DC

Type	Frame Size	Catalog No							
		12V AC	24V AC	42V AC	48V AC	110V AC	125V AC	240V AC	
3TH	3TH80-83	3TY4803-0BA4	3TY4803-0BB4	3TY4803-0BD4	3TY4803-0BW4	3TY4803-0BF4	3TY4803-0BG4	3TY4803-0BQ4	

Due to the mature nature of some product series, supply cannot be guaranteed on all versions listed on this page.

1) Maximum 4 blocks per relay.



### AC and DC operation

IEC 60 947, EN 60 947  
(VDE 0660), UL 508

### Design

The 3RT contactors are suitable for use in any climate. They are safe from touch to DIN VDE 0106 Part 100.

The 3RT contactors are available screw, spring-type, or ring lug connections.

An auxiliary contact is integrated in the basic unit of size S00 contactors. The basic units of sizes S0 to S3 only contain the main conducting paths.

All the basic units can be extended with auxiliary switch blocks. Cabinet units with 2 NO + 2 NC (terminal designations acc. to EN 50 012) are available as of size S0; the auxiliary switch block is removable.

The size S3 contactors have removable box terminals for the main conductor connections. Ring cable lugs or bars can thus also be connected.

### Contact reliability

If voltages  $\leq 110$  V and currents  $\leq 100$  mA are to be switched, the auxiliary contacts of 3RT contactors and 3RH contactor relays should be used to ensure good contact stability.

These auxiliary contacts are suitable for electronic circuits with currents  $\geq 1$  mA at a voltage of 17 V.

### Short-circuit protection of contactors

For the short-circuit protection of contactors without an overload relay, see the technical data.

For the short-circuit protection of contactors with an overload relay, see section 3.

### Motor protection

3RU overload relays can be mounted onto the 3RT contactors for protection against overloads. The overload relays must be ordered separately (see section 3).

### Surge suppression

The 3RT contactors can be retrofitted with RC elements, varistors, diodes or diode assemblies (combination of an interference suppression diode and a Zener diode for short tripping times) for suppressing opening surges in the coil.

The surge suppressors are plugged onto the front of size S00 contactors. Space is provided for them next to a snap-on auxiliary switch block.

With all size S0 to S3 contactors, varistors and RC elements can be plugged on directly at the coil terminals, either on the top or underneath. Diode assemblies are available in two different designs with different polarities. Depending on the application, they can be attached either only on the bottom (assembly with circuit-breaker) or only on the top (assembly with overload relay).

The plug-in direction of the diodes and diode assemblies is determined by a coding device. Exceptions: 3RT29 26-1E.00 and 3RT19 36-1T.00; in these cases the plug-in direction is identified by "+" and "-".

Coupling relays are supplied either without surge suppression or with a varistor or diode connected as standard, according to the design.


#### Note

*The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks (interference suppression diode 6 to 10 times; diode assemblies 2 to 6 times; varistor +2 ms to 5 ms).*

## 3RT contactors, 3-pole, sizes S00 to S3

### 3RT20 1. contactors (size S00),

Terminal designations acc. to EN 50 012 or DIN 50 005.

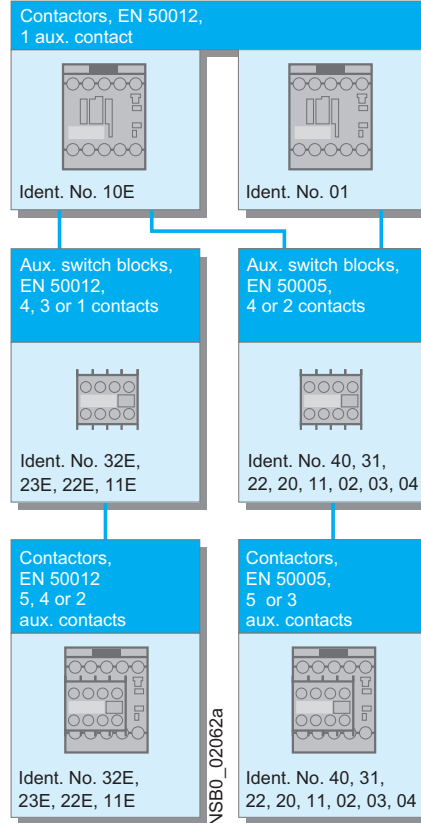

### Auxiliary switch blocks

The 3RT basic units can be extended with various auxiliary switch blocks, depending on the application:

#### Size S00 (3RT201)

Contactors with one NO contact as the auxiliary contact and with either screw or spring-type connections, identification number 10E, can be extended to obtain contactors with 2, 4 or 5 auxiliary contacts in accordance with EN 50 012 using auxiliary switch blocks. The identification numbers 11E, 22E, 23E and 32E on the auxiliary switch blocks apply to the complete contactors. These auxiliary switch blocks cannot be combined with contactors that have an NC contact in their basic unit, identification number 01, as these are coded.

All size S00 contactors with one auxiliary contact, identification number 10E or 01, and the contactors with 4 main contacts can be extended to obtain contactors with 3 or 5 auxiliary contacts (contactors with 4 main contacts: 2 or 4 auxiliary contacts) according to EN 50 005 using auxiliary switch blocks

with identification numbers 40 to 02. The identification numbers on the auxiliary switch blocks apply only to the attached auxiliary contacts.

Single or 2-pole auxiliary switch blocks that can be connected on either the top or the bottom facilitate quick, straightforward wiring, especially when assembling feeders. These auxiliary switch blocks are only available with screw-type terminals.

The solid-state compatible 3RH29 11-1NF.. auxiliary switch blocks for size S00 contactors contain two enclosed contact elements. They are ideal for switching low voltages and currents (hard gold-plated contacts) or for use in dusty atmosphere. The contacts do not have positively-driven operation.

All the above-mentioned auxiliary switch variants can be snapped into the location holes on the front of the contactors. The auxiliary switch block has a centrally positioned release lever for disassembly.


# Contactors and Contactor Assemblies

## Contactors for Switching Motors



### 3RT1/2 contactors, 3-pole, sizes S00 to S3

**3RT20 2. to 3RT10 4. contactors (sizes S0 to S3), single-pole auxiliary switch blocks,**  
terminal designations acc. to EN 50 005 or EN 50 012.

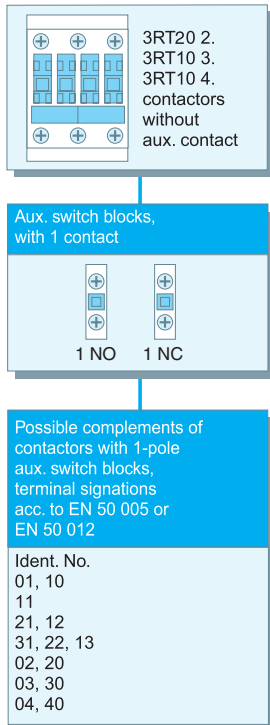

#### Sizes S0 to S3 (3RT202 to 3RT104)

An extensive range of auxiliary switch blocks is available for various applications. The contactors themselves do not have an integrated auxiliary conducting path.

**The auxiliary switch variants are identical for all size S0 to S3 contactors.**

One 4-pole or up to four single-pole auxiliary switch blocks (with screw or spring-type connections) can be snapped onto the front of the contactors. When the contactors are energized, the NC contacts open before the NO contacts close.

The terminal designations of the single-pole auxiliary switch blocks consist of location digits on the basic unit and function digits on the auxiliary switch blocks.


In addition, 2-pole auxiliary switch blocks (screw-type terminals) are provided for cable entries from above or below in the style of a four-connector block (feeder auxiliary switch).

If the available installation depth is restricted, 2-pole auxiliary switch blocks (screw or spring-type connections) can be mounted laterally on the left or right.

The auxiliary switch blocks designed for mounting onto the front can be disassembled with the aid of a centrally positioned release lever; the laterally mountable auxiliary switch blocks can be removed easily by pressing on the fluted grips.

The terminal designations of the individual auxiliary switch blocks comply with EN 50 005 or EN 50 012, while those of the complete contactors with an auxiliary switch block with 2 NO + 2 NC comply with EN 50 012.

**3RT20 2. to 3RT10 4. contactors (sizes S0 to S3), single-pole auxiliary switch blocks,**  
terminal designations acc. to EN 50 005 or EN 50 012.

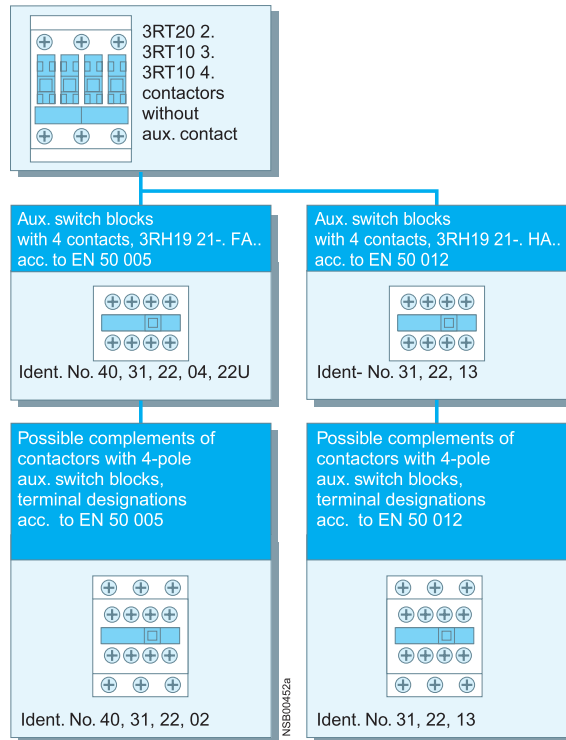

The laterally mountable auxiliary switch blocks to EN 50 012 can only be used if no 4-pole auxiliary switch blocks are snapped onto the front. If single-pole auxiliary switch blocks are used in addition, the location digits on the contactor must be noted.

Two enclosed contact elements and two standard contact elements are available for the 3RH29 21-FE22 solid-state compatible auxiliary switch block mountable on the front. The laterally mountable 3RH29 21-2DE11 solid-state compatible auxiliary switch block contains 2 enclosed contact elements (1 NO + 1 NC). The enclosed contact elements are ideal for switching low voltages and currents (hard gold-plated contacts) or for use in a dusty atmosphere. The contacts are positively driven.

#### Sizes S0 and S2 (3RT202 and 3RT103)

Up to four auxiliary contacts can be mounted, whereby any design of the auxiliary switch blocks is permitted. If two 2-pole, laterally mounted, auxiliary switch blocks are used, one must be mounted on the left and one on the right for the sake of symmetry.

Under certain circumstances, more auxiliary contacts are allowed for size S2 (please ask for details).

With regard to 3RT13/23 and 3RT15/25 4-pole contactors, please refer to pages 2/12 to 2/14.

#### Sizes S3 to S12 (3RT104 to 3RT107)

Up to eight auxiliary contacts can be mounted, whereby the following points must be noted:

- Of these eight auxiliary contacts, no more than four must be NC contacts.
- If laterally mounted auxiliary switch blocks are used, they must be symmetrical.

With regard to 3RT13 and 3RT15 4-pole contactors, please refer to pages 2/11 to 2/13.





**Overview**

**Design**

- 3RT10 contactors for switching motors
- 3RT12 vacuum contactors for switching motors
- 3RT14 contactors for AC-1 applications

**Operating mechanism**

- Two types of solenoid-operated mechanism are available:
- Conventional operating mechanism
  - Solid-state operating mechanism (with 3 performance levels)

**UC operation**

The contactors can be AC (40 to 60 Hz) and DC driven.

**Withdrawable coils**

To allow easy coil changing, for example if the application is changed, the magnetic coil can be pulled out upwards without tools after the release mechanism has been actuated, and can be replaced by any other required coil of the same size.

**Auxiliary contact complement**

The contactors can be equipped with a maximum of 8 auxiliary contacts, with identical auxiliary switch blocks from S0 to S12. Of these, no more than 4 are permitted to be NC contacts.

- 3RT10 and 3RT14 contactors: auxiliary contacts mounted laterally and on front
- 3RT12 vacuum contactors: auxiliary contact mounted laterally

**Contactor with conventional operating mechanism**

**3RT1...-A:**

The magnetic coil is switched on and off directly with the control supply voltage  $U_s$  via terminals A1/A2.

Multi-voltage range for the control supply voltage  $U_s$ : Several closely adjacent control supply voltages, available around the world, are covered by just one coil, for example UC 110-115-120-127 V or UC 220-230-240 V.

In addition, allowance is also made for a coil voltage tolerance of 0.8 times the lower rated control supply voltage ( $U_{s\ min}$ ) and 1.1 times the upper rated control supply voltage ( $U_{s\ max}$ ), within which the

contactor switches reliably and no thermal overloading occurs.

**Contactor with solid-state operating mechanism**

The power required for reliable switching and holding is supplied selectively to the magnetic coil by series-connected control electronics.

**Features:**

- **Extended voltage range for the control supply voltage  $U_s$ :** Compared with the conventional operating mechanism, the solid-state operating mechanism covers an even broader range of globally available control supply voltages within one coil variant. For example, the globally available voltages 200-208-220-230-240-254-277 V are covered with the coil for UC 200 to 277 V ( $U_{s\ min}$  to  $U_{s\ max}$ ).

- **Extended coil voltage tolerance 0.7 to  $1.25 \times U_s$ :** On account of the broad range for the rated control supply voltage and the additionally allowed coil voltage tolerance of  $0.8 \times U_{s\ min}$  to  $1.1 \times U_{s\ max}$ , an extended coil voltage tolerance of at least 0.7 to  $1.25 \times U_s$ , within which the contactors will operate reliably, is available for the most common control supply voltages of 24, 110 and 230 V.
- **Bridging short-time voltage dips:** Control voltage failures dipping to 0 V (at A1/A2) are bridged for up to approx. 25 ms, therefore preventing unintentional disconnection.

- **Defined ON and OFF thresholds:** As of voltages  $\geq 0.8 \times U_{s\ min}$ , the electronics reliably switch the contactor on and as of  $\leq 0.5 \times U_{s\ min}$  it is reliably switched off. The differential travel in the switching thresholds prevents chattering of the main contacts and hence increased wear or welding when operated in weak, unstable networks. Similarly, thermal overloading of the contactor coil is prevented if the voltage applied is too low – the contactor is not switched on and is operated with overexcitation.
- **Low control power consumption when closing and in closed state.**

**Electromagnetic compatibility (EMC)**

The contactors with solid-state operating mechanism conform to the requirements for operation in industrial plants.


- **Noise immunity**
  - Burst (IEC 61 000-4-4): 4 kV
  - Surge (IEC 61 000-4-5): 4 kV
  - Electrostatic discharge, ESD (IEC 61 000-4-2): 8/15 kV
  - Electromagnetic field (IEC 61 000-4-3): 10 V/m
- **Emitted interference**
  - Limiting value class A to EN 55 011

**Note:** In connection with converters, the control cables should be installed separately from the load cables to the converter.

**3RT1...-N: for DC 24 V PLC output**

**2 control options:**


- Control without an interface directly via a DC 24 V  $\geq 30$  mA PLC output (EN 61 131-2). Connection via a 2-pole plug-in connection; the connector, using screwless spring-force technology, is included in the scope of supply. The control supply voltage for supplying power to the solenoid operating mechanism must be connected to A1/A2.



- ① Sliding-dolly switch, must be in PLC "ON" position
- ② Plug-in connection, 2-pole

- Conventional control by applying the control supply voltage at A1/A2 via a switching contact.

**Note:** The sliding-dolly switch must be in the "PLC OFF" position (= setting ex works).



- ① Sliding-dolly switch, must be in PLC "OFF" position

**Note:** Before start-up, the sliding-dolly switch for PLC operation must be moved to the "PLC ON" position (setting ex works: "PLC OFF").

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS




### 3RT1 contactors, 3-pole, sizes S6 to S12

#### Overview

#### Contactors with solid-state operating mechanism

#### 3RT1...-P: for DC 24 V PLC output or PLC relay output, with indication of remaining lifetime

(Indication of remaining lifetime RLT: see 2/69.)

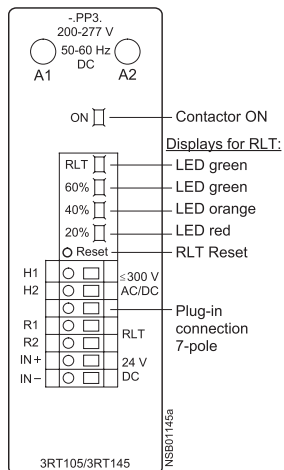

To supply power to the solenoid operating mechanism and the remaining lifetime indication, the control supply voltage  $U_c$  must be run to terminals A1/A2 of the laterally mounted electronics module. The control inputs of the contactor are brought out to a 7-pole plug-in connection; the connector, using screwless spring-force technology, is included in the scope of supply.

- The remaining lifetime RLT status signal is available at terminals R1/R2 via a floating relay contact (hard gold-plated, enclosed) and can be processed for example via SIMOCODE-DP or PLC inputs or elsewhere.

Permissible current carrying capacity of relay output R1/R2:

- $I_{e,AC}$ -15/24 to 230 V: 3 A
- $I_{e,DC}$ -13/24 V: 1 A


#### LED indicators

The following statuses are indicated by LEDs on the laterally mounted electronics module:

- Contactor ON (energized state): Green LED ("ON")
- Indication of remaining lifetime (see 2/69)

#### 2 control options:

- Contactor control without an interface directly via a DC 24 V  $\geq 30$  mA PLC output (EN 61 131-2) via terminals IN+/IN-.



Electronics module of 3RT1 ...-P contactor

Plug-in connection, 7-pole


S1 Changeover switch from automatic control via PLC semiconductor output to local control

S2 Local control option

Possibility of switching from automatic control to local control via terminals H1/H2, i.e. automatic control via a PLC or SIMOCODE-DP/PROFIBUS-DP can be deactivated, for example during start-up or in the event of a fault, and the contactor can be controlled manually.

- Contactor control via relay outputs, e.g. by
    - PLC
    - SIMOCODE-DP 3UF5 via terminals H1/H2.
- Contact loading:  
 $U_c$ /approx. 5 mA.

When operated via SIMOCODE-DP, a communication link to PROFIBUS-DP is also provided.



Electronics module of 3RT1 ...-P contactor

Plug-in connection, 7-pole

S1 Changeover switch from automatic control, e.g. via SIMOCODE-DP or PLC relay output to local control

S2 Local control option

#### 3RT12 vacuum contactors

In contrast with the 3RT10 contactors – the main contacts operate in air under atmospheric conditions – the contact gaps of the 3RT12 vacuum contactors are contained in hermetically enclosed vacuum contact tubes. Neither arcs nor arcing gases are produced. The particular benefit of 3RT12 vacuum contactors, however, is that their electrical endurance is at least twice as long as that of 3RT10 contactors.

They are therefore particularly well suited to frequent switching in jogging/mixed operation, for example in crane control systems.

#### Advantages:

- Very long electrical endurance
- High short-time current-carrying capacity for heavy starting
- No open arcs, no arcing gases, i.e. no minimum clearances from earthed parts required either
- Longer maintenance intervals
- Increased plant availability

#### Notes on operation:

- Switching motors with rated operational voltages  $U_e > 500$  V:

In order to damp overvoltages and protect the motor winding insulation against multiple reignition when switching off three-phase motors, it is recommended to fit the contactors on the outgoing side (T1/T2/T3) with the 3RT19 66-1PV. surge suppression module – RC varistor – (accessory).

This additional equipment is not required for operation in circuits with converters. It might be damaged by the voltage peaks and harmonics generated.

- Switching DC voltage: Vacuum contactors are basically unsuitable for switching DC voltage.

**Application**

WYE-delta starting can only be used either if the motor normally operates in a  $\Delta$  (delta) connection or starts softly or if the load torque during  $\Upsilon$  starting is low and does not increase sharply. On the  $\Upsilon$  step the motors can carry approximately 50% (class KL 16) or 30% (class KL 10) of their rated torque; the starting torque is approximately  $\frac{1}{3}$  of that during direct on-line starting. The starting current is approximately 2 to 2.7 times the rated motor current.

The changeover from  $\Upsilon$  to  $\Delta$  must not be effected until the motor has run up to rated speed. Drives which require this changeover to be performed earlier are unsuitable for WYE-delta starting.

The ratings given in the above table are only applicable to motors with a starting current ratio of  $I_A \leq 8.4 \times I_N$  and using either a 3RT19 16-2G or 3RT19 26-2G solid-state time-delay auxiliary switch block with a WYE-delta time-delay relay with a dead interval of approximately 50 ms on reversing.

For the circuit diagrams for the main and control circuits, see page 2/161. The size selected for the installation kits for WYE-delta starting is determined by the line contactor.

**Design****Components for customer assembly**

Installation kits with wiring connectors and, if necessary, mechanical connectors are available for contactor assemblies for WYE-delta starting. Contactors, overload relays, star-delta time-delay relays and auxiliary switches for the electrical interlock – if required also feeder terminals, mechanical interlocks <sup>1)</sup> and baseplates – must be ordered separately.

The wiring installation kits for sizes S00 and S0 contain the top and bottom main conducting path connections between the line and delta contactors (top) and between the delta and WYE contactors (bottom).

In the case of sizes S2 to S12 only the bottom main conducting path connection between the delta and WYE contactors is included in the wiring connector, owing to the larger conductor cross-section at the infeed.

**Motor protection**

Overload relays or thermistor motor protection tripping units can be used for overload protection.

The overload relay can be either mounted onto the line contactor or separately fitted. It must be set to 0.58 times the rated motor current.

**Surge suppression****Sizes S00 to S3**

All contactor assemblies can be fitted with RC elements, varistors or diode assemblies for damping opening surges in the coil.

As with the individual contactors, the surge suppressors can either be plugged onto the top of the contactors (S00) or fitted onto the coil terminals on the top or bottom (S0 to S3).

**Sizes S6 to S12**

The contactors are fitted with varistors as standard.

1) Exception:  
The mechanical interlock between the delta and WYE contactors is included in the installation kit for size S00 contactor assemblies.

# Contactors and Contactor Assemblies

## Contactors Assemblies for Switching Motors



### Contactor assemblies for WYE-delta starting

#### Overview

The contactor assemblies for star-delta starting can be ordered as follows:

- Sizes S00-S0 as assemblies. (see pages 2/47-2/48)
- Sizes S2-S12 as components for customer assembly

HP	Calculated horsepower ratings at 460 V AC	Operat. current $I_e$ A	Motor current A	Size	Line/delta contactor	WYE contactor	Accessories for customer assembly		
							Time-delay relay	Installation kit A double infeed	
30		50	9.5 ... 13.8	<b>S2-S2-S0</b>	3RT10 34	3RT20 26		3RP15 74-1N.30	3RA19 33-2C <sup>3)</sup>
			12.1 ... 17.2						
			15.5 ... 21.5						
			19 ... 27.6						
			24.1 ... 34						
31 ... 43									
50		80	37.9 ... 55.2	<b>S2-S2-S2</b>	3RT19 35	3RT10 34			3RA19 33-2B <sup>3)</sup>
			48.3 ... 65						
60		86	62.1 ... 77.8		3RT10 36				
75		115	31 ... 43.1	<b>S3-S3-S2</b>	3RT10 44	3RT10 35		3RP15 74-1N.30	3RA19 43-2C <sup>3)</sup>
			37.9 ... 55.2						
			48.3 ... 69						
			62.1 ... 77.6						
100		150	77.6 ... 108.6		3RT10 45	3RT10 36			
			98.3 ... 129.3						
			120.7 ... 150						
125		160	86 ... 160	<b>S6-S6-S3</b>	3RT10 54	3RT10 44		3RP15 74-1N.30	
150		195	86 ... 195						
190		230	86 ... 230		3RT10 55	3RT10 45			
200		280	86 ... 280		3RT10 56	3RT10 46			
250		350	95 ... 350	<b>S10-S10-S6</b>	3RT10 64	3RT10 54		3RP15 74-1N.30	
300		430	95 ... 430		3RT10 65	3RT10 56			
400		540	347 ... 540	<b>S12-S12-S10</b>	3RT10 75	3RT10 64		3RP15 74-1N.30	
450		610	347 ... 610						
500		690	347 ... 690			3RT10 65			
650		850	347 ... 850		3RT10 76	3RT10 66			

For accessories, see page 2/80.  
For circuit diagrams, see page 2/187.

1) The installation kit contains mechanical interlock; 3 connecting clips; wiring connectors on the top (connection between line contactor and delta contactor) and the bottom (connection between delta contactor and star contactor); WYE jumper.

2) The installation kit contains 5 connecting clips; wiring connectors on the top (connection between line contactor and delta contactor) and the bottom (connection between delta contactor and WYE contactor); star jumper.



# Contactors and Contactor Assemblies

## Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

Installation kit B for single infeed	WYE jumper	Baseplates	Overload relay, thermal		Overload relay, solid-state	
			Range of overload relay, thermal [A]	Order No. overload relay, thermal	Range of overload relay, solid-state [A]	Order No. overload relay, solid-state
3RA19 33-3D <sup>4)</sup>	3RT19 26-4BA31	3RA19 32-2E	5.5 ... 8	3RU11 36-1HB0	6 ... 25	-
			7 ... 10	3RU11 36-1JB0		
			9 ... 12.5	3RU11 36-1KB0		
			11 ... 16	3RU11 36-4AB0		
			14 ... 20	3RU11 36-4BB0		
			18 ... 25	3RU11 36-4DB0		
			22 ... 32	3RU11 36-4EB0		
			28 ... 40	3RU11 36-4FB0		
			36 ... 45	3RU11 36-4GB0		
			40 ... 50	3RU11 36-4HB0		
3RA19 43-3D <sup>4)</sup>	3RT19 36-4BA31	3RA19 42-2E	18 ... 25	3RU11 46-4DB0	13 ... 50	3RB20 46-1UB0
			22 ... 32	3RU11 46-4EB0		
			28 ... 40	3RU11 46-4FB0		
			36 ... 45	3RU11 46-4HB0		
			45 ... 63	3RU11 46-4JB0		
			57 ... 75	3RU11 46-4KB0		
			70 ... 90	3RU11 46-4LB0		
			18 ... 25	3RU11 46-4EB0		
			22 ... 32	3RU11 46-4FB0		
			28 ... 40	3RU11 46-4GB0		
36 ... 45	3RU11 46-4HB0					
45 ... 63	3RU11 46-4JB0					
57 ... 75	3RU11 46-4KB0					
70 ... 90	3RU11 46-4LB0					
3RA19 53-3D <sup>5)</sup>	3RT19 46-4BA31	3RA19 52-2E	-	-	50 ... 200	3RB20 56-1FG0

3) Installation kit contains wiring connector on the bottom (connection between delta contactor and WYE contactor) and WYE jumper.  
 4) Wiring connector on top from reversing contactor assembly (note conductor cross-sections).

5) A mechanical interlock adapter, 3RA1954-2C, is required to use the standard 3RA1954-2A mechanical interlock for the AC version of the S6-S6-S3 WYE-Delta starter. The S6-S6-S3 WYE-Delta DC version would require a special custom build spacer, which is not manufac-

6) Only use wiring connector on the top from reversing contactor assembly (note conductor cross-sections); order WYE jumper in addition.

# Contactor and Contactor Assemblies

## Contactor Assemblies for Switching Motors




### Contactor assemblies for WYE-delta starting

#### Selection and ordering data

Fully wired and tested contactor assemblies · Size S00-S00-S00 · Up to 11 kW

The figure shows the version with screw terminals

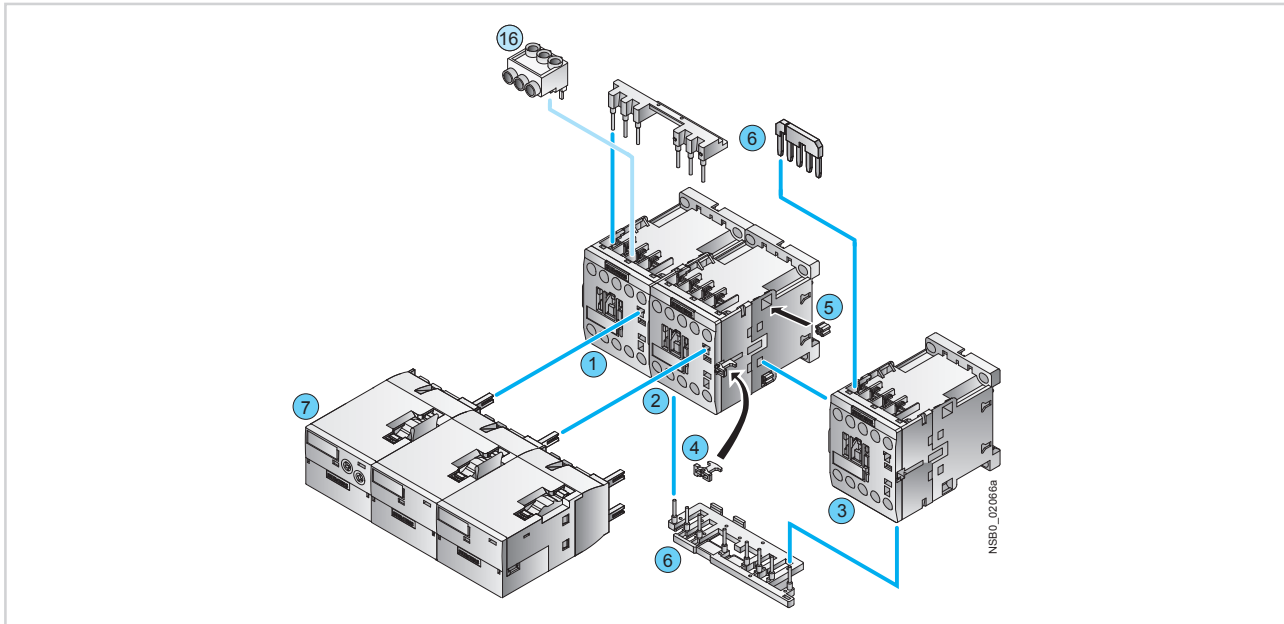

#### Mountable accessories

Individual parts	Order No.	Page
16 Three-phase feeder terminal <sup>3)</sup>	3RA29 13-3K	2/80

#### Fully wired and tested contactor assemblies

Individual parts	Order No.	Page
1 2 3 Contactor, 5.5 kW	Q11 <sup>1)</sup> 3RT20 15    Q13 <sup>2)</sup> 3RT20 15    Q12 <sup>2)</sup> 3RT20 15	2/8
1 2 3 Contactor, 7.5 kW	3RT20 17    3RT20 17    3RT20 15	2/8
1 2 3 Contactor, 11 kW	3RT20 18    3RT20 18    3RT20 16	2/8
4 5 6 Assembly kit comprising	3RA29 13-2BB1	2/80
4 Mechanical interlock		
5 4 connecting clips		
6 Wiring modules on the top and bottom for connecting the main current paths		
7 Function modules for wye-delta starting	3RA28 16-0EW20	2/27

<sup>1)</sup> Use version with 1 NO.

<sup>2)</sup> Use version with 1 NC.

<sup>3)</sup> Part 16 can only be mounted with contactors with screw terminal.

#### Note:


When the function modules for contactor assemblies for wye-delta starting are used, no other auxiliary switches are allowed to be mounted on the basic units.





Fully wired and tested contactor assemblies · Size S0-S0-S0 · Up to 22 kW

The figure shows the version with screw terminals

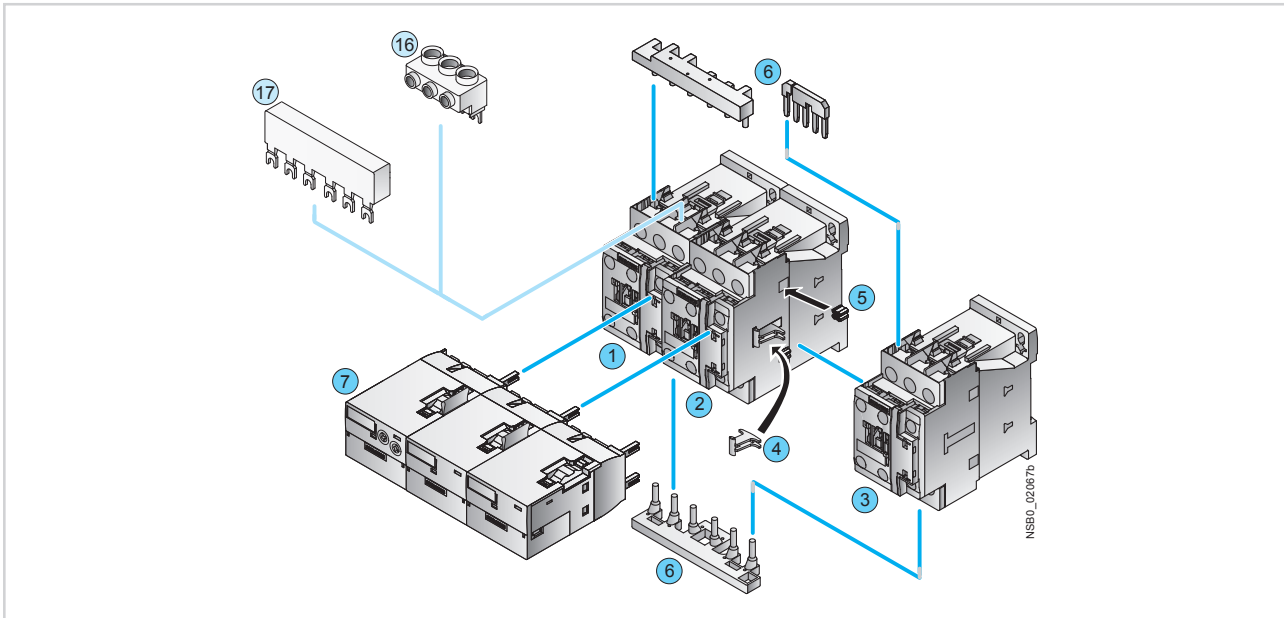

**Mountable accessories**

Individual parts	Order No.	Page
16 Three-phase feeder terminal <sup>1)</sup>	3RV29 25-5AB	2/80
17 Three-phase busbar <sup>1)</sup>	3RV19 15-1AB	1/8

**Fully wired and tested contactor assemblies**

Individual parts	Order No.			Page
	Q11	Q13	Q12	
1 2 3 Contactor, 11 kW	3RT20 24	3RT20 24	3RT20 24	2/8
1 2 3 Contactors, 15/18.5 kW	3RT20 26	3RT20 26	3RT20 24	2/8
1 2 3 Contactor, 22 kW	3RT20 27	3RT20 27	3RT20 26	2/8
4 5 6 Assembly kit	3RA29 23-2BB1			2/80

The assembly kit contains:

- 4 Mechanical interlock
- 5 Connecting clips
- 6 Wiring modules on the top and bottom for connecting the main current paths
- 7 Function modules 3RA28 16-0EW20 for wye-delta starting 2/27

<sup>1)</sup> The parts 16 and 17 can only be mounted with contactors with screw terminal.

Note:

When the function modules for contactor assemblies for wye-delta starting are used, no other auxiliary switches are allowed to be mounted on the basic units.

# Contactors and Contactor Assemblies

## Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

## Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

### Contactors and Contactor Assemblies

#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

SIRIUS



#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies


###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

Contactors and Contactor Assemblies



#### Contactors and Contactor Assemblies

##### Contactors and Contactor Assemblies


###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

###### Contactors and Contactor Assemblies

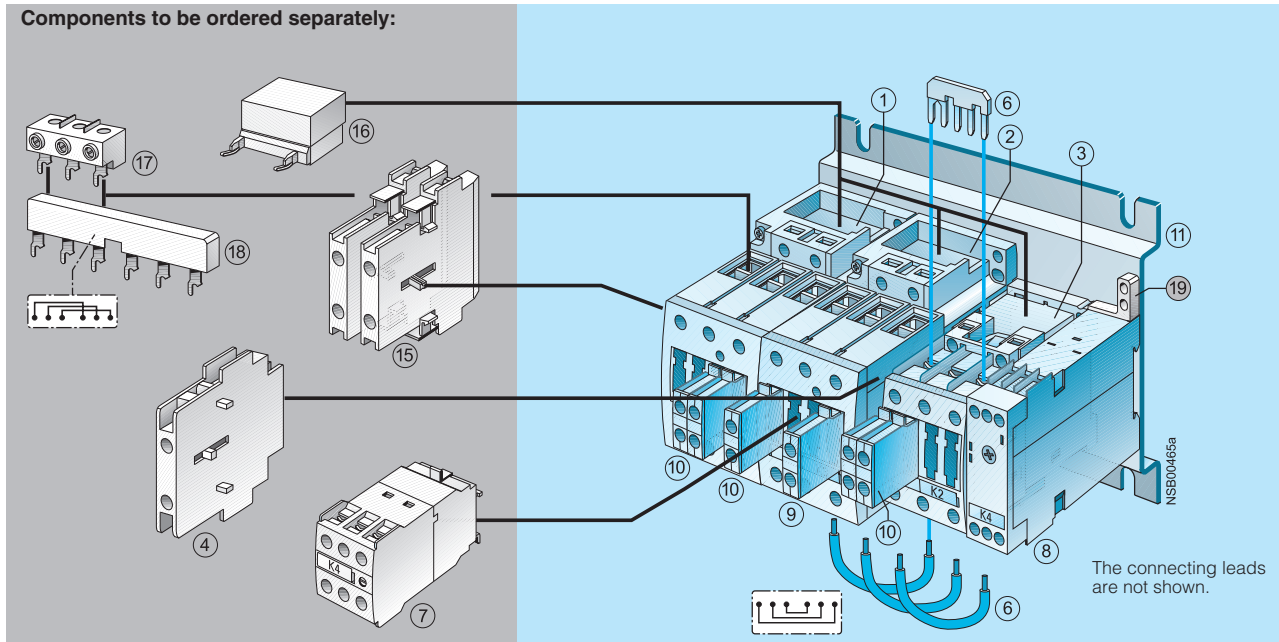

Accessory	Order No.	Page	Components	Order No.			Page
				K1	K3	K2	
④ Mechanical interlock, laterally mountable, depth must be adapted K3: 1.5 mm; K2: 0 mm	3RA19 24-2B	2/77	①②③ Contactors, 50/60 A, 30 HP	3RT10 34	3RT10 34	3RT20 26	2/8
⑦ Solid-state time-delay auxiliary switch block, mountable on the front	3RT19 26-2G...	2/69	⑧ Time-delay relay, laterally mountable	3RP15 74-1N.30			Sec. 11
⑮ Auxiliary switch block, laterally mountable	3RH19 21-1EA..	2/67	⑨ Auxiliary switch block with one unassigned NO contact	3RH19 21-1CA10			2/66
⑯ Surge suppressor	3RT19 26-1.... 3RT19 36-1....	2/71 2/71	⑩ Auxiliary switch block for local control 2 units 3 units	3RH19 21-1CA01 3RH19 21-1CA10			2/66
⑰ 3-phase feeder terminal	3RV19 35-5A	2/80	⑪ Baseplate	3RA19 32-2E			2/80
⑱ 3-phase busbar	3RV19 35-1A	1/8	⑫ Installation kit	3RA19 33-2C			2/80
⑲ Push-in lug <sup>2)</sup> for time-delay relay for screw mounting	3RP19 03	Sec. 11	The installation kit contains the WYE jumper on the top and the wiring jumper on the bottom for connecting the main conducting paths.				

For overview, see page 2/95.  
For circuit diagrams, see page 2/187.



1) Not included in scope of supply of complete contactor assemblies; available as accessory.

2) Possible in principle.  
If a solid-state time-delay auxiliary switch block is mounted onto the front of K3, an ordinary auxiliary switch block can only be mounted onto the side.



**Selection and ordering data**

Size S2-S2-S2 · up to 86 A, 60 HP

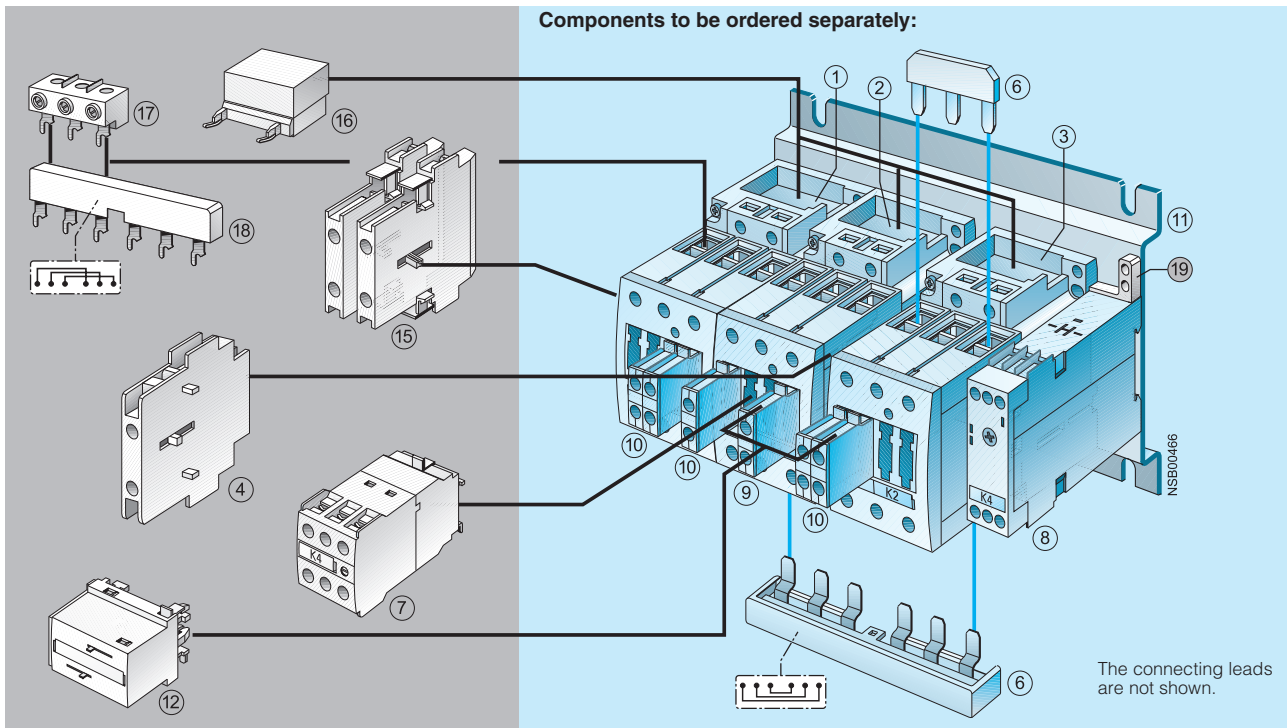

Accessory	Order No.	Page	Components	Order No.			Page
				K1	K3	K2	
④ Mechanical interlock, lateral	3RA19 24-2B	2/77	①②③ Contactors, 80 A, 50 HP	3RT10 35	3RT10 35	3RT10 34	2/8
⑦ Solid-state time-delay auxiliary switch block, mountable on the front	3RT19 26-2G...	2/69	①②③ Contactors, 86 A, 60 HP	3RT10 36	3RT10 36	3RT10 34	2/8
⑫ Mechanical interlock, mountable on the front	3RA19 24-1A	2/67	⑧ Time-delay relay, lateral	3RP15 74-1N.30			Sec. 11
⑮ Auxiliary switch block, lateral	3RH19 21-1EA..	2/67	⑨ Auxiliary switch block with one unassigned NO contact	3RH19 21-1CA10			2/66
⑯ Surge suppressor	3RT19 26-1.... 3RT19 36-1....	2/71 2/71	⑩ Auxiliary switch block for local control 2 units 3 units	3RH19 21-1CA01 3RH19 21-1CA10			2/66 2/80
⑰ 3-phase feeder terminal	3RV19 35-5A	2/80	⑪ Baseplate	3RA19 32-2F			2/80
⑱ 3-phase busbar	3RV19 35-1A	1/8	⑬ Installation kit	3RA19 33-2B			2/80
⑲ Push-in lug <sup>2)</sup> for time-delay relay for screw mounting	3RP19 03	Sec. 11	The installation kit contains the WYE jumper on top and the wiring jumper on bottom for connecting the main conducting paths.				

For overview, see page 2/95.  
For circuit diagrams, see page 2/187.

1) Not included in scope of supply of complete contactor assemblies; available as accessory.

2) Possible in principle. If a solid-state time-delay auxiliary switch block is mounted onto the front of K3, a standard auxiliary switch block can only be mounted onto the side.

# Contactors and Contactor Assemblies

## Contactor Assemblies for Switching Motors



SIRIUS



Contactor assemblies  
for WYE-delta starting

### Selection and ordering data

Size S3-S3-S2 · up to 150 A, 100 HP

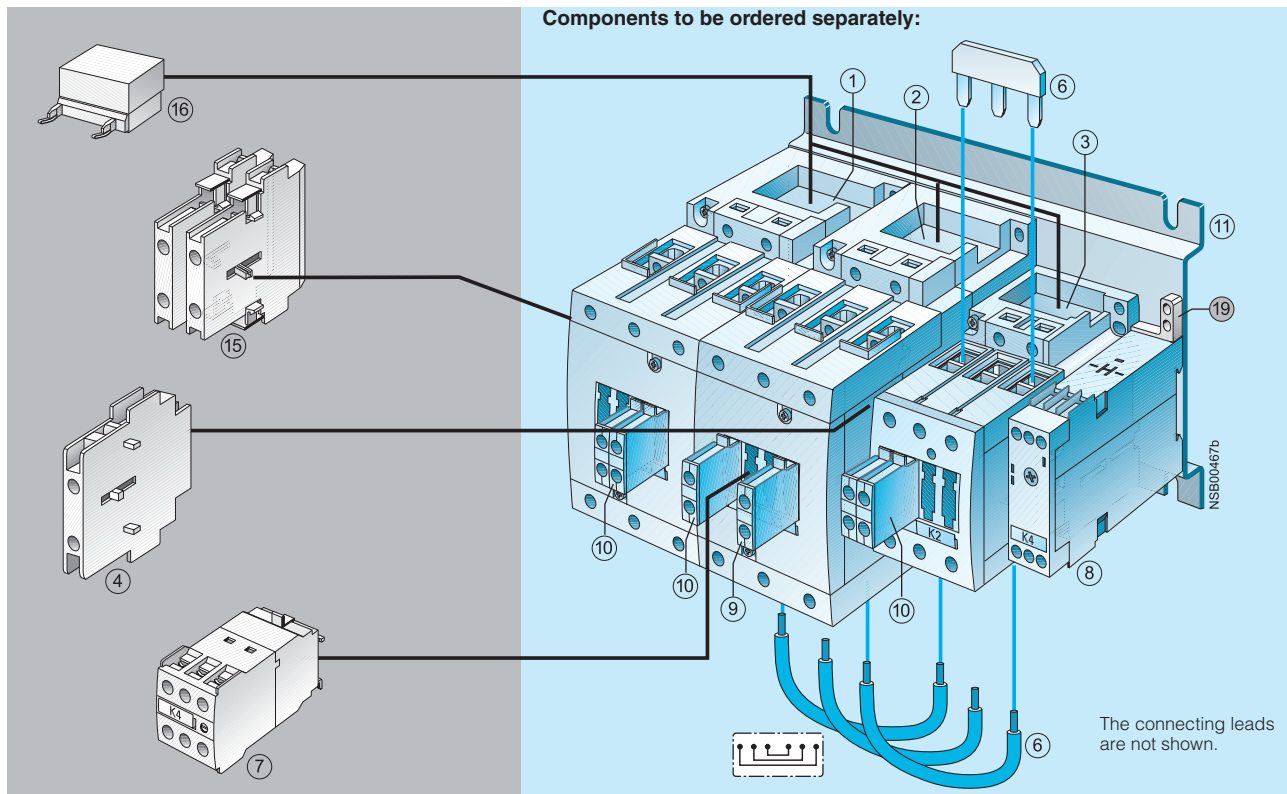

Accessory	Order No.	Page	Components	Order No.			Page
				K1	K3	K2	
④ Mechanical interlock, lateral, depth must be adapted K3: 0 mm; K2: 27.5 mm	3RA1924-2B	2/77	①②③ Contactors, 115 A, 75 HP	3RT1044	3RT1044	3RT1035	2/8
⑦ Solid-state time-delay auxiliary switch block, mountable on the front	3RT19 26-2G...	2/69	①②③ Contactors, 150 A, 100 HP	3RT1045	3RT1045	3RT1036	2/8
⑮ Auxiliary switch block, lateral	3RH1921-1EA...	2/67	⑧ Time-delay relay, lateral		3RP15 74-1N.30		Sec. 11
⑯ Surge suppressor	3RT19 . 6-1....	2/71	⑨ Auxiliary switch block with one unassigned NO contact		3RH1921-1CA10		2/66
⑰ Push-in lug <sup>2)</sup> for time-delay relay for screw mounting	3RP1903	Sec. 11	⑩ Auxiliary switch block for local control 2 units 3 units		3RH1921-1CA01 3RH1921-1CA10		2/66
			⑪ Baseplate		3RA1942-2E		2/80
			⑥ Installation kit		3RA1943-2C		2/80

The installation kit contains the WYE jumper on the top and the wiring jumper on the bottom for connecting the main conducting

For overview, see page 2/95.  
For circuit diagrams, see page 2/187.

- 1) Not included in scope of supply of the complete contactor assemblies; available as an accessory.
- 2) Possible in principle. If a solid-state time-delay auxiliary switch block is mounted onto the front of K3, a standard auxiliary switch block can only be mounted onto the side.

### SIRIUS



#### AC and DC operation

IEC 60947, EN 60947.

The 3RH2 contactor relays have screw, ring lug terminal or spring-type terminals. Four contacts are available in the basic unit.

The 3RH2 contactor relays are suitable for use in any climate. They are finger-safe according to EN 50274. The devices with ring lug terminal connection comply with degree of protection IP20 when fitted with the related terminal cover.

#### Contact reliability

High contact stability at low voltages and currents, suitable for solid-state circuits with currents  $\geq 1$  mA at a voltage of 17 V.

#### Surge suppression

RC elements, varistors, diodes or diode assemblies (combination of a diode and a Zener diode) can be plugged onto all contactor relays from the front for damping opening surges in the coil. The plug-in direction is determined by a coding device.

#### Note:

*The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assemblies 2 to 6 times, varistor +2 to 5 ms).*

#### Auxiliary switch blocks

The 3RH2 contactor relays can be expanded by up to four contacts by the addition of snap-on auxiliary switch blocks.

The auxiliary switch block can easily be snapped onto the front of the contactors. The auxiliary switch block has a centrally positioned release lever for disassembly.

The contactor relays with 4 contacts according to EN 50011, with the identification number 40E, can be extended with 80E to 44E auxiliary switch blocks to obtain contactor relays with 8 contacts according to EN 50011. The identification numbers 80E to 44E on the auxiliary switch blocks apply to the complete contactors. These auxiliary switch blocks (3RH29 11-1GA..) cannot be combined with contactor relays with identification numbers 31E and 22E; they are coded.


All contactor relays with 4 contacts according to EN 50011, identification numbers 40E to 22E, can be extended with auxiliary switch blocks 40 to 02 to obtain contactor relays with 6 or 8 contacts in accordance with EN 50005. The identification numbers on the auxiliary switch blocks apply only to the attached auxiliary switch blocks.

### 3RH21 control relays, size S00 with 4 or 8 contacts

In addition, fully mounted 3RH22 8-pole contactor relays are available; the mounted 4-pole auxiliary switch block in the 2nd tier is not removable. The terminal designations are according to EN 50011.

These versions are built according to special Swiss regulations SUVA and are distinguished externally by a red labeling plate.

Of the auxiliary contacts (integrated plus mountable) possible on the device, no more than four NC contacts are permitted.

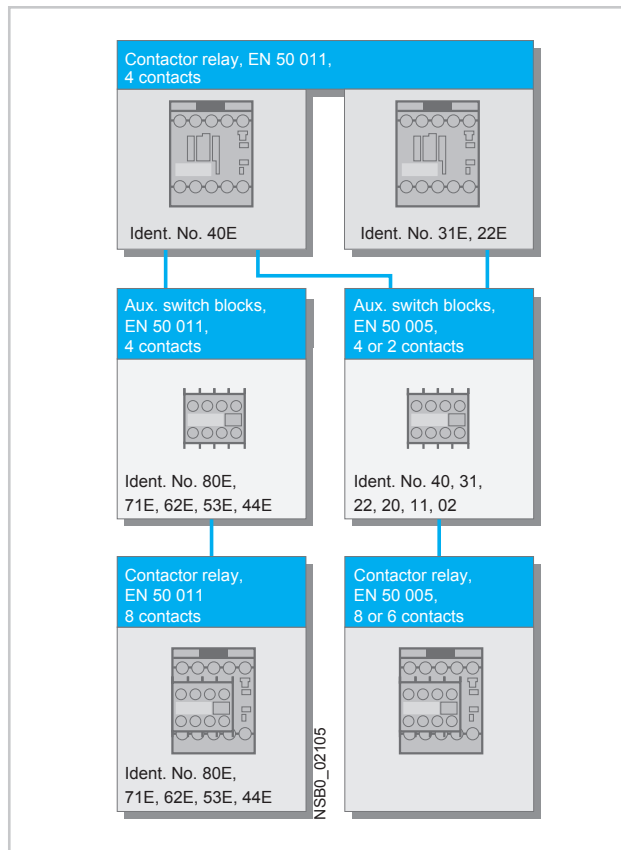

### 3RH24 latched control relays, size S00

#### Application

##### AC and DC operation

IEC 60 947, EN 60 947 (VDE 0660)

The terminal designations comply with EN 50 011.

The relay coil and the coil of the release solenoid are both designed for continuous duty.

The number of auxiliary contacts can be extended by means of auxiliary switch blocks (up to 4 poles).

RC elements, varistors, diodes or diode assemblies can be plugged onto both coils

from the front for damping opening surges.

The control relay can also be switched on and released manually.



# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3TF68 and 3TF69 vacuum contactors, 3-pole

#### Design

EN 60 947-4-1  
(VDE 0660 Part 102).

The 3TF contactors are suitable for use in any climate. They are safe from touch according to DIN VDE 0106 Part 100. Terminal covers (see accessories) may have to be fitted onto the connecting bars, depending on the configuration with other devices.

#### Main contacts

##### Contact erosion indication with 3TF68/69 vacuum contactors

The contact erosion of the vacuum interrupters can be monitored in the closed position by means of three white double slides on the contactor base.

The vacuum interrupter must be replaced if the distance indicated by one of the double slides is less than 0.5 mm while the contactor is in the closed position.

It is advisable to replace all three interrupters in order to ensure maximum reliability.

#### Auxiliary contacts

The terminal designations comply with EN 50 012.

When the contactors are energized, the NC contacts open before the NO contacts close.

##### Contact reliability

The auxiliary contacts are extremely reliable and as such are suitable for electronic circuits

- with currents  $\geq 1$  mA,
- at voltages greater than 17 V.

#### Surge suppression

##### Control circuit

Protection of the coil circuits against surges:

##### AC operation

- fitted with varistors as standard.

##### DC operation

Retrofitting options:

- varistors.

#### Electromagnetic compatibility (EMC)

3TF68/69...C contactors for AC operation are equipped with an electronically controlled solenoid mechanism with a high level of immunity to interference (see table opposite).

##### Note:

In operation in installations where it is not possible to observe the emitted interference limits, e.g. as an output contactor in static frequency changers, use of 3TF68/69...Q contactors (NS E catalogue, available in German) is recommended, without a main conductor path circuit (for further information refer also to the description below).

Contactors Type	Rated control supply voltage $U_s$	Overvoltage type (IEC 60 801)	Severity to IEC 60 801	Surge strength
3TF68 44-.C., 3TF69 44-.C..	110 V ... 132 V	Burst	3	2 kV
		Surge	4	6 kV
	200 V ... 276 V	Burst	4	4 kV
		Surge	4	5 kV
	380 V ... 600 V	Burst	4	4 kV
		Surge	4	6 kV

#### Circuit of the main conducting paths

An integrated RC varistor circuit in the main conducting paths of the contactors damps the rate of rise of switching overvoltages to uncritical values. Multiple restriking of the switching arcs is thereby prevented.

The operator of an installation can thus assume that the danger to the motor winding arising from switching overvoltages with a high rate of rise is ruled out.

The contactors can therefore be used without reservation for all AC switching applications, including three-phase motors with the demanding AC-4 utilization category.

##### Important note

The surge suppression circuit is not necessary when 3TF68/69 contactors are used in circuits with e.g. d.c. choppers, frequency converters or variable-speed drives.

It might be damaged by the voltage peaks and harmonics generated. This may also cause phase-to-phase short-circuits in the contactors.

**Remedy:** Order the special contactor design without surge suppression. In this case the Order No. must be supplemented with "-Z" and the order code "A02". No additional charge is made.

#### Short-circuit protection of contactors

For assembling fuseless load feeders, please select a circuit-breaker/contactor combination according to the brochure entitled "Verbraucherabzweige in sicherungsloser Bauweise", Order No. E20001-P285-A726 (available in German only).

### SIRIUS




The timer module, which is available in "ON-delay" and "OFF-delay" designs, allows time-delayed functions up to 100 s (3 distinct delay ranges).

It contains a relay with one NO contact and one NC contact; the relay is switched either after an ON-delay or after an OFF-delay.

The timer module with a WYE-DELTA function is equipped with one delayed and one instantaneous NO contact, with an interval time of 50 ms between the two (see diagram). The delay time of the NO contact can be set between 1.5 s and 30 s.

#### WYE-delta function



The timer module, which is available in "ON-delay" and "OFF-delay" with auxiliary power supply designs, allows time-delayed functions up to 100 s (3 distinct delay ranges). Contactors fitted with a time-delay block close or open after a delay according to the set time.

The ON-delay variant of the time-delay relay is connected in series with the contactor coil; terminal A1 of this coil must not be connected.

With the OFF-delay variant of the time-delay relay, the contactor coil is contacted directly via the relay; terminals A1 and A2 of the coil must not be connected.

The time-delay relays are suitable for both AC and DC operation.

The contactor on which the solid-state, time-delay auxiliary switch block is mounted operates without a delay.

#### Size S00 (3RT201)

The solid-state, time-delay auxiliary switch block is fitted onto the front of the contactor. The timer module is supplied with power directly by plug-in contacts via the coil terminals of the contactor, in parallel with A1/A2. The time function is activated by closing the contactor on which the auxiliary switch block is mounted. The OFF-delay variant operates without an auxiliary power supply. Minimum ON period: 200 ms.

#### Size S00 (3RT201)

The variant for size S00 contactors is fitted onto the front of the contactor (with the supply voltage switched off) and then slid into its latched position; at the same time, the time-delay relay is connected by means of plug-in contacts to coil terminals A1 and A2 of the contactor. Any contactor coil terminals which are not required are sealed off by means of covers on the enclosure of the time-delay block, to prevent them from being connected inadvertently (for circuit diagrams, see page 2/149).

A varistor is integrated in the timer module for damping opening surges in the contactor coil.

The solid-state, time-delay block cannot be mounted on size S00 coupling relays.

### Solid-state, time-delay auxiliary switch box

A varistor is integrated in the timer module for damping opening surges in the contactor coil.

The solid-state, time-delay auxiliary switch block cannot be mounted on size S00 coupling relays.

#### Sizes S0 to S12 (3RT202 to 3RT107)

The solid-state, time-delay auxiliary switch block is fitted onto the front of the contactor.

The timer module is supplied with power via two terminals (A1/A2); the time delay of the auxiliary switch block can be activated either by a parallel link to any contactor coil or by any power source.

The OFF-delay variant operates without an auxiliary power supply. Minimum ON period: 200 ms.

A single-pole auxiliary switch block can be snapped onto the front of the contactor in addition to the timer module.

The timer module has no integrated components for damping opening surges.

### Solid-state time-delay block with semiconductor output

#### Sizes S0 to S3 (3RT202 to 3RT107)



The time-delay block for size S0 to S3 contactors is plugged into coil terminals A1 and A2 on top of each contactor; the time-delay relay is connected both electrically and mechanically by means of pins.

A varistor is integrated in the timer module for damping opening surges in the contactor coil.

#### Configuration note

Activation of loads parallel to the start input is not permitted with AC operation (see ②).

The 3RT19 16-2D.../3RT19 26-2D... time-delay blocks with an OFF delay have a voltage-carrying start input B1. This means that if there is a parallel load on terminal B1, activation can be simulated with AC voltage. In this case, the additional load (e.g. contactor K3) must be wired as shown in ①.



Time-delay block  
Contactor



# Contactors and Contactor Assemblies


## Accessories for 3RT / 3RH Contactors

SIRIUS



### 3-phase EMC interference suppression module for size S00 contactor




A so-called back-e.m.f. (electromotive force) is produced when motors or various inductive loads are turned off. Voltage peaks of up to 4 000 V may occur as a result, with a frequency spectrum from 1 kHz to 10 MHz and a rate of voltage variation from 0.1 to 20 V/ns.



The connection between the main conducting path and the EMC interference suppression module enables contact arcing, which is responsible for contact erosion and the majority of clicking noises, to be reduced; this in turn is conducive to an electromagnetically compatible design.

Since the EMC interference suppression module achieves a significant reduction in radio-frequency components and the voltage level in three phases, the contact endurance is also improved considerably. This makes an important contribution towards enhancing the reliability and availability of the system as a whole.

There is no need for fine graduations within each performance class, as smaller motors inherently have a higher inductance, so that one solution for all fixed-speed drives up to 7.5 HP is adequate.

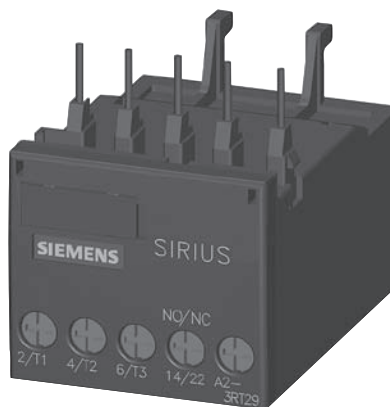

Two electrical variants are available:

The advantages of the RC circuit lie mainly in the reduction in the rate of rise and in its RF damping ability. The selected values ensure effective interference suppression over a wide range.

The varistor circuit is able to absorb high energy levels and is also suitable for frequencies from 10 to 400 Hz (variable-speed drives). There is no limiting below the knee-point voltage, however.

### OFF-delay device for size S00 to S3 contactors

**AC and DC operation**  
IEC 60 947, EN 60 947

For screwing and snapping onto 35 mm standard mounting rail. The OFF-delay devices have screw connections.

#### Application

The OFF-delay device prevents a contactor from dropping out unintentionally when there is a short-time voltage dip or voltage failure. It supplies the necessary power for a series-connected, DC-operated contactor during a voltage dip to ensure that the

contactor does not open. The 3RT19 16/3RT29 16 OFF-delay devices are specifically designed for operation with the 3RT contactors and 3RH contactor relays of the SIRIUS series.

#### Principle of operation

The OFF-delay device operates without external voltage on a capacitive basis, and can be energized with either AC or DC (24 V version for DC operation only). Voltage matching, which is only necessary with AC operation, is performed using a rectifier bridge.

A contactor opens after a delay when the capacitors of the contactor coil, built into the OFF-delay device, are switched in parallel. In the event of voltage failures, the capacitors are discharged via the coil and thereby delay the opening of the contactor.

If the command devices are upstream of the OFF-delay device in the circuit, the OFF delay takes effect with every opening operation. If the opening operation is downstream of the OFF-delay device, an OFF delay only applies in the event of failure of the mains voltage.

#### Operation

In the case of the versions for rated control supply voltages of 110 V and 230 V, either AC voltage or DC voltage can be applied on the line side, where as the variant for 24 V is designed for DC operation only. A DC-operated contactor is connected to the output in accordance with the input voltage that is applied.

The mean value of the OFF delay is approximately 1.5 times the specified minimum time.



### Application

#### DC operation

IEC 60 947 and EN 60 947  
The interface is suitable for use in any climate. It is safe from touch to DIN VDE 0106 Part 100. The terminal designations conform to EN 50 005.

### Functions

#### Design

System-compatible operation with DC 24 V, coil voltage tolerance 17 V to 30 V.  
Low power consumption in conformity with the technical data of the electronic systems.  
A light-emitting diode indicates the circuit state.

#### Surge suppression


The 3RH29 24-1GP11 interface has an integrated surge suppressor (varistor) for the contactor coil being switched.

#### Mounting

The 3RH29 24-1GP11 interface is mounted directly on the contactor coil.

### Terminal diagram


**3RH19/29 24-1GP1**  
with surge suppression



- ① Interface
- ② Contactor

### Connection example

**3RH19/29 24-1GP1**  
with surge suppression



- ① Interface
- ② Contactor

# Contactors and Contactor Assemblies

## Contactors Assemblies for Switching Motors

SIRIUS



### 3RT2 contactors


#### More information

Contactors	Type Size Width	mm	3RT2 S00 and S0 45
<b>Rated data of the auxiliary contacts</b>			
<b>According to IEC 60947-5-1/EN 60947-5-1</b> The data apply to integrated auxiliary contacts and contacts in the auxiliary switch blocks for contactor sizes S00 to S0 <sup>1)</sup>			
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)		V	690
<b>Conventional thermal current <math>I_{th}</math> = Rated operational current <math>I_e/AC-12</math></b>		A	10
<b>AC load</b>			
<b>Rated operational current <math>I_e/AC-15/AC-14</math></b>			
• For rated operational voltage $U_e$	24 V	A	10 <sup>1)</sup>
	110 V	A	10 <sup>1)</sup>
	125 V	A	10 <sup>1)</sup>
	220 V	A	10 <sup>1)</sup>
	230 V	A	10 <sup>1)</sup>
	380 V	A	3
	400 V	A	3
	500 V	A	2
	660 V	A	1
	690 V	A	1
<b>DC load</b>			
<b>Rated operational current <math>I_e/DC-12</math></b>			
• For rated operational voltage $U_e$	24 V	A	6
	60 V	A	6
	110 V	A	3
	125 V	A	2
	220 V	A	1
	440 V	A	0.3
	600 V	A	0.15
<b>Rated operational current <math>I_e/DC-13</math></b>			
• For rated operational voltage $U_e$	24 V	A	6
	60 V	A	2
	110 V	A	1
	125 V	A	0.9
	220 V	A	0.3
	440 V	A	0.14
	600 V	A	0.1
<b>Contact reliability at 17 V, 1 mA</b> acc. to EN 60947-5-4			Frequency of contact faults $<10^{-8}$ i. e. $<1$ fault per 100 million operating cycles

#### Endurance of the auxiliary contacts

It is assumed that the operating mechanisms are switched randomly, i. e. not synchronized with the phase angle of the supply system. The contact endurance is mainly dependent on the breaking current. The characteristic curves apply to:

- Integrated auxiliary contacts on 3RT20
- Auxiliary switch blocks 3RH 29 11, 3RH29 21 for contactors size S00 and S0.

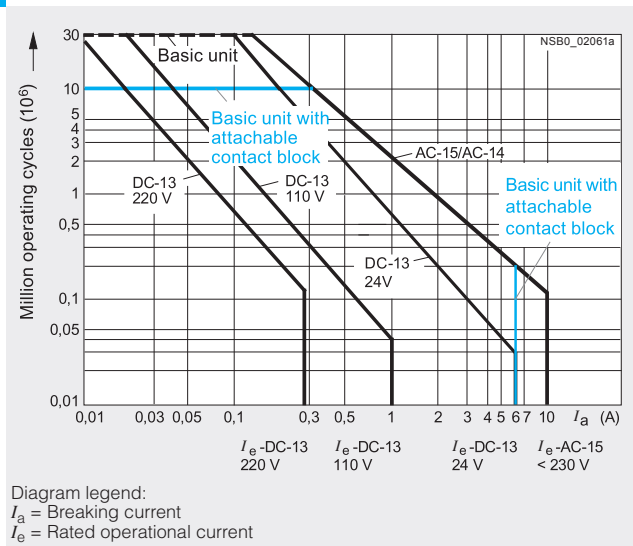

<sup>1)</sup> Integrated auxiliary contacts in size S0, auxiliary switches for snapping onto the front and for mounting onto the side in size S00 and S0:  $I_e = 6$  A at AC-14/AC-15.



### Endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i. e. not synchronized with the phase angle of the supply system.

The rated operational current  $I_e$  complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of at least 200,000 operating cycles.

If a shorter endurance is sufficient, the rated operational current  $I_e/AC-4$  can be increased.  $I_e$

**If the contacts are used for mixed operation**, i. e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:


$$X = \frac{A}{1 + \frac{C}{100} \left( \frac{A}{B} - 1 \right)}$$

Characters in the equation:

- X Contact endurance for mixed operation in operating cycles
- A Contact endurance for normal operation ( $I_a = I_e$ ) in operating cycles
- B Contact endurance for inching ( $I_a = \text{multiple of } I_e$ ) in operating cycles
- C Inching operations as a percentage of total switching operations

### Size S00

Operating cycles at

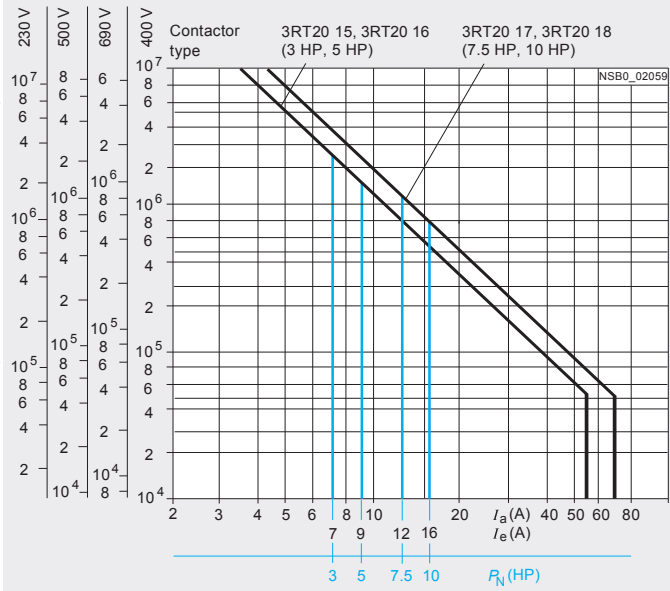

### Size S0

Operating cycles at

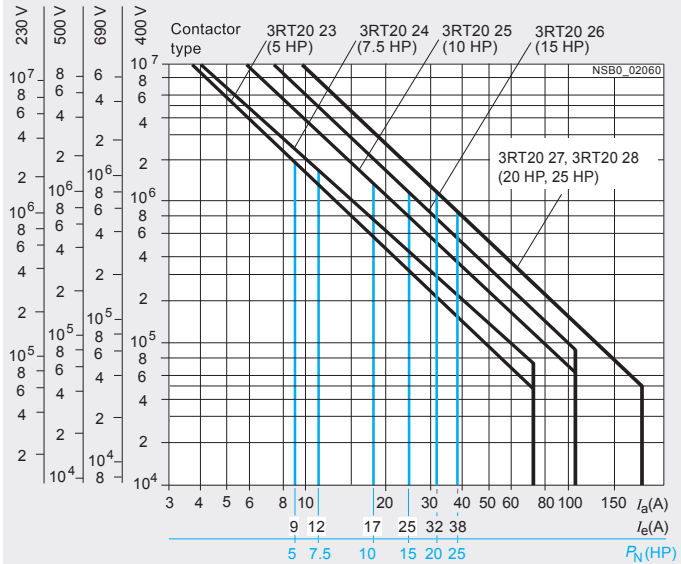


Diagram legend:

- $P_N$  = Rated power for squirrel-cage motors at 460 V
- $I_a$  = Breaking current
- $I_e$  = Rated operational current

# Contactors and Contactor Assemblies

## Contactors for Switching Motors




### 3RT1 contactors


#### Technical data

#### Endurance of the main contacts


##### Size S2

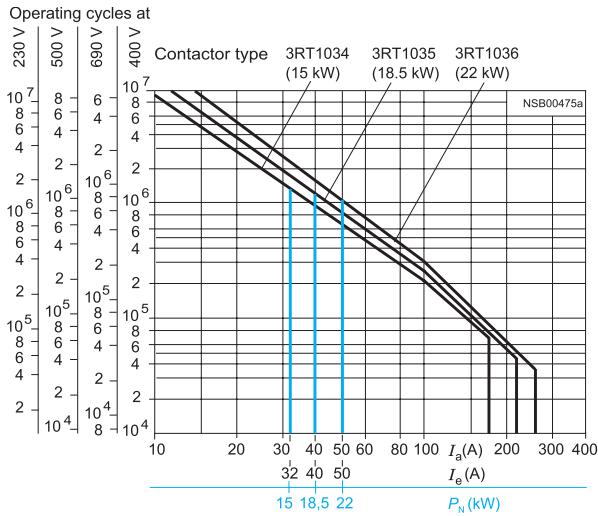


##### Size S3

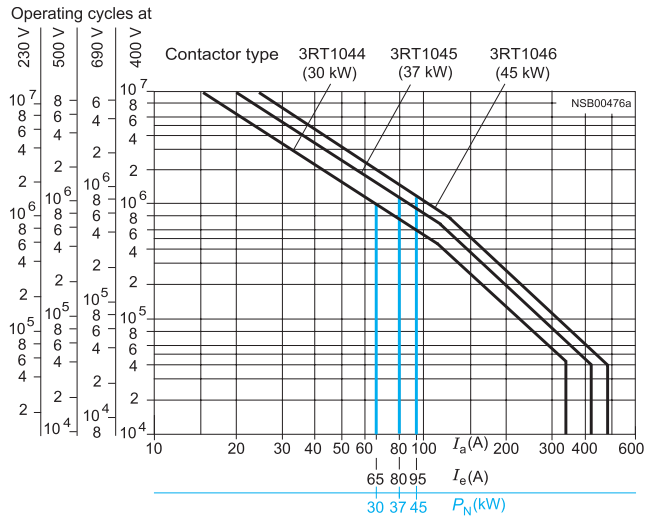

##### Sizes S6 to S12

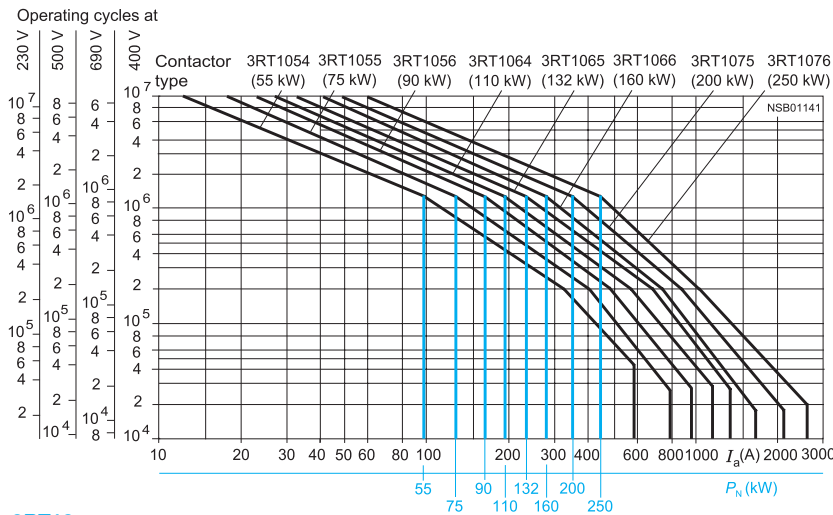

##### 3RT12 vacuum contactors Sizes S10 and S12

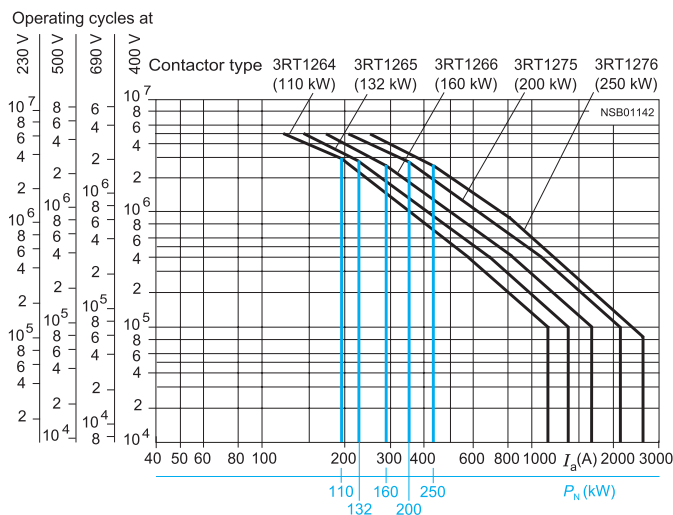

Legend:  
 $P_N$  = Ratings of three-phase motors with squirrel-cage rotor at 400 V  
 $I_a$  = Breaking current  
 $I_e$  = Rated operational current



Contactor	Type		3RT20 15	3RT20 16	3RT20 17	3RT20 18
	Size		S00	S00	S00	S00
	Width	mm	45	45	45	45
<b>Ⓢ and Ⓣ rated data</b>						
<b>Rated insulation voltage</b>		V AC	600			
<b>Uninterrupted current, at 40 °C</b>		• Open and enclosed	A 20			
<b>Maximum horsepower ratings</b> (Ⓢ and Ⓣ approved values)						
• Rated power for induction motors at 60 Hz		At 200 V hp	1.5	2	3	3
		230 V hp	2	3	3	5
		460 V hp	3	5	7.5	10
		575 V hp	5	7.5	10	10
<b>Short-circuit protection<sup>1)</sup></b> (contactor or overload relay)		At 600 V kA	5	5	5	5
• Fuse CLASS J <sup>2)</sup>		A	40	40	40	40
• Circuit breakers with overload protection according to UL 489		A	50	50	50	50
• Combination motor controllers type E according to UL 508			...3)	...3)	...3)	...3)
<b>NEMA/EEMAC ratings</b>						
NEMA/EEMAC size			--			0
• Uninterrupted current		- Open	A --			18
		- Enclosed	A --			18
• Rated power for induction motors at 60 Hz		At 200 V hp	--			3
		230 V hp	--			5
		460 V hp	--			10
		575 V hp	--			10
<b>Overload relays</b>		• Type	3RU21 1 / 3RB30 1			
		• Setting range	A 0.11 ... 16 / 0.1 ... 16			

Contactor	Type		3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28	
	Size		S0	S0	S0	S0	S0	S0	
	Width	mm	45	45	45	45	45	45	
<b>Ⓢ and Ⓣ rated data</b>									
<b>Rated insulation voltage</b>		V AC	600				600		
<b>Uninterrupted current, at 40 °C</b>		• Open and enclosed	A 35				42		
<b>Maximum horsepower ratings</b> (Ⓢ and Ⓣ approved values)									
• Rated power for induction motors at 60 Hz		At 200 V hp	2	3	5	7.5	10	10	
		230 V hp	3	3	5	7.5	10	10	
		460 V hp	5	7.5	10	15	20	25	
		575 V hp	7.5	10	15	20	25	25	
<b>Short-circuit protection<sup>1)</sup></b> (contactor or overload relay)		At 600 V kA	5	5	5	5	5	5	
• Fuse CLASS J <sup>2)</sup>		A	45	45	45	70	110	110	
• Circuit breakers with overload protection according to UL 489		A	70	70	70	100	100	100	
• Combination motor controllers type E according to UL 508									
		- At 480 V	Type	3RV20 2					
			A	--					
			kA	...3)					
		- At 600 V	Type	3RV20 2					
			A	--					
			kA	...3)					
<b>NEMA/EEMAC ratings</b>									
NEMA/EEMAC size			--				1		
• Uninterrupted current		- Open	A --				27		
		- Enclosed	A --				27		
• Rated power for induction motors at 60 Hz		At 200 V hp	--				7.5		
		230 V hp	--				7.5		
		460 V hp	--				15		
		575 V hp	--				20		
<b>Overload relays</b>		• Type	3RU21 2 / 3RB30 2						
		• Setting range	A 1.8 ... 40 / 0.1 ... 40						

<sup>1)</sup> For more information about short-circuit values, e. g. for protection against short-circuit currents, see UL reports (<http://support.automation.siemens.com>) for the individual devices.

<sup>2)</sup> Values for RK5 fuses on request.

<sup>3)</sup> Values on request.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10 contactors

#### Technical data

#### Ⓢ and Ⓜ ratings of the contactors

Contactor	Size Type		S2 3RT10 33/34	S2 3RT10 35	S2 3RT10 36	S3 3RT10 44	S3 3RT10 45	S3 3RT10 46
<b>Rated insulation voltage</b>		AC V	600			600		
<b>Continuous current, at 40 °C</b>	Free air and enclosed	A	45	55	50	90	105	
<b>Maximum horsepower ratings</b>	Ratings single phase motors at 50/60 Hz	at 115 V HP at 230 V HP	2 5	3 7½	3 10	5 15	7½ 15	10 –
(Ⓢ and Ⓜ-approved values)								
Ratings of three-phase motors at 50/60 Hz		at 200 V HP 230 V HP 460 V HP 575 V HP	7½/10 10 20/25 25/30	10 15 30 40	15 15 40 50	20 25 50 60	25 30 60 75	30 30 75 100
<b>Short-circuit protection</b>	Fuse or circuit-breaker acc. to UL 489	kA A A	5 125 125	5 150 150	5 200 200	5 250 250	10 300 300	10 350 400
<b>NEMA/EEMAC ratings</b>	NEMA/EEMAC SIZE		–		2	–		3
Conventional thermal current	Free air Enclosed	A A	–		45 45	–		90 90
Ratings of three-phase motors at 60 Hz		at 200 V HP 230 V HP 460 V HP 575 V hp	–		10 15 25 25	–		25 30 50 50
<b>Overload relay</b>	Type Setting range	A	3RU11 3 5.5 ... 50			3RU11 4 18 ... 100		

#### Contactor Size

S00 - S0 Screw and Spring connection	Screw and Spring connection	S2 - S12 Screw and Spring connection	Screw and Spring connection
Integrated or snap- on aux. switch block	Laterally mountable aux. switch block	Single pole and 4-pole Snap-on aux. switch block	Laterally mountable aux. switch block

#### Ⓢ and Ⓜ ratings of the auxiliary contacts

<b>Rated Voltage</b>		AC	600	600	600	600
<b>Switching Capacity</b>			A 600, P 300	A 300, Q 300	A 600, P 300	A 300, Q 300
<b>Uninterrupted current</b>	At 240 VAC	A	10	10	10	10





**Technical data**

Contactor	Size Type	S6 3RT10 54	S6 3RT10 55	S6 3RT10 56	S10 3RT10 64	S10 3RT10 65	S10 3RT10 66
-----------	-----------	----------------	----------------	----------------	-----------------	-----------------	-----------------

**Ⓢ and Ⓜ ratings of the contactors**

<b>Rated insulation voltage</b>		AC V	600			600			
<b>Continuous current, at 40 °C</b>	Free air and enclosed	A	140	195	195	250	330	330	
<b>Maximum horsepower ratings</b>	Ratings at 115 V single phase motors at 50/60 Hz	HP	25	30	30				
(Ⓢ and Ⓜ-approved values)									
Ratings of three-phase motors at 50/60 Hz		200 V HP	40	50	60	60	75	100	
		230 V HP	50	60	75	75	100	125	
		460 V HP	100	125	150	150	200	250	
		575 V HP	125	150	200	200	250	300	
<b>Short-circuit protection</b>		kA	10	10	10	10	18	18	
	CLASS RK5 fuse	A	450	500	500	700	800	800	
	Circuit-breaker acc. to UL 489	A	350	450	500	500	700	800	
<b>NEMA/EEMAC ratings</b>	NEMA/EEMAC SIZE		-	4	-	-	-	5	
	Conventional thermal current	Free air	A	-	150	-	-	-	300
		Enclosed	A	-	135	-	-	-	270
	Ratings of three-phase motors at 60 Hz		at 200 V HP	-	40	-	-	-	75
			230 V HP	-	50	-	-	-	100
			460 V HP	-	100	-	-	-	200
			575 V HP	-	100	-	-	-	200
<b>Overload relay</b>	Type	3RB20 56			3RB20 66				

Contactor	Size Type	S12 3RT10 75	S12 3RT10 76	
<b>Rated insulation voltage</b>		AC V	600	
<b>Continuous current, at 40 °C</b>	Free air and enclosed	A	400   540	
<b>Maximum horsepower ratings</b>	(Ⓢ and Ⓜ-approved values)			
Ratings of three-phase motors at 50/60 Hz		at 200 V HP	125   150	
		230 V HP	150   200	
		460 V HP	300   400	
		575 V HP	400   500	
<b>Short-circuit protection</b>		kA	18   30	
	CLASS RK5 fuse	A	1000   1200	
	Circuit-breaker acc. to UL 489	A	900   900	
<b>NEMA/EEMAC ratings</b>	NEMA/EEMAC SIZE		-   6	
	Conventional thermal current	Free air	A	-   600
		Enclosed	A	-   540
	Ratings of three-phase motors at 60 Hz		at 200 V HP	-   150
			230 V HP	-   200
			460 V HP	-   400
			575 V HP	-   400
<b>Overload relay</b>	Type	3RB20 66		

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



**3RT12 vacuum contactors**  
**3RT contactors for resistive loads**

### Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66	S12 3RT12 75	S12 3RT12 76
-----------	-----------	-----------------	-----------------	-----------------	-----------------	-----------------

### Ⓢ and Ⓣ ratings of the contactors

<b>Rated insulation voltage</b>	AC V	600			600	
<b>Continuous current, at 40 °C</b>	Free air and enclosed	A 330			540	
<b>Maximum horsepower ratings</b> (Ⓢ and Ⓣ-approved values)						
Ratings of three-phase motors at 50/60 Hz	at 200 V	HP	60	75	100	125
	230 V	HP	75	100	125	150
	460 V	HP	150	200	250	300
	575 V	HP	200	250	300	400
<b>Short-circuit protection</b>	CLASS RK5 fuse	kA	10	18	18	18
		A	700	800	800	1200
	Circuit-breaker acc. to UL 489	A	500	700	900	1000
<b>NEMA/EEMAC ratings</b>						
Conventional thermal current	NEMA/EEMAC SIZE		-			5
	Free air	A	-			-
	Enclosed	A	-			-
Ratings of three-phase motors at 60 Hz	at 200 V	HP	-	-	-	-
	230 V	HP	-	-	-	-
	460 V	HP	-	-	-	-
	575 V	HP	-	-	-	-
<b>Overload relay</b>	Type	3RB20 66			3RB20 66	

Contactor	Size Type	S3 3RT14 46	S6 3RT14 56	S10 3RT14 66	S12 3RT14 76
<b>Rated insulation voltage</b>	AC V	600			
<b>Maximum UL resistive load ratings</b>	A	110	210	360	580

Contactor	Size Type	S00 3RT23 15	S00 3RT23 16	S00 3RT23 17	S0 3RT23 24	S0 3RT23 25	S0 3RT23 26	S0 3RT23 27	S2 3RT13 36	S3 3RT13 44	S3 3RT13 46	
<b>Rated insulation voltage</b>	AC V	600										
<b>Maximum UL resistive load ratings</b>	A	16	18	20	30	30	35	42	60	100	110	




Type

Size

Dimensions (W x H x D)<sup>1)</sup>

- With mounted auxiliary switch block
- With mounted function block



mm

mm

mm

**3RT20 15, 3RT20 16**

**S00**

45 x 57.5 x 73 / 45 x 70 x 73

45 x 57.5 x 116 / 45 x 70 x 121

45 x 57.5 x 142 / 45 x 70 x 142

**3RT20 17, 3RT20 18**


**S00**

#### General data

##### Permissible mounting positions

The contactors are designed for operation on a vertical mounting surface.

AC and DC operation



Upright mounting position

AC and DC operation



Special design required. Positions 13 to 16 of the Order No. must be changed to **-1AA0**. Additional charge.

##### Mechanical endurance

- Basic unit
- Basic unit with snap-on auxiliary switch block
- Solid-state compatible auxiliary switch block

Operating cycles  
Operating cycles  
Operat. cycles

30 million  
10 million  
5 million

##### Electrical endurance

2)

**Rated insulation voltage  $U_i$**  (pollution degree 3)

V

690

**Rated impulse withstand voltage  $U_{imp}$**

kV

6

**Protective separation** between the coil and the main contacts acc. to EN 60947-1, Appendix N

V

400

##### Mirror contacts

A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.

- 3RT20 1., 3RT23 1. (removable auxiliary switch block)
- 3RT20 1., 3RT23 1. (permanently mounted auxiliary switch block)
- 3RH29 19-.NF. . . solid-state compatible auxiliary switch blocks have no mirror contacts.

Yes, this applies to both the basic unit as well as to between the basic unit and the mounted auxiliary switch block acc. to EN 60947-1, Appendix F  
Yes, acc. to EN 60947-1, Appendix F

##### Ambient temperature

- During operation
- During storage

°C  
°C

-25 ... +60  
-55 ... +80

**Degree of protection** acc. to EN 60947-1, Appendix C

IP20, coil assembly IP40

**Touch protection** acc. to EN 50274

Finger-safe

##### Shock resistance rectangular pulse

- AC operation
- DC operation

g/ms  
g/ms

6.7/5 and 4.2/10  
6.7/5 and 4.2/10

7.3/5 and 4.7/10  
7.3/5 and 4.7/10

##### Shock resistance sine pulse

- AC operation
- DC operation

g/ms  
g/ms

10.5/5 and 6.6/10  
10.5/5 and 6.6/10

11.4/5 and 7.3/10  
11.4/5 and 7.3/10

##### Conductor cross-sections

3)

#### Short-circuit protection for contactors without overload relays

For short-circuit protection for contactors with overload relays see [Section 3: Overload Relays](#)  
For short-circuit protection for fuseless load feeders see [Section 4: Combination Starters](#)

##### Main circuit

- Fuse links, operational class gG :  
NH 3NA, DIAZED 5SB, NEOZED 5SE acc. to IEC 60947-4-1/ EN 60947-4-1
  - Type of coordination "1"
  - Type of coordination "2"
  - Weld-free<sup>4)</sup>
- Miniature circuit breakers (up to 230 V) with C characteristic  
Short-circuit current 1 kA, type of coordination "1"

A  
A  
A  
A

35  
20  
10  
10

50  
25  
10  
10

##### Auxiliary circuit

- Fuse links, operational class gG : DIAZED 5SB, NEOZED 5SE (weld-free protection for  $I_k \geq 1$  kA)
- Miniature circuit breakers up to 230 V with C characteristic  
Short-circuit current  $I_k < 400$  A

A  
A

10  
6

<sup>1)</sup> Dimensions for devices with screw terminals / spring-type terminals.  
<sup>2)</sup> For endurance of the main contacts see page 2/109.

<sup>3)</sup> For conductor cross-sections see page 2/117 .  
<sup>4)</sup> Test conditions according to IEC 60947-4-1.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT2. 1. contactors

Contactors	Type Size Width	mm	3RT20 15, 3RT20 16 S00 45	3RT20 17, 3RT20 18 S00 45
<b>Control</b>				
<b>Solenoid coil operating range</b>				
• AC operation		50 Hz 60 Hz	0.8 ... 1.1 x $U_s$ 0.85 ... 1.1 x $U_s$	
• DC operation		Up to 50 °C Up to 60 °C	0.8 ... 1.1 x $U_s$ 0.85 ... 1.1 x $U_s$	
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x $U_s$ )				
• AC operation, 50/60 Hz, standard version	- Closing	VA	27/24.3	37/33
	- P.f.		0.8/0.75	0.8/0.75
	- Closed	VA	4.2/3.3	5.7/4.4
	- P.f.		0.25/0.25	0.25/0.25
• AC operation, 50 Hz, USA/Canada	- Closing	VA	26.4	36
	- P.f. for closing		0.81	0.8
	- Closed	VA	4.4	5.9
	- P.f. for closed		0.24	0.24
• AC operation, 60 Hz, USA/Canada	- Closing	VA	31.7	43
	- P.f. for closing		0.81	0.8
	- Closed	VA	4.8	6.5
	- P.f. for closed		0.25	0.25
• DC operation	Closing = Closed	W	4	4
<b>Permissible residual current of the electronics</b> (with 0 signal)				
	• AC operation		<3 mA x (230 V/ $U_s$ ) <sup>1)</sup>	<4 mA x (230 V/ $U_s$ ) <sup>1)</sup>
	• DC operation		<10 mA x (24 V/ $U_s$ ) <sup>1)</sup>	
<b>Operating times</b> <sup>2)</sup>				
Total break time = Opening delay + Arcing time				
• AC operation at 0.8 ... 1.1 x $U_s$	- Closing delay	ms	9 ... 35	8 ... 33
	- Opening delay	ms	3.5 ... 14	4 ... 15
• DC operation at 0.85 ... 1.1 x $U_s$	- Closing delay	ms	30 ... 100	30 ... 100
	- Opening delay	ms	7 ... 13	7 ... 13
• Arcing time		ms	10 ... 15	10 ... 15
<b>Operating times for 1.0 x <math>U_s</math></b> <sup>2)</sup>				
• AC operation	- Closing delay	ms	9.5 ... 24	9 ... 22
	- Opening delay	ms	4 ... 14	4.5 ... 15
• DC operation	- Closing delay	ms	35 ... 50	35 ... 50
	- Opening delay	ms	7 ... 12	7 ... 12

<sup>1)</sup> The 3RT29 16-1GA00 additional load module is recommended for higher residual currents.

<sup>2)</sup> The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assemblies 2 to 6 times, varistor +2 to 5 ms).

Contactors	Type Size		3RT20 15 S00	3RT20 16 S00	3RT20 17 S00	3RT20 18 S00		
<b>Main circuit</b>								
<b>AC capacity</b>								
<b>Utilization category AC-1</b>								
<b>Switching resistive loads</b>								
• Rated operational current $I_e$		At 40 °C up to 690 V	A	18	22	22	22	
		At 60 °C up to 690 V	A	16	20	20	20	
• Rated power for AC loads <sup>1)</sup> P.f.= 0.95 (at 60 °C)		230 V	kW	6.3	7.5	7.5	7.5	
		400 V	kW	11	13	13	13	
		500 V	kW	13.8	17	17	17	
		690 V	kW	19	22	22	22	
• Minimum conductor cross-section for loads with $I_e$		At 40 °C	mm <sup>2</sup>	2.5	2.5	2.5	2.5	
		At 60 °C	mm <sup>2</sup>	2.5	2.5	2.5	2.5	
<b>Utilization category AC-3</b>								
• Rated operational currents $I_e$		Up to 400 V	A	7	9	12	16	
		440 V	A	7	9	11	15	
		500 V	A	6	7.7	9.2	12.4	
		690 V	A	4.9	6.7	6.7	8.8	
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz		At 200 V	HP	1.5	2	3	3	
		230 V	HP	2	3	3	5	
		460 V	HP	3	5	7.5	10	
		575 V	HP	5	7.5	10	10	
<b>Thermal load capacity</b>			10 s current <sup>2)</sup>	A	56	72	96	128

<sup>1)</sup> Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

<sup>2)</sup> According to IEC 60947-4-1.  
For rated values for various start-up conditions see Section 3 --> "Overload Relays".



Contactors	Type Size Width	mm	3RT20 15 S00 45	3RT20 16 S00 45	3RT20 17 S00 45	3RT20 18 S00 45	
<b>Main circuit</b>							
<b>AC capacity</b>							
<b>Power loss per conducting path</b>		At $I_e/AC-3$	W	0.42	0.7	1.24	2.2
<b>Utilization category AC-4 (for <math>I_a = 6 \times I_e</math>)<sup>1)</sup></b>							
• Rated operational current $I_e$		Up to 400 V	A	6.5	8.5	8.5	11.5
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz		Up to 400 V	kW	3	4	4	5.5
• The following applies to a contact endurance of about 200000 operating cycles:							
- Rated operational currents $I_e$		Up to 400 V	A	2.6	4.1	4.1	5.5
		690 V	A	1.8	3.3	3.3	4.4
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz		At 230 V	kW	0.67	1.1	1.1	1.5
		400 V	kW	1.15	2	2	2.5
		500 V	kW	1.45	2	2	3
		690 V	kW	1.15	2.5	2.5	3.5

**Switching frequency**


<b>Switching frequency z</b> in operating cycles/hour						
• Contactors without overload relays		No-load switching frequency AC	h <sup>-1</sup>	10000		
Dependence of the switching frequency z' on the operational current I' and operational voltage U':		No-load switching frequency DC	h <sup>-1</sup>	10000		
$z' = z \cdot (I_e/I') \cdot (400 V/U)^{1.5} \cdot 1/h$		Rated operation AC-1 (AC/DC)	h <sup>-1</sup>	1000		
		AC-2 (AC/DC)	h <sup>-1</sup>	750		
		AC-3 (AC/DC)	h <sup>-1</sup>	750		
		AC-4 (AC/DC)	h <sup>-1</sup>	250		
• Contactors with overload relays (mean value)			h <sup>-1</sup>	15		

<sup>1)</sup> The data only apply to 3RT25 16 and 3RT25 17 (2 NO + 2 NC) up to a rated operational voltage of 400 V.

Contactors	Type Size	mm	3RT20 15 S00 45	3RT20 16 S00 45	3RT20 17 S00 45	3RT20 18 S00 45
------------	-----------	----	-----------------	-----------------	-----------------	-----------------

**Conductor cross-sections**

<b>Main conductors and auxiliary conductors</b> (1 or 2 conductors can be connected)				<b>Screw terminals</b>
• Solid		mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup> according to IEC 60947; max. 2 x (0.5 ... 4)	
• Finely stranded with end sleeve		mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup>	
• AWG cables, solid or stranded		AWG	2 x (20 ... 16) <sup>1)</sup> ; 2 x (18 ... 14) <sup>1)</sup> ; 2 x 12	
• Terminal screw			M3 (for standard screwdriver size 2 and Pozidriv 2)	
• Tightening torque		Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)	
<b>Main conductors, auxiliary conductors and coil terminals</b> (1 or 2 conductors can be connected)				<b>Spring-type terminals</b>
• Operating devices		mm	3.0 x 0.5; 3.5 x 0.5	
• Solid		mm <sup>2</sup>	2 x (0.5 ... 4)	
• Finely stranded with end sleeve		mm <sup>2</sup>	2 x (0.5 ... 2.5)	
• Finely stranded without end sleeve		mm <sup>2</sup>	2 x (0.5 ... 2.5)	
• AWG cables, solid or stranded		AWG	1 x (20 ... 12)	
<b>Auxiliary conductors for front and laterally mounted auxiliary switches</b> (1 or 2 conductors can be connected)				
• Operating devices		mm	3.0 x 0.5; 3.5 x 0.5	
• Solid		mm <sup>2</sup>	2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve		mm <sup>2</sup>	2 x (0.5 ... 1.5)	
• Finely stranded without end sleeve		mm <sup>2</sup>	2 x (0.5 ... 1.5)	
• AWG cables, solid or stranded		AWG	2 x (20 ... 14)	
<b>Main conductors and auxiliary conductors</b>				<b>Ring lug terminal connection</b>
• Terminal screw			M3, Pozidriv 2	
• Operating devices		mm	Ø 5 ... 6	
• Tightening torque		Nm	0.8 ... 1.2	
• Usable ring terminal lugs		mm	d <sub>2</sub> = min. 3.2	
- DIN 46234 without insulation sleeve		mm	d <sub>3</sub> = max. 7.5	
- DIN 46225 without insulation sleeve				
- DIN 46237 with insulation sleeve				
- JIS C2805 Type R without insulation sleeve				
- JIS C2805 Type RAV with insulation sleeve				
- JIS C2805 Type RAP with insulation sleeve				



For tool for opening the spring-type terminals (see Accessories on page 2/76).  
Maximum external diameter of the conductor insulation: 3.6 mm.

An "insulation stop" must be used for conductor cross-sections ≤ 1 mm<sup>2</sup> (see Accessories on page 2/76).

<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT2. 2. contactors

Type		3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28
Size		S0	S0	S0	S0	S0	S0
Dimensions (W x H x D) for AC operation <sup>1)</sup>		mm	45 x 85 x 97 / 45 x 101.5 x 97				
• With mounted auxiliary switch block		mm	45 x 85 x 141 / 45 x 101.5 x 144				
• With mounted function block			45 x 85 x 166 / 45 x 101.5 x 166				
Dimensions (W x H x D) for DC operation <sup>1)</sup>		mm	45 x 85 x 107 / 45 x 101.5 x 107				
• With mounted auxiliary switch block		mm	45 x 85 x 151 / 45 x 101.5 x 154				
• With mounted function block			45 x 85 x 176 / 45 x 101.5 x 176				
<b>General data</b>							
<b>Permissible mounting positions</b>							
The contactors are designed for operation on a vertical mounting surface.							
Upright mounting position							
AC and D operation		Special version required, also applies to 3RT20 2.-.K.40. coupling relays.					
<b>Mechanical endurance</b>							
• Basic unit	Operating cycles	10 million					
• Basic unit with snap-on auxiliary switch block	Operating cycles	10 million					
• Solid-state compatible auxiliary switch block	Operat. cycles	5 million					
<b>Electrical endurance</b>							
		2)					
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	690					
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	6					
<b>Protective separation</b> between the coil and the main contacts (acc. to EN 60947-1, Appendix N)	V	400					
<b>Mirror contacts</b>							
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.							
• 3RT20 2., 3RT23 2. (removable auxiliary switch block)		Yes, acc. to EN 60947-4-1, Appendix F					
• 3RT20 2., 3RT23 2. (permanently mounted auxiliary switch block)		Yes, acc. to EN 60947-4-1, Appendix F					
<b>Permissible ambient temperature</b>							
• During operation	°C	-25 ... +60					
• During storage	°C	-55 ... +80					
<b>Degree of protection</b> acc. to EN 60947-1, Appendix C		IP20, coil assembly IP20					
<b>Touch protection</b> acc. to EN 50274		Finger-safe					
<b>Shock resistance</b> rectangular pulse							
• AC operation	g/ms	7.5/5 and 4.7/10			8.3/5 and 5.3/10		
• DC operation	g/ms	>10/5 and 7.5/10			>10/5 and 7.5/10		
<b>Shock resistance</b> sine pulse							
• AC operation	g/ms	11.8/5 and 7.4/10			13.5/5 and 8.3/10		
• DC operation	g/ms	>15/5 and >10/10			>15/5 and >10/10		
<b>Conductor cross-sections</b>							
3)							
<b>Short-circuit protection for contactors without overload relays</b>							
<b>Main circuit</b>							
For short-circuit protection for contactors with overload relays see "Protection Equipment -> Overload Relays".							
For short-circuit protection for fuseless load feeders see "Motor Starters".							
• Fuse links, operational class gG : Type NH 3NA, DIAZED 5SB, NEOZED 5SE acc. to IEC 60947-4-1/ EN 60947-4-1	A	63		100		125	
- Type of coordination "1"	A	25		35		50	
- Type of coordination "2"	A	10		16		16	
- Weld-free <sup>4)</sup>	A	25		32		40	
• Miniature circuit breakers with C characteristic (short-circuit current 3 kA, type of coordination "1")	A	25		32		40	
<b>Auxiliary circuit</b>							
• Fuse links, operational class gG : DIAZED 5SB, NEOZED 5SE (weld-free protection for $I_k \geq 1$ kA)	A	10					
• Miniature circuit breaker with C characteristic (short-circuit current $I_k < 400$ A)	A	10					

<sup>1)</sup> Dimensions for devices with screw terminals / spring-type terminals.

<sup>2)</sup> For endurance of the main contacts see page 2/109.

<sup>3)</sup> For conductor cross-sections page 2/121.

<sup>4)</sup> Test conditions according to IEC 60947-4-1.



Contactors	Type		3RT20 23 ... 3RT20 25	3RT20 26 ... 3RT20 28	3RT20 2. -NB3	3RT20 2. -NF3..	3RT20 2. -NP3	
	Size		S0	S0	S0	S0	S0	
	Width	mm	45	45	45	45	45	
<b>Control</b>								
<b>Solenoid coil operating range</b>	AC/DC		0.8 ... 1.1 x U <sub>s</sub>		0.7 ... 1.3 x U <sub>s</sub>			
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x U <sub>s</sub> )								
• AC operation, 50 Hz, standard version	- Closing	VA	65	77	6.5	13.6	16.1	
	- P.f.		0.82	0.82	0.98	0.98	0.98	
	- Closed	VA	7.6	9.8	1.26	1.91	3.41	
• AC operation, 50/60 Hz, standard version	- P.f.		0.25	0.25	0.25	0.25	0.25	
	- Closing	VA	68/67	81/79	6.5/5.7	13.6/13.2	16.1/15.9	
	- P.f.		0.72/0.74	0.72/0.74	0.98/0.96	0.98/0.99	0.99/0.99	
• AC operation, 50 Hz, USA/Canada	- Closed	VA	7.9/6.5	10.5/8.5	1.26/1.30	1.91/1.90	3.41/3.58	
	- P.f.		0.25/0.28	0.25/0.28	0.25/0.28	0.25/0.28	0.25/0.28	
	- Closing	VA	65	77	--	--	--	
• AC operation, 60 Hz, USA/Canada	- P.f.		0.82	0.82	--	--	--	
	- Closed	VA	7.6	9.8	--	--	--	
	- P.f.		0.25	0.28	--	--	--	
• DC operation	- Closing	VA	73	87	--	--	--	
	- P.f.		0.76	0.76	--	--	--	
	- Closed	VA	7.2	9.4	--	--	--	
	- P.f.		0.28	0.28	--	--	--	
<b>Permissible residual current of the electronics</b> (with 0 signal)	Closing/closed	W	5.9/5.9	5.9/5.9	6.7/0.8	13.2/1.56	15/1.83	
• AC operation		mA	< 6 mA x (230 V/U <sub>s</sub> )		< 7 mA x (230 V/U <sub>s</sub> )			
	• DC operation	mA	< 16 mA x (24 V/U <sub>s</sub> )					
<b>Operating times for 0.8 ... 1.1 x U<sub>s</sub><sup>1)</sup></b>								
Total break time = Opening delay + Arcing time								
• AC operation	- Closing delay	ms	9 ... 38	8 ... 40	60 ... 80	50 ... 70	60 ... 80	
	- Opening delay	ms	4 ... 16	4 ... 16	30 ... 45	35 ... 45	35 ... 45	
• DC operation	- Closing delay	ms	50 ... 170	50 ... 170	60 ... 75	50 ... 70	50 ... 75	
	- Opening delay	ms	15 ... 17.5	15 ... 17.5	30 ... 45	35 ... 45	40 ... 50	
• Arcing time		ms	10	10	10	10	10	
<b>Operating times for 1.0 x U<sub>s</sub><sup>1)</sup></b>								
• AC operation	- Closing delay	ms	10 ... 18	10 ... 17	65 ... 80	50 ... 70	60 ... 80	
	- Opening delay	ms	4 ... 16	4 ... 16	30 ... 45	35 ... 45	30 ... 50	
• DC operation	- Closing delay	ms	55 ... 80	55 ... 80	60 ... 80	56 ... 70	60 ... 80	
	- Opening delay	ms	16 ... 17	16 ... 17	30 ... 45	35 ... 45	30 ... 50	

<sup>1)</sup> The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).



# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT20 2. contactors

Contactors	Type		3RT20 23	3RT20 24	3RT20 25	3RT20 26	3RT20 27	3RT20 28
	Size		S0	S0	S0	S0	S0	S0
	Width	mm	45	45	45	45	45	45

#### Main circuit

#### AC capacity

##### Utilization category AC-1, switching resistive loads

• Rated operational current $I_e$	At 40 °C up to 690 V	A	40			50		
	At 60 °C up to 690 V	A	35			42		
• Rated power for AC loads <sup>1)</sup> P.f. = 0.95 (at 60 °C)	230 V	kW	13.3			16		
	400 V	kW	23			28		
	500 V	kW	29			35		
	690 V	kW	40			48		
• Minimum conductor cross-section for loads with $I_e$	At 40 °C	mm <sup>2</sup>	10			10		
	At 60 °C	mm <sup>2</sup>	10			10		

##### Utilization category AC-3

• Rated operational currents $I_e$	Up to 400 V	A	9	12	17	25	32	38
	440 V	A	9	12	17	22	32	35
	500 V	A	6.8	12.4	17	18	32	32
	690 V	A	6.7	9	13	13	21	21
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz	At 230 V	HP	3	3	5	7.5	10	10
	460 V	HP	5	7.5	10	15	20	25
	575 V	HP	7.5	10	15	20	25	25

<b>Thermal load capacity</b>	10 s current <sup>2)</sup>	A	80	110	150	200	260	300
------------------------------	----------------------------	---	----	-----	-----	-----	-----	-----

<b>Power loss per conducting path</b>	at $I_e$ /AC-3	W	0.4	0.5	0.9	1.6	2.7	3.8
---------------------------------------	----------------	---	-----	-----	-----	-----	-----	-----

##### Utilization category AC-4 (for $I_a = 6 \times I_e$ )

• Rated operational current $I_e$	Up to 400 V	A	8.5	12.5	15.5	15.5	22	
• Rated power for squirrel-cage motors with 50 and 60 Hz	At 400 V	kW	4	5.5	7.5	7.5	11	
• The following applies to a contact endurance of about 200000 operating cycles:								
- Rated operational currents $I_e$	Up to 400 V	A	4.1	5.5	7.7	9	12	
	690 V	A	3.3	5.5	7.7	9	12	
- Rated power for squirrel-cage motors with 50 and 60 Hz	At 110 V	kW	0.5	0.73	1	1.2	1.6	
	At 230 V	kW	1.1	1.5	2	2.5	3.4	
	400 V	kW	2	2.6	3.5	4.4	6	
	500 V	kW	2	3.3	4.6	5.6	7.5	
	690 V	kW	2.5	4.6	6	7.7	10.3	

#### Switching frequency

##### Switching frequency $z$ in operating cycles/hour

• Contactors without overload relays	No-load switching frequency AC	h <sup>-1</sup>	5000					
	No-load switching frequency DC	h <sup>-1</sup>	1500					
Dependence of the switching frequency $z'$ on the operational current $I'$ and operational voltage $U'$ : $z' = z \cdot (I_e/I') \cdot (400 V/U')^{1.5} \cdot 1/h$	AC-1 (AC/DC)	h <sup>-1</sup>	1000					
	AC-2 (AC/DC)	h <sup>-1</sup>	1000			750		
	AC-3 (AC/DC)	h <sup>-1</sup>	1000			750		
	AC-4 (AC/DC)	h <sup>-1</sup>	300			250		
• Contactors with overload relays (mean value)		h <sup>-1</sup>	15					

<sup>1)</sup> Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).


<sup>2)</sup> According to IEC 60947-4-1. For rated values for various start-up conditions see Section 3 --> "Overload Relays"



Contactors	Type	<b>3RT20 23</b>	<b>3RT20 24</b>	<b>3RT20 25</b>	<b>3RT20 26</b>	<b>3RT20 27</b>	<b>3RT20 28</b>
	Size	<b>S0</b>	<b>S0</b>	<b>S0</b>	<b>S0</b>	<b>S0</b>	<b>S0</b>
	Width mm	<b>45</b>	<b>45</b>	<b>45</b>	<b>45</b>	<b>45</b>	<b>45</b>

**Conductor cross-sections (1 or 2 conductors connectable)**

Main conductors		Screw terminals	
Conductor cross-section			
• Solid	mm <sup>2</sup>	2 x (1 ... 2.5) <sup>1)</sup> ; 2 x (2.5 ... 10) <sup>1)</sup> according to IEC 60947	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (1 ... 2.5) <sup>1)</sup> ; 2 x (2.5 ... 6) <sup>1)</sup> ; 1 x 10	
• AWG cables, solid or stranded	AWG	2 x (16 ... 12); 2 x (14 ... 8)	
• Terminal screws		M4 (Pozi driv size 2)	
- Tightening torque	Nm	2 ... 2.5 (18 ... 22 lb.in)	
Auxiliary conductors		Spring-type terminals	
• Solid	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup> according to IEC 60947	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup>	
• Solid or stranded AWG (2 x)	AWG	2 x (20 ... 16) <sup>1)</sup> ; 2 x (18 ... 14) <sup>1)</sup> ; 1 x 12	
• Terminal screws		M3	
- Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)	
Main conductors		Ring lug terminal connection	
• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5	
• Solid	mm <sup>2</sup>	2 x (1 ... 10)	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (1 ... 6)	
• Finely stranded without end sleeve	mm <sup>2</sup>	2 x (1 ... 6)	
• AWG cables, solid or stranded	AWG	2 x (18 ... 8)	
Auxiliary conductors			
• Operating devices		3.0 x 0.5; 3.5 x 0.5	
• Solid	mm <sup>2</sup>	2 x (0.5 ... 2.5)	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5)	
• Finely stranded without end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5)	
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)	
Main conductors			
• Terminal screw	mm	M4, Pozi driv size 2	
• Operating devices	mm	Ø 5 ... 6	
• Tightening torque	Nm	2 ... 2.5	
• Usable ring lug terminals	mm	d <sub>2</sub> = min. 4.3	
- DIN 46234 without insulation sleeve	mm	d <sub>3</sub> = max. 12.2	
- DIN 46225 without insulation sleeve			
- DIN 46237 with insulation sleeve			
- JIS C2805 Type R without insulation sleeve			
- JIS C2805 Type RAV with insulation sleeve			
- JIS C2805 Type RAP with insulation sleeve			
Auxiliary conductors			
• Terminal screw		M3, Pozi driv size 2	
• Operating devices	mm	Ø 5 ... 6	
• Tightening torque	Nm	0.8 ... 1.2	
• Usable ring terminal lugs	mm	d <sub>2</sub> = min. 3.2	
	mm	d <sub>3</sub> = max. 7.5	



<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified.

Contactors	Size	<b>S00</b>	<b>S0</b>	<b>S0</b>
		<b>Screw or spring-type terminals</b>	<b>Screw or spring-type terminals</b>	<b>Screw or spring-type terminals</b>
		Integrated or snap-on auxiliary switch block	1- and 4-pole snap-on auxiliary switch block	Laterally mountable auxiliary switch block

**Ⓢ and Ⓜ rated data of the auxiliary contacts**

Rated voltage		V AC	600	600	600
Switching capacity			A 600, Q 600	A 600, Q 600	A 300, Q 300
Uninterrupted current	• At 240 V AC	A	10	10	10

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS






### 3RT10.3. contactors

#### Technical data

Contactor	Size Type	S2 3RT10 34	S2 3RT10 35	S2 3RT10 36
-----------	-----------	----------------	----------------	----------------

#### General data

<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.	AC and DC operation			For DC operation and forward inclination up to 22.5°: coil voltage tolerance 0.85 ... 1.1 × U <sub>s</sub>
---	---------------------	---	---	--

Upright mounting position:	AC and DC operation		Special design required. Positions 13 to 16 of the Order No. must be changed to <b>-1AA0</b> . Additional charge.	
----------------------------	---------------------	---	---	--

<b>Mechanical endurance</b>	Basic units Basic unit with snap-on auxiliary switch block Solid-state compatible aux. switch block	Oper. cycles	10 million 10 million 5 million
-----------------------------	---	--------------	---------------------------------------

<b>Electrical endurance</b>	See page 2/110.		
-----------------------------	-----------------	--	--

<b>Rated insulation voltage U<sub>i</sub></b> (pollution degree 3)	V	690
--	---	-----

<b>Rated impulse withstand voltage U<sub>imp</sub></b>	kV	6
--	----	---

<b>Safe isolation</b> between coil and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	400
--	---	-----

<b>Positively driven operation</b> There is positively driven operation if the NC and NO contacts cannot be closed at the same time	3RT10 3., 3RT13 3. (removable aux. switch block)	Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)
	3RT10 3., 3RT13 3. (permanent aux. switch block)	in accordance with Swiss regulations (SUVA) on request.

<b>Permissible ambient temperature</b>	in operation °C	-25 ... +60
	when stored °C	-55 ... +80

<b>Degree of protection</b> acc. to IEC 60 947-1 and DIN 40 050	IP 20 (terminal compartment IP 00), coil system IP 40	
---	---	--

<b>Shock resistance</b>	Rectangular pulse AC and DC operation	g/ms	10/5 and 5/10
	Sine pulse AC and DC operation	g/ms	15/5 and 8/10

<b>Conductor cross-sections</b>	See page 2/125.		
---------------------------------	-----------------	--	--

<b>Short-circuit protection of contactors without overload relays</b>	For short-circuit protection of contactors with overload relays, see Section 3. For short-circuit protection of weld-free contactors, see Section 4. (overload and short-circuit protection only with 3RV10 circuit-breaker). For short-circuit protection of fuseless load feeders, see Section 4.		
---	---	--	--

<b>Main circuit</b> Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – acc. to IEC 60 947-4-1/EN 60 947-4-1	Type of coord. "1" 1) Type of coord. "2" 1)	A A	125 63	160 80
--	--	--------	-----------	-----------

<b>Auxiliary circuit</b> Fuse links, utilization category gL/gG DIAZED Type 5SB, NEOZED Type 5SE (weld-free protection at I <sub>k</sub> ≥ 1 kA) or miniature circuit-breaker with C-characteristic (short-circuit current I <sub>k</sub> < 400 A)	A A	10 10
---	--------	----------

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relays permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.



Technical data

Contactor	Size Type	S2 3RT10 34	S2 3RT10 35	S2 3RT10 36
<b>Control circuit</b>				
<b>Coil voltage tolerance</b>		AC/DC		
		0.8 ... 1.1 × U <sub>s</sub>		
<b>Power consumption of the coils</b> (with coil in cold state and 1.0 × U <sub>s</sub> )		<b>Standard design</b>		
AC operation		Hz	50	50/60
	Closing	VA	104	127 /113
	p.f.		0.78	0.73/ 0.69
	Closed p.f.	VA	9.7	11.3 / 9.5
			0.42	0.41/ 0.42
			0.36	0.35/ 0.38
<b>For USA and Canada</b>				
		Hz	50	60
	Closing	VA	108	120
	p.f.		0.76	0.7
	Closed p.f.	VA	9.6	10.1
			0.42	0.42
DC operation	closing = closed	W	13.3	13.3
<b>Permissible residual current of the electronics</b> (with 0 signal)				
	AC operation	$< 12 \text{ mA} \times \left(\frac{230 \text{ V}}{U_s}\right)$		$< 18 \text{ mA} \times \left(\frac{230 \text{ V}}{U_s}\right)$
	DC operation	$< 38 \text{ mA} \times \left(\frac{24 \text{ V}}{U_s}\right)$		$< 38 \text{ mA} \times \left(\frac{24 \text{ V}}{U_s}\right)$
<b>Operating times at 0.8 ... 1.1 × U<sub>s</sub> 1)</b>		Break-time = opening time + arcing time		
AC operation	closing time	ms	11 ... 30	10 ... 24
	opening time	ms	7 ... 10	7 ... 10
DC operation	closing time	ms	50 ... 95	60 ... 100
	opening time	ms	20 ... 30	20 ... 25
Arcing time		ms	10	10
<b>Operating times at 1.0 × U<sub>s</sub> 1)</b>				
AC operation	closing time	ms	13 ... 22	12 ... 20
	opening time	ms	7 ... 10	7 ... 10
DC operation	closing time	ms	60 ... 75	70 ... 85
	opening time	ms	20 ... 30	20 ... 25

Main circuit

Load ratings with AC

AC-1 utilization category, switching resistive load

Rated operational currents I <sub>e</sub>	at 40 °C up to 690 V	A	50	60	55
	at 60 °C up to 690 V	A	45	55	50
Ratings of three-phase loads <sup>2)</sup> p.f. = 0.95 (at 60 °C)	at 230 V	kW	18	22	20
	400 V	kW	31	38	35
	500 V	kW	39	46	43
	690 V	kW	54	66	60
Minimum conductor cross-section with I <sub>e load</sub>	at 40 °C	mm <sup>2</sup>	16	16	16
	60 °C	mm <sup>2</sup>	10	16	10

AC-2 and AC-3 utilization categories

Rated operational currents I <sub>e</sub>	up to 400 V	A	32	40	50
	500 V	A	32	40	50
	690 V	A	20	24	24
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	7.5	11	15
	400 V	kW	15	18.5	22
	500 V	kW	18.5	22	30
	690 V	kW	18.5	22	22

<b>Thermal loading capacity</b>	10 s current <sup>3)</sup>	A	320	400	400
<b>Power loss per conducting path</b>	at I <sub>e</sub> /AC-3	W	1.8	2.6	5

1) The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks (varistor +2 ms to 5 ms, diode assemblies 2 to 6 times).

2) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

3) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.3. contactors

#### Technical data

Contactor	Size Type		S2 3RT10 34		S2 3RT10 35		S2 3RT10 36		
<b>Main circuit</b>									
<b>Load ratings with AC</b>									
<b>AC-4 utilization category</b> (at $I_a = 6 \times I_e$ )									
Rated operational current $I_e$		up to 400 V	A	29	35	41			
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 400 V	kW	15	18.5	22			
• For a contact endurance of approx. 200 000 operating cycles:									
Rated operational currents $I_e$		up to 400 V	A	15.6	18.5	24			
		690 V	A	15.6	18.5	24			
Ratings of squirrel-cage motors at 50 Hz and 60 Hz		at 230 V	kW	4.7	5.4	7.3			
		400 V	kW	8.2	9.5	12.6			
		500 V	kW	9.8	11.8	15.8			
		690 V	kW	13	15.5	21.8			
<b>AC-5a utilization category, switching gas discharge lamps</b> per main conducting path at 230 V									
	Rating per lamp	Rated operational current per lamp (A)							
	uncorrected								
	L 18 W	0.37	Units	122	149	135			
	L 36 W	0.43	Units	105	128	116			
	L 58 W	0.67	Units	67	82	75			
	lead-lag								
	L 18 W	0.11	Units	409	500	454			
	L 36 W	0.21	Units	214	262	238			
	L 58 W	0.32	Units	141	172	156			
<b>Switching gas discharge lamps with correction, electronic ballast</b> per main conducting path at 230 V									
Rating per lamp	Capacitor (µF)	Rated operational current per lamp (A)							
Parallel correction									
L 18 W	4.5	0.11	Units	78	98	123			
L 36 W	4.5	0.21	Units	78	98	123			
L 58 W	7	0.32	Units	50	63	79			
With electronic ballast, single lamp									
L 18 W	6.8	0.10	Units	224	280	350			
L 36 W	6.8	0.18	Units	124	155	194			
L 58 W	10	0.27	Units	83	104	129			
With electronic ballast, twin lamp									
L 18 W	10	0.18	Units	124	155	194			
L 36 W	10	0.35	Units	64	80	100			
L 58 W	22	0.52	Units	43	54	67			
<b>AC-5b utilization category, switching incandescent lamps</b> per main conducting path at 230/220 V									
			kW	5.8	7.3	9.1			
<b>AC-6a utilization category, switching three-phase transformers</b> with inrush									
Rated operational current $I_e$		up to 400 V	A	30	20	30	20	30	20
Ratings of three-phase transformers with an inrush of $n = 30$ or $20$ . The ratings must be re-calculated for other inrush factors $x$ :		at 230 V	kVA	8.2	12.3	9.7	14.5	11.5	17.2
		400 V	kVA	14.3	21.5	16.8	25.3	20	29.9
		500 V	kVA	17.9	26.8	21	31.6	24.9	37.4
		690 V	kVA	23.9	23.9	28.7	28.7	28.7	28.7
$P_x = P_{n30} \cdot \frac{30}{x}$									
<b>AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors</b> Ambient temperature 40 °C									
Rated operational currents $I_e$		up to 400 V	A	29	36	36			
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 20 µH) at 50 Hz, 60 Hz and		at 230 V	kvar	12	15	15			
		400 V	kvar	20	25	25			
		525 V	kvar	25	33	33			
		690 V	kvar	20	25	25			



Technical data

Contactor	Size Type	<b>S2</b> <b>3RT10 34</b>	<b>S2</b> <b>3RT10 35</b>	<b>S2</b> <b>3RT10 36</b>
-----------	-----------	------------------------------	------------------------------	------------------------------

Main circuit

Load ratings with DC

DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)

Rated operational current  $I_e$  (at 60 °C)

Number of conducting paths connected in series

	1	2	3	1	2	3	1	2	3
up to 24 V A	45	45	45	55	55	55	50	50	50
60 V A	20	45	45	23	45	45	23	45	45
110 V A	4.5	45	45	4.5	45	45	4.5	45	45
220 V A	1	5	45	1	5	45	1	5	45
440 V A	0.4	1	2.9	0.4	1	2.9	0.4	1	2.9
600 V A	0.25	0.8	1.4	0.25	0.8	1.4	0.25	0.8	1.4

DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)

Rated operational current  $I_e$  (at 60 °C)

Number of conducting paths connected in series

	1	2	3	1	2	3	1	2	3
up to 24 V A	35	45	45	35	55	55	35	50	50
60 V A	6	45	45	6	45	55	6	45	50
110 V A	2.5	25	45	2.5	25	55	2.5	25	50
220 V A	1	5	25	1	5	25	1	5	25
440 V A	0.1	0.27	0.6	0.1	0.27	0.6	0.1	0.27	0.6
600 V A	0.06	0.16	0.35	0.06	0.16	0.35	0.06	0.16	0.35

Operating frequency

Operating frequency  $z$  in operating cycles per hour

Contactor without overload relays	No-load operating frequency	1/h	AC		DC		AC		DC	
			5000	1500	5000	1500	5000	1500		
Dependence of the operating frequency $z'$ on the operational current $I'$ and the operational voltage $U'$ :	for AC-1	1/h	AC/DC		AC/DC		AC/DC		AC/DC	
	for AC-2	1/h	1200	750	1200	600	1000	400	1000	400
	for AC-3	1/h	1000	250	1000	300	800	300	800	300
	for AC-4	1/h	250		300		300		300	
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 V}{U'}\right)^{1.5}$		1/h	15		15		15		15	
Contactor with overload relays (mean value)		1/h	15		15		15		15	

Contactor	Size Type	<b>S2</b> <b>3RT10 3.</b>
-----------	-----------	------------------------------

Conductor cross-sections

Screw connections (1 or 2 conductor connections possible)	Main conductor: With box terminal		Front terminal connected	Back terminal connected	Both terminals connected
	Finely stranded with end sleeve	mm <sup>2</sup>	0.75 ... 25	0.75 ... 25	max. 2 × 16
	Finely stranded without end sleeve	mm <sup>2</sup>	0.75 ... 25	0.75 ... 25	max. 2 × 16
	Stranded	mm <sup>2</sup>	0.75 ... 35	0.75 ... 35	max. 2 × 25
	Solid	mm <sup>2</sup>	0.75 ... 16	0.75 ... 16	max. 2 × 16
	Ribbon cable (qty. × width × thickness)	mm	6 × 9 × 0.8	6 × 9 × 0.8	2 × (6 × 9 × 0.8)
	AWG conductor connections, solid or stranded	AWG	18 ... 2	18 ... 2	2 × (18 ... 2)
	- Terminal screws		M 6 (Pozidriv size 2)		
	- Tightening torque	Nm	3 ... 4.5 (27 ... 40 lb.in)		
	<b>Auxiliary conductor:</b>				
	Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)		
	Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)		
	AWG conductor connections, solid or stranded	AWG	2 × (20 ... 16); 2 × (18 ... 14); 1 × 12		
	- Terminal screws		M 3		
	- Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)		
<b>Cage Clamp connections</b> (1 or 2 conductor connections possible)	<b>Auxiliary conductor:</b>				
	Solid	mm <sup>2</sup>	2 × (0.25 ... 2.5)		
	Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.25 ... 1.5)		
	Finely stranded without end sleeve	mm <sup>2</sup>	2 × (0.25 ... 2.5)		
	AWG conductor connections, solid or stranded	AWG	2 × (24 ... 14)		

- For tool for opening the Cage Clamp connection, see on accessories [page 2/76](#)
- An "insulation stop" must be used for conductor cross-sections ≤ 1 mm<sup>2</sup>, see accessories on [page 2/76](#).
- Max. outer diameter of conductor insulation: 3.6 mm.
- For information about Cage Clamp connections, see Appendix page 19/17.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.4. contactors

#### Technical data

Contactor	Size Type		S3 3RT10 44	S3 3RT10 45	S3 3RT10 46
<b>General data</b>					
<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.		AC and DC operation			For DC operation and forward inclination up to 22.5°: coil voltage tolerance 0.85 ... 1.1 x U <sub>e</sub>
Upright mounting position:		AC and DC operation	 Special design required. Positions 13 to 16 of the Order No. must be changed to <b>-1AA0</b> . Additional charge.		
<b>Mechanical endurance</b>	Basic units Basic unit with snap-on auxiliary switch block Solid-state compatible aux. switch block	Oper. cycles	10 million 10 million 5 million		
<b>Electrical endurance</b>			See page 2/110.		
<b>Rated insulation voltage U<sub>i</sub></b> (pollution degree 3)		V	1000		
<b>Rated impulse withstand voltage U<sub>imp</sub></b>		kV	6		
<b>Safe isolation</b> between coil and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])		V	690		
<b>Positively driven operation</b> There is positively driven operation if the NC and NO contacts cannot be closed at the same time		3RT10 4., 3RT13 4., 3RT14 4. (removable aux. switch block)  3RT10 4., 3RT13 4., 3RT14 4. (permanent aux. switch block)	Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC) in accordance with Swiss regulations (SUVA) on request.		
<b>Permissible ambient temperature</b>		in operation °C when stored °C	-25 ... +60 -55 ... +80		
<b>Degree of protection</b> acc. to IEC 60 947-1 and DIN 40 050			IP 20 (terminal compartment IP 00), coil system IP 40		
<b>Shock resistance</b>		Rectangular pulse AC and DC operation g/ms Sine pulse AC and DC operation g/ms	6.8/5 and 4/10 10.6/5 and 6.2/10		
<b>Conductor cross-sections</b>			See page 2/129.		
<b>Short-circuit protection of contactors without overload relays</b>			For short-circuit protection of contactors with overload relays, see Section 3. For short-circuit protection of fuseless load feeders, see Section 4.		
<b>Main circuit</b> Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE – acc. to IEC 60 947-4/ EN 60 947-4-4 (VDE 0660 Part 102)			Type of coord. "1" 1) A Type of coord. "2" 1) A Weld-free 2) A	250 125 63	250 160 100
<b>Auxiliary circuit</b> Fuse links, utilization category gL/gG DIAZED Type 5SB, NEOZED Type 5SE (weld-free protection at I <sub>k</sub> ≥ 1 kA) or miniature circuit-breaker with C-characteristic (short-circuit current I <sub>k</sub> < 400 A)			A A A	10 10	

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if

2) Test conditions acc. to IEC 60 947-4-1.





### Technical data

Contactor	Size Type	S3 3RT10 44	S3 3RT10 45	S3 3RT10 46
<b>Control circuit</b>				
<b>Coil voltage tolerance</b>		AC/DC		
		0.8 to 1.1 × U <sub>s</sub>		
<b>Power consumption of the coils</b> (with coil in cold state and 1.0 × U <sub>s</sub> )		<b>Standard design</b>		
AC operation		Hz	50	50/60
	Closing	VA	218	247 / 211
	p.f.		0.61	0.62/ 0.57
	Closed	VA	21	25 / 18
	p.f.		0.26	0.27/ 0.3
			0.68	0.7/ 0.62
			22	27 / 20
			0.27	0.29/ 0.31
		<b>For USA and Canada</b>		
		Hz	50	60
	Closing	VA	218	232
	p.f.		0.61	0.55
	Closed	VA	21	20
	p.f.		0.26	0.28
			0.68	0.52
			22	21
			0.27	0.29
DC operation	closing = closed	W	15	15
<b>Permissible residual current of the electronics</b> (with 0 signal)				
	AC operation	mA	$< 25 \text{ mA} \times \left( \frac{230 \text{ V}}{U_s} \right)$	
	DC operation	mA	$< 43 \text{ mA} \times \left( \frac{24 \text{ V}}{U_s} \right)$	
<b>Operating times at 0.8 to 1.1 × U<sub>s</sub> 1)</b>		Break-time = opening time + arcing time		
AC operation	closing time	ms	16 ... 57	17 ... 90
	opening time	ms	10 ... 19	10 ... 25
DC operation	closing time	ms	90 ... 230	90 ... 230
	opening time	ms	14 ... 20	14 ... 20
Arcing time		ms	10 ... 15	10 ... 15
<b>Operating times at 1.0 × U<sub>s</sub> 1)</b>				
AC operation	closing time	ms	18 ... 34	18 ... 30
	opening time	ms	11 ... 18	11 ... 23
DC operation	closing time	ms	100 ... 120	100 ... 120
	opening time	ms	16 ... 20	16 ... 20

### Main circuit

#### Load ratings with AC

<b>AC-1 utilization category, switching resistive load</b>					
Rated operational currents I <sub>e</sub>	at 40 °C up to 690 V	A	100	120	120
	1000 V	A	50	60	70
	at 60 °C up to 690 V	A	90	100	100
	1000 V	A	40	50	60
Ratings of three-phase loads 2) p.f. = 0.95 (at 60 °C)	at 230 V	kW	34	38	38
	400 V	kW	59	66	66
	500 V	kW	74	82	82
	690 V	kW	102	114	114
	1000 V	kW	66	82	98
Minimum conductor cross-section with I <sub>e load</sub>	at 40 °C	mm <sup>2</sup>	35	50	50
	60 °C	mm <sup>2</sup>	35	35	35
<b>AC-2 and AC-3 utilization categories</b>					
Rated operational currents I <sub>e</sub>	up to 400 V	A	65	80	95
	500 V	A	65	80	95
	690 V	A	47	58	58
	1000 V	A	25	30	30
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	18.5	22	22
	400 V	kW	30	37	45
	500 V	kW	37	45	55
	690 V	kW	55	55	55
	1000 V	kW	30	37	37
<b>Thermal loading capacity</b>	10 s current 3)	A	600	760	760
<b>Power loss per conducting path</b>	at I <sub>e</sub> /AC-3	W	4.6	7.7	10.8

1) The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks (varistor +2 ms to 5 ms, diode assem-

2) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

3) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.4. contactors

#### Technical data

Contactor	Size Type	S3 3RT10 44	S3 3RT10 45	S3 3RT10 46
-----------	-----------	----------------	----------------	----------------

#### Main circuit

##### Load ratings with AC

##### AC-4 utilization category (at $I_a = 6 \times I_e$ )

Rated operational current $I_e$	up to 400 V	A	55	66	80
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	30	37	45
• For a contact endurance of approx. 200 000 operating cycles:					
Rated operational currents $I_e$	up to 400 V	A	28	34	42
	690 V	A	28	34	42
	1000 V	A	20	23	23
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	8.7	10.4	12
	400 V	kW	15.1	17.9	22
	500 V	kW	18.4	22.4	27
	690 V	kW	25.4	30.9	38
	1000 V	kW	22	30	30

##### AC-5a utilization category, switching gas discharge lamps

per main conducting path at 230 V

Rating per lamp	Rated operational current per lamp (A)				
uncorrected					
L 18 W	0.37	Units	243	270	
L 36 W	0.43	Units	209	232	
L 58 W	0.67	Units	134	149	
lead-lag					
L 18 W	0.11	Units	818	909	
L 36 W	0.21	Units	428	476	
L 58 W	0.32	Units	281	312	

##### Switching gas discharge lamps with correction, electronic ballast

per main conducting path at 230 V

Rating per lamp	Capacitor (μF)	Rated operational current per lamp (A)				
Parallel correction						
L 18 W	4.5	0.11	Units	160	197	234
L 36 W	4.5	0.21	Units	160	197	234
L 58 W	7	0.32	Units	103	127	150
With electronic ballast, single lamp						
L 18 W	6.8	0.10	Units	455	560	665
L 36 W	6.8	0.18	Units	253	311	369
L 58 W	10	0.27	Units	168	207	246
With electronic ballast, twin lamp						
L 18 W	10	0.18	Units	253	311	369
L 36 W	10	0.35	Units	130	160	190
L 58 W	22	0.52	Units	88	108	128

##### AC-5b utilization category, switching incandescent lamps

per main conducting path at 230/220 V

	kW	9	14.6	17.3
--	----	---	------	------

##### AC-6a utilization category, switching three-phase transformers

with inrush

Rated operational current $I_e$	up to 400 V	A	30	20	30	20	30	20
	690 V	A	42.3	63.5	56.3	80	56.3	84.4
			42.3	47	56.3	58	56.3	58
Ratings of three-phase transformers with an inrush of $n = 30$ or $20$ .	at 230 V	kVA	16.8	25.3	22.4	31.9	22.4	33.6
The ratings must be re-calculated for other inrush factors $x$ :	400 V	kVA	29.3	43.9	39	55.4	39	58
	500 V	kVA	36.6	54.9	48.7	69.3	48.7	73.1
	690 V	kVA	50.3	56.2	67.3	69.3	67.3	69.3

$$P_x = P_{n30} \cdot \frac{30}{x}$$

##### AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors

Ambient temperature 40 °C

Rated operational currents $I_e$	up to 400 V	A	57	72
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μH) at 50 Hz, 60 Hz and	at 230 V	kvar	24	29
	400 V	kvar	40	50
	525 V	kvar	50	65
	690 V	kvar	40	50



Technical data

Contactor	Size Type	<b>S3</b> <b>3RT10 44</b>	<b>S3</b> <b>3RT10 45</b>	<b>S3</b> <b>3RT10 46</b>
-----------	-----------	------------------------------	------------------------------	------------------------------

Main circuit

Load ratings with DC

DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)

Rated operational current  $I_e$  (at 60 °C)

Number of conducting paths connected in series

up to 24 V A

60 V A

110 V A

220 V A

440 V A

600 V A

	1	2	3	1	2	3	1	2	3
90	90	90	90	100	100	100	100	100	100
23	90	90	90	60	100	100	60	100	100
4.5	90	90	90	9	100	100	9	100	100
1	5	70	2	10	80	2	10	80	80
0.4	1	2.9	0.6	1.8	1.8	0.6	1.8	1.8	4.5
0.26	0.8	1.4	0.4	1	1	0.4	1	1	2.6

DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)

Rated operational current  $I_e$  (at 60 °C)

Number of conducting paths connected in series

up to 24 V A

60 V A

110 V A

220 V A

440 V A

600 V A

	1	2	3	1	2	3	1	2	3
40	90	90	90	40	100	100	40	100	100
6	90	90	90	6.5	100	100	6.5	100	100
2.5	90	90	90	2.5	100	100	2.5	100	100
1	7	35	1	7	35	1	7	35	35
0.15	0.42	0.8	0.15	0.42	0.8	0.15	0.42	0.8	0.8
0.06	0.16	0.35	0.06	0.16	0.35	0.06	0.16	0.35	0.35

Operating frequency

Operating frequency  $z$  in operating cycles per hour

Contactor without overload relays

No-load operating frequency

AC	DC	AC	DC	AC	DC
5000	1000	5000	1000	5000	1000

Dependence of the operating frequency  $z'$  on the operational current  $I'$  and the operational voltage  $U'$ :

$$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$$

for AC-1 1/h  
for AC-2 1/h  
for AC-3 1/h  
for AC-4 1/h

AC/DC	AC/DC	AC/DC
1000	900	900
400	400	350
1000	1000	850
300	300	250

Contactor with overload relays (mean value)

15	15	15
----	----	----

Contactor	Size Type	<b>S3</b> <b>3RT10 4.</b>
-----------	-----------	------------------------------

Conductor cross-sections

Screw connections (1 or 2 conductor connections possible)

Main conductor: With box terminal

Finely stranded with end sleeve mm<sup>2</sup>  
 Finely stranded without end sleeve mm<sup>2</sup>  
 Solid mm<sup>2</sup>  
 Stranded mm<sup>2</sup>  
 Ribbon cable (qty. × width × thickness) mm  
 AWG conductor connections, solid and stranded AWG  
 – Terminal screws  
 – Tightening torque Nm

Front terminal connected	Back terminal connected	Both terminals connected
2.5 ... 35 4 ... 50 2.5 ... 16 4 ... 70 6 × 9 × 0.8	2.5 ... 50 10 ... 50 2.5 ... 16 10 ... 70 6 × 9 × 0.8	max. 2 × 35 max. 2 × 35 max. 2 × 16 max. 2 × 50 2 × (6 × 9 × 0.8)
10 ... 2/0	10 ... 2/0	2 × (10 ... 1/0)

Connection for drilled copper bars

max. width

M 6 (hexagon socket)  
 4 ... 6 (36 ... 53 lb.in)  
 10  
 If bars larger than 12 × 10 mm are connected, a 3RT19 46-4EA1 terminal cover is to comply with the phase clearance.  
 If conductors larger than 25 mm<sup>2</sup> are connected, a 3RT19 46-4EA1 terminal cover is needed to comply with the phase clearance.

Without box terminal With cable lugs (1 or 2 conductor connections possible)

Finely stranded with cable lug mm<sup>2</sup>  
 Stranded with cable lug mm<sup>2</sup>  
 AWG conductor connections, solid or stranded

Auxiliary conductor:

Solid mm<sup>2</sup>  
 Finely stranded with end sleeve mm<sup>2</sup>  
 AWG conductor connections, solid or stranded AWG  
 – Terminal screws  
 – Tightening torque Nm

2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)  
 2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)  
 2 × (20 ... 16); 2 × (18 ... 14); 1 × 12  
 M 3  
 0.8 ... 1.2 (7 ... 10.3 lb.in)

Cage Clamp connections (1 or 2 conductor connections possible)

Auxiliary conductor: Solid mm<sup>2</sup>  
 Finely stranded with end sleeve mm<sup>2</sup>  
 Finely stranded without end sleeve mm<sup>2</sup>  
 AWG conductor connections, solid or stranded AWG

2 × (0.25 ... 2.5)  
 2 × (0.25 ... 1.5)  
 2 × (0.25 ... 2.5)  
 2 × (24 ... 14)

- For tool for opening the Cage Clamp connection, see on accessories page 2/76
  - An "insulation stop" must be used for conductor cross-sections ≤ 1 mm<sup>2</sup>, see accessories on page 2/76.
  - Max. outer diameter of conductor insulation: 3.6 mm.
  - For information about Cage Clamp connections, see Appendix page 19/17.
- 1) Only crimping cable lugs acc. to DIN 46 234

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.5. contactors

#### Technical data

Contactor	Size Type	S6 3RT10 54	S6 3RT10 55	S6 3RT10 56
-----------	-----------	----------------	----------------	----------------

#### General data

<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.				
<b>Mechanical endurance</b>	Oper. cycles	10 million		
<b>Electrical endurance</b>		See page 2/110		
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	1000		
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	8		
<b>Safe isolation</b> between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690		
<b>Positively driven operation</b> There is positively driven operation if the NC and NO contacts cannot be closed at the same time		Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)		
<b>Permissible ambient temperature</b>	in operation °C when stored °C	-25 ... +60/+55 with AS-Interface -55 ... +80		
<b>Degree of protection</b> acc. to IEC 60 947-1 and DIN 40 050		IP 00/open type, coil system IP 20		
<b>Shock resistance</b>	Rectangular pulse g/ms Sine pulse g/ms	8.5/5 and 4.2/10 13.4/5 and 6.5/10		
<b>Conductor cross-sections</b>		See page 2/132		
<b>Electromagnetic compatibility (EMC)</b>		See page 2/93		

#### Short-circuit protection of contactors without overload relays

<b>Main circuit</b> Fuse links, utilization category gL/gG NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE - acc. to IEC 60 947-4-1/EN 60 947-4-1		Type of coord. "1" 1) A Type of coord. "2" 1) A Weld-free 2) A	355 315 80	355 315 160
<b>Auxiliary circuit</b> Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1$ kA) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ( $I_k < 400$ A)	A		10	

Contactor	Size Type	S6 3RT10 5.
-----------	-----------	----------------

#### Control circuit

<b>Coil voltage tolerance</b>	AC/DC (UC)	$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$			
<b>Power consumption of solenoid mechanism</b> (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$ )		Conventional op. mechanism		Solid-state op. mechanism	
		$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	Closing p.f.	250	300	190	280
	VA	0.9	0.9	0.8	0.8
	Closed p.f.	4.8	5.8	3.5	4.4
	VA	0.8	0.8	0.5	0.4
DC operation	Closing	300	360	250	320
	W	4.3	5.2	2.3	2.8
<b>PLC control input</b> (EN 61 131-2/Type 2)		DC 24 V/≤ 30 mA			
<b>Operating times</b> (Break-time = opening time + arcing time)		Conventional op. mechanism		Solid-state op. mechanism Operation via A1/A2	
					PLC input
- at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	20 ... 95		95 ... 135	35 ... 75
	opening time	40 ... 60		80 ... 90	80 ... 90
- at $U_{s \min} \dots U_{s \max}$	closing time	25 ... 50		100 ... 120	40 ... 60
	opening time	40 ... 60		80 ... 90	80 ... 90
Arcing time		10 ... 15		10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



**Technical data**

Contactor	Size Type	S6 3RT10 54	S6 3RT10 55	S6 3RT10 56
-----------	-----------	-------------	-------------	-------------

**Main circuit**

**Load ratings with AC**

**AC-1 utilization category, switching resistive load**

Rated operational currents $I_e$	at 40 °C up to 690 V	A	160	185	215
	at 60 °C up to 690 V	A	140	160	185
	at 60 °C up to 1000 V	A	80	90	100
Ratings of three-phase loads <sup>1)</sup> p.f. = 0.95 (at 60 °C)	at 230 V	kW	53	60	70
	400 V	kW	92	105	121
	500 V	kW	115	131	152
	690 V	kW	159	181	210
	1000 V	kW	131	148	165
Minimum conductor cross-section with $I_{e \text{ load}}$	at 40 °C	mm <sup>2</sup>	70	95	95
	60 °C	mm <sup>2</sup>	50	70	95

**AC-2 and AC-3 utilization categories**

Rated operational currents $I_e$	up to 500 V	A	115	150	185
	690 V	A	115	150	170
	1000 V	A	53	65	65
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	37	50	61
	400 V	kW	64	84	104
	500 V	kW	81	105	132
	690 V	kW	113	146	167
	1000 V	kW	75	90	90

**Thermal loading capacity**

10 s current <sup>2)</sup>	A	1100	1300	1480
----------------------------	---	------	------	------

**Power loss per conducting path**

at $I_e/AC-3/500$ V	W	7	9	13
---------------------	---	---	---	----

**AC-4 utilization category (at  $I_a = 6 \times I_e$ )**

Rated operational current $I_e$	up to 400 V	A	97	132	160
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	55	75	90

• For a contact endurance of approx. 200 000 operating cycles:

Rated operational currents $I_e$	up to 500 V	A	54	68	81
	690 V	A	48	57	65
	1000 V	A	34	38	42
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	16	20	25
	400 V	kW	29	38	45
	500 V	kW	37	47	57
	690 V	kW	48	55	65
	1000 V	kW	49	55	60

**AC-6a utilization category, switching three-phase transformers**

with inrush	n	30	20	30	20	30	20	
Rated operational current $I_e$	up to 690 V	A	90	115	99	148	99	148
Ratings of three-phase transformers with an inrush of n = 30 or 20. The ratings must be re-calculated for other inrush factors x:	at 230 V	kVA	35	45	39	58	39	58
	400 V	kVA	62	79	68	102	68	102
	500 V	kVA	77	99	85	128	85	128
	690 V	kVA	107	137	118	176	118	176
	1000 V	kVA	80	80	98	98	117	117

$$P_x = P_{n,30} \cdot \frac{30}{x}$$

**AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors**

Ambient temperature 40 °C

Rated operational currents $I_e$	up to 500 V	A	105	125	145
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 µH) at 50 Hz, 60 Hz and	at 230 V	kvar	42	50	58
	400 V	kvar	72	86	100
	500 V	kvar	90	108	125
	690 V	kvar	72	86	100

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### Technical data

Contactors	Size Type	<b>S6</b> <b>3RT10 54</b>	<b>S6</b> <b>3RT10 55</b>	<b>S6</b> <b>3RT10 56</b>
------------	-----------	------------------------------	------------------------------	------------------------------

### Main circuit

#### Load ratings with DC

<b>DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)</b>				
<b>Rated operational current <math>I_e</math></b> (at 60 °C)				
Number of conducting paths connected in series		1	2	3
up to 24 V	A	160	160	160
60 V	A	160	160	160
110 V	A	18	160	160
220 V	A	3.4	20	160
440 V	A	0.8	3.2	1.4
600 V	A	0.5	1.6	0.75
<b>DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)</b>				
<b>Rated operational current <math>I_e</math></b> (at 60 °C)				
Number of conducting paths connected in series		1	2	3
up to 24 V	A	160	160	160
60 V	A	7.5	160	160
110 V	A	2.5	160	160
220 V	A	0.6	2.5	160
440 V	A	0.17	0.65	11.5
600 V	A	0.12	0.37	4

#### Operating frequency

<b>Operating frequency <math>z</math></b> in operating cycles per hour				
Contactors without overload relays	No-load operating frequency	1/h	2000	2000
Dependence of the operating frequency $z'$ on the operational current $I'$ and the operational voltage $U'$ :	for AC-1	1/h	800	800
	for AC-2	1/h	400	300
	for AC-3	1/h	1000	750
	for AC-4	1/h	130	130
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 V}{U'}\right)^{1.5}$ 1/h				
Contactors with overload relays (mean value)		1/h	60	60

Contactors	Size Type	<b>S6</b> <b>3RT10 5.</b>
------------	-----------	------------------------------

### Conductor cross-sections

<b>Screw connections</b>	<b>Main conductor:</b> with 3RT19 55-4G box terminal (75 HP)		Front terminal connected	Back terminal connected	Both terminals connected
	finely stranded with end sleeve	mm <sup>2</sup>	16 ... 70	16 ... 70	max. 1 × 50, 1 × 70
	Finely stranded without end sleeve	mm <sup>2</sup>	16 ... 70	16 ... 70	max. 1 × 50, 1 × 70
	Stranded	mm <sup>2</sup>	16 ... 70	16 ... 70	max. 2 × 70
	AWG conductor connections, solid/stranded		6 ... 2/0	6 ... 2/0	max. 2 × 1/0
	Ribbon cable (qty. x width x thickness)	mm	min. 3 × 9 × 0.8	min. 3 × 9 × 0.8	
		mm	max. 6 × 15.5 × 0.8	max. 6 × 15.5 × 0.8	max. 2 × (6 × 15.5 × 0.8)
	with 3RT19 56-4G box terminal				
	Finely stranded with end sleeve	mm <sup>2</sup>	16 ... 120	16 ... 120	max. 1 × 95, 1 × 120
	Finely stranded without end sleeve	mm <sup>2</sup>	16 ... 120	16 ... 120	max. 1 × 95, 1 × 120
Stranded	mm <sup>2</sup>	16 ... 120	16 ... 120	max. 2 × 120	
AWG conductor connections, solid/stranded		6 ... 250 kcmil	6 ... 250 kcmil	max. 2 × 3/0	
Ribbon cable (qty. x width x thickness)	mm	min. 3 × 9 × 0.8	min. 3 × 9 × 0.8		
	mm	max. 10 × 15.5 × 0.8	max. 10 × 15.5 × 0.8	max. 2 × (10 × 15.5 × 0.8)	
- Terminal screws		M 10 (hexagon socket, A/F4)			
- Tightening torque	Nm	10 ... 12 (90 ... 110 lb.in)			
Without box terminal/busbar connection					
Finely stranded with cable lug	mm <sup>2</sup>	16 ... 95	If cable lugs acc. to DIN 46 235 are connected, as of a conductor cross-section of 95 mm <sup>2</sup> a 3RT19 56-4EA1 terminal cover is necessary to comply with the phase clearance.		
Stranded with cable lug	mm <sup>2</sup>	25 ... 120			
AWG conductor connections, solid or stranded	AWG	4 ... 250 kcmil			
Connecting bar (max. width)	mm	17			
- Terminal screws		M 8 × 25 (A/F 13)			
- Tightening torque	Nm	10 ... 14 (89 ... 124 lb.in)			
<b>Auxiliary conductor:</b>					
Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)			
Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)			
AWG conductor connections, solid or stranded	AWG	2 × (18 ... 14)			
- Terminal screws		M 3 (PZ 2)			
- Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)			




**Technical data**

Contactor	Size Type	<b>S10</b> <b>3RT10 64</b>	<b>S10</b> <b>3RT10 65</b>	<b>S10</b> <b>3RT10 66</b>
-----------	-----------	-------------------------------	-------------------------------	-------------------------------

**General data**

**Permissible mounting position**

The contactors are designed for operation on a vertical mounting surface.



**Mechanical endurance**

Oper. cycles 10 million

**Electrical endurance**

See page 2/110

**Rated insulation voltage  $U_i$**  (pollution degree 3)

V 1000

**Rated impulse withstand voltage  $U_{imp}$**

kV 8

**Safe isolation** between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])

V 690

**Positively driven operation**

There is positively driven operation if the NC and NO contacts cannot be closed at the same time

Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)

**Permissible ambient temperature**

in operation °C -25 ... +60/+55 with AS-Interface  
when stored °C -55 ... +80

**Degree of protection** acc. to IEC 60 947-1 and DIN 40 050

IP 00/open type, coil system IP 20

**Shock resistance**

Rectangular pulse  
Sine pulse

$g/ms$  8.5/5 and 4.2/10  
 $g/ms$  13.4/5 and 6.5/10

**Conductor cross-sections**

See page 2/135

**Electromagnetic compatibility (EMC)**

See page 2/93

**Short-circuit protection**

**Main circuit**

Fuse links, utilization category gL/gG  
NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE  
– acc. to IEC 60 947-4-1/EN 60 947-4-1

Type of coord. "1" 1)	A	500
Type of coord. "2" 1)	A	400
Weld-free 2)	A	250

**Auxiliary circuit**

Fuse links, utilization category gL/gG  
(weld-free protection at  $I_k \geq 1$  kA)  
DIAZED Type 5SB, NEOZED Type 5SE  
or miniature circuit-breaker with C-characteristic ( $I_k < 400$  A)

A 10

Contactor	Size Type	<b>S10</b> <b>3RT10 6.</b>
-----------	-----------	-------------------------------

**Control circuit**

**Coil voltage tolerance**

AC/DC (UC)

$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

**Power consumption of solenoid mechanism**

(with coil in cold state and rated range  $U_{s \min} \dots U_{s \max}$ )

		Conventional op. mechanism		Solid-state op. mechanism	
		$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	closing	490	590	400	530
	p.f.	0.9	0.9	0.8	0.8
	closed	5.6	6.7	4	5
DC operation	p.f.	0.9	0.9	0.5	0.4
	closing	540	650	440	580
	closed	6.1	7.4	3.2	3.8

**PLC control input** (EN 61 131-2/Type 2)

DC 24 V  $I \leq 30$  mA

**Operating times**

(Break-time = opening time + arcing time)

		Conventional op. mechanism		Solid-state op. mechanism	
				Operation via A1/A2	
				PLC input	
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	30 ... 95		105 ... 145	45 ... 80
	opening time	40 ... 80		80 ... 100	80 ... 100
– at $U_{s \min} \dots U_{s \max}$	closing time	35 ... 50		110 ... 130	50 ... 65
	opening time	50 ... 80		80 ... 100	80 ... 100
Arcing time		10 ... 15		10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.6. contactors

#### Technical data

Contactor	Size Type	S10 3RT10 64		S10 3RT10 65		S10 3RT10 66		
<b>Main circuit</b>								
<b>Load ratings with AC</b>								
<b>AC-1 utilization category, switching resistive load</b>								
Rated operational currents $I_e$	at 40 °C up to 690 V	A	275	330				
	at 60 °C up to 690 V	A	250	300				
	at 60 °C up to 1000 V	A	100	150				
Ratings of three-phase loads 1) p.f. = 0.95 (at 60 °C)	at 230 V	kW	94	113				
	400 V	kW	164	197				
	500 V	kW	205	246				
	690 V	kW	283	340				
	1000 V	kW	164	246				
Minimum conductor cross-section with $I_{e \text{ load}}$	at 40 °C	mm <sup>2</sup>	150	185				
	60 °C	mm <sup>2</sup>	120	185				
<b>AC-2 and AC-3 utilization categories</b>								
Rated operational currents $I_e$	up to 500 V	A	225	265		300		
	690 V	A	225	265		280		
	1000 V	A	68	95		95		
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	73	85		97		
	400 V	kW	128	151		171		
	500 V	kW	160	189		215		
	690 V	kW	223	265		280		
	1000 V	kW	90	132		132		
<b>Thermal loading capacity</b>	10 s current 2)	A	1800	2400		2400		
<b>Power loss per conducting path</b>	at $I_e/AC-3/500$ V	W	17	18		22		
<b>AC-4 utilization category (at <math>I_a = 6 \times I_e</math>)</b>								
Rated operational current $I_e$	up to 400 V	A	195	230		280		
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	110	132		160		
• For a contact endurance of approx. 200 000 operating cycles:								
Rated operational currents $I_e$	up to 500 V	A	96	117		125		
	690 V	A	85	105		115		
	1000 V	A	42	57		57		
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	30	37		40		
	400 V	kW	54	66		71		
	500 V	kW	67	82		87		
	690 V	kW	82	102		112		
	1000 V	kW	59	80		80		
<b>AC-6a utilization category, switching three-phase transformers</b>								
with inrush		n	30	20	30	20	30	20
Rated operational current $I_e$	up to 690 V	A	151	227	182	265	182	273
Ratings of three-phase transformers with an inrush of n = 30 or 20. The ratings must be re-calculated for other inrush factors x:	at 230 V	kVA	60	90	72	105	72	109
	400 V	kVA	105	157	126	183	126	189
	500 V	kVA	130	196	158	229	158	236
	690 V	kVA	180	271	217	317	217	326
	1000 V	kVA	117	117	164	164	164	164
$P_x = P_{n30} \cdot \frac{30}{x}$								
<b>AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors</b>								
Ambient temperature 40 °C								
Rated operational currents $I_e$	up to 500 V	A	183	220				
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 µH) at 50 Hz, 60 Hz and	at 230 V	kvar	73	88				
	400 V	kvar	127	152				
	500 V	kvar	159	191				
	690 V	kvar	127	152				

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.



Technical data

Contactor	Size Type	<b>S10 3RT10 64</b>	<b>S10 3RT10 65</b>	<b>S10 3RT10 66</b>
-----------	-----------	-------------------------	-------------------------	-------------------------

Main circuit

Load ratings with DC




<b>DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)</b>							
<b>Rated operational current <math>I_e</math> (at 60 °C)</b>							
Number of conducting paths connected in series		1	2	3	1	2	3
up to 24 V A		200	200	200	300	300	300
60 V A		200	200	200	300	300	300
110 V A		18	200	200	33	300	300
220 V A		3.4	20	200	3.8	300	300
440 V A		0.8	3.2	11.5	0.9	4	11
600 V A		0.5	1.6	4	0.6	2	5.2
<b>DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)</b>							
<b>Rated operational current <math>I_e</math> (at 60 °C)</b>							
Number of conducting paths connected in series		1	2	3	1	2	3
up to 24 V A		200	200	200	300	300	300
60 V A		7.5	200	200	11	300	300
110 V A		2.5	200	200	3	300	300
220 V A		0.6	2.5	200	0.6	2.5	300
440 V A		0.17	0.65	1.4	0.18	0.65	1.4
600 V A		0.12	0.37	0.75	0.125	0.37	0.75

Operating frequency

<b>Operating frequency z</b> in operating cycles per hour							
Contactor without overload relays	No-load operating frequency	1/h	2000		2000		2000
Dependence of the operating frequency z' on the operational current I' and the operational voltage U':	for AC-1	1/h	750		800		750
	for AC-2	1/h	250		300		250
	for AC-3	1/h	500		700		500
	for AC-4	1/h	130		130		130
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400V}{U'}\right)^{1.5}$ 1/h							
Contactor with overload relays (mean value)		1/h	60		60		60

Contactor	Size Type	<b>S10 3RT10 6.</b>
-----------	-----------	-------------------------

Conductor cross-sections

<b>Screw connections</b>	<b>Main conductor:</b> with 3RT19 66-4G box terminal		Front terminal connected	Back terminal connected	Both terminals connected	
	Finely stranded with end sleeve	mm <sup>2</sup>	70 ... 240 	120 ... 185 	min. 2 × 50, max. 2 × 185 	
	Finely stranded without end sleeve	mm <sup>2</sup>	70 ... 240	120 ... 185	min. 2 × 50, max. 2 × 185	
	Stranded	mm <sup>2</sup>	95 ... 300	120 ... 240	min. 2 × 70, max. 2 × 240	
	AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil	250 ... 500 kcmil	min. 2 × 2/0, max. 2 × 500 kcmil	
	Ribbon cable (qty. × width × thickness)	mm	min. 6 × 9 × 0.8 max. 20 × 24 × 0.5	min. 6 × 9 × 0.8 max. 20 × 24 × 0.5	max. 2 × (20 × 24 × 0.5)	
	– Terminal screws	mm	M 12 (hexagon socket, A/F 5)			
	– Tightening torque	Nm	20 ... 22 (180 ... 195 lb.in)			
	<b>Without box terminal/busbar connection</b>					
	Finely stranded with cable lug	mm <sup>2</sup>	50 ... 240	If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm <sup>2</sup> and acc. to DIN 46 235 as of a conductor cross-section of 185 mm <sup>2</sup> a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.		
	Stranded with cable lug	mm <sup>2</sup>	70 ... 240			
	AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil			
	Connecting bar (max. width)	mm	25			
	– Terminal screws	mm	M 10 × 30 (A/F 17)			
	– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)			
<b>Auxiliary conductor:</b>						
Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)				
Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)				
AWG conductor connections, solid or stranded	AWG	2 × (18 ... 14) M 3 (PZ 2)				
– Terminal screws	mm	0.8 ... 1.2 (7 ... 10.3 lb.in)				
– Tightening torque	Nm					

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.7. contactors


#### Technical data

Contactors	Size Type	<b>S12</b> <b>3RT10 75</b>	<b>S12</b> <b>3RT10 76</b>
------------	-----------	-------------------------------	-------------------------------

#### General data

##### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



##### Mechanical endurance

Oper. cycles 10 million

##### Electrical endurance

See page 2/110

##### Rated insulation voltage $U_i$ (pollution degree 3)

V 1000

##### Rated impulse withstand voltage $U_{imp}$

kV 8

##### Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])

V 690

##### Positively driven operation

There is positively driven operation if the NC and NO contacts cannot be closed at the same time

Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)

##### Permissible ambient temperature

in operation °C -25 ... +60/+55 with AS-Interface  
when stored °C -55 ... +80

##### Degree of protection acc. to IEC 60 947-1 and DIN 40 050

IP 00/open type, coil system IP 20

##### Shock resistance

Rectangular pulse  
Sine pulse

g/ms 8.5/5 and 4.2/10  
g/ms 13.4/5 and 6.5/10

##### Conductor cross-sections

See page 2/138

##### Electromagnetic compatibility (EMC)

See page 2/93

#### Short-circuit protection

##### Main circuit

Fuse links, utilization category gL/gG  
NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE  
– to IEC 60 947-4/EN 60 947-4-4 (VDE 0660 Part 102)

Type of coord. "1" 1) A  
Type of coord. "2" 1) A  
Weld-free 2) A

630	630
500	500
250	315

##### Auxiliary circuit

Fuse links, utilization category gL/gG  
(weld-free protection at  $I_k \geq 1$  kA)  
DIAZED Type 5SB, NEOZED Type 5SE  
or miniature circuit-breaker with C-characteristic ( $I_k < 400$  A)

A 10

#### Control circuit

##### Coil voltage tolerance

AC/DC (UC)

$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

##### Power consumption of solenoid mechanism

(with coil in cold state and rated range  $U_{s \min} \dots U_{s \max}$ )

			Conventional op. mechanism		Solid-state op. mechanism	
			$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	closing	VA	700	830	560	750
		p.f.	0.9	0.9	0.8	0.8
	closed	VA	7.6	9.2	5.4	7
DC operation	closing	W	770	920	600	800
	closed	W	8.5	10	4	5

##### PLC control input (EN 61 131-2/Type 2)

DC 24 V/≤ 30 mA

##### Operating times

(Break-time = opening time + arcing time)

			Conventional op. mechanism		Solid-state op. mechanism	
					Operation via A1/A2	PLC input
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	ms	45 ... 100		120 ... 150	60 ... 90
		opening time	ms	60 ... 100		80 ... 100
– at $U_{s \min} \dots U_{s \max}$	closing time	ms	50 ... 70		125 ... 150	65 ... 80
		opening time	ms	70 ... 100		80 ... 100
Arcing time		ms	10 ... 15		10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



**Technical data**

Contactor	Size Type	S12 3RT10 75	S12 3RT10 76
-----------	-----------	-----------------	-----------------

**Main circuit**

**Load ratings with AC**

<b>AC-1 utilization category, switching resistive load</b>			S12 3RT10 75	S12 3RT10 76
Rated operational currents $I_e$	at 40 °C up to 690 V	A	430	610
	at 60 °C up to 690 V	A	400	550 <sup>3)</sup>
	at 60 °C up to 1000 V	A	200	200
Ratings of three-phase loads <sup>1)</sup> p.f. = 0.95 (at 60 °C)	at 230 V	kW	151	208
	400 V	kW	263	362
	500 V	kW	329	452
	690 V	kW	454	624
	1000 V	kW	329	329
Minimum conductor cross-section with $I_{e \text{ load}}$	at 40 °C	mm <sup>2</sup>	2 × 150	2 × 185
	60 °C	mm <sup>2</sup>	240	2 × 185
<b>AC-2 and AC-3 utilization categories</b>			S12 3RT10 75	S12 3RT10 76
Rated operational currents $I_e$	up to 500 V	A	400	500 <sup>4)</sup>
	690 V	A	400	450
	1000 V	A	180	180
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	132	164
	400 V	kW	231	291
	500 V	kW	291	363
	690 V	kW	400	453
	1000 V	kW	250	250
<b>Thermal loading capacity</b>	10 s current <sup>2)</sup>	A	3200	4000
<b>Power loss per conducting path</b>	at $I_e/AC-3/500 \text{ V}$	W	35	55
<b>AC-4 utilization category (at <math>I_a = 6 \times I_e</math>)</b>			S12 3RT10 75	S12 3RT10 76
Rated operational current $I_e$	up to 400 V	A	350	430
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	200	250
• For a contact endurance of approx. 200 000 operating cycles:				
Rated operational currents $I_e$	up to 500 V	A	150	175
	690 V	A	135	150
	1000 V	A	80	80
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	48	56
	400 V	kW	85	98
	500 V	kW	105	123
	690 V	kW	133	148
	1000 V	kW	113	113
<b>AC-6a utilization category, switching three-phase transformers with inrush</b>			S12 3RT10 75	S12 3RT10 76
Rated operational current $I_e$	up to 690 V	A	251	270
Ratings of three-phase transformers with an inrush of $\eta = 30$ or 20. The ratings must be re-calculated for other inrush factors x:	at 230 V	kVA	100	107
	400 V	kVA	173	187
	500 V	kVA	217	234
	690 V	kVA	300	323
	1000 V	kVA	311	311
$P_x = P_{n30} \cdot \frac{30}{x}$				
<b>AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors</b>			S12 3RT10 75	S12 3RT10 76
Ambient temperature 40 °C				
Rated operational currents $I_e$	up to 500 V	A	287	407
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 µH) at 50 Hz, 60 Hz and	at 230 V	kvar	114	162
	400 V	kvar	199	282
	500 V	kvar	248	352
	690 V	kvar	199	282

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.

3) Ambient temperature 50 °C for 3RT10 76-.N contactor

4) Ambient temperature 55 °C for 3RT10 76-.N contactor

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT10.7. contactors

#### Technical data

Contactors	Size Type	S12 3RT10 75	S12 3RT10 76
------------	-----------	-----------------	-----------------

#### Main circuit

##### Load ratings with DC

DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)		Rated operational current $I_e$ (at 60 °C)		
Number of conducting paths connected in series		1	2	3
up to 24 V	A	400	400	400
60 V	A	330	400	400
110 V	A	33	400	400
220 V	A	3.8	400	400
440 V	A	0.9	4	11
600 V	A	0.6	2	5.2

DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)		Rated operational current $I_e$ (at 60 °C)		
Number of conducting paths connected in series		1	2	3
up to 24 V	A	400	400	400
60 V	A	11	400	400
110 V	A	3	400	400
220 V	A	0.6	2.5	400
440 V	A	0.18	0.65	1.4
600 V	A	0.125	0.37	0.75




##### Operating frequency

Operating frequency $z$ in operating cycles per hour		Contactors without overload relays		Contactors with overload relays (mean value)	
No-load operating frequency	1/h	2000		60	60
Dependence of the operating frequency $z'$ on the operational current $I'$ and the operational voltage $U'$ :	for AC-1	1/h	700		500
	for AC-2	1/h	200		170
	for AC-3	1/h	500		420
	for AC-4	1/h	130		130

$$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400 \text{ V}}{U'} \right)^{1.5} \quad 1/\text{h}$$

Contactors	Size Type	S12 3RT10 7.
------------	-----------	-----------------

#### Conductor cross-sections

Screw connections		Front terminal connected	Back terminal connected	Both terminals connected
<b>Main conductor:</b> with 3RT19 66-4G box terminal				
Finely stranded with end sleeve	mm <sup>2</sup>	70 ... 240 	120 ... 185 	min. 2 × 50, max. 2 × 185 
Finely stranded without end sleeve	mm <sup>2</sup>	70 ... 240	120 ... 185	min. 2 × 50, max. 2 × 185
Stranded	mm <sup>2</sup>	95 ... 300	120 ... 240	min. 2 × 70, max. 2 × 240
AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil	250 ... 500 kcmil	min. 2 × 2/0, max. 2 × 500 kcmil
Ribbon cable (qty. × width × thickness)	mm	min. 6 × 9 × 0.8	min. 6 × 9 × 0.8	max. 2 × (20 × 24 × 0.5)
– Terminal screws	mm	max. 20 × 24 × 0.5	max. 20 × 24 × 0.5	
– Tightening torque	Nm	M 12 (hexagon socket, A/F 5)	20 ... 22 (180 ... 195 lb.in)	
<b>Without box terminal/busbar connection</b>				
Finely stranded with cable lug	mm <sup>2</sup>	50 ... 240	If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm <sup>2</sup> and acc. to DIN 46 235 as of a conductor cross-section of 185 mm <sup>2</sup> a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.	
Stranded with cable lug	mm <sup>2</sup>	70 ... 240		
AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil		
Connecting bar (max. width)	mm	25		
– Terminal screws		M 10 × 30 (A/F 17)		
– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)		
<b>Auxiliary conductor:</b>				
Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947;		
Finely stranded with end sleeve	mm <sup>2</sup>	max. 2 × (0.75 ... 4)		
AWG conductor connections, solid or stranded	AWG	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)		
– Terminal screws		2 × (18 ... 14)		
– Tightening torque	Nm	M 3 (PZ 2)		
		0.8 ... 1.2 (7 ... 10.3 lb.in)		




### Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66
-----------	-----------	-----------------	-----------------	-----------------

### General data

#### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



#### Mechanical endurance

Oper. cycles 10 million

#### Electrical endurance

See page 2/110

#### Rated insulation voltage $U_i$ (pollution degree 3)

V 1000

#### Rated impulse withstand voltage $U_{imp}$

kV 8

#### Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])

V 690

#### Positively driven operation

There is positively driven operation if the NC and NO contacts cannot be closed at the same time

Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)

#### Permissible ambient temperature

in operation °C –25 ... +60/+55 with AS-Interface  
when stored °C –55 ... +80

#### Degree of protection acc. to IEC 60 947-1 and DIN 40 050

IP 00/open type, coil system IP 20

#### Shock resistance

Rectangular pulse  
Sine pulse

g/ms 8.5/5 and 4.2/10  
g/ms 13.4/5 and 6.5/10

#### Conductor cross-sections

See page 2/141

#### Electromagnetic compatibility (EMC)

See page 2/93

### Short-circuit protection

#### Main circuit

Fuse links, utilization category gL/gG  
NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE  
– to IEC 60 947-4/EN 60 947-4-4 (VDE 0660 Part 102)

Type of coord. "1" 1)	A
Type of coord. "2" 1)	500
Weld-free 2)	500
	400

#### Auxiliary circuit

Fuse links, utilization category gL/gG  
(weld-free protection at  $I_k \geq 1$  kA)  
DIAZED Type 5SB, NEOZED Type 5SE  
or miniature circuit-breaker with C-characteristic ( $I_k < 400$  A)

A 10

### Control circuit

#### Coil voltage tolerance

AC/DC (UC)

$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

#### Power consumption of solenoid mechanism

(with coil in cold state and rated range  $U_{s \min} \dots U_{s \max}$ )

			Conventional op. mechanism		Solid-state op. mechanism	
			$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	closing	VA	530	630	420	570
	p.f.		0.9	0.9	0.8	0.8
	closed	VA	6.1	7.4	4.3	5.6
p.f.	0.9		0.9	0.8	0.8	
DC operation	closing	W	580	700	460	630
	closed		6.8	8.2	3.4	4.2

#### PLC control input (EN 61 131-2/Type 2)

DC 24 V/≤ 30 mA

#### Operating times

(Break-time = opening time + arcing time)

			Conventional op. mechanism		Solid-state op. mechanism	
					Operation via A1/A2	PLC input
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	ms	30 ... 95		105 ... 145	45 ... 80
	opening time		40 ... 80		80 ... 100	80 ... 100
– at $U_{s \min} \dots U_{s \max}$	closing time	ms	35 ... 50		110 ... 130	50 ... 65
	opening time		50 ... 80		80 ... 100	80 ... 100
Arcing time		ms	10 ... 15		10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT12.6. vacuum contactors

#### Technical data

Contactor	Size Type	S10 3RT12 64	S10 3RT12 65	S10 3RT12 66
-----------	-----------	-----------------	-----------------	-----------------

#### Main circuit

##### Load ratings with AC

<b>AC-1 utilization category, switching resistive load</b>				
Rated operational currents $I_e$	at 40 °C up to 1000 V	A	330	
	at 60 °C up to 1000 V	A	300	
Ratings of three-phase loads <sup>1)</sup> p.f. = 0.95 (at 60 °C)	at 230 V	kW	113	
	400 V	kW	197	
	500 V	kW	246	
	690 V	kW	340	
	1000 V	kW	492	
Minimum conductor cross-section with $I_{e,load}$	at 40 °C	mm <sup>2</sup>	185	
	60 °C	mm <sup>2</sup>	185	
<b>AC-2 and AC-3 utilization categories</b>				
Rated operational currents $I_e$	up to 1000 V	A	225	265
				300
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	73	85
	400 V	kW	128	151
	500 V	kW	160	189
	690 V	kW	223	265
	1000 V	kW	320	378
				288
				428
<b>Thermal loading capacity</b>	10 s current <sup>2)</sup>	A	1800	2120
<b>Power loss per conducting path</b>	at $I_e/AC-3$	W	9	12
				14
<b>AC-4 utilization category (at <math>I_a = 6 \times I_e</math>)</b>				
Rated operational current $I_e$	up to 690 V	A	195	230
				280
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW	110	132
				160
• For a contact endurance of approx. 400 000 operating cycles:				
Rated operational currents $I_e$	up to 690 V	A	97	115
	1000 V	A	68	81
				140
				98
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW	30	37
	400 V	kW	55	65
	500 V	kW	68	81
	690 V	kW	94	112
	1000 V	kW	95	114
				138
				140
<b>AC-6a utilization category, switching three-phase transformers with inrush</b>				
Rated operational current $I_e$	up to 690 V	A	30	20
			185	278
Ratings of three-phase transformers with an inrush of $n = 30$ or $20$ . The ratings must be re-calculated for other inrush factors $x$ :	at 230 V	kVA	74	111
	400 V	kVA	128	193
	500 V	kVA	160	241
	690 V	kVA	221	332
	1000 V	kVA	320	482
$P_x = P_{n30} \cdot \frac{30}{x}$				
<b>AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors</b>				
Ambient temperature 40 °C				
Rated operational currents $I_e$	up to 500 V	A	220	
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 μH) at 50 Hz, 60 Hz and	at 230 V	kvar	88	
	400 V	kvar	152	
	500 V	kvar	191	
	690 V	kvar	152	

##### Operating frequency

<b>Operating frequency <math>z</math></b> in operating cycles per hour				
Contactors without overload relays	No-load operating frequency	1/h	2000	2000
Dependence of the operating frequency $z'$ on the operational current $I'$ and the operational voltage $U'$ :	for AC-1	1/h	800	750
	for AC-2	1/h	300	250
	for AC-3	1/h	750	750
	for AC-4	1/h	250	250
$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400 V}{U'} \right)^{1.5}$ 1/h				
Contactors with overload relays (mean value)		1/h	60	60

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.





## Technical data

Contactor	Size Type	S10 3RT12 6.		
<b>Conductor cross-sections</b>				
<b>Screw connections</b>				
<b>Main conductor:</b> with 3RT19 66-4G box terminal		Front terminal connected	Back terminal connected	Both terminals connected
Finely stranded with end sleeve	mm <sup>2</sup>	70 ... 240	120 ... 185	min. 2 × 50, max. 2 × 185
Finely stranded without end sleeve	mm <sup>2</sup>	70 ... 240	120 ... 185	min. 2 × 50, max. 2 × 185
Stranded	mm <sup>2</sup>	95 ... 300	120 ... 240	min. 2 × 70, max. 2 × 240
AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil	250 ... 500 kcmil	min. 2 × 2/0, max. 1 × 500 kcmil
Ribbon cable (qty. × width × thickness)	mm mm	min. 6 × 9 × 0.8 max. 20 × 24 × 0.5	min. 6 × 9 × 0.8 max. 20 × 24 × 0.5	max. 2 × (20 × 24 × 0.5)
– Terminal screws		M 12 (hexagon socket, A/F 5)		
– Tightening torque	Nm	20 ... 22 (180 ... 195 lb.in)		
<u>Without box terminal/busbar connection</u>				
Finely stranded with cable lug	mm <sup>2</sup>	50 ... 240	If cable lugs acc. to DIN 46 234 are con- nected, as of a conductor cross-section of 240 mm <sup>2</sup> and acc. to DIN 46 235 as of a con- ductor cross-section of 185 mm <sup>2</sup> a 3RT19 66- 4EA1 terminal cover is necessary to comply with the phase clearance.	
Stranded with cable lug	mm <sup>2</sup>	70 ... 240		
AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil		
Connecting bar (max. width)	mm	25		
– Terminal screws		M 10 × 30 (A/F 17)		
– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)		
<b>Auxiliary conductor:</b>				
Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)		
Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)		
AWG conductor connections, solid or stranded	AWG	2 × (18 ... 14)		
– Terminal screws		M 3 (PZ 2)		
– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)		

# Contactors and Contactor Assemblies

## Contactors for Switching Motors

SIRIUS



### 3RT12.7. contactors


#### Technical data

Contactors	Size Type	<b>S12</b> <b>3RT12 75</b>	<b>S12</b> <b>3RT12 76</b>
------------	-----------	-------------------------------	-------------------------------

#### General data

##### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



##### Mechanical endurance

Oper. cycles 10 million

##### Electrical endurance

See page 2/110

##### Rated insulation voltage $U_i$ (pollution degree 3)

V 1000

##### Rated impulse withstand voltage $U_{imp}$

kV 8

##### Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])

V 690

##### Positively driven operation

There is positively driven operation if the NC and NO contacts cannot be closed at the same time

Yes, between main contacts and auxiliary NC contacts and within the auxiliary switch blocks acc. to ZH 1/457, IEC 60 947-4-1, Annex H (draft 17B/996/DC)

##### Permissible ambient temperature

in operation °C -25 ... +60/+55 with AS-Interface  
when stored °C -55 ... +80

##### Degree of protection acc. to IEC 60 947-1 and DIN 40 050

IP 00/open type, coil system IP 20

##### Shock resistance

Rectangular pulse  
Sine pulse

g/ms 8.5/5 and 4.2/10  
g/ms 13.4/5 and 6.5/10

##### Conductor cross-sections

See page 2/144

##### Electromagnetic compatibility (EMC)

See page 2/93

#### Short-circuit protection

##### Main circuit

Fuse links, utilization category gL/gG  
NH Type 3NA, DIAZED Type 5SB, NEOZED Type 5SE  
– to IEC 60 947-4/EN 60 947-4-4 (VDE 0660 Part 102)

Type of coord. "1" 1)	A	800
Type of coord. "2" 1)	A	800
Weld-free 2)	A	500

##### Auxiliary circuit

Fuse links, utilization category gL/gG  
(weld-free protection at  $I_k \geq 1$  kA)  
DIAZED Type 5SB, NEOZED Type 5SE  
or miniature circuit-breaker with C-characteristic ( $I_k < 400$  A)

A 10

#### Control circuit

##### Coil voltage tolerance

AC/DC (UC)

$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

##### Power consumption of solenoid mechanism

(with coil in cold state and rated range  $U_{s \min} \dots U_{s \max}$ )

			Conventional op. mechanism		Solid-state op. mechanism	
			$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	closing	VA	700	830	560	750
		p.f.	0.9	0.9	0.8	0.8
	closed	VA	7.6	9.2	5.4	7
DC operation	p.f.		0.9	0.9	0.8	0.8
	closing	W	770	920	600	800
	closed	W	8.5	10	4	5

##### PLC control input (EN 61 131-2/Type 2)

DC 24 V/≤ 30 mA

##### Operating times

(Break-time = opening time + arcing time)

			Conventional op. mechanism		Solid-state op. mechanism	
					Operation via A1/A2	PLC input
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	ms	45 ... 100		120 ... 150	60 ... 90
		opening time	ms	60 ... 100	80 ... 100	80 ... 100
– at $U_{s \min} \dots U_{s \max}$	closing time	ms	50 ... 70		125 ... 150	65 ... 80
		opening time	ms	70 ... 100	80 ... 100	80 ... 100
Arcing time		ms	10 ... 15		10 ... 15	10 ... 15

1) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

2) Test conditions acc. to IEC 60 947-4-1.



### Technical data

Contactor	Size Type	S12 3RT12 75	S12 3RT12 76
-----------	-----------	-----------------	-----------------

### Main circuit

#### Load ratings with AC

AC-1 utilization category, switching resistive load				S12 3RT12 75	S12 3RT12 76
Rated operational currents $I_e$	at 40 °C up to 1000 V	A		610	
	at 60 °C up to 1000 V	A		550	
Ratings of three-phase loads <sup>1)</sup> p.f. = 0.95 (at 60 °C)	at 230 V	kW		208	
	400 V	kW		362	
	500 V	kW		452	
	690 V	kW		624	
	1000 V	kW		905	
Minimum conductor cross-section with $I_{e \text{ load}}$	at 40 °C	mm <sup>2</sup>		2 × 185	
	60 °C	mm <sup>2</sup>		2 × 185	
AC-2 and AC-3 utilization categories				S12 3RT12 75	S12 3RT12 76
Rated operational currents $I_e$	up to 1000 V	A		400	500
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW		132	164
	400 V	kW		231	291
	500 V	kW		291	363
	690 V	kW		400	507
	1000 V	kW		578	728
<b>Thermal loading capacity</b>	10 s current <sup>2)</sup>	A		3200	4000
<b>Power loss per conducting path</b>	at $I_e$ /AC-3	W		21	32
AC-4 utilization category (at $I_a = 6 \times I_e$ )				S12 3RT12 75	S12 3RT12 76
Rated operational current $I_e$	up to 690 V	A		350	430
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 400 V	kW		200	250
• For a contact endurance of approx. 400 000 operating cycles:					
Rated operational currents $I_e$	up to 690 V	A		175	215
	1000 V	A		123	151
Ratings of squirrel-cage motors at 50 Hz and 60 Hz	at 230 V	kW		56	70
	400 V	kW		98	122
	500 V	kW		124	153
	690 V	kW		172	212
	1000 V	kW		183	217
AC-6a utilization category, switching three-phase transformers with inrush				S12 3RT12 75	S12 3RT12 76
Rated operational current $I_e$	up to 690 V	A		279	419
Ratings of three-phase transformers with an inrush of $n = 30$ or $20$ . The ratings must be re-calculated for other inrush factors $x$ :	at 230 V	kVA		111	167
	400 V	kVA		193	290
	500 V	kVA		241	363
	690 V	kVA		332	501
	1000 V	kVA		482	726
$P_x = P_{n,30} \cdot \frac{30}{x}$					
AC-6b utilization category, switching low-inductance (low-loss, metallized-dielectric) three-phase capacitors				S12 3RT12 75	S12 3RT12 76
Ambient temperature 40 °C					
Rated operational currents $I_e$	up to 500 V	A		407	
Ratings of single capacitors or of capacitor banks (minimum inductance between parallel capacitors 6 µH) at 50 Hz, 60 Hz and	at 230 V	kvar		162	
	400 V	kvar		282	
	500 V	kvar		352	
	690 V	kvar		282	

#### Operating frequency

Operating frequency $z$ in operating cycles per hour				S12 3RT12 75	S12 3RT12 76
Contactor without overload relays	No-load operating frequency	1/h		2000	
Dependence of the operating frequency $z'$ on the operational current $I'$ and the operational voltage $U'$ :	for AC-1	1/h		700	
	for AC-2	1/h		250	
	for AC-3	1/h		750	
	for AC-4	1/h		250	
$z' = z \cdot \frac{I_e}{I'} \cdot \left(\frac{400 \text{ V}}{U'}\right)^{1.5}$		1/h			
Contactor with overload relays (mean value)		1/h		60	

1) Industrial furnaces and electric heaters with resistance heating, for example (higher current input allowed for during heating up).

2) Acc. to VDE 0660 Part 102. For rated values for various starting conditions, see Section 3.

# Contactors and Contactor Assemblies




## Contactors for Switching Motors

SIRIUS






### 3RT12.7. vacuum contactors

#### Technical data

Contactor	Size Type	S12 3RT12 7.		
<b>Conductor cross-sections</b>				
<b>Screw connections</b>				
<b>Main conductor:</b> with 3RT19 66-4G box terminal		Front terminal connected	Back terminal connected	Both terminals connected
Finely stranded with end sleeve	mm <sup>2</sup>	70 ... 240 	120 ... 185 	 min. 2 × 50, max. 2 × 185 min. 2 × 50, max. 2 × 185 min. 2 × 70, max. 2 × 240 min. 2 × 2/0, max. 2 × 500 kcmil
Finely stranded without end sleeve	mm <sup>2</sup>	70 ... 240	120 ... 185	
Stranded	mm <sup>2</sup>	95 ... 300	120 ... 240	
AWG conductor connections, solid or stranded	AWG	3/0 ... 600 kcmil	250 ... 500 kcmil	
Ribbon cable (qty. × width × thickness)	mm	min. 6 × 9 × 0.8	min. 6 × 9 × 0.8	
– Terminal screws	mm	max. 20 × 24 × 0.5	max. 20 × 24 × 0.5	max. 2 × (20 × 24 × 0.5)
– Tightening torque	Nm	M 12 (hexagon socket, A/F 5) 20 ... 22 (180 ... 195 lb.in)		
<u>Without box terminal/busbar connection</u>				
Finely stranded with cable lug	mm <sup>2</sup>	50 ... 240	If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm <sup>2</sup> and acc. to DIN 46 235 as of a conductor cross-section of 185 mm <sup>2</sup> a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.	
Stranded with cable lug	mm <sup>2</sup>	70 ... 240		
AWG conductor connections, solid or stranded	AWG	2/0 ... 500 kcmil		
Connecting bar (max. width)	mm	25		
– Terminal screws		M 10 × 30 (A/F 17)		
– Tightening torque	Nm	14 ... 24 (124 ... 210 lb.in)		
<b>Auxiliary conductor:</b>				
Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)		
Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)		
AWG conductor connections, solid or stranded	AWG	2 × (18 ... 14)		
– Terminal screws		M 3 (PZ 2)		
– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)		



Technical data			
Contactor	Size	<b>S3</b>	
	Type	<b>3RT14 46</b>	
General data			
<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.	AC and DC operation	  For DC operation and forward inclination up to 22.5°: coil voltage tolerance 0.85 ... 1.1 × $U_s$	
Upright mounting position:			
	AC operation	Special design required. Positions 13 ... 16 of the Order No. must be changed to <b>-1AA0</b> . Additional charge.	
	DC operation	-	
<b>Mechanical endurance</b>	Oper. cycles	10 million	
<b>Electrical endurance</b> AC-1 utilization category at $I_e$	Oper. cycles	0.5 million	
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	1000	
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	6	
<b>Safe isolation</b> between coil and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690	
<b>Permissible ambient temperature</b>	in operation	°C	-25 ... +60
	when stored	°C	-55 ... +80
<b>Degree of protection</b> acc. to IEC 60 947-1 and DIN 40 050	IP 20 (terminal compartment IP 00), coil system IP 40		
Shock resistance			
Rectangular pulse	AC and DC operation	g/ms	6.8/5 and 4/10
Sine pulse	AC and DC operation	g/ms	10.6/5 and 6.2/10
<b>Conductor cross-sections</b>	See page 2/147		
Short-circuit protection of contactors without overload relays			
<b>Main circuit</b>			
Fuse links, utilization category gL/gG NH, Type 3NA	Type of coord. "1" 2)	A	250
Fuse links, utilization category gR SITOR, Type 3NE	Type of coord. "2" 2)	A	250
<b>Auxiliary circuit</b>			
Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1$ kA) DIAZED Type 5SB, NEOZED Type 5SE		A	10
or miniature circuit-breaker with C-characteristic ( $I_k < 400$ A)		A	10
Control circuit			
<b>Coil voltage tolerance</b>	AC/DC	0.8 ... 1.1 × $U_s$	
<b>Power consumption of the coils</b> (with coil in cold state and 1.0 × $U_s$ )		<b>Standard design</b>	<b>For USA and Canada</b>
AC operation	Hz	50	60
	VA	270	300
		0.68	0.52
		0.7 / 0.62	
	VA	22	21
		0.27	0.29
		0.29/ 0.31	0.27
DC operation	W	15	
<b>Operating times at 0.8 ... 1.1 × <math>U_s</math> 1)</b> Break-time = opening time + arcing time			
AC operation	closing time	ms	17 ... 90
	opening time	ms	10 ... 25
DC operation	closing time	ms	90 ... 230
	opening time	ms	14 ... 20
Arcing time		ms	10 ... 15
<b>Operating times at 1.0 × <math>U_s</math> 1)</b>			
AC operation	closing time	ms	18 ... 30
	opening time	ms	11 ... 23
DC operation	closing time	ms	100 ... 120
	opening time	ms	16 ... 20

1) The opening times of the NO contacts and the closing times of the NC contacts increase if the contactor coils are protected against voltage peaks: varistor +2 ms to 5 ms, diode assemblies 2 to 6 times.

2) According to excerpt from IEC 60 947-4-1 (VDE 0660 Part 102):  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible. The contactor and/or overload relay must be replaced if necessary.

Type of coordination "2":  
No damage can be tolerated to the overload relay, but contact welding on the contactor is permitted if the contacts can be easily separated.

# Contactors and Contactor Assemblies

## Contactors for Special Applications

SIRIUS



**3RT14 contactors, 3-pole,  
for switching resistive loads (AC-1)**

### Technical data

Contactant	Size Type	<b>S3 3RT14 46</b>
------------	-----------	------------------------

### Main circuit

#### Load ratings with AC

##### AC-1 utilization category, switching resistive load

Rated operational currents $I_e$	at 40 °C up to 690 V	A	140
	at 60 °C up to 690 V	A	130
Ratings of three-phase loads p.f. = 0.95 (at 60 °C)	at 1000 V	A	60
	at 230 V	kW	50
	400 V	kW	86
	500 V	kW	107
	690 V	kW	148
Minimum conductor cross-section with $I_{e\text{load}}$	at 40 °C	mm <sup>2</sup>	50
	at 60 °C	mm <sup>2</sup>	50

##### AC-2 and AC-3 utilization categories

With an electrical endurance of 1.3 million operating cycles

Rated operational current $I_e$	up to 690 V	A	44
Ratings of slipring or squirrel-cage motors at 50 Hz and 60 Hz (at 60 °C)	at 230 V	kW	12.7
	400 V	kW	22
	500 V	kW	29.9
	690 V	kW	38.2

<b>Power loss per conducting path</b>	at $I_e/AC-1$	W	12.5
---------------------------------------	---------------	---	------

#### Load ratings with DC

##### DC-1 utilization category, switching resistive load $L/R \leq 1$ ms)

Number of conducting paths when connected in series

			1	2	3
Rated operational currents $I_e$ (at 60 °C)	up to 24 V	A	130	130	130
	60 V	A	80	130	130
	110 V	A	12	130	130
	220 V	A	2.5	13	130
	440 V	A	0.8	2.4	6
	600 V	A	0.48	1.3	3.4

##### DC-3 and DC-5 utilization categories, shunt and series motors

Number of conducting paths when connected in series

			1	2	3
Rated operational currents $I_e$ (at 60 °C)	up to 24 V	A	6	130	130
	60 V	A	3	130	130
	110 V	A	1.25	130	130
	220 V	A	0.35	1.75	4
	440 V	A	0.15	0.42	0.8
	600 V	A	0.1	0.27	0.45

#### Operating frequency

##### Operating frequency $z$ in operating cycles per hour



			AC operation	DC operation
Contactors without overload relays	No-load operating frequency	1/h	5000	1000
Rated operation	for AC-1	1/h	650	650
	for AC-3	1/h	1000	1000

Dependence of the operating frequency  $z'$  on the operational current  $I'$  and the operational voltage  $U'$ :

$$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400V}{U'} \right)^{1.5} \quad 1/h$$



**Technical data**

Contactor	Size Type	<b>S3</b> <b>3RT14 46</b>		
<b>Conductor cross-sections</b>				
<b>Screw connections</b> (1 or 2 conductor connections possible)	<b>Main conductor:</b> <u>With box terminal</u>	Front terminal connected	Back terminal connected	Both terminals connected
	Finely stranded with end sleeve Finely stranded without end sleeve Solid Stranded Ribbon cable (qty. x width x thickness) AWG conductor connections – Terminal screws – Tightening torque	mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup> mm mm AWG Nm mm	2.5 ... 50 4 ... 50 2.5 ... 16 4 ... 70 6 x 9 x 0.8 10 ... 2/0 	2.5 ... 50 10 ... 50 2.5 ... 16 10 ... 70 6 x 9 x 0.8 10 ... 2/0 
Connection for drilled copper bars	max. width	M 6 (hexagon socket) 4 ... 6 (36 ... 53 lb.in) 10 If bars larger than 12 x 10 mm are connected, a 3RT19 46-4EA1 terminal cover is necessary to comply with the phase clearance		
	<u>Without box terminal with cable lugs</u>			
	Finely stranded with cable lug	mm <sup>2</sup>	10 ... 50 <sup>1)</sup>	If conductors larger than 25 mm <sup>2</sup> are connected, a 3RT19 46-4EA1 terminal cover is necessary to comply with the phase clearance
	Stranded with cable lug	mm <sup>2</sup>	10 ... 70 <sup>1)</sup>	
	AWG conductor connections, solid or stranded	AWG	7 ... 1/0	
	<b>Auxiliary conductor:</b>			
	Solid	mm <sup>2</sup>	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5) acc. to IEC 60 947; max. 2 x (0.75 ... 4)	
	Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5); 2 x (0.75 ... 2.5)	
	AWG conductor connections, solid or stranded	AWG	2 x (20 ... 16); 2 x (18 ... 14); 1 x 12	
	– Terminal screws	M 3		
	– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)	



# Contactors and Contactor Assemblies

## Contactors for Special Applications

SIRIUS



### 3RT14 contactors, 3-pole, for switching resistive loads (AC-1)


#### Technical data

Contactors	Size Type	<b>S6</b> <b>3RT14 56</b>
------------	-----------	------------------------------

#### General data

##### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



##### Mechanical endurance

Oper. cycles 10 million

##### Electrical endurance

AC-1 utilization category at  $I_e$

Oper. cycles 0.5 million

##### Rated insulation voltage $U_i$ (pollution degree 3)

V 1000

##### Rated impulse withstand voltage $U_{imp}$

kV 8

##### Safe isolation between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])

V 690

##### Permissible ambient temperature

in operation °C -25 ... +60/+55 with AS-Interface  
when stored °C -55 ... +80

##### Degree of protection acc. to IEC 60 947-1 and DIN 40 050

IP 00/open type, coil system IP 20

##### Shock resistance

Rectangular pulse

g/ms 8.5/5 and 4.2/10

Sine pulse

g/ms 13.4/5 and 6.5/10

##### Conductor cross-sections

See page 2/149

##### Electromagnetic compatibility (EMC)

See page 2/93

#### Short-circuit protection

##### Main circuit

Fuse links, utilization category gL/gG, NH, Type 3NA

Type of coordination "1" A

355

Fuse links, utilization category gR, SITOR, Type 3NE

Type of coordination "2" A

350

##### Auxiliary circuit

Fuse links, utilization category gL/gG

(weld-free protection at  $I_k \geq 1$  kA)

DIAZED Type 5SB, NEOZED Type 5SE

or miniature circuit-breaker with C-characteristic ( $I_k < 400$  A)

A

10

#### Control circuit

##### Coil voltage tolerance

AC/DC (UC)

$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

##### Power consumption of solenoid mechanism

(with coil in cold state and rated range  $U_{s \min} \dots U_{s \max}$ )

Conventional op. mechanism      Solid-state op. mechanism

AC operation

closing

VA

p.f.

closed

VA

p.f.

closed

W

$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
250	300	190	280
0.9	0.9	0.8	0.8
4.8	5.8	3.5	4.4
0.8	0.8	0.5	0.4
300	360	250	320
4.3	5.2	2.3	2.8

##### PLC control input (EN 61 131-2/Type 2)

DC 24 V/≤ 30 mA

##### Operating times

(Break-time = opening time + arcing time)

Conventional op. mechanism      Solid-state op. mechanism

- at  $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$

closing time

ms

opening time

ms

95 ... 135

80 ... 90

35 ... 75

80 ... 90

- at  $U_{s \min} \dots U_{s \max}$

closing time

ms

opening time

ms

100 ... 120

80 ... 90

40 ... 60

80 ... 90

Arcing time

ms

10 ... 15

10 ... 15

10 ... 15

#### Main circuit

##### Load ratings with AC

##### AC-1 utilization category, switching resistive load

Rated operational currents  $I_e$

at 40 °C up to 690 V A

at 60 °C up to 690 V A

at 1000 V A

275

250

100

Ratings

of three-phase loads

p.f. = 0.95 (at 60 °C)

at 230 V kW

400 V kW

500 V kW

690 V kW

1000 V kW

95

165

205

285

165

Minimum conductor cross-section with  $I_{e \text{ load}}$

at 40 °C mm<sup>2</sup>

at 60 °C mm<sup>2</sup>

2 × 70

120

##### Power loss per conducting path

at  $I_e$ /AC-1 W

20



#### Technical data

Contactor	Size Type	<b>S6</b> <b>3RT14 56</b>
-----------	-----------	------------------------------

#### Main circuit

##### Load ratings with AC

##### AC-2 and AC-3 utilization category

With an electrical endurance of 1.3 million operating cycles

Rated operational current $I_e$	up to 690 V	A	97
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz (at 60°C)	at 230 V	kW	30
	400 V	kW	55
	500 V	kW	55
	690 V	kW	90

##### Load ratings with DC

##### DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)

Number of conducting paths connected in series

				1	2	3
Rated operational currents $I_e$ (at 60°C)	up to 24 V	A		315	315	315
	60 V	A		315	315	315
	110 V	A		18	315	315
	220 V	A	3.4		20	315
	440 V	A	0.8		3.2	11.5
	600 V	A	0.5		1.6	4

##### DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)

Number of conducting paths connected in series

				1	2	3
Rated operational currents $I_e$ (at 60°C)	up to 24 V	A		315	315	315
	60 V	A	7.5		315	315
	110 V	A	2.5		315	315
	220 V	A	0.6		2.5	315
	440 V	A	0.17		0.65	1.4
	600 V	A	0.12		0.37	0.75

#### Operating frequency

##### Operating frequency z in operating cycles per hour

Contactors without overload relays	No-load op. frequency for AC-1 for AC-3	1/h	2000
		1/h	600
		1/h	1000

Dependence of the operating frequency z' on the operational current I' and operational voltage U':

$$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400V}{U'} \right)^{1.5} \quad 1/h$$

#### Conductor cross-sections

##### Screw connections

##### Main conductor:

with 3RT19 55-4G box terminal

Finely stranded with end sleeve	mm <sup>2</sup>	10 ... 70
Finely stranded without end sleeve	mm <sup>2</sup>	10 ... 70
Stranded	mm <sup>2</sup>	16 ... 70
AWG conductor connections, solid or stranded		6 ... 2/0
Ribbon cable (qty. × width × thickness)	mm	min. 3 × 9 × 0.8
	mm	max. 6 × 15.5 × 0.8

with 3RT19 56-4G box terminal

Finely stranded with/without end sleeve	mm <sup>2</sup>	10 ... 120
Stranded	mm <sup>2</sup>	16 ... 120
AWG conductor connections, solid or stranded	AWG	6 ... 250 kcmil
Ribbon cable (qty. × width × thickness)	mm	min. 3 × 9 × 0.8
	mm	max. 10 × 15.5 × 0.8

– Terminal screws




– Tightening torque

Without box terminal/busbar connection

Finely stranded with cable lug	mm <sup>2</sup>	16 ... 95
Stranded with cable lug	mm <sup>2</sup>	25 ... 120
AWG conductor connections, solid or stranded	AWG	4 ... 250 kcmil
Connecting bar (max. width)	mm	17
– Terminal screws		M 8 × 25 (A/F 13)
– Tightening torque	Nm	10 ... 14 (89 ... 124 lb.in)

##### Auxiliary conductor:

Solid	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)
Finely stranded with end sleeve	mm <sup>2</sup>	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)
AWG conductor connections, solid or stranded	AWG	2 × (18 ... 14)
– Terminal screws		M 3 (PZ2)
– Tightening torque	Nm	0.8 ... 1.2 (7 ... 10.3 lb.in)

	Front terminal connected	Back terminal connected	Both terminals connected
	10 ... 70 10 ... 70 16 ... 70 6 ... 2/0 	10 ... 70 10 ... 70 16 ... 70 6 ... 2/0 	max. 1×50, 1×70 max. 1×50, 1×70 max. 2 × 70 max. 2 × 1/0 
	min. 3 × 9 × 0.8 max. 6 × 15.5 × 0.8	min. 3 × 9 × 0.8 max. 6 × 15.5 × 0.8	max. 2 × (6 × 15.5 × 0.8)
	10 ... 120 16 ... 120 6 ... 250 kcmil	10 ... 120 16 ... 120 6 ... 250 kcmil	max. 1 × 95, 1 × 120 max. 2 × 120 max. 2 × 3/0
	min. 3 × 9 × 0.8 max. 10 × 15.5 × 0.8 M 10 (hexagon socket, A/F4)	min. 3 × 9 × 0.8 max. 10 × 15.5 × 0.8	max. 2 × (10 × 15.5 × 0.8)
	10 ... 12 (90 ... 110 lb.in)		
	16 ... 95 25 ... 120 4 ... 250 kcmil	If cable lugs acc. to DIN 46 235 are connected, as of a conductor cross-section of 95 mm <sup>2</sup> a 3RT19 56-4EA1 terminal cover is necessary to comply with the phase clearance.	
	M 8 × 25 (A/F 13) 10 ... 14 (89 ... 124 lb.in)		
	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5) acc. to IEC 60 947; max. 2 × (0.75 ... 4)		
	2 × (0.5 ... 1.5); 2 × (0.75 ... 2.5)		
	2 × (18 ... 14)		
	M 3 (PZ2)		
	0.8 ... 1.2 (7 ... 10.3 lb.in)		

# Contactors and Contactor Assemblies

## Contactors for Special Applications

3RT14 contactors, 3-pole,  
for switching resistive loads (AC-1)


SIRIUS



### Technical data

Contactors	Size Type	S10 3RT14 66	S12 3RT14 76
------------	-----------	-----------------	-----------------

### General data

<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.			
<b>Mechanical endurance</b>	Oper. cycles	10 million	
<b>Electrical endurance</b> AC-1 utilization category at $I_e$	Oper. cycles	0.5 million	
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	1000	
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	8	
<b>Safe isolation</b> between coil, auxiliary contacts and main contacts (acc. to DIN VDE 0106 Part 101 and A1 [draft 2/89])	V	690	
<b>Permissible ambient temperature</b>	in operation when stored	°C	-25 ... +60/+55 with AS-Interface -55 ... +80
<b>Degree of protection</b> acc. to IEC 60 947-1 and DIN 40 050	IP 00/open type, coil system IP 20		
<b>Shock resistance</b>			
Rectangular pulse	g/ms	8.5/5 and 4.2/10	
Sine pulse	g/ms	13.4/5 and 6.5/10	
<b>Conductor cross-sections</b>	<a href="#">See page 2/152</a>		
<b>Electromagnetic compatibility (EMC)</b>	<a href="#">See page 2/93</a>		

### Short-circuit protection

<b>Main circuit</b>			
Fuse links, utilization category gL/gG, NH, Type 3NA	Type of coordination "1"	A	500
Fuse links, utilization category gR, SITOR, Type 3NE	Type of coordination "2"	A	500
<b>Auxiliary circuit</b>		A	10
Fuse links, utilization category gL/gG (weld-free protection at $I_k \geq 1$ kA) DIAZED Type 5SB, NEOZED Type 5SE or miniature circuit-breaker with C-characteristic ( $I_k < 400$ A)			

Contactors	Size Type	S10 3RT14 66
------------	-----------	-----------------

### Control circuit

<b>Coil voltage tolerance</b>		AC/DC (UC)	$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$			
<b>Power consumption of solenoid mechanism</b> (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$ )			Conventional op. mechanism		Solid-state op. mechanism	
			$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
AC operation	closing	VA	490	590	400	530
	p.f.		0.9	0.9	0.8	0.8
	closed	VA	5.6	6.7	4	5
	p.f.		0.9	0.9	0.5	0.4
DC operation	closing	W	540	650	440	580
	closed	W	6.1	7.4	3.2	3.8
<b>PLC control input</b> (EN 61 131-2/Type 2)			DC 24 V/≤ 30 mA			
<b>Operating times</b> (Break-time = opening time + arcing time)			Conventional op. mechanism		Solid-state op. mechanism	
					Operation via A1/A2	PLC input
- at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	ms	30 ... 95		105 ... 145	45 ... 80
	opening time	ms	40 ... 80		80 ... 200	80 ... 100
- at $U_{s \min} \dots U_{s \max}$	closing time	ms	35 ... 50		110 ... 130	50 ... 65
	opening time	ms	50 ... 80		80 ... 100	80 ... 100
Arcing time		ms	10 ... 15		10 ... 15	10 ... 15



**Technical data**

Contactor	Size Type	<b>S12</b> <b>3RT14 76</b>
-----------	-----------	-------------------------------

**Control circuit**

<b>Coil voltage tolerance</b>		AC/DC (UC)	$0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$			
<b>Power consumption of solenoid mechanism</b> (with coil in cold state and rated range $U_{s \min} \dots U_{s \max}$ )			Conventional op. mechanism		Solid-state op. mechanism	
AC operation	closing	VA	$U_{s \min}$	$U_{s \max}$	$U_{s \min}$	$U_{s \max}$
	p.f.		700	830	560	750
	closed	VA	0.9	0.9	0.8	0.8
DC operation	p.f.		7.6	9.2	5.4	7
	closing	W	0.9	0.9	0.8	0.8
	closed	W	770	920	600	800
			8.5	10	4	5
<b>PLC control input</b> (EN 61 131-2/Type 2)			DC 24 V/≤ 30 mA			
<b>Operating times</b> (Break-time = opening time + arcing time)			Conventional op. mechanism		Solid-state op. mechanism Operation via A1/A2	
– at $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	closing time	ms	45 ... 100		120 ... 150	60 ... 90
	opening time	ms	60 ... 100		80 ... 100	80 ... 100
– at $U_{s \min} \dots U_{s \max}$	closing time	ms	50 ... 70		125 ... 150	65 ... 80
	opening time	ms	70 ... 100		80 ... 100	80 ... 100
Arcing time		ms	10 ... 15		10 ... 15	10 ... 15

Contactor	Size Type	<b>S10</b> <b>3RT14 66</b>	<b>S12</b> <b>3RT14 76</b>
-----------	-----------	-------------------------------	-------------------------------

**Main circuit**

**Load ratings with AC**

<b>AC-1 utilization category, switching resistive load</b>					
Rated operational currents $I_e$	at 40 °C up to 690 V	A	400	690	
	at 60 °C up to 690 V	A	380	650 1)	
	at 1000 V	A			
Ratings of three-phase loads p.f. = 0.95 (at 60 °C)	at 230 V	kW	145	245	
	400 V	kW	250	430	
	500 V	kW	315	535	
	690 V	kW	430	740	
	1000 V	kW			
Minimum conductor cross-section with $I_{e \text{ load}}$	at 40 °C	mm <sup>2</sup>	240	2 × 240	
	at 60 °C	mm <sup>2</sup>	240	2 × 240	
<b>Power loss per conducting path</b>	at $I_e/AC-1$	W	27	55	
<b>AC-2 and AC-3 utilization categories</b> With an electrical endurance of 1.3 million operating cycles					
Rated operational current $I_e$	up to 690 V	A	138	170	
Ratings of slipping or squirrel-cage motors at 50 Hz and 60 Hz (at 60 °C)	at 230 V	kW	37	55	
	400 V	kW	75	90	
	500 V	kW	90	110	
	690 V	kW	132	160	

**Load ratings with DC**

<b>DC-1 utilization category, switching resistive load (L/R ≤ 1 ms)</b>			Number of conducting paths connected in series			1	2	3	1	2	3
Rated operational currents $I_e$ (at 60 °C)	up to 24 V	A	380	380	380	500	500	500	500	500	500
	60 V	A	380	380	380	500	500	500	500	500	500
	110 V	A	33	380	380	33	500	500	33	500	500
	220 V	A	3.8	380	380	3.8	500	500	3.8	500	500
	440 V	A	0.9	4	11	0.9	4	11	0.9	4	11
	600 V	A	0.6	2	5.2	0.6	2	5.2	0.6	2	5.2
<b>DC-3 and DC-5 utilization categories, shunt and series motors (L/R ≤ 15 ms)</b>			Number of conducting paths connected in series			1	2	3	1	2	3
Rated operational currents $I_e$ (at 60 °C)	up to 24 V	A	380	380	380	500	500	500	500	500	500
	60 V	A	11	380	380	11	500	500	11	500	500
	110 V	A	3	380	380	3	500	500	3	500	500
	220 V	A	0.6	2.5	380	0.6	2.5	500	0.6	2.5	500
	440 V	A	0.18	0.65	1.4	0.18	0.65	1.4	0.18	0.65	1.4
	600 V	A	0.125	0.37	0.75	0.125	0.37	0.75	0.125	0.37	0.75

1) Ambient temperature 50 °C for 3RT14 76-N contactor

# Contactors and Contactor Assemblies

## Contactors for Special Applications

3RT14 contactors, 3-pole,  
for switching resistive loads (AC-1)

SIRIUS



### Technical data

Contactor	Size Type	S10 3RT14 66	S12 3RT14 76
-----------	-----------	-----------------	-----------------

### Main circuit

#### Operating frequency

Operating frequency  $z$  in operating cycles per hour

Contactor without overload relays	No-load op. frequency for AC-1	1/h	2000
	No-load op. frequency for AC-3	1/h	600
		1/h	1000

Dependence of the operating frequency  $z'$  on the operational current  $I'$  and operational voltage  $U'$ :

$$z' = z \cdot \frac{I_e}{I'} \cdot \left( \frac{400 \text{ V}}{U'} \right)^{1.5} \text{ 1/h}$$

### Conductor cross-sections

#### Screw connections

#### Main conductor:

with 3RT19 66-4G box terminal

Finely stranded with end sleeve

mm<sup>2</sup>

Finely stranded without end sleeve

mm<sup>2</sup>

Stranded

mm<sup>2</sup>

AWG conductor connections, solid or stranded

Ribbon cable (qty. × width × thickness)

mm

mm

– Terminal screws

– Tightening torque

M 12 (hexagon socket, A/F 5)

20 ... 22 (180 ... 195 lb.in)

Without box terminal/busbar connection

Finely stranded with cable lug

mm<sup>2</sup>

Stranded with cable lug

mm<sup>2</sup>

AWG conductor connections, solid or stranded

AWG

Connecting bar (max. width)

mm

– Terminal screws

– Tightening torque

M 10 × 30 (A/F 17)

14 ... 24

(124 ... 210 lb.in)

If cable lugs acc. to DIN 46 234 are connected, as of a conductor cross-section of 240 mm<sup>2</sup> and DIN 46 235 as of a conductor cross-section of 185 mm<sup>2</sup>, a 3RT19 66-4EA1 terminal cover is necessary to comply with the phase clearance.

#### Auxiliary conductor:

Solid

mm<sup>2</sup>

Finely stranded with end sleeve

mm<sup>2</sup>

AWG conductor connections, solid or stranded

AWG

– Terminal screws

– Tightening torque

M 3 (PZ3)

0.8 ... 1.2 (7 ... 10.3 lb.in)

Front terminal connected

Back terminal connected

Both terminals connected

70 ... 240



120 ... 185



min. 2 × 50,  
max. 2 × 185  
min. 2 × 50,  
max. 2 × 185  
min. 2 × 70,  
max. 2 × 240  
min. 2 × 2/0,  
max. 2 × 500 kcmil





#### More information

Contactors	Type		3RT23 16	3RT23 17	3RT23 25	3RT23 26	3RT23 27	
	Size		S00		S0			
Dimensions (W x H x D) <sup>3)</sup>	Width	mm	45 x 57.5 x 73		60 x 85 x 97			
<b>General data</b>								
<b>Permissible mounting position<sup>1)</sup></b>								
<b>Mechanical endurance</b>		Operating cycles	30 million		10 million			
<b>Electrical endurance at I<sub>e</sub>/AC-1</b>		Operating cycles	Approx. 0.5 million					
<b>Rated insulation voltage U<sub>i</sub></b> (pollution degree 3)		V	690					
<b>Permissible ambient temperature</b>		• During operation • During storage	°C	-25 ... +60		°C		-55 ... +80
<b>Degree of protection</b> Acc. to EN 60947-1, Appendix C		Device Connection range	IP20				IP20 IP00	
<b>Touch protection</b> acc.to EN 50274			Finger-safe					
<b>Short-circuit protection of contactors without overload relays</b>								
<b>Main circuit</b>								
Fuse links, gG operational class: LV HRC 3NA, DIAZED 5SB, NEOZED 5SE		• Type of coordination *1*1) • Type of coordination *2*1) • Weld-free	A	35 20 10		63 20 16		
according to IEC 60947-4-1/ EN 60947-4-1			A					
<b>Control</b>								
<b>Solenoid coil operating range</b>								
• AC operation		- At 50 Hz - At 60 Hz		0.8 ... 1.1 x U <sub>s</sub> 0.85 ... 1.1 x U <sub>s</sub>		-- --		
• DC operation		- At 50 °C - At 60 °C		0.8 ... 1.1 x U <sub>s</sub> 0.85 ... 1.1 x U <sub>s</sub>		-- --		
• AC/DC operation				--		0.8 ... 1.1 x U <sub>s</sub>		
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x U <sub>s</sub> )								
• AC operation, 50 Hz, standard version		- Closing - P.f.	VA	-- --		77 0.82		
		- Closed - P.f.	VA	-- --		9.8 0.25		
• AC operation, 50/60 Hz, standard version		- Closing - P.f.	VA	27/24.3 0.8/0.75		37/33 0.8/0.75		
		- Closed - P.f.	VA	4.2/3.3 0.25/0.25		5.7/4.4 0.25/0.25		
• AC operation, 60 Hz, USA, Canada		- Closing - P.f.	VA	31.7 0.77		43 0.77		
		- Closed - P.f.	VA	4.8 0.25		6.5 0.25		
• DC operation		- Closing = Closed	W	4		5.9		
<b>Operating times for 0.8 ... 1.1 x U<sub>s</sub><sup>2)</sup></b> Total break time = Opening delay + Arcing time								
• AC operation		- Closing delay - Opening delay	ms	8 ... 35 3.5 ... 14		8 ... 33 4 ... 15		
• DC operation		- Closing delay - Opening delay	ms	30 ... 100 7 ... 13		50 ... 170 15 ... 17.5		
• Arcing time			ms	10 ... 15		10		
<b>Main circuit</b>								
<b>AC capacity</b>								
<b>Utilization category AC-1, switching resistive loads</b>								
• Rated operational currents I <sub>e</sub>		At 40 °C, up to 600 V	A	18		20		
• Rated power for AC loads P.f. = 0.95 (at 40 °C)		At 460 V	HP	5		5		
• Minimum conductor cross-section for loads with I <sub>e</sub>		At 40 °C At 60 °C	mm <sup>2</sup> mm <sup>2</sup>	2.5 2.5		2.5 2.5		
• Rated operational currents I <sub>e</sub>		At 60 °C, up to 400 V	A	9		12		
• Rated power for slipping or squirrel-cage motors at 60 Hz		At 460 V	HP	5		5		

<sup>1)</sup> In accordance with the corresponding 3-pole 3RT2. contactors.  
<sup>2)</sup> With size S00, DC operation: Operating times at 0.85 ... 1.1 x U<sub>s</sub>.

<sup>3)</sup> Dimensions for devices with screw terminals. Size S0 for AC operation. DC operation: Depth + 10mm.

# Contactors and Contactor Assemblies

## Contactors for Special Applications


SIRIUS



### 3RT13 contactors, 4-pole (4 NO), for switching resistive loads

#### Technical specifications

Type		<b>3RT13 36</b>	<b>3RT13 44</b>	<b>3RT13 46</b>
Size		<b>S2</b>	<b>S3</b>	<b>S3</b>
Dimensions (W x H x D)	mm	61 x 85 x 86	73 x 112 x 110	93 x 146 x 134
• With mounted auxiliary switch block	mm	61 x 85 x 135	73 x 112 x 160	93 x 146 x 183



#### General technical specifications

<b>Permissible mounting position<sup>1)</sup></b>		
<b>Mechanical endurance</b>	Operating cycles	10 million
<b>Electrical endurance at <math>I_e/AC-1</math></b>	Operating cycles	Approx. 0.5 million
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	690
<b>Permissible ambient temperature</b>	°C	-25 ... +60
• During operation	°C	-55 ... +80
• During storage		
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C	Device Connection range	IP20 IP00
<b>Touch protection</b> acc. to EN 50274		Finger-safe

#### Short-circuit protection of contactors without overload relays

<b>Main circuit</b>				
Fuse links, operational class gG:	• Type of coordination "1" <sup>1)</sup>	A	160	250
LV HRC, 3NA; DIAZED, 5SB; NEOZED, 5SE	• Type of coordination "2" <sup>1)</sup>	A	63	125
according to IEC 60947-4-1/EN 60947-4-1	• Weld-free	A	50	63
				250
				160
				100

#### Control circuit

<b>Coil operating range (AC/DC)</b>			0.8 ... 1.1 x $U_s$
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x $U_s$ )			
• AC operation, 50 Hz	- Closing	VA	145
	- P.f.	VA	0.79
	- Closed	VA	12.5
	- P.f.	VA	0.36
			270
			0.68
			22
			0.27
• AC operation, 50/60 Hz	- Closing	VA	170/155
	- P.f.	VA	0.76/0.72
	- Closed	VA	15/11.8
	- P.f.	VA	0.35/0.38
			298/274
			0.72/0.62
			27/20
			0.29/0.31
• DC operation	- Closing	W	13.3
	= Closed		15
<b>Operating times for 0.8 ... 1.1 x <math>U_s</math><sup>2)</sup></b> Total break time = Opening delay + Arcing time			
• DC operation	- Closing delay	ms	50 ... 110
	- Opening delay	ms	15 ... 30
			110 ... 200
			14 ... 20
• AC operation	- Closing delay	ms	4 ... 35
	- Opening delay	ms	10 ... 30
			20 ... 50
			10 ... 25
• Arcing time		ms	10 ... 15
			10 ... 15

#### Main circuit

##### AC capacity

<b>Utilization category AC-1, switching resistive loads</b>			
• Rated operational currents $I_e$	At 40 °C, up to 690 V	A	60
	At 60 °C, up to 690 V	A	55
			110
			100
			140
			120
• Rated power for AC loads	At 230 V	kW	23
P.f. = 0.95 (at 40 °C)	400 V	kW	39
			42
			72
			53
			92
• Minimum conductor cross-section	At 40 °C	mm <sup>2</sup>	16
for loads with $I_e$	At 60 °C	mm <sup>2</sup>	16
			50
			50

##### Utilization categories AC-2 and AC-3

• Rated operational currents $I_e$	At 60 °C, up to 400 V	A	26
• Rated power for slipring	At 230 V	kW	5.5
or squirrel-cage motors at 50 and 60 Hz	400 V	kW	11
			--
			--
			--

<sup>1)</sup> In accordance with the corresponding 3-pole 3RT1 contactors.

<sup>2)</sup> With size S00, DC operation: Operating times for 0.85 ... 1.1 x  $U_s$





## More information

Contactors	Type		3RT25 16 S00	3RT25 17 S00	3RT25 18 S00	3RT25 26 S0
	Size					
Dimensions (W x H x D) for screw terminal versions	Width	mm	45 x 57.5 x 73	45 x 57.5 x 73	45 x 57.5 x 73	60 x 85 x 97

## General data

Permissible mounting position<sup>1)</sup>

## Mechanical endurance

Operating cycles	30 million	10 million
------------------	------------	------------

Electrical endurance at  $I_e/AC-1$ 

Operating cycles	Approx. 0.5 million
------------------	---------------------

Rated insulation voltage  $U_i$  (pollution degree 3)

V	690
---	-----

## Permissible ambient temperature

• During operation	°C	-25 ... +60
• During storage	°C	-55 ... +80

## Degree of protection acc. to EN 60947-1, Appendix C

- Terminal compartment

IP20	IP20
IP20	IP00

## Touch protection acc. to EN 50274

Finger-safe

## Short-circuit protection of contactors without overload relays

## Main circuit

Fuse links, gG operational class:	• Type of coordination *1"	A	35	63
LV HRC 3NA, DIAZED 5SB, NEOZED 5SE	• Type of coordination *2"	A	20	35
Acc. to IEC 60947-4-1/EN 60947-4-1	• Weld-free	A	10	16

## Control

## Solenoid coil operating range

See 3RT23 16	See 3RT23 17	See 3RT23 26
--------------	--------------	--------------

Power consumption of the solenoid coils (when coil is cold and  $1.0 \times U_s$ )

See 3RT23 16	See 3RT23 17	See 3RT23 26
--------------	--------------	--------------

Operating times for  $0.8 \dots 1.1 \times U_s$ 

Total break time = Opening delay + Arcing time

See 3RT23 16	See 3RT23 17	See 3RT23 26
--------------	--------------	--------------

## Main circuit

## AC capacity

## Utilization categories AC-1, switching resistive loads

• Rated operational currents $I_e$	At 40 °C up to 690 V	A	18	22	40
	At 60 °C up to 690 V	A	16	20	35
• Rated power for AC loads p.f. = 0.95 (at 60 °C)	At 230 V	kW	6.5	7.5	15
	400 V	kW	11	13	26
• Minimum conductor cross-section for loads with $I_e$	At 40 °C	mm <sup>2</sup>	2.5	2.5	10

## Utilization categories AC-2 and AC-3

• Rated operational currents $I_e$ (at 60 °C)	Up to 400 V	A	9	12	16	25 / 20 <sup>2)</sup>
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz	At 230 V	kW	3	3	4	5.5
	NO contact at 400 V	kW	4	5.5	7.5	11
	NC contact at 400 V	kW	4	4	4	11

## Load rating with DC

Utilization category DC-1, switching resistive load ( $L/R \leq 1$  ms)

• Rated operational currents $I_e$ (at 60 °C)	- 1 conducting path	Up to 24 V	A	16	20	35
		60 V	A	16	20	20
		110 V	A	2.1	2.1	4.5
		220 V	A	0.8	0.8	1
		440 V	A	0.6	0.6	0.4
		Up to 24 V	A	16	20	35
	- 2 conducting paths in series	60 V	A	16	20	35
		110 V	A	12	12	35
		220 V	A	1.6	1.6	5
		440 V	A	0.8	0.8	1

Utilization category DC-3/DC-5<sup>3)</sup>, shunt-wound and series-wound motors ( $L/R \leq 15$  ms)

• Rated operational currents $I_e$ (at 60 °C)	- 1 conducting path	Up to 24 V	A	16	20	20
		60 V	A	0.5	0.5	5
		110 V	A	0.15	0.15	2.5
		220 V	A	0.75	0.75	1
		440 V	A	--	--	0.09
		Up to 24 V	A	16	20	35
	- 2 conducting paths in series	60 V	A	5	5	35
		110 V	A	0.35	0.35	15
		220 V	A	--	--	3
		440 V	A	--	--	0.27

<sup>1)</sup> In accordance with the corresponding 3-pole 3RT2. contactors.

<sup>2)</sup> For AC operation: 25 A; for DC operation: 20 A.

<sup>3)</sup> For  $U_s > 24$  V the rated operational currents  $I_e$  for the NC contact conducting paths are 50 % of the values for the NO  $I_e$  contact conducting paths.

# Contactors and Contactor Assemblies

## Contactors for Special Applications


**3RT15 contactors, 4-pole (2 NO + 2 NC),  
for switching motors**

**SIRIUS**



### Technical specifications

Type		<b>3RT15 35</b>
Size		<b>S2</b>
Dimensions (W x H x D)	mm	73 x 112 x 110
• With mounted auxiliary switch block	mm	73 x 112 x 160



### General technical specifications

#### Permissible mounting position<sup>1)</sup>

<b>Mechanical endurance</b>	Operating cycles	10 million
<b>Electrical endurance at <math>I_e/AC-1</math></b>	Operating cycles	Approx. 0.5 million
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	690
<b>Permissible ambient temperature</b>		
• During operation	°C	-25 ... +60
• During storage	°C	-55 ... +80
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP20 (IP00 terminal compartment)
<b>Touch protection</b> acc. to EN 50274		Finger-safe

### Short-circuit protection of contactors without overload relays

#### Main circuit

Fuse links, operational class gG:  
LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE  
according to IEC 60947-4-1/EN 60947-4-1

• Type of coordination "1"	A	160
• Type of coordination "2"	A	80
• Weld-free	A	50

### Control circuits

<b>Coil operating range (AC/DC)</b>		0.8 ... 1.1 x $U_s$
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x $U_s$ )		
• AC operation, 50 Hz		
- Closing	VA	145
- P.f.	VA	0.79
- Closed	VA	12.5
- P.f.	VA	0.36
• AC operation, 50/60 Hz		
- Closing	VA	170/155
- P.f.	VA	0.76/0.72
- Closed	VA	15/11.8
- P.f.	VA	0.35/0.38
• DC operation (closing = closed)	W	13.3
<b>Operating times for 0.8 ... 1.1 x <math>U_s</math><sup>2)</sup></b> Total break time = Opening delay + Arcing time		
• AC operation		
- Closing delay	ms	4 ... 35
- Opening delay	ms	10 ... 30
• DC operation		
- Closing delay	ms	50 ... 110
- Opening delay	ms	15 ... 30
• Arcing time	ms	10 ... 15

### Main circuit

#### AC capacity

##### Utilization category AC-1, switching resistive loads

• Rated operational currents $I_e$	At 40 °C up to 690 V	A	60
	At 60 °C up to 690 V	A	55
• Rated power for AC loads	At 230 V	kW	20
P.f. = 0.95 (at 60 °C)	400 V	kW	36
• Minimum conductor cross-section for loads with $I_e$	At 40 °C	mm <sup>2</sup>	16

##### Utilization categories AC-2 and AC-3

• Rated operational currents $I_e$ (at 60 °C)	Up to 400 V	A	40
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz	At 230 V	kW	9.5
	400 V	kW	18.5

<sup>1)</sup> In accordance with the corresponding 3-pole 3RT1 contactors.

<sup>2)</sup> With size S00, DC operation: Operating times for 0.85 ... 1.1 x  $U_s$ .



### Technical specifications

All technical specifications not mentioned in the table below are identical to those of the 3RT10 17 contactors for size S00, to

those of the 3RT10 26 contactors for size S0 and to those of the 3RT10 45 contactors for size S3.

Type		3RT16 17-.A..3 S00	3RT16 27-.A..1 S0	3RT16 47-.A..1 S3
Size				
Dimensions (W x H x D) including auxiliary switches and connecting cables		45 x 101 x 105	45 x 100 x 130	70 x 167 x 183
<b>General technical specifications</b>				
<b>Capacitor rating at rated power</b> (utilization category AC-6b)	230 V, 50/60 Hz kvar <b>400 V, 50/60 Hz kvar</b> 525 V, 50/60 Hz kvar 690 V, 50/60 Hz kvar	3 ... 7.5 <b>5 ... 12.5</b> 7.5 ... 15 10 ... 21	3.5 ... 15 <b>6 ... 25</b> 7.8 ... 30 10 ... 42	3.5 ... 30 <b>5 ... 50</b> 7.5 ... 60 10 ... 84
<b>Auxiliary contacts mounted</b> (unassigned)		1 NO + 1 NC	1 NO	
<b>Auxiliary contacts mountable</b> (lateral), not for sizes S00 and S0		--		2 NC + 2 NO or 1 NO + 1 NC
<b>Max. switching frequency</b>	h <sup>-1</sup>	180	100	
<b>Electrical endurance</b>	Operating cycles	> 250000	> 150000	> 100000
<b>Ambient temperature</b>	°C	60		
<b>Short-circuit protection</b>		1.6 ... 2.2 × I <sub>e</sub>		
<b>Coil operating range</b>		0.8 ... 1.1 × U <sub>s</sub>		
<b>Conductor cross-sections (1 or 2 conductors connectable)</b>				
<b>Main conductors</b>		<b>Screw terminals</b>		
• Solid	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>2</sup> ; 2 x (0.75 ... 2.5) <sup>2</sup> according to IEC 60947; max. 2 x (1 ... 4) <sup>2</sup>	2 x (1 ... 2.5) <sup>2</sup> ; 2 x (2.5 ... 6) <sup>2</sup> <sup>1</sup> according to IEC 60947; max. 1 x 10 <sup>1</sup> 2)	--
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>2</sup> ; 2 x (0.75 ... 2.5) <sup>2</sup>	2 x (1 ... 2.5) <sup>2</sup> ; 2 x (2.5 ... 6) <sup>1</sup> 2)	--
• AWG cables				
- Solid	AWG	2 x (20 ... 16)	2 x (16 ... 12)	--
- Solid or stranded	AWG	2 x (18 ... 14)	2 x (14 ... 10)	--
- Stranded	AWG	1 x 12	1 x 8	--
• Terminal screws		M3	M4 (Pozidriv size 2)	--
- Tightening torque	Nm	0.8 ... 1.2	2 ... 2.5	--
	lb.in	7 ... 10.3	18 ... 22	--

<sup>1</sup>) 3RV19 25-5AB feeder terminal for 16 mm<sup>2</sup>.

<sup>2</sup>) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

# Contactors and Contactor Assemblies

## Contactors for Special Applications

SIRIUS



### 3RT20 coupling relays (interface) for switching motors

#### More information





All technical specifications not mentioned in the table below are identical to those of the 3RT20 contactors for switching motors (see 2/115-2/117)

Contactors	Type	3RT20 1.-.HB4.	3RT20 1.-.JB4.	3RT20 1.-.KB4.	3RT20 2.-.KB4.
	Size	S00	S00	S00	S0
	Width	mm 45	45	45	45

#### General data

<b>Mechanical endurance</b>	Operating cycles	30 million			10 million
<b>Protective separation</b> between the coil and the main contacts acc. to EN 60947-1, Appendix N	V	400			

#### Control

<b>Solenoid coil operating range</b>		0.7 ... 1.25 x U <sub>s</sub>			
<b>Power consumption of the solenoid coil</b> (for cold coil) Closing = Closed	At U <sub>s</sub> 17 V W	1.6			2.3
	24 V W	2.8			4.5
	30 V W	4.4			7
<b>Permissible residual current</b> of the electronics (for 0 signal)		< 10 mA x (24 V/U <sub>s</sub> )			< 6 mA x (24 V/U <sub>s</sub> )
<b>Overvoltage configuration of the solenoid coil</b>		Without overvoltage damping 	With diode 	With suppressor diode 	With varistor 




Operating times of the coupling contactors					
• Closing					
- At 17 V	ON-delay NO	ms	40 ... 130		70 ... 270
	OFF-delay NC	ms	30 ... 80		60 ... 250
- At 24 V	ON-delay NO	ms	35 ... 60		65 ... 90
	OFF-delay NC	ms	25 ... 40		55 ... 80
- At 30 V	ON-delay NO	ms	25 ... 50		52 ... 65
	OFF-delay NC	ms	15 ... 30		43 ... 57
• Closing at 17 ... 30 V					
	OFF-delay NO	ms	7 ... 20	38 ... 65	7 ... 20
	ON-delay NC	ms	20 ... 30	55 ... 75	20 ... 30

Contactors	Type	3RT20 1.-1MB4.-0KT0	3RT20 1.-1VB4.	3RT20 1.-1WB4.
	Size	S00	S00	S00
	Width	mm 45	45	45

#### General data

<b>Mechanical endurance</b>	Operating cycles	30 million		
<b>Protective separation</b> between the coil and the main contacts acc. to EN 60947-1, Appendix N	V	400		

#### Control

<b>Solenoid coil operating range</b>		0.85 ... 1.85 x U <sub>s</sub>		
<b>Power consumption of the solenoid coil</b> (for cold coil) Closing = Closed	At U <sub>s</sub> 24 V W	1.6		
<b>Permissible residual current, upright mounting position</b>		On request		
<b>Overvoltage configuration of the solenoid coil</b>		Without overvoltage damping 	With diode 	With suppressor diode 

Operating times of the coupling contactors					
• Closing					
- At 20.5 V	ON-delay NO	ms	30 ... 120		
	OFF-delay NC	ms	20 ... 110		
- At 24 V	ON-delay NO	ms	25 ... 90		
	OFF-delay NC	ms	15 ... 80		
- At 44 V	ON-delay NO	ms	15 ... 60		
	OFF-delay NC	ms	10 ... 50		
• Opening					
	OFF-delay NO	ms	5 ... 20	20 ... 80	5 ... 20
	ON-delay NC	ms	10 ... 30	30 ... 90	10 ... 30



#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3TF68/69 contactors are climate-proof.

They are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices (see [Accessories and Spare Parts](#) on page 2/54).

##### Main contacts

###### Contact erosion indication with 3TF68/69 vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of 3 white double slides on the contactor base. If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, then the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all 3 vacuum interrupters simultaneously.

##### Auxiliary contacts

###### Contact reliability

These auxiliary contacts are particularly suitable for solid-state circuits with currents  $\geq 1$  mA at a voltage  $\geq 17$  V.

##### Electromagnetic compatibility

The 3TF68/69...-C contactors for AC operation are fitted with an electronically controlled solenoid operating mechanism with a high interference immunity (for EMC values see page 3/115). The solenoid coil is connected to varistors for protection against overvoltages.

The 3TF68/69...-Q.. contactors for AC operation are designed for operation in systems with AC control supply voltage which is subject to strong interference. The solenoid systems of these contactors are configured in the DC economy circuit with rectification. The rectifier bridge is connected to varistors for protection against overvoltages.

##### Protection of the main current paths

An integrated RC varistor connection for the main current paths dampens the switching overvoltage rises to safe values. This prevents multiple restricting. It can therefore be assumed that the motor winding cannot be damaged by switching overvoltages with steep voltage rises.

##### Note:

During operation in installations in which the emitted interference limits cannot be observed, e.g. when used for output contactors in converters, 3TF68/69...-Q contactors without a main current path circuit are recommended.

#### Technical specifications

Contactor	Type	3TF68 and 3TF69
<b>Rated data of the auxiliary contacts</b>		Acc. to IEC 60947-5-1
<b>Rated insulation voltage</b> $U_i$ (pollution degree 3)	V	690
<b>Conventional thermal current</b> $I_{th} = \text{Rated operational current } I_e/\text{AC-12}$	A	10
<b>AC load</b>		
<b>Rated operational current</b> $I_e/\text{AC-15}/\text{AC-14}$		
• For rated operational voltage $U_e$		
- At 24 V	A	10
- At 110 V	A	10
- At 125 V	A	10
- At 220 V	A	6
- At 230 V	A	5.6
- At 380 V	A	4
- At 400 V	A	3.6
- At 500 V	A	2.5
- At 660 V	A	2.5
- At 690 V	A	2.3
<b>DC load</b>		
<b>Rated operational current</b> $I_e/\text{DC-12}$		
• For rated operational voltage $U_e$		
- At 24 V	A	10
- At 60 V	A	10
- At 110 V	A	3.2
- At 125 V	A	2.5
- At 220 V	A	0.9
- At 440 V	A	0.33
- At 600 V	A	0.22
<b>Rated operational current</b> $I_e/\text{DC-13}$		
• For rated operational voltage $U_e$		
- At 24 V	A	10
- At 60 V	A	5
- At 110 V	A	1.14
- At 125 V	A	0.98
- At 220 V	A	0.48
- At 440 V	A	0.13
- At 600 V	A	0.07
<b>Ⓢ and Ⓣ rated data of the auxiliary contacts</b>		
Rated voltage, max.	V AC	600
Switching capacity		A 600, P 600

## 3TF68 and 3TF69 Vacuum contactors


Contactor

3TF68 and 3TF69

### Contact endurance of the auxiliary contacts

The contact endurance for utilization category AC-12 or AC-15/AC-14 depends mainly on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The characteristic curves apply to 230 V AC.

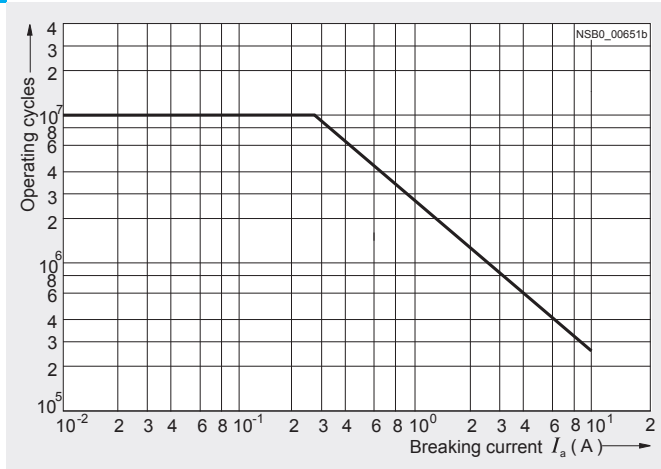

### Contact erosion indication with vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of 3 white double slides on the contactor base.

If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all 3 vacuum interrupters.

3TF68 and 3TF69

### Contact endurance of the main contacts

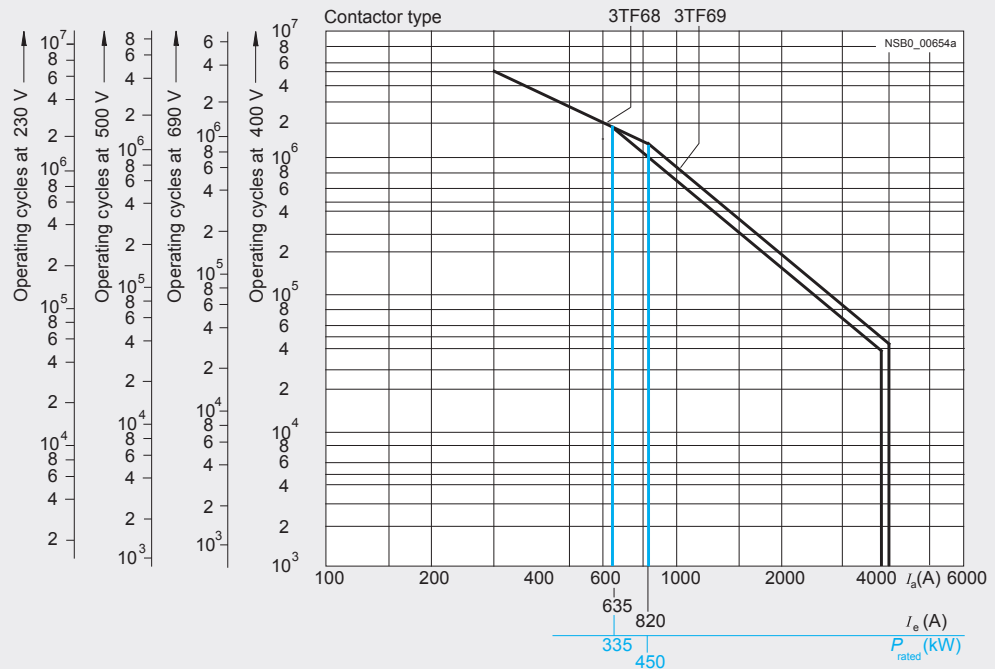


Diagram legend:  
 $P_{rated}$  = Rated power for squirrel-cage motors at 400 V  
 $I_a$  = Breaking current  
 $I_e$  = Rated operational current



Type		<b>3TF68</b>	<b>3TF69</b>
Size		<b>14</b>	<b>14</b>
Dimensions (W x H x D)		230 x 276 x 237	230 x 295 x 237

#### General data

<b>Permissible mounting position, installation instructions</b> <sup>1) 2)</sup> The contactors are designed for operation on a vertical mounting surface.	
---	--

<b>Mechanical endurance</b>	Operating cycles	5 million
<b>Electrical endurance</b>	Operating cycles	<sup>3)</sup>
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	kV	1
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	8
<b>Protective separation</b> between the coil and the main contacts acc. to IEC 60947-1, Appendix N	kV	1
<b>Mirror contacts</b> A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact. One NC contact each must be connected in series for the right and left auxiliary switch block respectively.		Yes, acc. to IEC 60947-4-1, Appendix F
<b>Permissible ambient temperature</b>	°C	-25 ... +55
• During operation	°C	-55 ... +80
• During storage		
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP00/open, coil assembly IP40
<b>Touch protection</b> acc. to EN 50274		Finger-safe with cover
<b>Shock resistance</b>		
• Rectangular pulse		
- AC operation	g/ms	8.1/5 and 4.7/10
- DC operation	g/ms	9/5 and 5.7/10
• Sine pulse		
- AC operation	g/ms	12.8/5 and 7.4/10
- DC operation	g/ms	14.4/5 and 9.1/10
<b>Conductor cross-sections</b>		See page 2/164.
<b>Electromagnetic compatibility (EMC)</b>		See page 2/93.

#### Short-circuit protection

<b>Main circuit</b>			
Fuse links, gG operational class: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1			
• Type of coordination "1"	A	1000	1250
• Type of coordination "2"	A	500	630
• Weld-free <sup>4)</sup>	A	400	500
<b>Auxiliary circuit</b>			
• Short-circuit test with fuse links of gG operational class: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE with $I_k = 1$ kA acc. to IEC 60947-5-1	A	10	
• Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400$ A acc. to IEC 60947-5-1	A	10	

<sup>1)</sup> To easily replace the laterally mounted auxiliary switches it is recommended to maintain a minimum distance of 30 mm between the contactors.  
<sup>2)</sup> If mounted at a 90° angle (conducting paths are horizontally above each other), the switching frequency is reduced by 80% compared with the normal values.  
<sup>3)</sup> See "Endurance of the auxiliary contacts", page 2/160.  
<sup>4)</sup> Test conditions according to IEC 60947-4-1.



## 3TF68 and 3TF69 Vacuum contactors

Contactor	Type	3TF68	3TF69
	Size	14	14
<b>Control</b>			
<b>Coil operating range</b>		0.8 x $U_{s \min}$ ... 1.1 x $U_{s \max}$	
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x $U_s$ )			
• AC operation, $U_{s \max}$	- Closing - Closed	VA/p.f. VA/p.f.	1850/1 49/0.15
• AC operation, $U_{s \min}$	- Closing - Closed	VA/p.f. VA/p.f.	1200/1 13.5/0.47
• DC economy circuit <sup>1)</sup>	- Closing at 24 V - Closed	W W	1010 28
For contactors of type 3TF68/69...-Q:			
• AC operation, $U_{s \min}$ <sup>2)</sup>	- Closing - Closed	VA/p.f. VA/p.f.	1000/0.99 11/1
<b>Operating times for 0.8 ... 1.1 x <math>U_s</math></b> (Total break time = Opening delay + Arcing time)		(Values apply to cold and warm coil)	
• AC operation	- Closing delay - Opening delay	ms ms	70 ... 120 (22 ... 65) <sup>3)</sup> 70 ... 100
• DC economy circuit	- Closing delay - Opening delay	ms ms	76 ... 110 50
• Arcing time		ms	10 ... 15
For contactors of type 3TF68/69...-Q:			
• AC operation	- Closing delay - Opening delay	ms ms	35 ... 90 65 ... 90
<b>Operating times for 1.0 x <math>U_s</math></b> (Total break time = Opening delay + Arcing time)			
• AC operation	- Closing delay - Opening delay	ms ms	80 ... 100 (30 ... 45) <sup>3)</sup> 70 ... 100
• DC economy circuit	- Closing delay - Opening delay	ms ms	80 ... 90 50
<b>Minimum command duration</b> for closing	Standard Reduced make-time	ms ms	120 90
<b>Minimum interval time</b> between two ON commands		ms	100

<sup>1)</sup> At 24 V DC; for further voltages, deviations of up to ±10 % are possible.

<sup>2)</sup> Including reversing contactor.

<sup>3)</sup> Values in brackets apply to contactors with reduced operating times.

Contactor	Type	3TF6. 44- .CF7	3TF6. 44- .CM7	3TF6. 44- .CP7	3TF6. 44- .CQ7	3TF6. 44- .CS7
<b>Electromagnetic compatibility</b>						
<b>Rated control supply voltage <math>U_s</math></b>	V AC	110 ... 132	200 ... 240	230 ... 277	380 ... 460	500 ... 600
<b>Overvoltage type</b> acc. to IEC 60801		Burst/Surge				
<b>Degree of severity</b> acc. to IEC 60801						
• Burst		3	4	4	4	4
• Surge		4	4	4	4	4
<b>Overvoltage resistance</b>						
• Burst	kV	2	4	4	4	4
• Surge	kV	6	5	5	6	6



Contactor	Type		3TF68	3TF69
	Size		14	14
<b>Main circuit</b>				
<b>AC capacity</b>				
<b>Utilization category AC-1</b>				
<b>Switching resistive loads</b>				
• Rated operational currents $I_e$	At 40 °C up to 690 V	A	700	910
	At 55 °C up to 690 V	A	630	850
	At 55 °C up to 1000 V	A	450	800
• Rated power for AC loads with p.f. = 0.95 at 55°C	230 V	kW	240	323
	400 V	kW	415	558
	500 V	kW	545	735
	690 V	kW	720	970
	1000 V	kW	780	1385
• Minimum conductor cross-sections for loads with $I_e$	At 40°C	mm <sup>2</sup>	2 x 240	$I_e \geq 800$ A: 2 x 60 x 5 (copper busbars)
	At 55°C	mm <sup>2</sup>	2 x 185	$I_e < 800$ A: 2 x 240
<b>Utilization categories AC-2 and AC-3</b>				
• Rated operational currents $I_e$	Up to 690 V	A	630	820
	1000 V	A	435	580
• Rated power for slipping or squirrel-cage motors at 50 Hz and 60 Hz	At 230 V	kW	200	260
	400 V	kW	347	450
	500 V	kW	434	600
	690 V	kW	600	800
	1000 V	kW	600	800
<b>Utilization category AC-4 (for <math>I_a = 6 \times I_e</math>)</b>				
• Rated operational current $I_e$	Up to 690 V	A	610	690
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 400 V	kW	355	400
The following applies to a contact endurance of about 200000 operating cycles:				
• Rated operational currents $I_e$	Up to 690 V	A	300	360
	1000 V	A	210	250
• Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 230 V	kW	97	110
	400 V	kW	168	191
	500 V <sup>1)</sup>	kW	210	250
	690 V <sup>1)</sup>	kW	278	335
	1000 V <sup>1)</sup>	A	290	350
<b>Switching frequency</b>				
<b>Switching frequency z</b> in operating cycles/hour				
• Contactors without overload relays	No-load switching frequency AC	1/h	2000	1000
	No-load switching frequency DC	1/h	1000	1000
	AC-1	1/h	700	700
	AC-2	1/h	200	200
	AC-3	1/h	500	500
	AC-4	1/h	150	150
• Contactors with overload relays (mean value)		1/h	15	15

<sup>1)</sup> Max. permissible rated operational current  $I_e/AC-4 = I_e/AC-3$  up to 500 V, for reduced contact endurance and reduced switching frequency.



## 3TF68 and 3TF69 Vacuum contactors

Contactor	Type	3TF68	3TF69
	Size	14	14
<b>Conductor cross-sections</b>			
<b>Main conductors:</b>		<b>Screw terminals</b>	
<ul style="list-style-type: none"> <li>• Busbar connections                             <ul style="list-style-type: none"> <li>- Finely stranded with cable lug</li> <li>- Stranded with cable lug</li> <li>- Solid or stranded</li> <li>- Connecting bar (max. width)</li> </ul> </li> <li>• Terminal screw                             <ul style="list-style-type: none"> <li>- Tightening torque</li> </ul> </li> <li>• With box terminal<sup>1)</sup> <ul style="list-style-type: none"> <li>- Connectable copper bars</li> <li>- Width</li> <li>- Max. thickness</li> <li>- Terminal screw</li> <li>- Tightening torque</li> </ul> </li> </ul>	mm <sup>2</sup> mm <sup>2</sup> AWG mm  Nm  mm mm  Nm lb.in	50 ... 240 70 ... 240 2/0 ... 500 MCM 50  M10 x 30 14 ... 24 (124 ... 210 lb.in)  15 ... 25 1 x 26 or 2 x 11 A/F 6 (hexagon socket) 25 ... 40 221 ... 354	50 ... 240 50 ... 240 2/0 ... 500 MCM 60 (U <sub>g</sub> ≤ 690 V) 50 (U <sub>g</sub> > 690 V)  M12 x 40 20 ... 35 (177 ... 310 lb.in)  15 ... 38 1 x 46 or 2 x 18 A/F 8 (hexagon socket) 35 ... 50 266 ... 443
<b>Auxiliary conductors:</b>			
<ul style="list-style-type: none"> <li>• Solid</li> <li>• Finely stranded with end sleeve</li> <li>• Pin-end connector acc. to DIN 46231</li> <li>• Solid or stranded</li> <li>• Tightening torque</li> </ul>	mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup> AWG Nm lb.in	2 x (0.5 ... 1) <sup>2</sup> /2 x (1 ... 2.5) <sup>2</sup> 2 x (0.5 ... 1) <sup>2</sup> /2 x (0.75 ... 2.5) <sup>2</sup> 2 x (1 ... 1.5) 2 x (18 ... 12) 0.8 ... 1.4 7 ... 12	

<sup>1)</sup> See "Accessories and Spare Parts", page 2/54.

<sup>2)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Contactor	Type	3TF68	3TF69
	Size	14	14
<b>Ⓢ and Ⓣ rated data</b>			
<b>Rated insulation voltage</b>	V AC	600	600
<b>Uninterrupted current</b>	A	630	820
<b>Maximum horsepower ratings</b> (Ⓢ and Ⓣ approved values)			
<ul style="list-style-type: none"> <li>• Rated power for induction motors at 60 Hz                             <ul style="list-style-type: none"> <li>- At 200 V</li> <li>- At 230 V</li> <li>- At 460 V</li> <li>- At 575 V</li> </ul> </li> </ul>	hp hp hp hp	231 266 530 664	290 350 700 860
<b>NEMA/EEMAC ratings</b>			
SIZE	hp	6	7
<ul style="list-style-type: none"> <li>• Uninterrupted current                             <ul style="list-style-type: none"> <li>- Open</li> <li>- Enclosed</li> </ul> </li> <li>• Rated power for induction motors at 60 Hz                             <ul style="list-style-type: none"> <li>- At 200 V</li> <li>- At 230 V</li> <li>- At 460 V</li> <li>- At 575 V</li> </ul> </li> </ul>	A A  hp hp hp hp	600 540  150 200 400 400	820 810  -- 300 600 600
<b>Overload relays</b>	Type	3RB12 .	
<ul style="list-style-type: none"> <li>• Setting range</li> </ul>	A	200 ... 820	



#### Overview

##### 3TC4 and 3TC5

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1

The contactors are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices.

The DC motor ratings given in the tables are applicable to the DC-3 and DC-5 utilization categories with two-pole switching of the load or with the two conducting paths of the contactor connected in series.

One contactor conducting path can switch full power up to 220 V. The ratings for higher voltages are available on request.

##### 3TC7

IEC 60947-4-1, EN 60947-4-1.

The contactors are suitable for use in any climate. They are suitable for switching and controlling DC motors as well as all other DC circuits.

The solenoid excitation is configured for a particularly large operating range. It is between 0.7 or 0.8 to 1.2  $\times U_N$ .

3TC74 contactors can be used at up to 750 V/400 A and 50 Hz in AC-1 operation.

#### Application

The contactors are suitable for switching and controlling DC motors as well as all other DC circuits.

A version with an especially large coil operating range is available for operation in electrically driven vehicles and in switchgears with significant fluctuations in the actuating voltage



#### Technical specifications

Contactors	Type	3TC4 and 3TC7	3TC5
<b>Rated data of the auxiliary contacts</b>			
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	690	
<b>Conventional thermal current <math>I_{th}</math> = Rated operational current <math>I_e/AC-12</math></b>	A	10	10
<b>AC load</b>			
<b>Rated operational current <math>I_e/AC-15/AC-14</math></b> • For rated operational voltage $U_e$			
	24 V A	10	10
	110 V A	10	10
	125 V A	10	10
	220 V A	6	6
	230 V A	5.6	5.6
	380 V A	4	4
	400 V A	3.6	3.6
	500 V A	2.5	2.5
	660 V A	2.5	2.5
	690 V A	--	--
<b>DC load</b>			
<b>Rated operational current <math>I_e/DC-12</math></b> • For rated operational voltage $U_e$			
	24 V A	10	10
	60 V A	10	10
	110 V A	3.2	8
	125 V A	2.5	6
	220 V A	0.9	2
	440 V A	0.33	0.6
	600 V A	0.22	0.4
<b>Rated operational current <math>I_e/DC-13</math></b> • For rated operational voltage $U_e$			
	24 V A	10	10
	60 V A	5	5
	110 V A	1.14	2.4
	125 V A	0.98	2.1
	220 V A	0.48	1.1
	440 V A	0.13	0.32
	600 V A	0.07	0.21

## 3TC contactors

Contactors	Type	<b>3TC44 ... 3TC56</b>
<b>Ⓢ and Ⓣ rated data of the auxiliary contacts</b>		
Rated voltage, max.	V AC	600
Switching capacity		A 600, P 600

Contactors	Type	<b>3TC44 ... 3TC78</b>
<b>Contact endurance of the main contacts</b>		

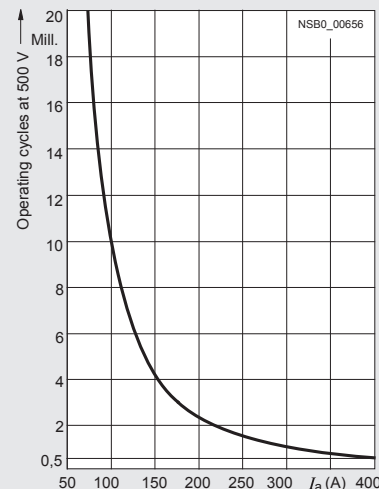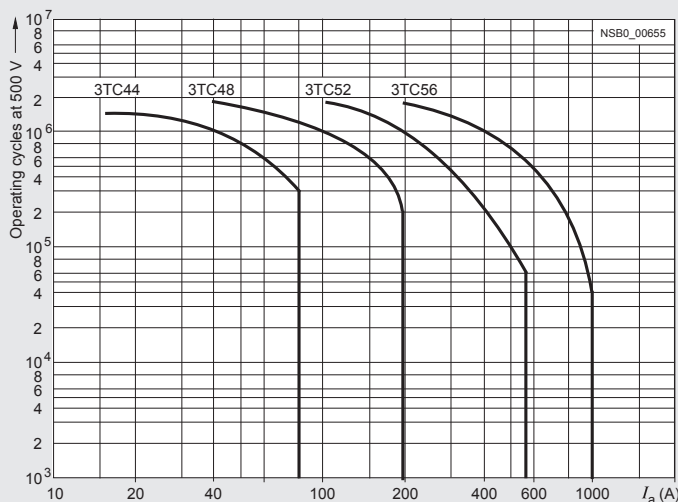

3TC44 to 3TC56 contactors

Legend for the diagrams:

$I_a$  = Breaking current


3TC74 and 3TC78 contactors

Contactors	Type Size	<b>3TC44 2</b>	<b>3TC48 4</b>	<b>3TC52 8</b>	<b>3TC56 12</b>
------------	-----------	--------------------	--------------------	--------------------	---------------------

### General technical specifications

#### Permissible mounting positions

The contactors are designed for operation on a vertical mounting surface.



<b>Mechanical endurance</b>	Operating cycles	10 million
<b>Electrical endurance</b>	Operating cycles	1) <sup>1)</sup>
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	800   1000
<b>Protective separation</b> between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	Up to 300   Up to 660
<b>Mirror contacts<sup>2)</sup></b> A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with a NO main contact.		Yes, acc. to IEC 60947-4-1, Appendix F
<b>Permissible ambient temperature</b>	°C	-25 ... +55
• During operation	°C	-50 ... +80
• During storage		
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP00/open, for AC operation, coil assembly IP40
<b>Shock resistance</b>	Rectangular pulse g/ms	7.5/5 and 3.4/10   10/5 and 5/10   12/5 and 5.5/10   12/5 and 5.6/10

### Short-circuit protection

#### Main circuit

Fuse links, operational class gG:

LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE

• Type of coordination "1"

• Type of coordination "2"

#### Auxiliary circuit

• Short-circuit test with fuse links of gG operational class:

DIAZED, type 5SB; NEOZED, type 5SE

with short-circuit current  $I_k = 1$  kA acc. to IEC 60947-5-1

• Test with miniature circuit breaker up to 230 V with C characteristic:

Short-circuit current  $I_k = 400$  A acc. to IEC 60947-5-1

	A	50	160	250	400
	A	35	63	80	250
	A	16			
	A	10			

1) See the endurance diagram above.

2) For 3TC44, one NC contact each must be connected in series for the right and left auxiliary switch block respectively.



Type			3TC44	3TC48	3TC52	3TC56
Size			2	4	8	12
Dimensions (W x H x D)		mm	70 x 85 x 141	100 x 183 x 180	135 x 238 x 232	160 x 279 x 310
		mm	70 x 85 x 100	100 x 183 x 154	135 x 238 x 200	160 x 279 x 251
<b>Control circuits</b>						
<b>Coil operating range</b>			0.8 ... 1.1 x U <sub>s</sub>			
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x U <sub>s</sub> )						
• DC operation	- Closing = Closed	W	10	19	30	86
• AC operation, 50 Hz coil	- Closing	VA/p.f.	68/0.86	300/0.5	640/0.48	1780/0.3
	- Closed	VA/p.f.	10/0.29	26/0.24	46/0.23	121/0.22
• AC operation, 60 Hz coil	- Closing	VA/p.f.	95/0.79	365/0.45	730/0.38	2140/0.3
	- Closed	VA/p.f.	12/0.3	35/0.26	56/0.24	140/0.29
• AC operation, 50/60 Hz coil	- Closing at 50 Hz/60 Hz	VA/p.f.	79/73/0.83/0.78	--	--	--
	- Closed at 50 Hz/60 Hz	VA/p.f.	11/9/0.28/0.27	--	--	--
<b>Operating times</b> (for 0.8 ... 1.1 x U <sub>s</sub> ) Total break time = Opening delay + Arcing time			(The values apply up to and including 20 % undervoltage, 10 % overvoltage, as well as when the coil is cold and warm)			
• DC operation	- Closing delay	ms	35 ... 190	90 ... 380	120 ... 400	110 ... 400
	- Opening delay <sup>1)</sup>	ms	10 ... 25	17 ... 28	22 ... 35	40 ... 110
• AC operation	- Closing delay	ms	10 ... 40	20 ... 50	20 ... 50	20 ... 50
	- Opening delay <sup>1)</sup>	ms	5 ... 25	5 ... 30	10 ... 30	10 ... 30
• Arcing time	- DC-1	ms	20			
	- DC-3/DC-5	ms	30			
<b>Main circuit</b>						
<b>Load rating with DC</b>						
<b>Utilization category DC-1, switching resistive loads (L/R ≤ 1 ms)</b>						
• Rated operational currents I <sub>e</sub> (at 55 °C)	Up to U <sub>e</sub> 750 V	A	32	75	220	400
• Minimum conductor cross-section		mm <sup>2</sup>	6	25	95	240
• Rated power at U <sub>e</sub>	At 220 V	kW	7	16.5	48	88
	440 V	kW	14	33	97	176
	600 V	kW	19.2	45	132	240
	750 V	kW	24	56	165	300
<b>Utilization category DC-3 and DC-5</b>						
<b>Shunt-wound and series-wound motors (L/R ≤ 15 ms)</b>						
• Rated operational currents I <sub>e</sub> (at 55 °C)	Up to 220 V	A	32	75	220	400
	440 V	A	29	75	220	400
	600 V	A	21	75	220	400
	750 V	A	7.5	75	170	400
• Rated power at U <sub>e</sub>	At 110 V	kW	2.5	6.5	20	35
	220 V	kW	5	13	41	70
	440 V	kW	9	27	82	140
	600 V	kW	9	38	110	200
	750 V	kW	4	45	110	250
<b>Switching frequency</b>						
<b>Switching frequency z</b> in operating cycles/hour						
AC/DC operation						
• With resistive load DC-1		h <sup>-1</sup>	1500	1000		
	• For inductive load DC-3/DC-5		750	600		
<b>Conductor cross-sections (1 or 2 conductors connectable)</b>						
<b>Main conductors:</b>			<b>Screw terminals</b>			
• Solid	mm <sup>2</sup>		2 x (2.5 ... 10)	2 x (6 ... 16)	--	--
• Finely stranded with end sleeve	mm <sup>2</sup>		2 x (1.5 ... 4)	--	--	--
• Stranded with cable lug	mm <sup>2</sup>		2 x 16	2 x 35	2 x 120	2 x 150
• Pin-end connector acc. to DIN 46231	mm <sup>2</sup>		2 x (1 ... 6)	--	--	--
• Busbars	mm		--	15 x 2.5	25 x 4	2 x (25 x 3)
• Terminal screw			M5	M6	M10	M10
<b>Auxiliary conductors:</b>						
• Solid	mm <sup>2</sup>		2 x (1 ... 2.5)			
• Finely stranded with end sleeve	mm <sup>2</sup>		2 x (0.75 ... 1.5)			

<sup>1)</sup> The opening delay times can increase if the contactor coils are damped against voltage peaks. Only 3TC44 contactors are allowed to be fitted with diodes.


### 3TC contactors

Type		<b>3TC74</b>	<b>3TC78</b>
Design		<b>1-pole contactors</b>	<b>2-pole contactors</b>
Dimensions		78 x 352 x 276	160 x 366 x 290

#### General technical specifications

##### Permissible mounting positions

The contactors are designed for operation on a vertical mounting surface.



<b>Mechanical endurance</b>	Operating cycles	30 million
<b>Electrical endurance</b>	Operating cycles	1) <sup>1)</sup>
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	1500
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	8
<b>Protective separation</b> between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	630
<b>Permissible ambient temperature</b>	°C	-25 ... +55
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP00/open

#### Short-circuit protection

##### Main circuit

Fuse links, operational class gG:

- LV HRC, type 3NA
- Type of coordination "1"
- Type of coordination "2"

##### Auxiliary circuits

- Short-circuit test with fuse links of gG operational class: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current  $I_k = 1$  kA acc. to IEC 60947-5-1
- Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current  $I_k = 400$  A acc. to IEC 60947-5-1

#### Control circuits

##### Coil operating range

- DC operation
 

At $U_c = 24$ V	0.8 ... 1.2 x $U_s$
At $U_c > 24$ V	0.7 ... 1.2 x $U_s$
- AC operation
 

At $U_c = 24$ V	0.7 ... 1.15 x $U_s$
At $U_c > 24$ V	0.7 ... 1.14 x $U_s$

##### Power consumption of the solenoid coils (when coil is cold and 1.0 x $U_s$ )

- DC operation Closing = Closed W 46 92
- AC operation, 50 Hz Closing, VA 80 160
- Closed 0.95 0.95

##### Operating times

(Total break time = Opening delay + Arcing time)

- AC and DC operation
 

- Closing delay	ms	60 ... 100
- Opening delay	ms	20 ... 35
- Arcing time at 0.06 ... 4 x  $I_e$  ms 40 ... 70

#### Main circuit

##### Load rating with DC

##### Utilization category DC-1, switching resistive loads ( $L/R \leq 1$ ms)

- Rated operational current  $I_n/DC-1$  (at 55 °C) A 500 500
- Minimum conductor cross-section mm<sup>2</sup> 2 x 150 2 x 150
- Rated power
 

At 220 V	kW	110	110
440 V	kW	220	220
600 V	kW	300	300
750 V	kW	375	375
1200 V	kW	—	600
1500 V	kW	—	750
- Critical currents, without arc extinction
 

At 440 V	A	≤ 7	—
600 V	A	≤ 13	—
750 V	A	≤ 15	—
≤ 800 V	A	—	≤ 7
1200 V	A	—	≤ 13
1500 V	A	—	≤ 15

##### Utilization categories DC-3 and DC-5, switching DC motors

- Permissible rated current for regenerative braking At 110 ... 600 V A 400

##### Switching frequency

##### Switching frequency $z$ in operating cycles/hour

- AC/DC operation
- With resistive load DC-1 h<sup>-1</sup> 750 1000
- For inductive load DC-3/DC-5 h<sup>-1</sup> 500 500

<sup>1)</sup> Endurance see page 2/166..

<sup>2)</sup> See Selection and ordering data.





#### Technical specifications

Contactor	Type	3RT19 26-2C Solid-state timing relay blocks with semiconductor output	3RT19 26-2D	3RT19 26-2E	3RT19 26-2F	3RT19 26-2G Solid-state time-delay auxiliary switch blocks
<b>General data</b>						
<b>Rated insulation voltage <math>U_i</math></b> Pollution degree 3 Overvoltage category III acc. to EN 60664-1	V AC	250				
<b>Permissible ambient temperature</b>						
• During operation	°C	-25 ... +60				
• During storage	°C	-40 ... +80				
<b>Degree of protection</b> acc. to EN 60947-1, Appendix C						
• Cover		IP40				
• Terminals		IP20				
<b>Shock resistance</b> Half-sine acc. to IEC 60068-2-27	g/ms	15/11				
<b>Vibration resistance</b> according to IEC 60068-2-6	Hz/mm	10 ... 55/0.35				
<b>EMC tests</b>	Basic specification	IEC 61000-6-4				
<b>Conductor connections</b>						
• Solid	mm <sup>2</sup>	2 x (0.5 ... 1.5), 2 x (0.75 ... 4)				
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 2.5)				
• AWG cables, solid or stranded	AWG	2 x (18 ... 14)				
• Terminal screws		M3				
• Tightening torque	Nm lb.in	0.8 ... 1.2 7 ... 10.3				
<b>Permissible mounting positions</b>		Any				
<b>Control</b>						
<b>Operating range of excitation</b>		0.8 ... 1.1 x $U_N$ , 0.95 ... 1.05 times the rated frequency		0.85 ... 1.1 x $U_N$ , 0.95 ... 1.05 times the rated frequency		
<b>Rated power</b>	W	1		2		
• Power consumption at 230 V AC, 50 Hz	VA	1		4		
<b>Overvoltage protection</b>		Varistor integrated in timing relay		--		
<b>Recovery time</b>	ms	50		150		
<b>Minimum ON period</b>	ms	35		200 (with OFF-delay)		
<b>Setting accuracy</b> With reference to upper limit of scale	Typ. %	±15				
<b>Repeat accuracy</b>	Max. %	±1				
<b>Load side</b>						
<b>Rated operational currents <math>I_e</math></b>						
• AC-140, DC-13	A	0.3 for 3RT19 16		--		
	A	0.3 for 3RT19 26		--		
• AC-15, 230 V, 50 Hz	A	--		3		
• DC-13, 24 V	A	--		1		
• DC-13, 110 V	A	--		0.2		
• DC-13, 230 V	A	--		0.1		
<b>Short-time loading capacity</b>	Up to 10 ms	A		10		
<b>DIAZED protection</b> gG operational class	A	--		4		
<b>Residual current</b>	Max. mA	5		--		
<b>Voltage drop</b> With conducting output	Max. VA	3.5		--		
<b>Mechanical endurance</b>	Operating cycles	100 x 10 <sup>6</sup>		10 x 10 <sup>6</sup>		
<b>Switching frequency</b> for load						
• With $I_e$ at 230 V AC	h <sup>-1</sup>	2500		2500		
• With 3RT20 16 contactor at 230 V AC	h <sup>-1</sup>	2500		5000		





**Accessories**  
**3RT1 contactors**

**Function** | **Function chart**



- Timing relay energized
- Contact closed
- Contact open

**Solid-state timing relay blocks** | **1 NO contact (semiconductor output)**

ON-delay,  
two-wire design  
(varistor integrated)

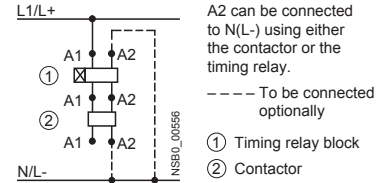



OFF-delay  
with auxiliary voltage  
(varistor integrated)

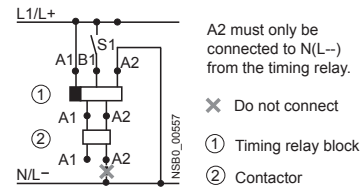



**Solid-state time-delay auxiliary switch blocks** | **1 NO + 1 NC**

ON-delay





OFF-delay  
without auxiliary voltage

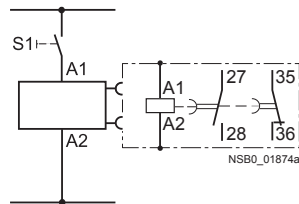

**Solid-state time-delay auxiliary switch blocks** | **2 NO**

Wye-delta function:  
1 NO delayed,  
1 NO instantaneous,  
dead time 50 ms  
(varistor integrated)

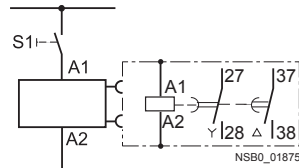



Contactor	Type	<b>3RH19 24, 3TX7 090</b> <b>Coupling links for mounting on contactors</b> <b>acc. to IEC 60947/EN 60947</b>
<b>General data</b>		
<b>Rated insulation voltage</b> $U_i$ (pollution degree 3)	V	300
<b>Protective separation</b> between coil and contacts acc. to IEC 60947-1, Appendix N	V AC	Up to 300
<b>Permissible ambient temperature</b>		
• During operation	°C	-25 ... +60
• During storage	°C	-40 ... +80
<b>Degree of protection acc. to IEC 60947-1, Appendix C</b>		
• Connections		IP20
• Enclosure		IP40
<b>Circuit diagram</b>		
		<p>① Coupling link ② Contactor</p>
<b>Conductor cross-sections</b>		
• Solid	mm <sup>2</sup>	2 x (0.5 ... 2.5)
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5)
Terminal screws		M3
<b>Control side</b>		
<b>Rated control supply voltage</b> $U_s$	V DC	24
<b>Operating range</b>	V DC	17 ... 30
<b>Power consumption at</b> $U_s$	W	0.5
<b>Nominal current input</b>	mA	20
<b>Release voltage</b>	V	≥ 4
<b>Function display</b>		Yellow LED
<b>Protection circuit</b>		Varistor
<b>Load side</b>		
<b>Mechanical endurance</b>	Operating cycles	20 x 10 <sup>6</sup>
<b>Electrical endurance at</b> $I_e$	Operating cycles	1 x 10 <sup>5</sup>
<b>Switching frequency</b>	Operating cycles h <sup>-1</sup>	5000
<b>Make-time</b>	ms	Approx. 7
<b>Break-time</b>	ms	Approx. 4
<b>Bounce time</b>	ms	Approx. 2
<b>Contact material</b>		AgSnO
<b>Switching voltage</b>	AC/DC V	24 ... 250
<b>Permissible residual current</b> of the electronics (with 0 signal)	mA	2.5




#### Technical specifications

Contactor relays	Type	<b>3RH2</b>
	Size	<b>S00</b>

#### Permissible mounting positions

The contactor relays are designed for operation on a vertical mounting surface.



Upright mounting position



Special version required

(3RH21 22-2K .40 coupling relays and contactor relays with extended operating range on request)

#### Positively-driven operation of contacts in contactor relays

##### 3RH2:

**Yes**, in the basic unit and the auxiliary switch block as well as between the basic unit and the front-mounted auxiliary switch block (removable) acc. to:

- ZH 1/457
- IEC 60947-5-1, Appendix L

##### 3RH22:

**Yes**, in the basic unit and the auxiliary switch block as well as between the basic unit and the snap-on auxiliary switch block (permanently mounted) acc. to:

- ZH 1/457
- IEC 60947-5-1, Appendix L

##### Note:

3RH29 11-.NF. solid-state compatible auxiliary switch blocks have no positively-driven contacts.

##### Explanations:

There is positively-driven operation if it is ensured that the NC and NO contacts cannot be closed at the same time.

##### ZH1/457

Safety Rules for Controls on Power-Operated Metalworking Presses.

##### IEC 60947-5-1, Appendix L

Low-Voltage Controlgear, Controls and Contact Blocks. Special requirements for positively-driven contacts

#### Contact reliability

Contact reliability at 17 V, 1 mA acc. to IEC 60947-5-4

Frequency of contact faults  $< 10^{-8}$  i.e.  $< 1$  fault per 100 million operating cycles


#### Contact endurance for AC-15/AC-14 and DC-13 utilization categories

The contact endurance is mainly dependent on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

If magnetic circuits other than the contactor coil systems or solenoid valves are present, e.g. magnetic brakes, protective measures for the load circuits are necessary, e.g. in the form of RC elements and free-wheel diodes.

The characteristic curves apply to:

- 3RH21/3RH22 contactor relays
- 3RH24 latched contactor relays
- 3RH29 11 auxiliary switch blocks<sup>1)</sup>
- Auxiliary switch blocks for snapping onto the front, max. 4-pole and for mounting onto the side in size S00

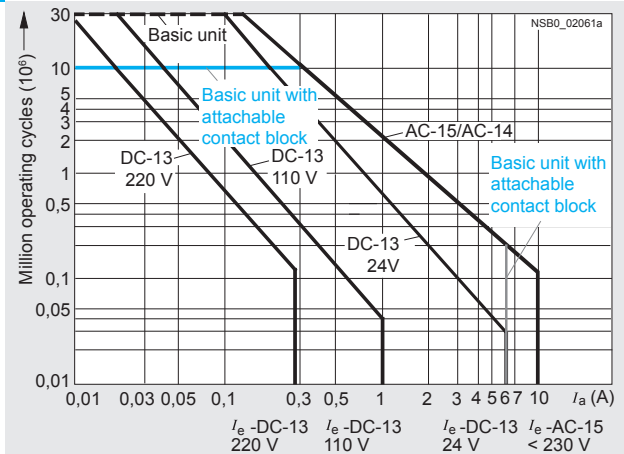

##### Diagram legend:

$I_a$  = Breaking current  
 $I_e$  = Rated operational current

<sup>1)</sup>  $I_e$  = 6 A for AC-15/AC-14.



Type			<b>3RH21</b>	<b>3RH22</b>	<b>3RH24</b>
Size			<b>S00</b>	<b>S00</b>	<b>S00</b>
Dimensions (W x H x D) with screw terminals		mm	45 x 57.5 x 73	--	90 x 57.5 x 73
• With mounted auxiliary switch block		mm	45 x 57.5 x 116	45 x 57.5 x 116	--

#### General technical specifications

<b>Mechanical endurance</b>				
• Basic units	Operating cycles	30 million		5 million
• Basic unit with snap-on auxiliary switch block	Operating cycles	10 million		
• Solid-state compatible auxiliary switch block	Operating cycles	5 million		

<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)	V	690
---	---	-----

<b>Rated impulse withstand voltage <math>U_{imp}</math></b>	kV	6
---	----	---

<b>Protective separation</b> between the coil and the contacts in the basic unit acc. to IEC 60947-1, Appendix N	V	400
--	---	-----

<b>Permissible ambient temperature</b>		
• During operation	°C	-25 ... +60
• During storage	°C	-55 ... +80

<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP20, coil assembly IP40
---	--	--------------------------

<b>Touch protection</b> acc. to EN 50274		Finger-safe
--	--	-------------

<b>Shock resistance</b>				
• Rectangular pulse	- AC operation	g/ms	7.3/5 and 4.7/10	
	- DC operation	g/ms	>10/5 and >5/10	
• Sine pulse	- AC operation	g/ms	11.4/5 and 7.3/10	
	- DC operation	g/ms	>15/5 and >8/10	

#### Short-circuit protection

• Short-circuit test with fuse links of gG operational class: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1$ kA acc. to IEC 60947-5-1	A	10
• Test with miniature circuit breaker up to 230 V with C characteristic: Short-circuit current $I_k = 400$ A acc. to IEC 60947-5-1	A	6


#### Conductor cross-sections

<b>Auxiliary conductors and coil terminals</b> (1 or 2 conductors can be connected)				<b>Screw terminals</b>
• Solid	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup> according to IEC 60947; max. 2 x (0.5 ... 4)		
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> ; 2 x (0.75 ... 2.5) <sup>1)</sup>		
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) <sup>1)</sup> ; 2 x (18 ... 14) <sup>1)</sup>		
• Terminal screw - Tightening torque	Nm	M3 (for standard screwdriver size 2 or Pozidriv 2) 0.8 ... 1.2 (7 ... 10.3 lb.in)		

<b>Auxiliary conductors and coil terminals</b> (1 or 2 conductors can be connected)				<b>Spring-type terminals</b>
• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5		
• Solid	mm <sup>2</sup>	2 x (0.5 ... 4)		
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 2.5)		
• Finely stranded without end sleeve	mm <sup>2</sup>	2 x (0.5 ... 2.5)		
• AWG cables, solid or stranded	AWG	2 x (20 ... 12)		

<b>Auxiliary conductors for front and laterally mounted auxiliary switches</b>				
• Operating devices	mm	3.0 x 0.5; 3.5 x 0.5		
• Solid	mm <sup>2</sup>	2 x (0.5 ... 2.5)		
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5)		
• Finely stranded without end sleeve	mm <sup>2</sup>	2 x (0.5 ... 2.5)		
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)		

<b>Auxiliary conductor and coil terminals</b>				<b>Ring terminal lug connection</b>
• Terminal screw	mm	M3, Pozidriv size 2		
• Operating devices	Nm	Ø 5 ... 6		
• Tightening torque	mm	0.8 ... 1.2		
• Usable ring terminal lugs	mm	$d_2 = \text{min. } 3.2$		
- DIN 46234 without insulation sleeve	mm	$d_3 = \text{max. } 7.5$		
- DIN 46225 without insulation sleeve				
- DIN 46237 with insulation sleeve				
- JIS C2805 Type R without insulation sleeve				
- JIS C2805 Type RAV with insulation sleeve				
- JIS C2805 Type RAP with insulation sleeve				



<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

**Note:**

Max. external diameter of the cable insulation: 3.6 mm.

Tool for opening the spring-type terminals  
see [Accessories, page 2/76](#).

An insulation stop must be used for conductor cross-sections  $\leq 1$  mm<sup>2</sup>, see [Accessories, page 2/76](#).



Contactor relays	Type	3RH2.
	Size	S00
<b>Control circuits</b>		
<b>Coil operating range</b>		
• AC operation	At 50 Hz	0.8 ... 1.1 x $U_s$
	At 60 Hz	0.85 ... 1.1 x $U_s$
• DC operation	At +50 °C	0.8 ... 1.1 x $U_s$
	At +60 °C	0.85 ... 1.1 x $U_s$
<b>Power consumption of the solenoid coils</b> (when coil is cold and 1.0 x $U_s$ )		
• AC operation, 50 Hz		
- Closing	VA/p.f.	37/0.8
- Closed	VA/p.f.	5.7/0.25
• AC operation, 60 Hz		
- Closing	VA/p.f.	33/0.75
- Closed	VA/p.f.	4.4/0.25
• DC operation (closing = closed)	W	4.0
<b>Permissible residual current of the electronics</b> (with 0 signal)		
• For AC operation <sup>1)</sup>		< 4 mA x (230 V/ $U_s$ )
• For DC operation		< 10 mA x (24 V/ $U_s$ )
<b>Operating times<sup>2)</sup></b>		
Total break time = OFF-delay + Arcing time		
Values apply with coil in cold state and at operating temperature for operating range		
<u>AC operation</u>		
• Closing		
- ON-delay of NO contact	With 0.8 ... 1.1 x $U_s$ ms	8 ... 33
	With 1.0 x $U_s$ ms	9 ... 22
	3RH24 minimum operating time ms	≥ 35
- OFF-delay of NC contact	With 0.8 ... 1.1 x $U_s$ ms	6 ... 25
	With 1.0 x $U_s$ ms	6.5 ... 19
• Opening		
- OFF-delay of NO contact	With 0.8 ... 1.1 x $U_s$ ms	4 ... 15
	With 1.0 x $U_s$ ms	4.5 ... 15
	3RH24 minimum operating time ms	≥ 30
- ON-delay of NC contact	With 0.8 ... 1.1 x $U_s$ ms	5 ... 15
	With 1.0 x $U_s$ ms	5 ... 15
<u>DC operation</u>		
• Closing		
- ON-delay of NO contact	With 0.8 ... 1.1 x $U_s$ ms	30 ... 100
	With 1.0 x $U_s$ ms	35 ... 50
	3RH24 minimum operating time ms	≥ 100
- OFF-delay of NC contact	With 0.8 ... 1.1 x $U_s$ ms	25 ... 90
	With 1.0 x $U_s$ ms	30 ... 45
• Opening		
- OFF-delay of NO contact	With 0.8 ... 1.1 x $U_s$ ms	7 ... 13
	With 1.0 x $U_s$ ms	7 ... 12
	3RH24 minimum operating time ms	≥ 30
- ON-delay of NC contact	With 0.8 ... 1.1 x $U_s$ ms	13 ... 19
	With 1.0 x $U_s$ ms	13 ... 18
• Arcing time		10 ... 15
Dependence of the switching frequency $z'$ on the operational current $I'$ and operational voltage $U'$ :		
$z' = z \cdot I_0 / I' \cdot (U_0 / U')^{1.5} \cdot 1/h$		

<sup>1)</sup> The 3RT29 16-1GA00 additional load module is recommended for higher residual currents (see page 2/72).

<sup>2)</sup> The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).



Contactor relays	Type	3RH2.	
	Size	S00	
<b>Load side</b>			
<b>AC capacity</b>			
<b>Rated operational currents <math>I_e</math></b>			
AC-12	A	10	
AC-15/AC-14 for rated operational voltage $U_s$	Up to 230 V A	6	
	400 V A	3	
	500 V A	2	
	690 V A	1	
<b>Load rating with DC</b>			
<b>Rated operational currents <math>I_e</math></b>			
DC-12 for rated operational voltage $U_s$			
• 1 conducting path	24 V A	6	
	60 V A	6	
	110 V A	3	
	220 V A	1	
	440 V A	0.3	
	600 V A	0.15	
• 2 conducting paths in series	24 V A	10	
	60 V A	10	
	110 V A	4	
	220 V A	2	
	440 V A	1.3	
	600 V A	0.65	
• 3 conducting paths in series	24 V A	10	
	60 V A	10	
	110 V A	10	
	220 V A	3.6	
	440 V A	2.5	
	600 V A	1.8	
DC-13 for rated operational voltage $U_s$			
• 1 conducting path	24 V A	6	
	60 V A	2	
	110 V A	1	
	220 V A	0.3	
	440 V A	0.14	
	600 V A	0.1	
• 2 conducting paths in series	24 V A	10	
	60 V A	3.5	
	110 V A	1.3	
	220 V A	0.9	
	440 V A	0.2	
	600 V A	0.1	
• 3 conducting paths in series	24 V A	10	
	60 V A	4.7	
	110 V A	3	
	220 V A	1.2	
	440 V A	0.5	
	600 V A	0.26	
<b>Switching frequency</b>			
<b>Switching frequency <math>z</math> in operating cycles/hour</b>			
• For rated operation	AC-12/DC-12	$h^{-1}$	1000
• For utilization category	AC-15/AC-14	$h^{-1}$	1000
	DC-13	$h^{-1}$	1000
• No-load switching frequency		$h^{-1}$	10000
Dependence of the switching frequency $z'$ on the operational current $I'$ and operational voltage $U'$ : $z' = z \cdot I_e/I' \cdot (U_e/U')^{1.5} \cdot 1/h$			
<b>Ⓢ and Ⓜ rated data</b>			
<b>Basic units and auxiliary switch blocks</b>			
• Rated control supply voltage	V AC	max. 600	
• Rated voltage	V AC	600	
• Switching capacity		A 600, Q 600	
• Uninterrupted current at 240 V AC	A	10	





#### Technical specifications

All technical specifications not mentioned in the table below are identical to those of the 3RH21 contactor relays (see page 5/6).

Contactor type	3RH21 ...HB40	3RH21 ...JB40	3RH21 ...KB40
Size	S00	S00	S00
<b>Control circuits</b>			
<b>Coil operating range</b>	0.7 ... 1.85 x $U_s$		
<b>Power consumption of the solenoid coil</b> (for cold coil) Closing = Closed			
• At $U_s = 17$ V	W	1.4	
• At $U_s = 24$ V	W	2.8	
• At $U_s = 30$ V	W	4.4	
<b>Permissible residual current</b> of the electronics for 0 signal	< 10 mA x (24 V/ $U_s$ )		
<b>Overvoltage configuration of the solenoid coil</b>	No overvoltage damping 	With diode 	With suppressor diode 
<b>Operating times</b>			
• <b>Closing</b> at 17 V			
- ON-delay NO	ms	40 ... 130	
- OFF-delay NC	ms	30 ... 80	
• At 24 V			
- ON-delay NO	ms	35 ... 60	
- OFF-delay NC	ms	25 ... 40	
• At 30 V			
- ON-delay NO	ms	25 ... 50	
- OFF-delay NC	ms	15 ... 30	
• <b>Opening</b> at 17 ... 30 V			
- OFF-delay NO	ms	7 ... 20	38 ... 65
- ON-delay NC	ms	20 ... 30	55 ... 75
			7 ... 20
			20 ... 30
<b>Upright mounting position</b>	Request required		

Contactor type	3RH21 ...MB40-0KT0	3RH21 ...VB40	3RH21 ...WB40
Size	S00	S00	S00
<b>Control circuits</b>			
<b>Coil operating range</b>	0.85 ... 1.85 x $U_s$		
<b>Power consumption of the solenoid coil</b> (for cold coil) Closing = Closed at $U_s = 24$ V	W	1.6	
<b>Permissible residual current</b> of the electronics for 0 signal	< 8 mA x (24 V/ $U_s$ )		
<b>Overvoltage configuration of the solenoid coil</b>	Diode, varistor or RC element, attachable 	Built-in diode 	Built-in suppressor diode 
<b>Control circuits</b>			
<b>Operating times</b>			
• Closing at 20.5 V			
- ON-delay NO	ms	30 ... 120	
- OFF-delay NC	ms	20 ... 110	
• At 24 V			
- ON-delay NO	ms	25 ... 90	
- OFF-delay NC	ms	15 ... 80	
• At 44 V			
- ON-delay NO	ms	15 ... 60	
- OFF-delay NC	ms	10 ... 50	
• Closing at 17 ... 30 V			
- OFF-delay NO	ms	5 ... 20	20 ... 80
- ON-delay NC	ms	10 ... 30	30 ... 90
			5 ... 20
			10 ... 30
<b>Upright mounting position</b>	Request required		



#### Terminal designations and identification numbers for auxiliary contacts

##### Terminal designations

The terminal designations are 2-digit, e.g. 13, 14, 21, 22:

- Tens digit: sequence digit
- 1-2 for normally closed contacts (NC)

##### Identification numbers

The identification number indicates the number and type of the auxiliary contacts, e.g. 40, 31, 22, 13:

- 1st digit: number of normally open contacts (NO)
- 2nd digit: number of normally closed contacts (NC)

Examples:

- 31 = 3 NO + 1 NC
- 40 = 4 NO

#### Selection guide for mountable auxiliary switch blocks for power contactors and contactor relays

The auxiliary switch blocks of the 3RH29 series for mounting on the front and side can be used for power contactors as well as for contactor relays.

The possible combinations of basic unit and mounted auxiliary switch block can be found in the tables below.

Where the columns and lines intersect (blue and green in the example) you will find the identification number for the combination of basic unit (column) and auxiliary switch block (line).

Auxiliary contacts		3-pole contactors			Order No.
Version	3RT20 1 S00	3RT20 1 S00	3RT20 2 S0		
NO NC		10	01	11	
		13 14	21 22	13 21 14 22	
		2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	According to EN 50012 <sup>1)</sup>
Auxiliary switches without NO contact					
-- 1		11	02	12	<b>3RH29 11-.HA01</b>
-- 2		12	03	13	<b>3RH29 11-.HA02</b>
-- 3		13	04	14	<b>3RH29 11-.HA03</b>
-- 4		14	--	--	<b>3RH29 11-.FA04</b>
Auxiliary switch with 1 NO contact					
1 --		20	11	21	<b>3RH29 11-.HA10</b>
1 1		21	12	22	<b>3RH29 11-.HA11</b>

1) Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.

Type	Example 1	Example 2
Type	<b>3RT20 motor contactor, S00 with 1 NO</b>	<b>3RT20 motor contactor, S0 with 1 NO + 1 NC</b>
Sequence digit	2. 3. 4. 5.	3. 4. 5. 6.
Type	<b>Auxiliary switch with 4 NC, 3RH29 11-.FA04</b>	<b>Auxiliary switch with 3 NC, 3RH29 11-.HA03</b>
Function digit	.1 .1 .1 .1 .2 .2 .2 .2	.1 .1 .1 .2 .2 .2
Type	<b>3RT20 motor contactor, S00 with auxiliary switch block</b>	<b>3RT20 motor contactor, S0 with auxiliary switch block</b>
Terminal design.	13 21 31 41 51 14 22 32 42 52	13 21 31 41 51 14 22 32 42 52
Type	<b>Ident. No. 14</b>	<b>Ident. No. 14</b>

# Contactor and Contactor Assemblies

## 3RT Contactors

SIRIUS



### 3RT2 and 3RH2 contactors and relays

#### Additional auxiliary switch blocks



Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays			Order No.	
	S00 3RT20 1 10	3RT20 1 01	S0 3RT20 2 11	S00 3RT23 1 --	3RT25 1 --	S0 3RT23 2 11	3RT25 2 11	S00 3RH21, 3RH24 40E	3RH21, 3RH24 31E	3RH21, 3RH24 22E		
	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8		
Front auxiliary switches	According to EN 50012 <sup>1)</sup>			According to EN 50012 <sup>1)</sup>				According to EN 50011 <sup>1)</sup>				
<b>Without NO contact</b>												
-- 1		11	02	12	01	01	12	12	41X	32X	23X	<b>3RH29 11-.HA01</b>
-- 2		12	03	13	02	02	13	--	42E	33X	24	<b>3RH29 11-.HA02</b>
-- 3		13	04	14	03	--	--	--	43	34	--	<b>3RH29 11-.HA03</b>
-- 4		14	--	--	--	--	--	--	44E	--	--	<b>3RH29 11-.FA04</b>
<b>With 1 NO contact</b>												
1 --		20	11	21	10	10	21	21	50E	41E	32E	<b>3RH29 11-.HA10</b>
1 1		21	12	22	11	11	22	22	51X	42X	33X	<b>3RH29 11-.HA11</b>
1 2		22	13	23	12	12	23	--	52	43	34	<b>3RH29 11-.HA12</b>
1 3		23	14	24	13	--	--	--	53X	44X	--	<b>3RH29 11-.HA13</b>
<b>With 2 NO contacts</b>												
2 --		30	21	31	20	20	31	31	60E	51X	42X	<b>3RH29 11-.HA20</b>
2 1		31	22	32	21	21	32	32	61	52	43	<b>3RH29 11-.HA21</b>
2 2		32	23	33	22	22	33	--	62X	53	44X	<b>3RH29 11-.HA22</b>
2 2		32	23	33	22	22	33	--	62X	53	44X	<b>3RH29 11-.FA22</b>

<sup>1)</sup> Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



#### Additional auxiliary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays			Order No.	
	S00 3RT20 1 10	S0 3RT20 1 01	S0 3RT20 2 11	S00 3RT23 1 --	S0 3RT25 1 --	S0 3RT23 2 11	S0 3RT25 2 11	S00 3RH21, 3RH24 40E   31E   22E				
	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8		
	According to EN 50012 <sup>1)</sup>			According to EN 50012 <sup>1)</sup>				According to EN 50011 <sup>1)</sup>				
<b>Front auxiliary switches with 3 NO contacts</b>												
3 --		40	31	41	30	30	41	41	70	61	52	3RH29 11-.HA30
3 1		41	32	42	31	31	42	42	71X	62X	53X	3RH29 11-.HA31
<b>Front auxiliary switches with 4 NO contacts</b>												
4 --		50	41	51	40	40	51	51	80E	71X	62X	3RH29 11-.FA40
		Acc. to EN 50005			Acc. to EN 50005				Acc. to EN 50005			
<b>Front auxiliary switches with make-before-break</b>												
-- 1		21	12	22	11	11	22	22	51	42	33	3RH29 11-.FB11
-- 2		32	23	33	22	22	33	--	62	53	44	3RH29 11-.FB22
-- 3		32	23	33	22	22	33	--	62	53	44	3RH29 11-.FC22
<b>Front auxiliary switches with complete inscription<sup>2)</sup></b>												
1 --		20	11	21	10	10	21	21	50	41	32	3RH29 11-1AA10
1 --		20	11	21	10	10	21	21	50	41	32	3RH29 11-1BA10
-- 1		11	02	12	01	01	12	12	41	32	23	3RH29 11-1AA01
-- 1		11	02	12	01	01	12	12	41	32	23	3RH29 11-1BA01
1 1		21	12	22	11	11	22	22	51	42	33	3RH29 11-1LA11
1 1		21	12	22	11	11	22	22	51	42	33	3RH29 11-1MA11
2 --		30	21	31	20	20	31	31	60	51	42	3RH29 11-1LA20
2 --		30	21	31	20	20	31	31	60	51	42	3RH29 11-1MA20

<sup>1)</sup> Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.

<sup>2)</sup> Terminals from the top or bottom.

#### Additional auxiliary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors			4-pole contactors				Contactor relays			Order No.
	S00 3RT20 1 10	S0 3RT20 1 01	S0 3RT20 2 11	S00 3RT23 1 --	S0 3RT25 1 --	S0 3RT23 2 11	S0 3RT25 2 11	S00 3RH21, 3RH24 40E	S0 31E	S0 22E	
	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8.	5. 6. 7. 8.	5. 6. 7. 8.	
	Acc. to EN 50005			Acc. to EN 50005				According to EN 50011 <sup>1)</sup>			

#### Front auxiliary switches with complete inscription (for contactor relays)

4 --		--	--	--	--	--	--	80E	--	--	<b>3RH29 11-GA40</b>
3 1		--	--	--	--	--	--	71E	--	--	<b>3RH29 11-GA31</b>
2 2		--	--	--	--	--	--	62E	--	--	<b>3RH29 11-GA22</b>
1 3		--	--	--	--	--	--	53E	--	--	<b>3RH29 11-GA13</b>
-- 4		--	--	--	--	--	--	44E	--	--	<b>3RH29 11-GA04</b>

#### Front auxiliary switches with complete inscription, special version

4 --		50	41	51	40	40	51	51	80E	71X	62X	<b>3RH29 11-XA40-0MA0</b>
3 1		41	32	42	31	31	42	42	71E	62X	53	<b>3RH29 11-XA31-0MA0</b>
2 2		32	23	33	22	22	33	--	62E	53	44X	<b>3RH29 11-XA22-0MA0</b>
-- 4		14	--	--	--	--	--	--	44E	--	--	<b>3RH29 11-XA04-0MA0</b>

#### Front auxiliary switches, Solid-state compatible

-- 2		12	03	13	02	02	13	--	42	33	24	<b>3RH29 11-NF02</b>
1 1		21	12	22	11	11	22	22	51	42	33	<b>3RH29 11-NF11</b>
2 --		30	21	31	20	20	31	31	60	51	42	<b>3RH29 11-NF20</b>

<sup>1)</sup> Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



Additional auxiliary switch blocks

Auxiliary contacts		3-pole contactors			4-pole contactors				Contactor relays			Order No.
Version		S00		S0		S0		S00				
NO	NC	3RT20 1	3RT20 1	3RT20 2	3RT23 1	3RT25 1	3RT23 2	3RT25 2	3RH21, 3RH24	40E	31E	22E
		10	01	11	--	--	11	11	40E	31E	22E	
Left	Right	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8	
		According to EN 50012 <sup>1)</sup>			According to EN 50012 <sup>1)</sup>				According to EN 50011 <sup>1)</sup>			

Lateral auxiliary switches for size S00

--	2		12	--	--	02	02	--	--	--	--	3RH29 11-.DA02
--	2		14	--	--	--	--	--	--	--	--	3RH29 11-.DA02
1	1		21	--	--	11	11	--	--	--	--	3RH29 11-.DA11
1	1		32	--	--	22	22	--	--	--	--	3RH29 11-.DA11
2	--		30	--	--	20	20	--	--	--	--	3RH29 11-.DA20
2	--		50	--	--	40	40	--	--	--	--	3RH29 11-.DA20
2	--		41	--	--	31	31	--	--	--	--	3RH29 11-.DA20 + 3RH29 11-.DA11
2	--		32	--	--	22	22	--	--	--	--	3RH29 11-.DA20 + 3RH29 11-.DA02
1	1		23	--	--	13	--	--	--	--	--	3RH29 11-.DA11 + 3RH29 11-.DA02

Lateral auxiliary switches for size S0

--	2		12	03	13	02	02	13	--	--	--	3RH29 21-.DA02
--	2		14	--	--	--	--	--	--	--	--	3RH29 21-.DA02
1	1		21	12	22	11	11	22	22	--	--	3RH29 21-.DA11
1	1		32	23	33	22	22	33	--	--	--	3RH29 21-.DA11
2	--		30	21	31	20	20	31	31	--	--	3RH29 21-.DA20
2	--		50	41	51	40	40	51	51	--	--	3RH29 21-.DA20

<sup>1)</sup> Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.

# Contactors and Contactor Assemblies

## 3RT Contactors

SIRIUS



### 3RT2 and 3RH2 contactors and relays

#### Additional auxiliary switch blocks

Auxiliary contacts Version NO NC	3-pole contactors S00			4-pole contactors S00				Contactor relays S00			Order No.
	3RT20 1 10	3RT20 1 01	3RT20 2 11	3RT23 1 --	3RT25 1 --	3RT23 2 11	3RT25 2 11	3RH21, 3RH24 40E	31E	22E	
Left Right	2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8.	5. 6. 7. 8.	5. 6. 7. 8.	According to EN 50012 <sup>1)</sup>
<b>Lateral auxiliary switches for size S0, S00</b>											
2 -- 1 1		41 32 42	31 31 42 42	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 21-DA20 + 3RH29 21-DA11</b>
2 -- -- 2		32 23 33	22 22 33 --	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 21-DA20 + 3RH29 21-DA02</b>
1 1 -- 2		23 14 24	13 -- -- --	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 21-DA11 + 3RH29 21-DA02</b>
<b>Lateral auxiliary switches for contactor relays</b>											
-- 2		-- -- --	-- -- --	-- --	-- --	-- --	-- --	42Z 33X 24			<b>3RH29 21-DA02</b>
1 1		-- -- --	-- -- --	-- --	-- --	-- --	-- --	51X 42X 33X			<b>3RH29 21-DA11</b>
2 --		-- -- --	-- -- --	-- --	-- --	-- --	-- --	60Z 51X 42X			<b>3RH29 21-DA20</b>
<b>Lateral auxiliary switches, Solid-state compatible for size S00</b>											
1 1		21 -- --	11 11 -- --	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 11-2DE11</b>
1 1		32 -- --	22 22 -- --	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 11-2DE11</b>
<b>Lateral auxiliary switches, Solid-state compatible for size S0, S00</b>											
1 1		21 12 22	11 11 22 22	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 21-2DE11</b>
1 1		32 23 33	22 22 33 --	-- --	-- --	-- --	-- --	-- --	-- --	-- --	<b>3RH29 21-2DE11</b>
<b>Lateral auxiliary switches, Solid-state compatible for contactor relays</b>											
1 1		-- -- --	-- -- --	-- --	-- --	-- --	-- --	51X 42X 33X			<b>3RH29 21-DE11</b>


<sup>1)</sup> Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.






#### Internal circuit diagrams (applicable to screw, spring and ring lug connection)

**Sizes S2 to S12**  
**Terminal designations according to EN 50 012**  
**3RT10 3 to 3RT10 7, 3RT12, 3RT14 contactors**




**3RT10 3 to 3RT10 7, 3RT14 contactors**  
 With 3RH19 21-..HA22 4-pole auxiliary contact block, mountable on the front  
**2 NO + 2 NC**  
 Ident. no. 22E




**3RT1. 5, 3RT1. 6, 3RT1. 7 contactors** (sizes S6, S10, S12)  
 With 3RH19 21-1DA11 2-pole auxiliary switch blocks, laterally mountable  
**2 NO + 2 NC**




**3RH19 21-..HA../-..XA..4-pole auxiliary switch blocks, for snapping onto the front<sup>2)</sup>**

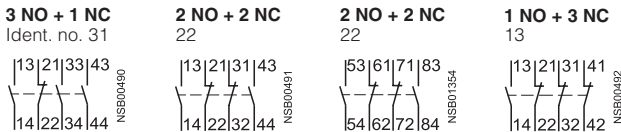

**3RH19 21-..DA11, 3RH19 21-2DE11 first laterally mountable auxiliary switch block (solid-state compatible)**



**3RH19 21-..JA11, 3RH19 21-2JE11 second laterally mountable auxiliary switch block (solid-state compatible)**  
 (only for sizes S3 to S12)




**Contactors with 4 main contacts, sizes S2 to S3**  
**Terminal designations acc. to EN 50 005**  
**3RT13/23 and 3RT15/25 contactors**




(3RH19 21 auxiliary switch blocks acc. to EN 50 005 can be snapped on)

#### 3RT16 capacitor contactors

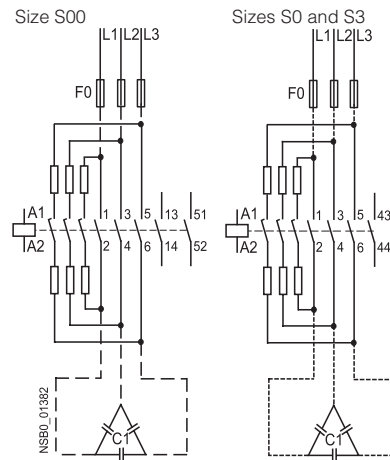

#### Surge suppressor (plug-in direction coded; exception: marked +/- for 3RT19 16-1T... diode assembly) for sizes S2 to S3




1) RH29 auxiliaries are intended to be used only with 3RT2 or 3RH2 base devices.  
 3RH19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.  
 2) Not for 3RT12. vacuum contactors

#### Internal circuit diagrams (applicable to screw connection and Spring-type terminal connection)


##### Accessories for size S2<sup>1)</sup> to S12 contactors Terminal designations acc. to EN 50 005

**3RH19 21-.F...**, 4-pole,  
for snapping onto the front <sup>1)</sup>


**4 NO**  
Ident. no. 40




**3 NO + 1 NC**  
31




**2 NO + 2 NC**  
22



**4 NC**  
04



**2 NO + 2 NC**  
22 U



make-before-break

**3RH19 21-.CA.. auxiliary switch blocks, single-pole,**  
for snapping onto the front <sup>2)</sup>

**1 NO**



**1 NC**



**3RH19 21-1CD.. auxiliary switch blocks, single-pole,**  
with make-before-break contacts, for snapping onto the front <sup>1)</sup>

**1 NO**



**1 NC**



(terminal designations according to EN 50 005 or EN 50 012)

##### Accessories for size S0 to S12 contactors Terminal designations acc. to EN 50 005

**3RH19 21-1LA.. and 3RH19 21-1MA.. auxiliary switch block, 2-pole,**  
for snapping onto the front <sup>1)</sup>  
cable entry from above or below

**2 NO**




**1 NO + 1 NC**



**2 NC**




#### Internal wiring



Example: 1 NO + 1 NC,  
cable entry from below

**3RH19 21-.FE22 solid-state compatible auxiliary switch block, 4-pole,**  
for snapping onto the front <sup>1)</sup>

**2 NO + 2 NC**  
Ident. no. 22



**3RH19 21-.EA.. first laterally mountable auxiliary switch blocks (left)**

**2 NO**



**1 NO + 1 NC**



**2 NC**



**3RH19 21-.EA.. first laterally mountable auxiliary switch blocks (right)**

**2 NO**



**1 NO + 1 NC**



**2 NC**



**3RH19 21-.KA.. second laterally mountable auxiliary switch blocks (left)**  
(only for sizes S3 to S12)

**2 NO**



**1 NO + 1 NC**



**2 NC**



**3RH19 21-.KA.. second laterally mountable auxiliary switch blocks (right)**  
(only for sizes S3 to S12)

**2 NO**



**1 NO + 1 NC**



**2 NC**



1) RH29 auxiliaries are intended to be used only with 3RT2 or 3RH2 base devices.  
3RH19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.

2) Not for 3RT12. vacuum contactors




### Circuit diagrams


#### Accessories for size S2 to S3 contactors and control relays

**Solid-state time-delay blocks**  
(see configuring aid on page 2/38)

**3RT19 16-2C...**  
ON-delay  
Size S00




**3RT19 16-2D...**  
OFF-delay (with auxiliary voltage)  
Size S00




**Sizes S2 to S12**

**3RT19 16-2E.../2F.../2G... solid-state, time-delay auxiliary switch blocks**


**1 NO + 1 NC**  
ON-delay



**1 NO + 1 NC**  
OFF-delay




**2 NO**  
WYE-delta function




(Integrated varistors not shown)

**3RT19 26-2C...**  
ON-delay  
Sizes S0 to S3



**3RT19 26-2D...**  
OFF-delay (with auxiliary voltage)  
Sizes S0 to S3



A2 can only be connected to N(L-) via the time-delay relay.  
x don't connect

- ① Time-delay block
- ② Contactor

A2 can be connected to N(L-) via either the contactor or the time-delay relay.  
- - - optional connection

Designation	Circuit diagram
3RA2811-.CW10 ON-delay	
3RA2812-.DW10 OFF-delay with auxiliary voltage	
3RA2813-.AW10 ON-delay, 1 CO contact	
3RA2813-.FW10 ON-delay, 1 NC contact/ 1 NO contact	

Designation	Circuit diagram
3RA2814-.AW10 OFF-delay, 1 CO contact	
3RA2814-.FW10 OFF-delay with auxiliary voltage, 1 NC contact/ 1 CO contact	
3RA2815-.AW10 OFF-delay without auxiliary voltage, 1 CO contact	
3RA2815-.FW10 OFF-delay without auxiliary voltage, 1 NC contact/ 1 NO contact	

3RT29 accessories are intended to be used only with 3RT2 or 3RH2 base devices.  
3RT19 auxiliaries are intended to be used only with 3RT1 or 3RH1 base devices.

# Contactors and Contactor Assemblies

## 3RA Contactor Assemblies


3RA13 / 3RA23 contactor assemblies  
for reversing

SIRIUS



### Circuit diagrams

#### Size S00 to S0 Main circuit




The 3RA2913-2AA (S00) and 3RA2913-2AA (S0) installation kit contains wiring connectors for connecting the main conducting paths, the mechanical interlock and two connecting clips for the contactors.


#### Control circuit (sizes S00 and S0)

(terminal designations of contactors according to EN 50 012)


##### for momentary-contact operation



##### for maintained-contact operation



#### Sizes S2 to S3 Main circuit




The 3RA19 3-2A installation kits contain, among other things, the wiring connectors on the top and bottom for connecting the main conducting paths.


#### Control circuit

(terminal designations of contactors according to EN 50 005)

##### for momentary-contact operation



##### for maintained-contact operation



The 3RA19 24-2B mechanical interlock contains one NC contact for the NC contact interlock for each contactor


### Position of terminals

#### Sizes S2 to S3

##### Terminal designations according to EN 50 005

3RA19 24-2B mechanical interlock (laterally mountable), integrated in reversing contactor assemblies (reversing starters), contains one NC contact for the electrical interlock for each contactor

#### 2 NC

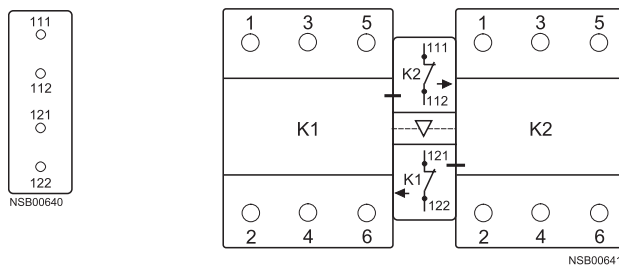


- S0 "OFF" button
- S1 "Clockwise ON" button
- S2 "Counterclockwise ON" button
- S "CW-OFF-CCW" button

- K1 Clockwise contactor
- K2 Counterclockwise contactor


- F1 Fuses for main circuit
- F3 Fuses for control circuit
- F2 Overload relay

**Circuit diagrams**

**Size S00 / S0  
Main circuit**

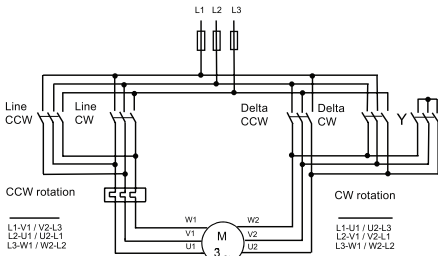


**Control circuits with 3RA2816-0EW20 function module (set of three) snapped onto the front**

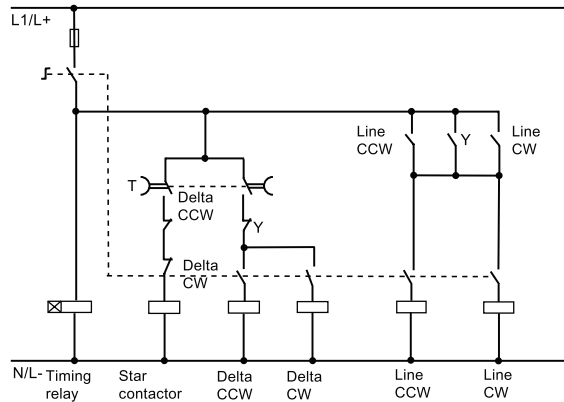


**Sizes S2 to S3  
Main circuit**


**Sizes S2 and S3**

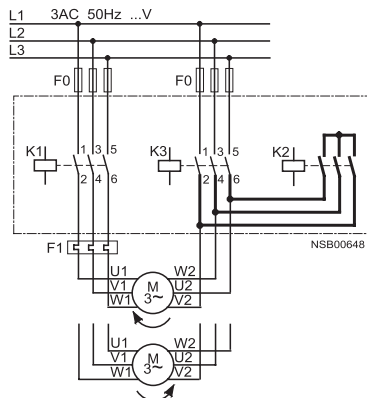


**3RA2816-0EW20**

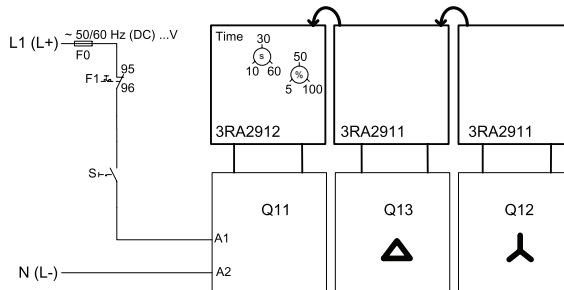

**Control circuits with 3RP15 7. time-delay relay, laterally mounted (typical circuits) for momentary-contact operation**

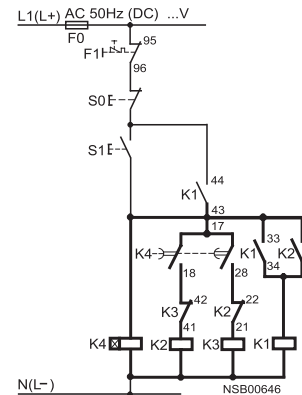

**for maintained-contact operation**

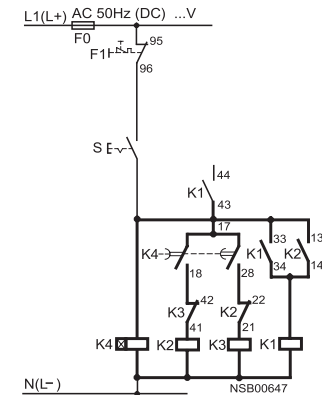


Contact element 17/18 is only closed on the star step; the contact element is open on the delta step and when de-energized.

### 3TF68 and 3TF69 vacuum contactors

#### Internal circuit diagrams


##### 3TF68 44 and 3TF69 44 contactors

**4 NO + 4 NC**  
AC operation  
max. complement of auxiliary switches



##### 3TF68 33 and 3TF69 33 contactors

**3 NO + 3 NC**  
DC operation  
max. complement of auxiliary switches



##### Auxiliary switch blocks 3TY7 681-1G

for coil reconnection,  
3TF68 and 3TF69,  
DC economy circuit



##### Auxiliary switch blocks 3TY7 561-1AA00

first auxiliary switch block  
left or right mounted on left mounted on right



##### Auxiliary switch blocks 3TY7 561-1KA00

second auxiliary switch block  
left or right mounted on left mounted on right



##### Auxiliary switch blocks 3TY7 561-1EA00

with make-before-break contacts  
mounted on left mounted on right




##### Auxiliary switch blocks 3TY7 561-1.

solid-state compatible aux. switch block  
mounted on left mounted on right




##### Interface for control by PLC 3TX7 090-0D

with surge suppression



#### Circuit diagrams for DC economy circuit - maintained-contact operation

##### 3TF68 33 and 3TF69 33 contactors

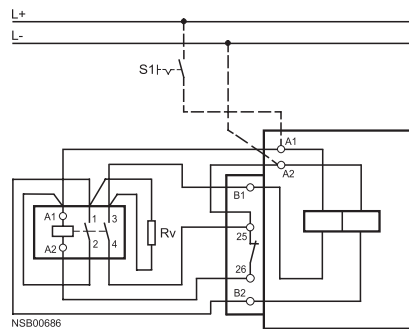

Terminal designations according to EN 50 012.



#### Terminal diagrams

##### DC operation

L+ is to be connected to coil terminal A1.

**3RH21 coupling relays for auxiliary circuits, size S00**


**Terminal designations according to EN 50 011**

(it is not possible to snap on an auxiliary switch block)

Surge suppressor can be mounted


##### 4 NO

Ident no.: 40E




##### 3 NO + 1 NC

31E



##### 2 NO + 2 NC


22E



##### Suppressor Diode integrate


##### 4 NO

Ident no.:40E




##### 3 NO + 1 NC

31E



##### 2 NO + 2 NC


22E



##### Diode integrated


##### 4 NO

Ident no.:40E




##### 3 NO + 1 NC

31E



##### 2 NO + 2 NC

22E




#### Position of terminals

##### Size S00

##### 3RH21 coupling relays


##### 4 NO

Ident no.: 40E




##### 3 NO + 1 NC

31E



##### 2 NO + 2 NC

22E




##### 3RH19 21- . DA11 first laterally mountable auxiliary switch block 1)


mountable on left or right

##### 1 NO + 1 NC

left



right




##### 3RH19 21- . JA11 second laterally mountable auxiliary switch block 1)


mountable on left or right (only for sizes S3 to S12)

##### 1 NO + 1 NC

left



right



1) Note the location digit.  
Can only be used if no 4-pole auxiliary switch block is snapped onto the front.



# Contactors and Contactor Assemblies

## 3RH2 Control & Latching Relays




### 3RH2 Terminal Designations

Terminal designations according to EN 50 011

#### 3RH21 control relays


##### 4 NO

Ident no.: 40E




##### 3 NO + 1 NC

31E



##### 2 NO + 2 NC

22E




#### 3RH21 40 control relays

with 3RH19 11-1GA... auxiliary switch blocks snapped onto the front


##### 8 NO

Ident no.: 80E




##### 7 NO + 1 NC

71E




##### 6 NO + 2 NC

62E




##### 5 NO + 3 NC

53E



##### 4 NO + 4 NC


Ident no.: 44E



#### 3RH24 latched control relays


##### 4 NO

Ident no.: 40E

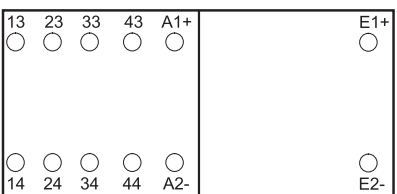


##### 3 NO + 1 NC

31E

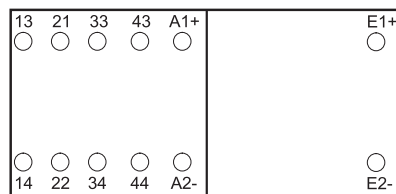

##### 2 NO + 2 NC

Ident no.: 22E

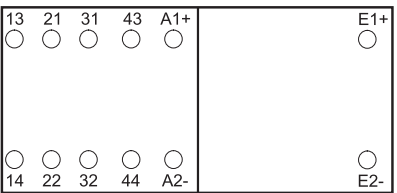



**Position of terminals (applicable to screw connection and Cage Clamp connection)**


**Size S00**

**Terminal designations according to EN 50 012**

**3RT20 1 contactors, 3RT20 1 coupling relays,**


**1 NO**

Ident. no. 10E



**1 NC**

01




**3RT20 1 contactors (with 1 NO)**

with auxiliary switch blocks snapped onto the front  
3RH19 11-.H...


**1 NO + 1 NC**

Ident. no.: 11




**2 NO + 2 NC**

22




**2 NO + 3 NC**

Ident. no.: 23



**3 NO + 2 NC**


32




**Size S0**

**Terminal designations according to EN 50 012**

**3RT20 2 Contactors with 1NO + 1NC**  
**3RT20 2 Coupling Relays**




**3RT20 2 Contactors with 3NO + 3NC**



**Sizes S2 to S12**

**Terminal designations according to EN 50 012**

**3RT 10 3, 3RT10 4, 3RT14 46 contactors,**




**3RT 10 3, 3RT 10 4 contactors**

3RH19 21-.HA22  
4-pole auxiliary switch block snapped onto the front

**2 NO + 2 NC**

Ident. no. 22 E




**3RT10 3, 3RT10 4 contactors**

with 4-pole auxiliary switch block for snapping onto the front  
3RH19 21-.HA31

**3 NO + 1 NC**

Ident. no. 31 E




**3RT10 3, 3RT10 4 contactors**

with 4-pole auxiliary switch block for snapping onto the front  
3RH19 21-.HA13

**1 NO + 3 NC**

13 E





### 3RT1/2 contactors and accessories


#### Position of terminals (applicable to screw connection and Spring-type connection)

**Accessories for size S2 to S12 contactors**  
*Terminal designations acc. to EN 50 005*

**3RH19 21- . F... auxiliary switch blocks, 4-pole,**  
 for snapping onto the front


**4 NO**

Ident. no. 40




**3 NO + 1 NC**

31




**2 NO + 2 NC**

22




**4 NC**

04



**2 NO + 2 NC**


22 U




make-before-break

**3RH19 21-1LA.. auxiliary switch blocks, 2-pole,**  
 for snapping onto the front, cable entry from above


**2 NO**



**1 NO + 1 NC**




**2 NC**




**3RH19 21-1MA.. auxiliary switch blocks, 2-pole,**  
 for snapping onto the front, cable entry from below


**2 NO**



**1 NO + 1 NC**




**2 NC**



**3RH19 21- . FE22 solid-state compatible auxiliary switch block, 4-pole,**  
 for snapping onto the front

**2 NO + 2 NC**


Ident. no. 22




*Terminal designations according to EN 50 005 or EN 50 012*

**3RH19 21- . CA.. auxiliary switch blocks, single-pole,**  
 for snapping onto the front


**1 NO**



**1 NC**




**1 NO**



with extended contact-making

**1 NC**




with extended contact-making


**Position of terminals**

**Accessories for size S2 to S12 contactors**  
Terminal designations acc. to EN 50 005


**3RH19 21- . EA.. first laterally mountable auxiliary switch blocks (left)**

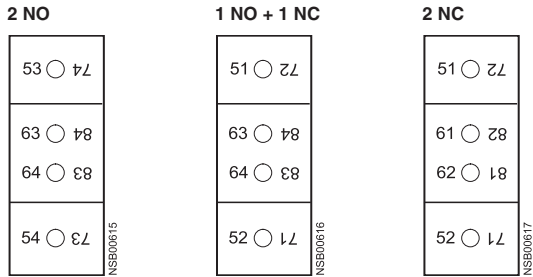


**3RH19 21- . EA.. first laterally mountable auxiliary switch blocks (right)**

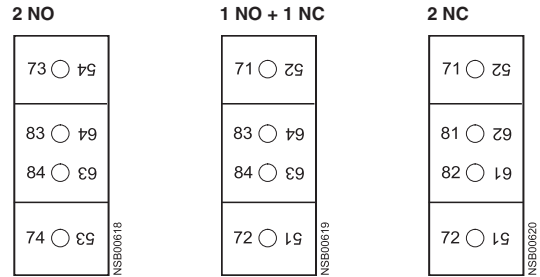

**3RH19 21- . KA.. second laterally mountable auxiliary switch blocks (left)**  
(only for sizes S3 to S12; can only be used if no auxiliary switches are snapped onto the front)

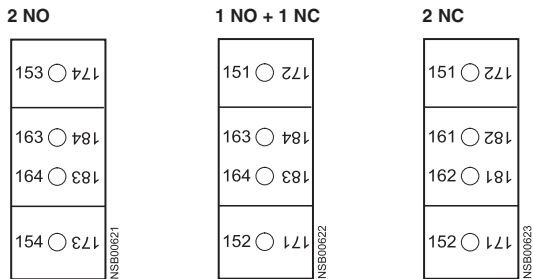


**3RH19 21- . KA.. second laterally mountable auxiliary switch blocks (right)**  
(only for sizes S3 to S12; can only be used if no auxiliary switches are snapped onto the front)

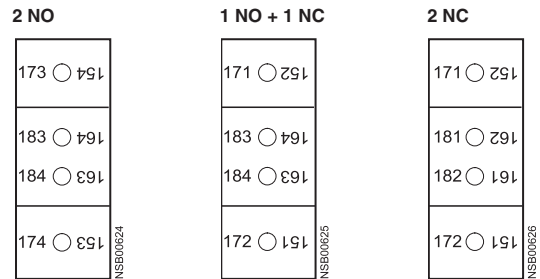


**Accessories for size S2 to S12 contactors**  
Terminal designations acc. to DIN 46 199 Part 5

**3RT19 26-2E.../2F.../2G... solid-state, time-delay auxiliary switch blocks**

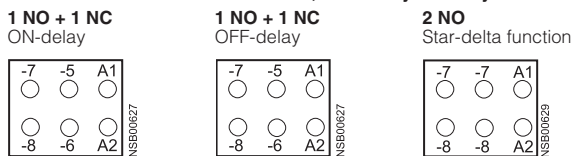


**3RT16 capacitor contactors**

**Size S00**  
with 4-pole auxiliary switch block mounted on the front



The auxiliary switch block comprises 3 leading contacts (not shown) and one unassigned NO contact.

**Sizes S2 and S3**  
with 4-pole auxiliary switch block mounted on the front



The auxiliary switch block comprises 3 leading contacts (not shown) and one unassigned NO contact.

#### Position of terminals (applicable to screw connection and Spring-type terminal connection)


##### Sizes S6 to S12

##### 3RT1.5, 3RT1.6, 3RT1.7 contactors

- with conventional op. mechanism (3RT1...-A...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 2 NO + 2 NC, incl. in contactor) 3RH19 21-1JA11 (expandable to 4 NO + 4 NC)


**2 NO + 2 NC or 4 NO + 4 NC**



- with solid-state op. mechanism (3RT1...-N...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 2 NO + 2 NC, incl. in contactor) 3RH19 21-1JA11 (expandable to 4 NO + 4 NC)


**2 NO + 2 NC or 4 NO + 4 NC**



- with solid-state op. mechanism (3RT1...-P...)

with laterally mountable auxiliary switch blocks 3RH19 21-1DA11 (for 1 NO + 1 NC, incl. in contactor) 3RH19 21-1JA11 (expandable to 2 NO + 2 NC)


**1 NO + 1 NC or 2 NO + 2 NC**




##### Contactors with 4 main contacts, size S00 Terminal designations acc. to EN 50 005

##### 3RT23 and 3RT25 contactors

**4 NO**




**2 NO + 2 NC**



##### Contactors with 4 main contacts, sizes S2 to S3 Terminal designations acc. to EN 50 005


##### 3RT13 and 3RT15 contactors

**4 NO**



Size S0 with integrated 1NO + 1NC aux (13/14 + 21/22) and only one set of A1+A2 on front

**2 NO + 2 NC**






#### Position of terminals


##### AC operation

**3TF68 and 3TF69 contactors**  
4 NO + 4 NC



##### DC operation


**3TF68 and 3TF69 contactors**  
3 NO + 3 NC  
max. complement of auxiliary switches



##### Solid-state compatible auxiliary switch blocks

3TY7 561-1. for lateral mounting onto  
size 6 to 14 contactors

mounted  
on left




mounted  
on right



## 3RT20 contactors, 3-pole

### Dimension drawings


**3RT2.1.-1 contactor and 3RH21...-1 contactor relays**  
**Size S00 and NEMA Size 0**, screw connection  
 with surge suppressor and auxiliary switch block

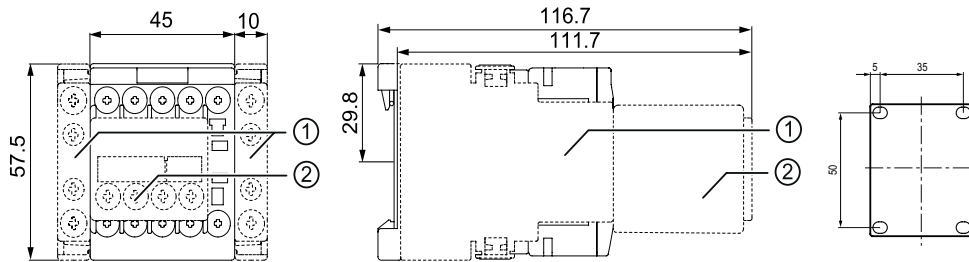

Lateral clearance from  
earthed parts = 6 mm


- 1) Laterally mountable auxiliary switch block  
3RH2911-1DA.. / -1DE.. / -1EE..
- 2) Auxiliary switch block for mounting on the front  
3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..

**3RT2.1.-2 contactor and 3RH21...-2 contactor relay**  
**Size S00**, Spring-type terminal connection  
 with auxiliary switch block

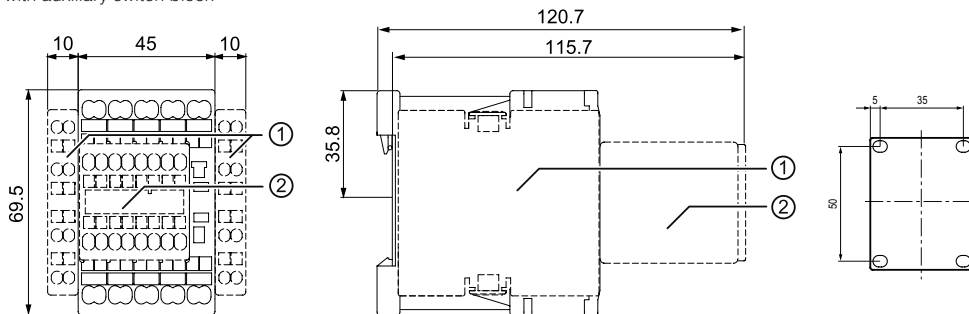

- 1) Laterally mountable auxiliary switch block  
3RH2911-2DA.. / -2DE.. / -2EE..
- 2) Auxiliary switch block for mounting on the front  
3RH2911-2FA.. / -2GA.. / -2HA.. / -2NF..

**3RT2.2.-1 contactors Size S0 and NEMA Size 1**,  
 (screw-type connection system) with auxiliary switch blocks  
 mounted and other accessories

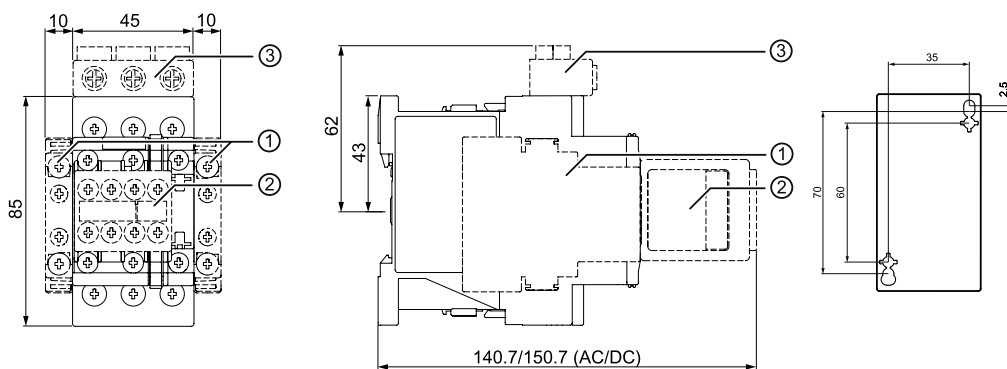

- 1) Laterally mountable auxiliary switch block  
3RH2921-1DA.. / -1DE..
- 2) Auxiliary switch block for mounting on the front  
3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..
- 3) 3-phase infeed terminal  
3RV2925-5AB

For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)






**Dimension drawings**

**3RT2.2.-2 and 3RT202.-.....0LA2 contactors**

**Size S0** (spring-loaded connection) with auxiliary switch blocks mounted

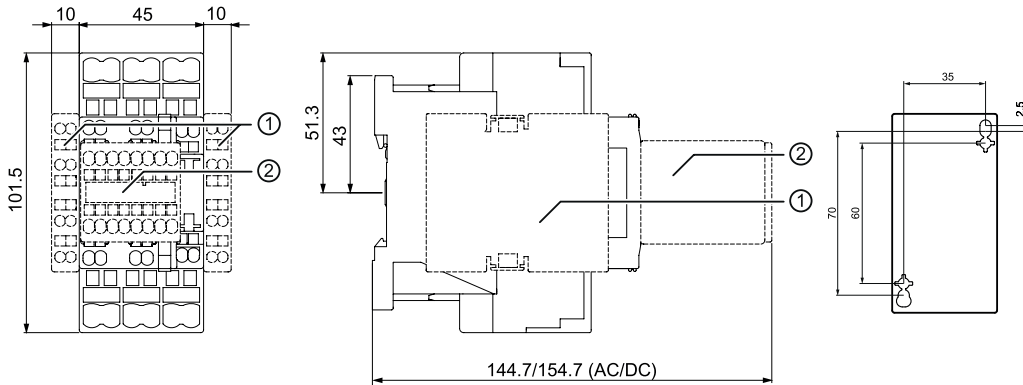


**For size S0:**

- 1) Laterally mountable auxiliary switch block 3RH2921-2DA.. / -2DE..
- 2) Auxiliary switch block for mounting on the front 3RH2911-2FA.. / -2GA.. / -2HA.. / -2NF..

**3RT10 3 contactors**

**Size S2 and NEMA Size 2**, screw connection

with surge suppressor, auxiliary switch blocks and mounted overload relay

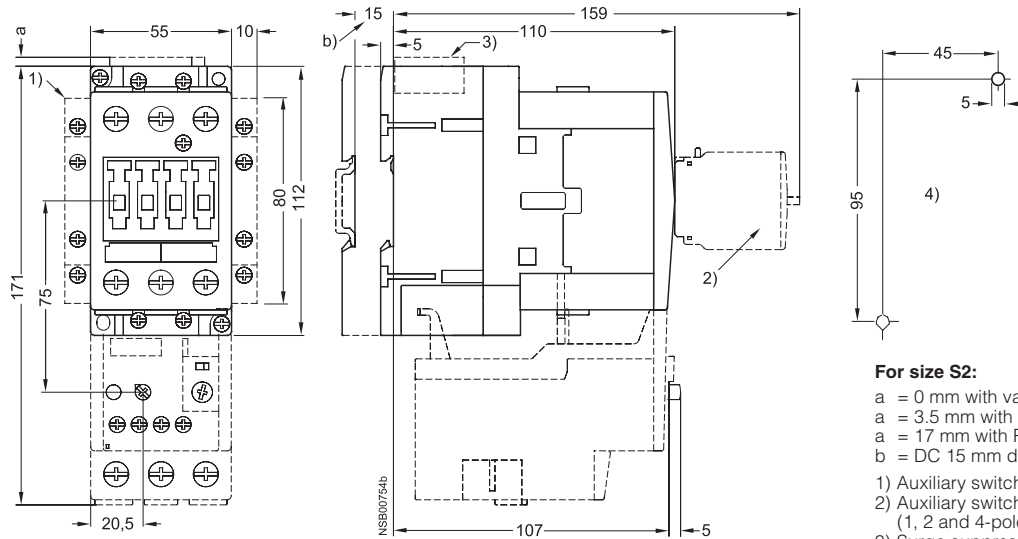

**For size S2:**

- a = 0 mm with varistor < 240 V, diode assembly
- a = 3.5 mm with varistor > 240 V
- a = 17 mm with RC element
- b = DC 15 mm deeper than AC
- 1) Auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front (1, 2 and 4-pole)
- 3) Surge suppressor
- 4) Drilling pattern


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)

## 3RT10 and 3RT14 contactors, 3-pole

### Dimension drawings


#### 3RT10 3 contactors

**Size S2**, Spring-type terminal connection  
with surge suppressor, auxiliary switch blocks and mounted overload relay

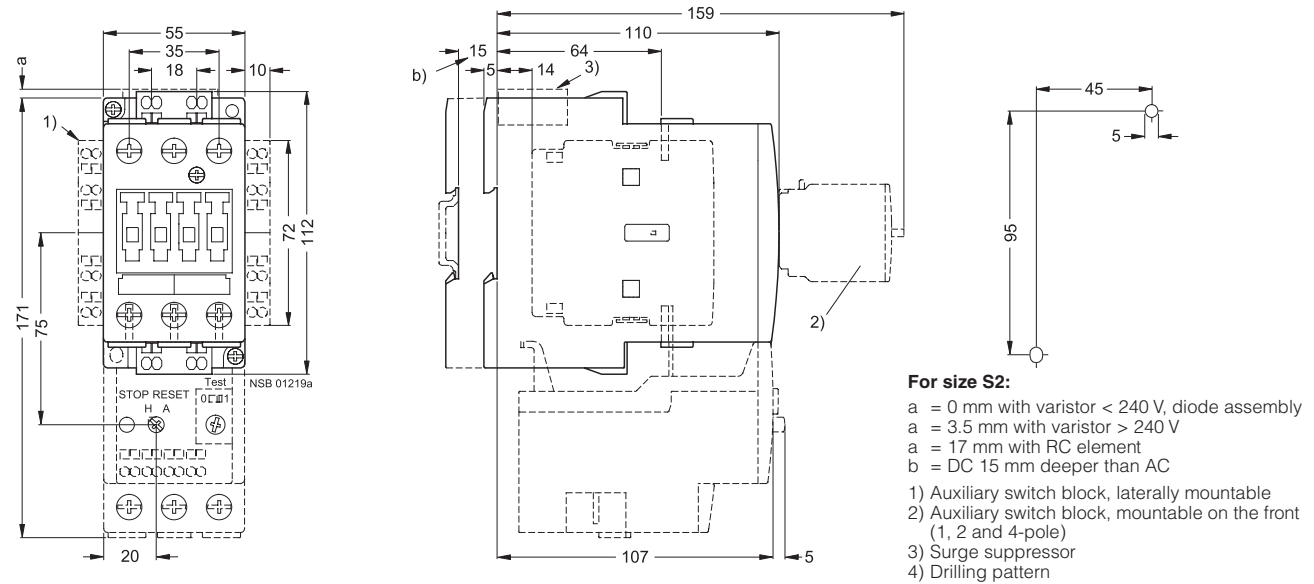

#### 3RT10 4, 3RT14 46 contactors

**Size S3 and NEMA Size 3**, screw connection  
with surge suppressor, auxiliary switch blocks and mounted overload relay

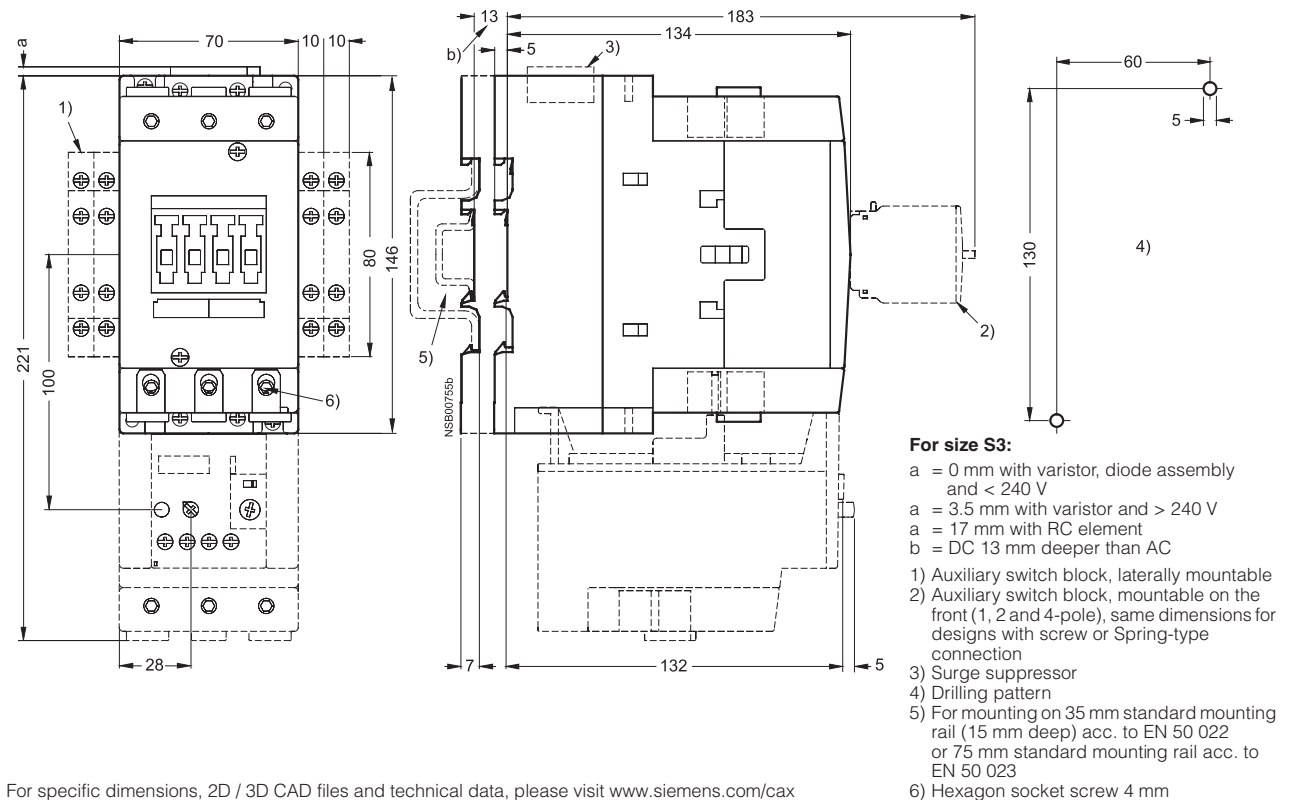


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)



**Dimension drawings**

**3RT10 4 contactors,  
Size S3**, Spring-type terminal connection  
with surge suppressor, auxiliary switch blocks  
and mounted overload relay

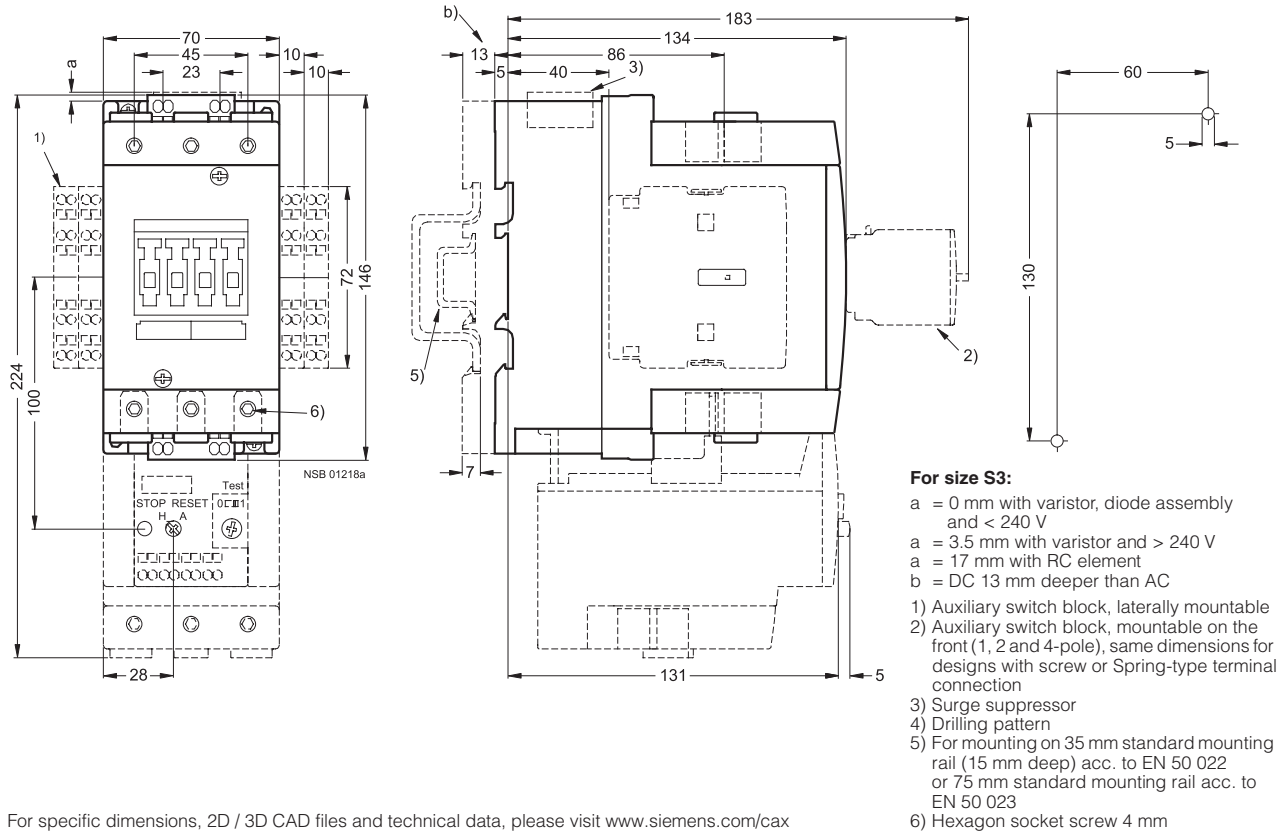


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)

## 3RT10 and 3RT14 contactors, 3-pole


### Dimension drawings

#### 3RT10 5, 3RT14 5 contactors Size S6 and NEMA Size 4

with auxiliary switch block, laterally mountable and mountable on the front,  
mounted overload relay and box terminals,  
laterally mounted electronics module with remaining lifetime indication

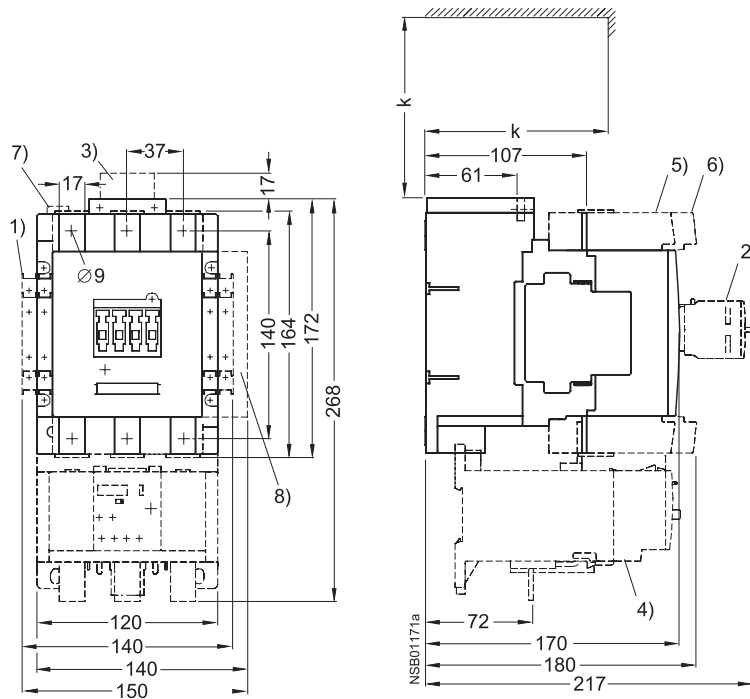

Clearance from earthed parts with  
directly mounted overload relay:  
lateral: 10 mm  
front: 20 mm



#### For size S6:

$k = 120$  mm (minimum clearance for removing the  
withdrawable coil)

- 1) Second auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front
- 3) RC element
- 4) 3RB10 overload relay, mounted
- 5) 3RT19 55-4G box terminal block  
(hexagon socket 4 mm)
- 6) 3RT19 56-4G box terminal block  
(hexagon socket 4 mm)
- 7) PLC connection DC 24 V and changeover switch  
(with 3RT1...-N)
- 8) Electronics module with remaining lifetime indication  
(auxiliary switch block not mountable on right-  
hand side)


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)



**Dimension drawings**

**3RT10 6, 3RT14 6 contactors  
Size S10**

with auxiliary switch block, laterally mountable and mountable on the front,  
mounted overload relay and box terminals,  
laterally mounted electronics module with remaining lifetime indication

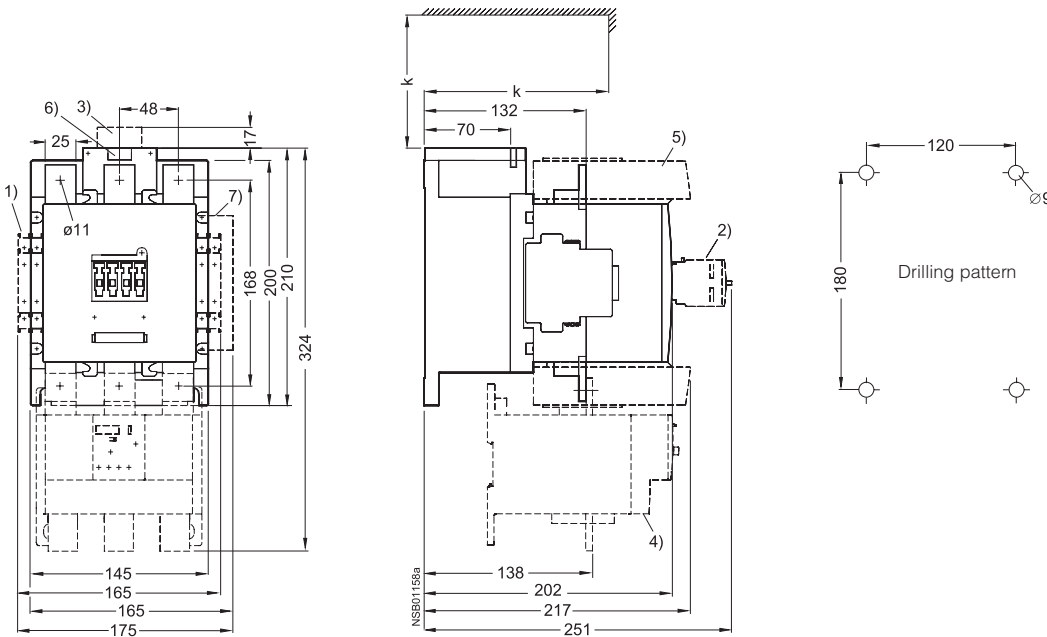


**3RT10 7, 3RT14 7 contactors  
Size S12**

with auxiliary switch block, laterally mountable and mountable on the front,  
mounted overload relay and box terminals,  
laterally mounted electronics module with remaining lifetime indication

**For sizes S10 and S12:**

Clearance from earthed parts with directly mounted  
overload relay:  
lateral: 10 mm  
front: 20 mm

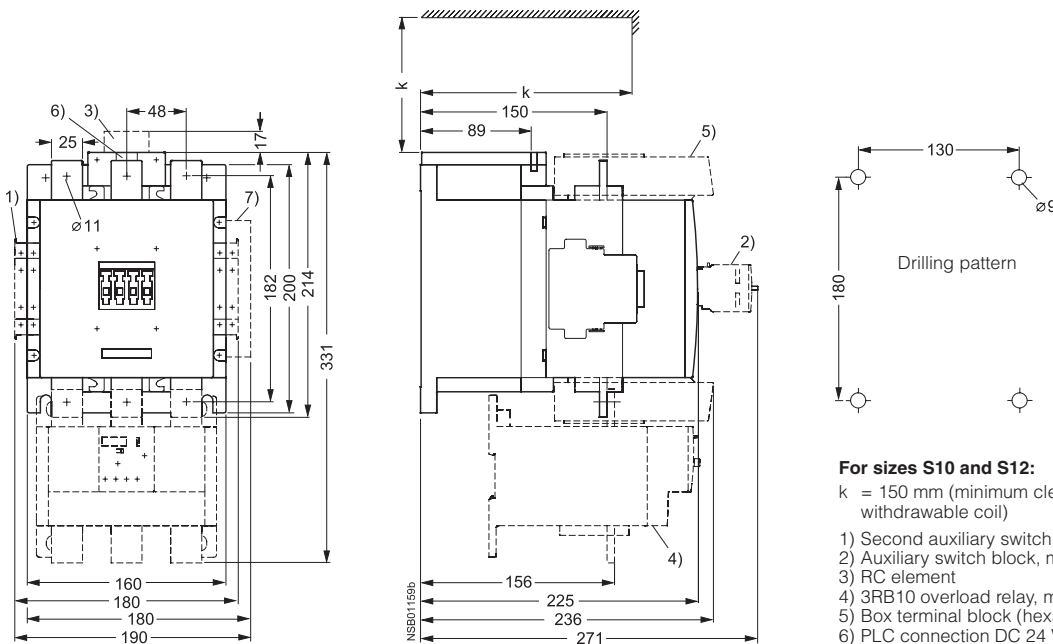

**For sizes S10 and S12:**

k = 150 mm (minimum clearance for removing the  
withdrawable coil)

- 1) Second auxiliary switch block, laterally mountable
- 2) Auxiliary switch block, mountable on the front
- 3) RC element
- 4) 3RB10 overload relay, mounted
- 5) Box terminal block (hexagon socket 6 mm)
- 6) PLC connection DC 24 V and changeover switch (with 3RT1...-N)
- 7) Electronics module with remaining lifetime indication (auxiliary switch block not mountable on right-hand side)

For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)



## 3RT12 vacuum contactors, 3-pole

### Dimension drawings

#### 3RT12 6 vacuum contactors


##### Size S10

with auxiliary switch block, laterally mountable,  
mounted overload relay and box terminals,  
laterally mounted electronics module with remaining lifetime indication

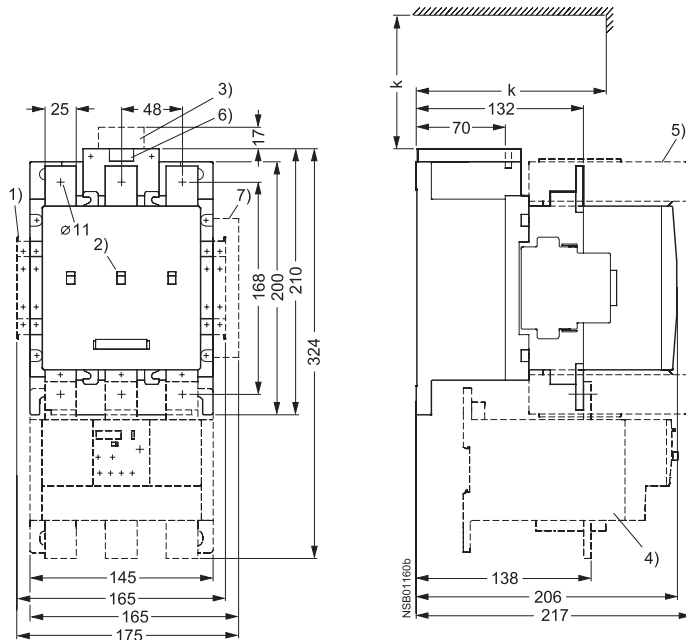

#### Detail



Contact erosion indicator for vacuum interrupters



#### 3RT12 7 vacuum contactors

##### Size S12

with auxiliary switch block, laterally mountable,  
mounted overload relay and box terminals,  
laterally mounted electronics module with remaining lifetime indication

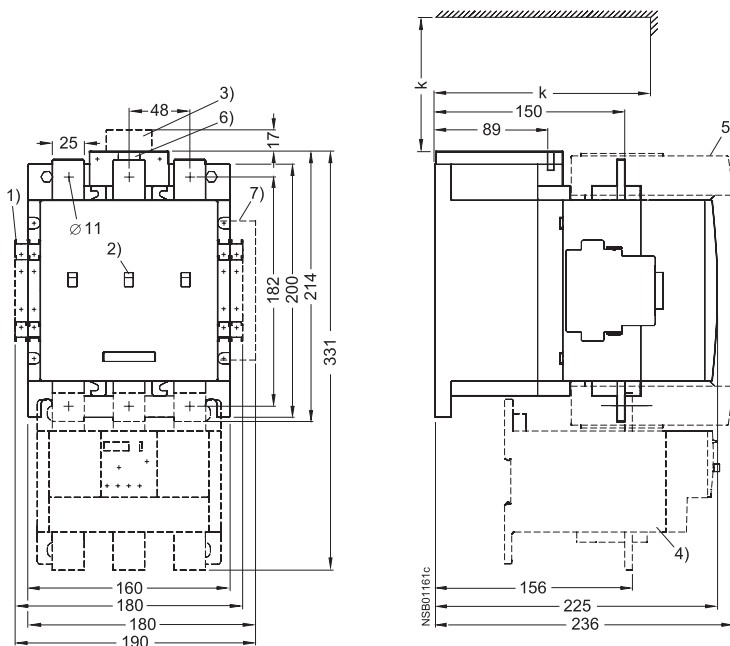

#### For sizes S10 and S12:

k = 150 mm (minimum clearance for removing the withdrawable coil)

- 1) Second auxiliary switch block, laterally mountable
- 2) Position and contact erosion indicator
- 3) RC element
- 4) 3RB10 overload relay, mounted
- 5) Box terminal block (hexagon socket 6 mm)
- 6) PLC connection DC 24 V and changeover switch (with 3RT1...-N)
- 7) Electronics module with remaining lifetime indication (auxiliary switch block not mountable on right-hand side)


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)



**Dimension drawings**

**3RT23 1 and 3RT25 1 contactors**

**Size S00**, screw connection  
with surge suppressor and auxiliary switch block

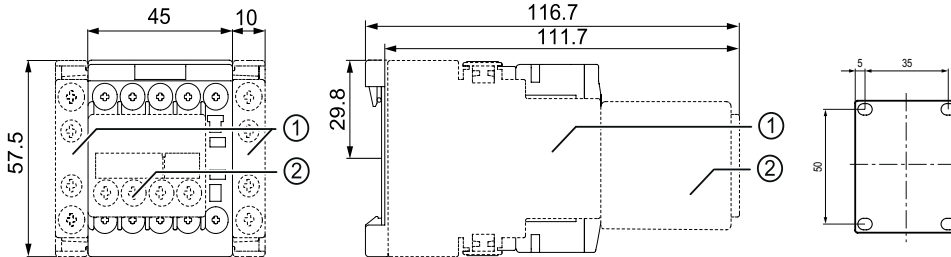


**Lateral clearance from  
earthed parts = 6 mm**

**For size S00:**

- 1) Laterally mountable auxiliary switch block 3RH2911-1DA.. / -1DE.. / -1EE..
- 2) Auxiliary switch block for mounting on the front 3RH2911-1FA.. / -1GA.. / -1HA.. / -1NF..

**3RT23 2 and 3RT25 2 contactors**

**Size S0** with coil terminal module  
and auxiliary switch block

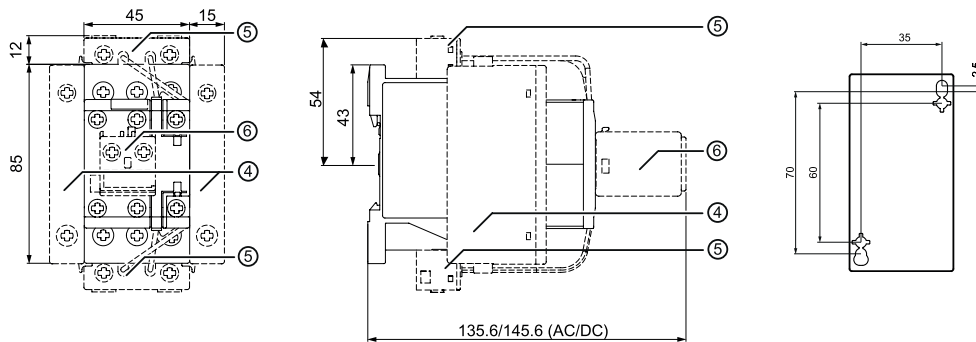


**For size S0:**

- 4) 4-pole contactor for switching 4 resistive loads 3RT232. 4-pole pole-changing contactor for changing the polarity of hoisting gear motors (2 NO contacts and 2 NC contacts) 3RT252.
- 5) Coil terminal module 3RT2926-4RA11/-4RB11
- 6) Auxiliary switch block for mounting on the front 3RH2911-1AA.. / -1BA

**3RT13 3 and 3RT15 3 contactors**

**Size S2** with surge suppressor  
and auxiliary switch block

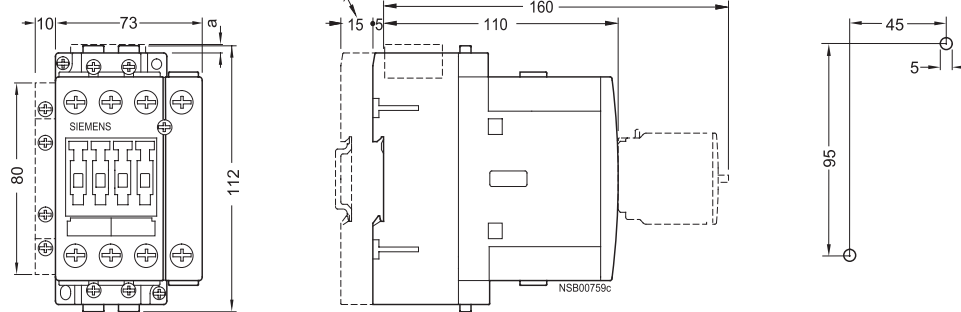


**For sizes S2 and S3:**

- a = 0 mm with varistor < 240 V
- a = 3.5 mm with varistor > 240 V
- a = 17 mm with RC element and diode assembly
- b = S2: DC 15 mm deeper than AC
- S3: DC 13 mm deeper than AC

- 1) Auxiliary switch block, laterally mountable (right or left)
- 2) Auxiliary switch block, mountable on the front, (1, 2 and 4-pole, also 3RH19 21-1FE22 solid-state compatible design)
- 3) Surge suppressor
- 4) Drilling pattern
- 5) For mounting on 35 mm standard mounting rail (15 mm deep) acc. to EN 50 022 or, in the case of size S3, 75mm standard mounting rail acc. to EN 50 023
- 6) Hexagon socket screw 4 mm

**3RT13 4 contactors**

**Size S3** with surge suppressor  
and auxiliary switch block

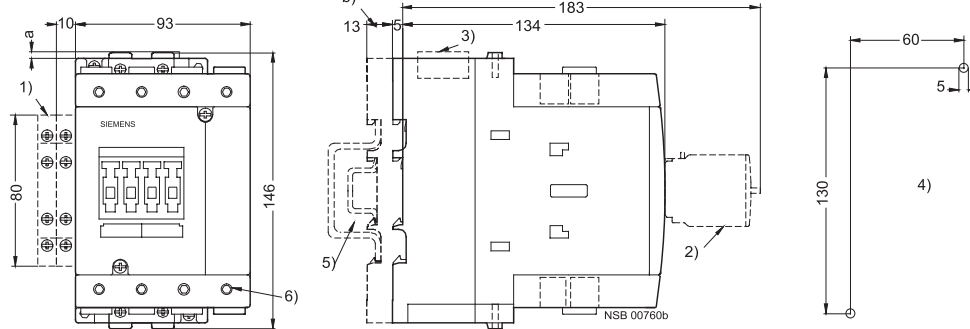


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)


## 3RT16 capacitor contactors

### Dimension drawings


**3RT16 17 capacitor contactors**  
Size S00

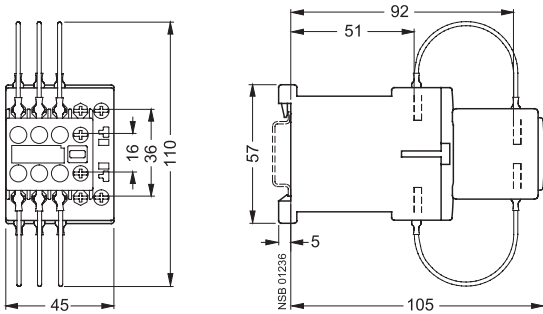

**3RT16 27 capacitor contactors**  
Size S0

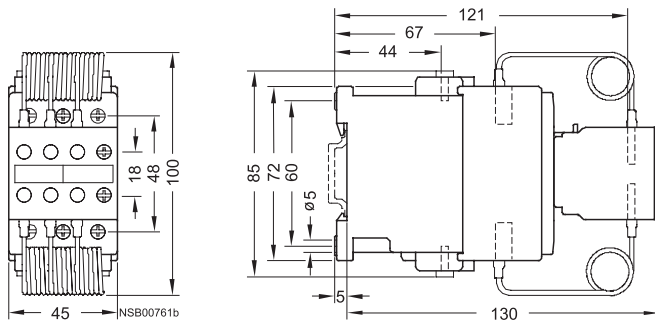

**3RT16 47 capacitor contactors**  
Size S3

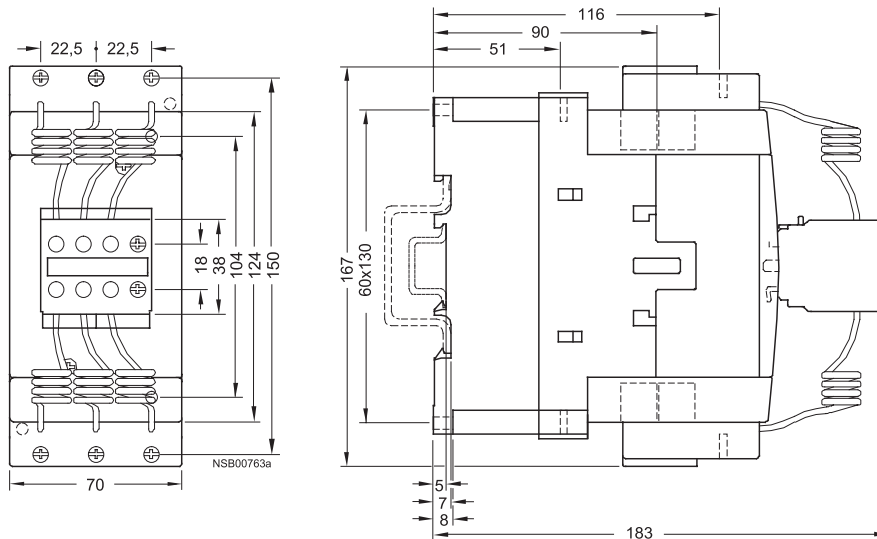


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)






## Dimension drawings


Size S00 / 3RA231

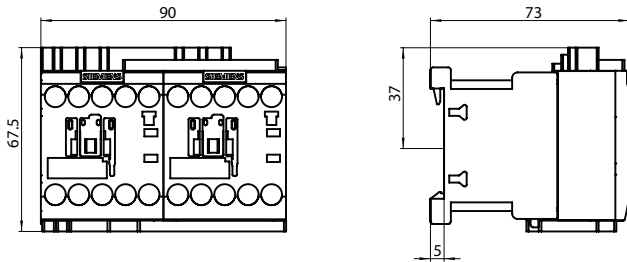


Size S0 / 3RA232

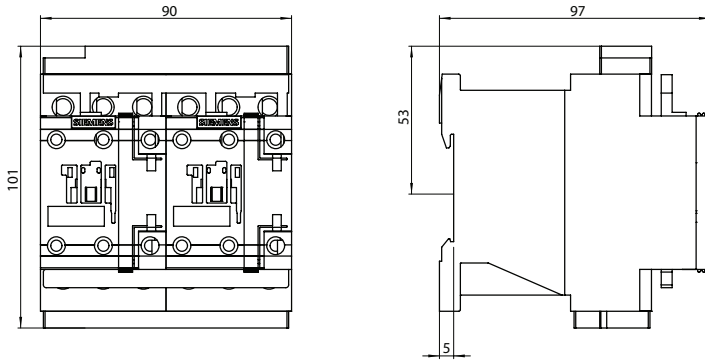

Size S2 / 3RA133

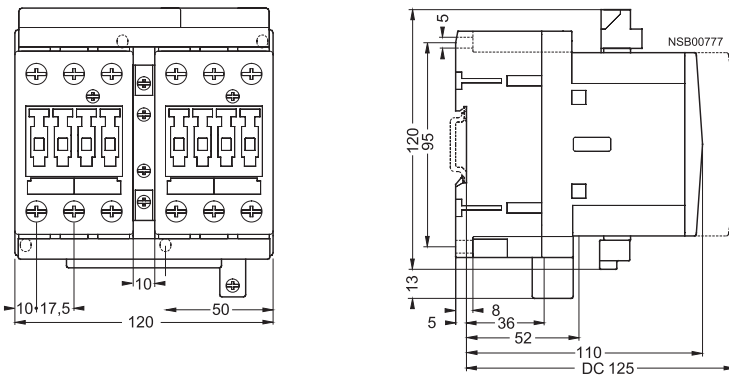

Size S3 / 3RA134

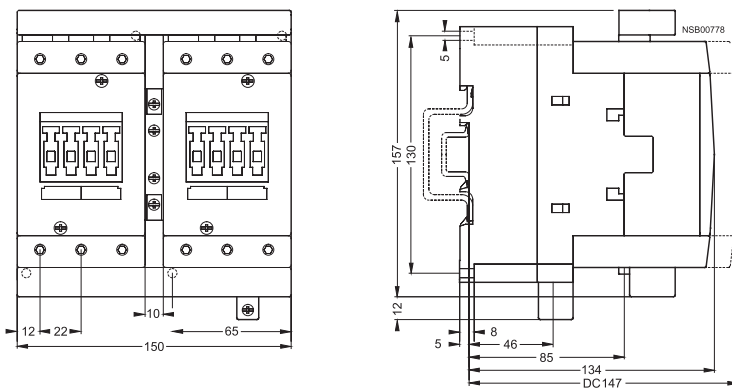


For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)


## 3RA13 contactor assemblies for reversing

### Dimension drawings

#### Size S6

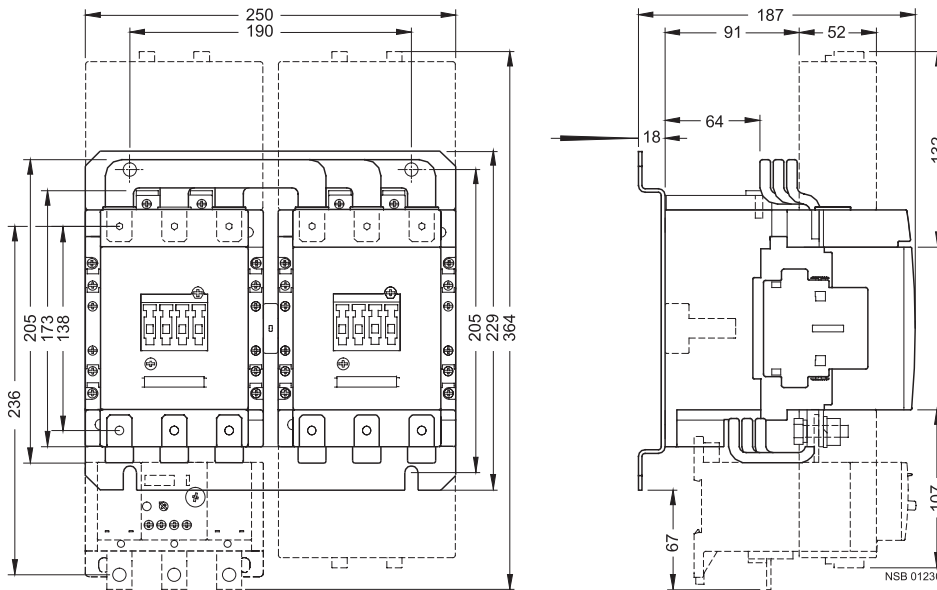





#### Size S10

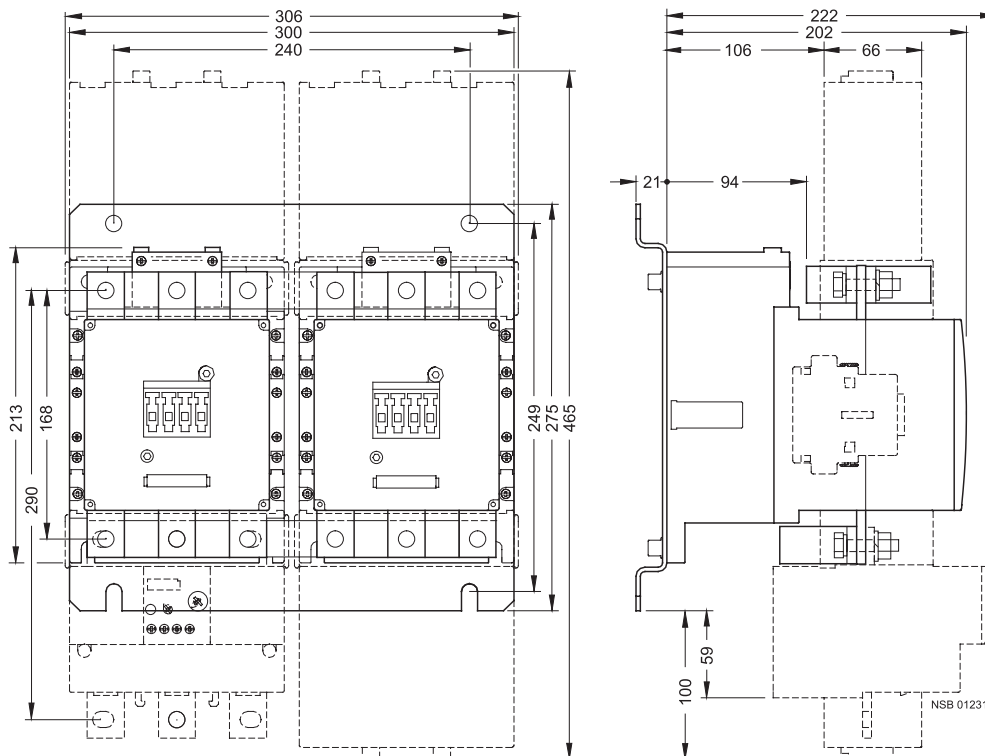

The assemblies shown on this page are for customer assembly with individual components.

**Dimension drawings**

Size S12

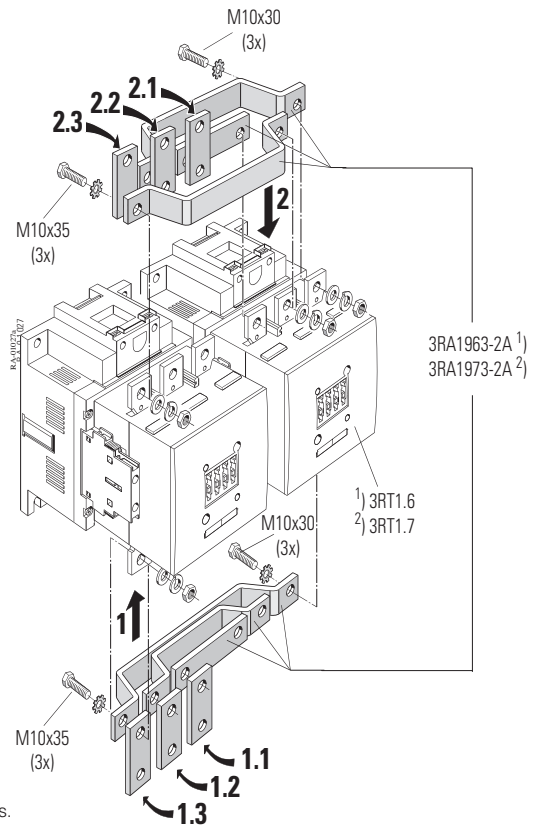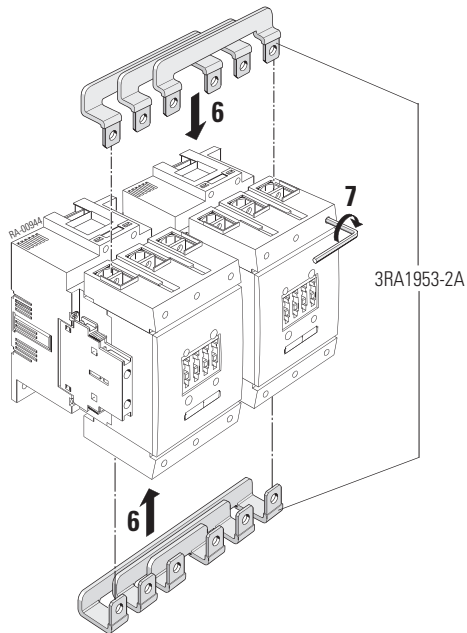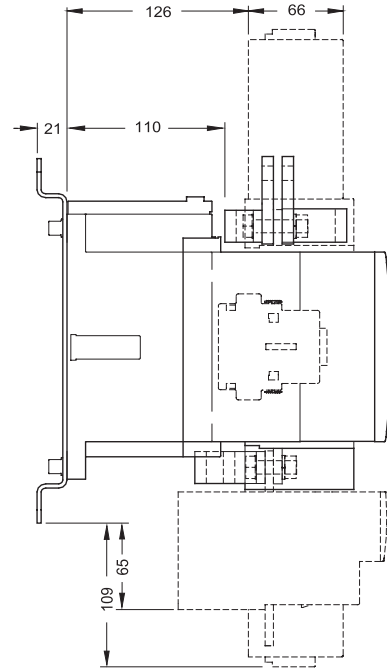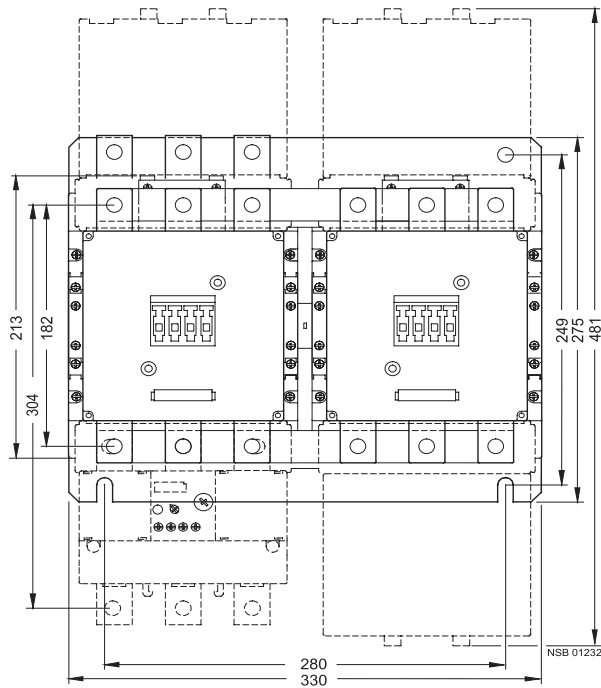


The assemblies shown on this page are for customer assembly with individual components.


## 3TF68 and 3TF69 vacuum contactors, 3TC4 and 3TC5 DC contactors

### Dimension drawings

#### 3TF68 vacuum contactors

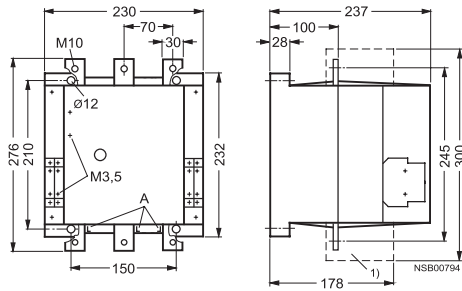


Detail  
A = Contact erosion indicator for vacuum interrupter contacts



#### 3TC4 and 3TC5 contactors


##### 3TC44 contactors Size 2, AC and DC operation

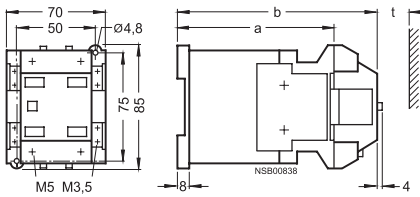

t = minimum clearance from insulated components: 15 mm (600 V and 750 V)  
from grounded components: 30 mm (600 V and 750 V)

	a	b
DC operation	109	141
AC operation	68	100

##### 3TC52 contactors Size 8, AC and DC operation

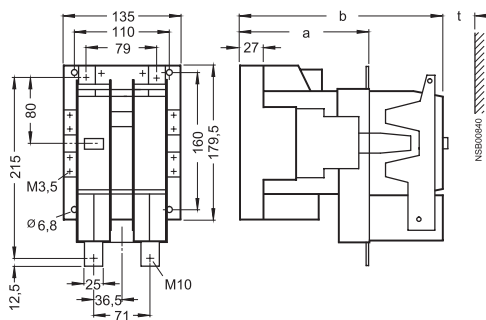


t = minimum clearance from insulated components: 20 mm (600 V and 750 V)  
from grounded components: 70 mm (600 V and 750 V)


	a	b
DC operation	147	232
AC operation	115	200

1) With box terminals for laminated copper bars (accessories).


#### 3TF69 vacuum contactors

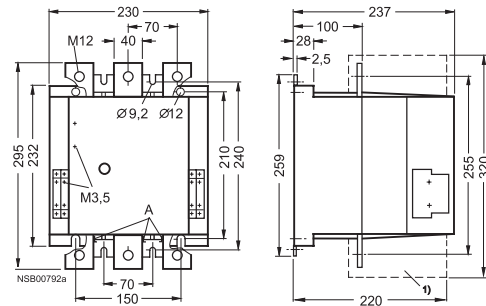

Detail  
A = Contact erosion indicator for vacuum interrupter contacts




##### 3TC48 contactors Size 4, AC and DC operation

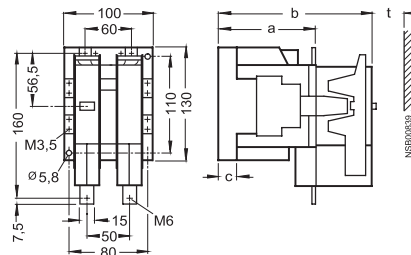

t = minimum clearance from insulated components: 15 mm (600 V),  
20 mm (750 V)  
from grounded components: 35 mm (600 V),  
55 mm (750 V)

	a	b	c
DC operation	112	180	21.5
AC operation	86	154	23.5

##### 3TC56 contactors Size 12, AC and DC operation

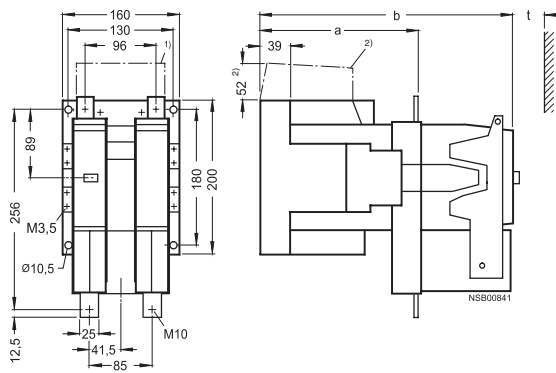

t = minimum clearance from insulated components: 25 mm (600 V and 750 V)  
from grounded components: 80 mm (600 V),  
100 mm (750 V)


	a	b
DC operation	200	310
AC operation	141	251

2) DC operation only




**Dimension drawings**


**Terminal cover for box terminals  
for size S2,  
3RT19 36-4EA2**

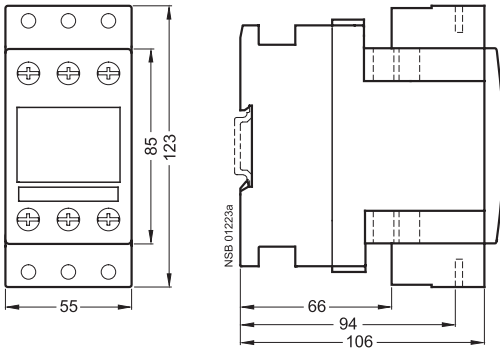


**Terminal cover for box terminals  
for size S3,  
3RT19 46-4EA2**

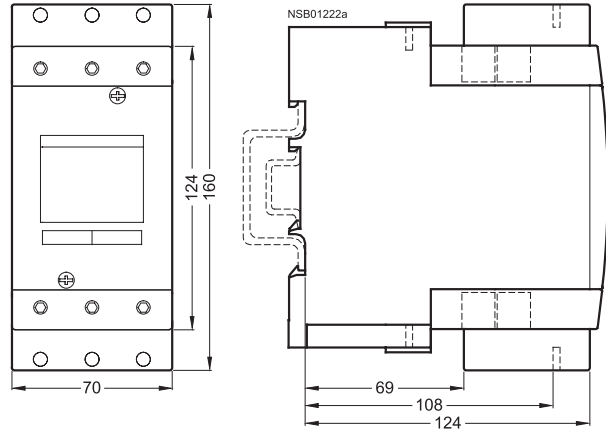

**Terminal cover for cable lug and bar connection  
for size S3,  
3RT19 46-4EA1**

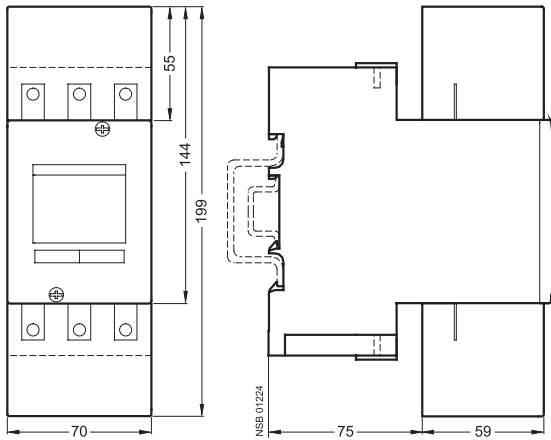


**Auxiliary conductor terminal, 3-pole  
3RT19 46-4F  
Size S3  
mounted on contactor**

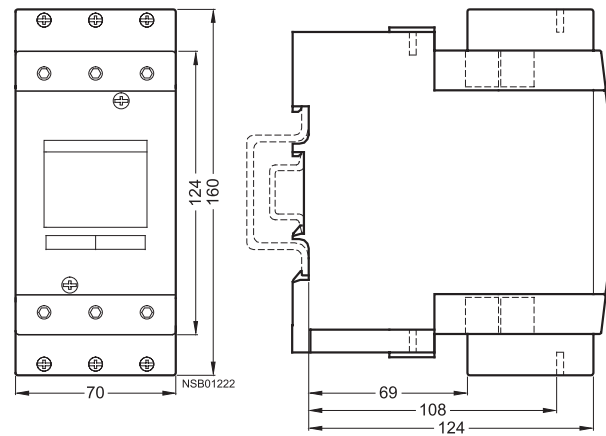

For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)


### Dimension drawings

#### 3RA19.2-2A baseplates for reversing contactor assemblies

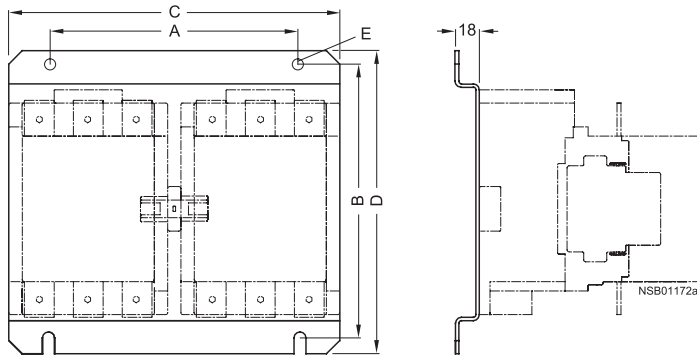

	A	B	C	D	E
S6	190	205	250	229	9
S10	240	249	300	275	11
S12	280	249	330	275	11

#### 3RA19.2-2E, 3RA19.2-2F baseplates for star-delta assemblies

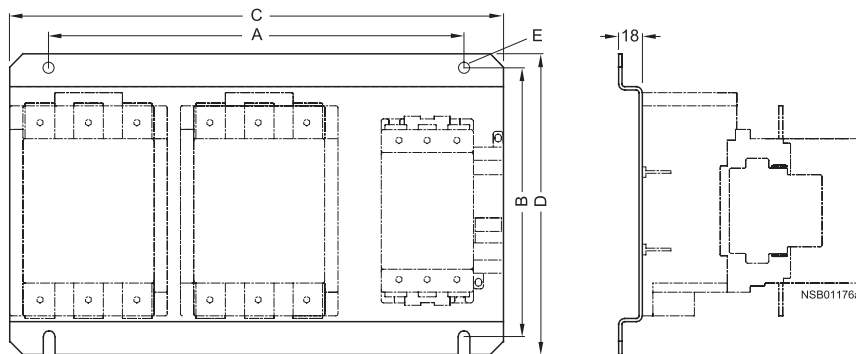

	A	B	C	D	E
S6-S6-S3	316	205	376	229	9
S6-S6-S6	343	205	403	229	9
S10-S10-S6	393	250	453	275	11
S10-S10-S10	423	250	483	275	11
S12-S12-S10	450	250	510	275	11
S12-S12-S12	465	250	525	275	11




For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)



#### Dimension drawings

##### 3RH21 control relays



Size S00, with screw connections



Lateral clearance from earthed parts = 6 mm

##### 3RH24 latched control relays




Size S00



#### 3RH21 coupling relays

#### Dimension drawings

Size S00, with screw connections, with surge suppressor

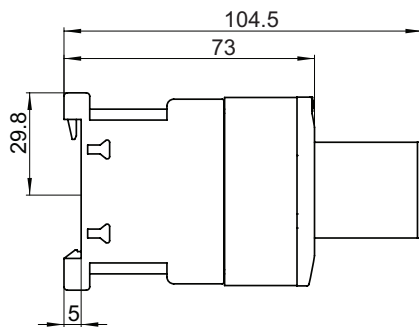

- 1) Surge suppressor
- 2) Drilling pattern

Deviating dimensions for coupling relays with Spring-type terminal connections

Height: 69.5 mm

For specific dimensions, 2D / 3D CAD files and technical data, please visit [www.siemens.com/cax](http://www.siemens.com/cax)

# Contactors and Contactor Assemblies



Notes