

MILBANK®
ENERGY AT WORK



New England Area Catalog



Milbank Overview

Energy At Work since 1927

Milbank provides the tools that empower life. We enable the amazing in countless everyday ways through our thoughtfully designed products and collaborative ingenuity. More than a manufacturing company, we are an active and engaged contributor in the movement of energy. We are energy at work.

Milbank designs and builds solutions that move power for the residential, commercial, industrial, utility and transportation sectors. Milbank combines more than 85 years of expertise in electrical engineering and production with a commitment to develop and implement sustainable, integrated power solutions. A third-generation, family-owned business, Milbank is headquartered in Kansas City, Mo. For more information, please visit www.milbankworks.com.



METERING

Milbank meter sockets have set the standard for quality since 1927. With a 99.97% quality performance, thousands of products to meet your utility's requirements and tens of millions of sockets installed across the globe, our products help keep energy at work. And with 22 stocking locations across the U.S., and our OneSERT program to help during emergency situations, our meter sockets are ready to go, wherever the job may be.



ENCLOSURES & ENCLOSED CONTROLS

When it comes to enclosures and enclosed control products, Milbank has it covered! We offer a complete line of junction boxes, telephone cabinet covers, transformer cabinets, touchscreen controls, wireways, pushbutton enclosures, consoles and thermal management products. We specialize in custom-built enclosures and are more than happy to design a solution for your specific project. Our commercial pedestals are easy to install, fast, safe and secure, and completely customizable.



GENERATORS & ENERGY MANAGEMENT

Milbank's standby and portable generators give you the peace of mind of living life uninterrupted during increasingly frequent power outages caused by severe weather, high demand and other situations. Our energy management systems give you reliable and sustainable ways to reduce both your energy costs and your impact on the environment.

Table of Contents

Air Conditioner Disconnects

30 & 60 amp AC disconnects	6
60 amp AC disconnect with 20 amp GFCI receptacle	7
Hot tub disconnects.....	8

Single Position Sockets

100 amps, 4 terminals, ringless, solar	9
125-200 amps, 4 terminals, ringless	10-12
125 amps, 5 & 7 terminals, medium duty lever bypass, ringless.....	13
200 amps, 5 terminals, medium duty lever bypass, ringless	14
200 amps, 4 terminals, heavy duty lever bypass, ringless.....	15
200 amps, 5 & 7 terminals, heavy duty lever bypass, ringless	16-17
320 amps, 4,5 & 7 terminals, heavy duty lever bypass, ringless	18-19

Meter Mains

100-200 amps, 4 terminals, ringless	20
100-200 amps, 4 terminals, lever bypass, ringless.....	21
100-200 amps, 4 terminals, meter main with load center, ringless.....	22
100-200 amps, 7 terminals, lever bypass, ringless.....	23
320 amps, 4 terminals, lever bypass, ringless.....	24
Cold Sequence, 200 & 400 amps, 7 terminals, lever bypass, ringless.....	25

Multi-Position

100 amps, 4 terminals, ringless & ring type, vertical	26
100 amps, 4 terminals, ringless.....	27-28
200 amps, 4 terminals, ringless.....	29
125 amps, 4 terminals, with single position lever bypass, ringless	30
100 amps, 5 terminals, lever bypass, ringless, vertical	31
100-200 amps, 5 terminals, lever bypass, ringless.....	32-33
200 amps, 7 terminals, lever bypass, ringless.....	34

Multi-Position Meter Mains

125 amps, 4 terminals, with single position lever, ringless	35
125 & 200 amps, 4 terminals, ringless	36-37
200 amps, 5 terminals, lever bypass, ringless.....	38

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Table of Contents

Transformer Rated

20 amps, 6 -13 terminals, plunger bypass, ringless	39
20 amps, 6 -13 terminals, test switch provision, ringless	40
20 amps, 6 -13 terminals, pre-wired, ringless	41
Test switches, test switch work sheet.....	42
CT Cabinets	43-44

Polyphase Enclosures

A base enclosures	45
-------------------------	----

Pedestals

Meter pedestal for pad mounting	46
200 amps, 4 terminal, direct bury.....	47
200 amps, 4 terminal, lever bypass, direct bury	48

Temp Power Units

125, 4 terminal, ringless	49
---------------------------------	----

Parts & Accessories

Circuit breakers and accessories	50-54
--	-------

Miscellaneous


Commercial pedestals.....	55-56
Generators.....	57
SynapSwitch™.....	58
Reference information	59-63
Index.....	64



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Catalog Number Logic

How our product catalog numbers are derived

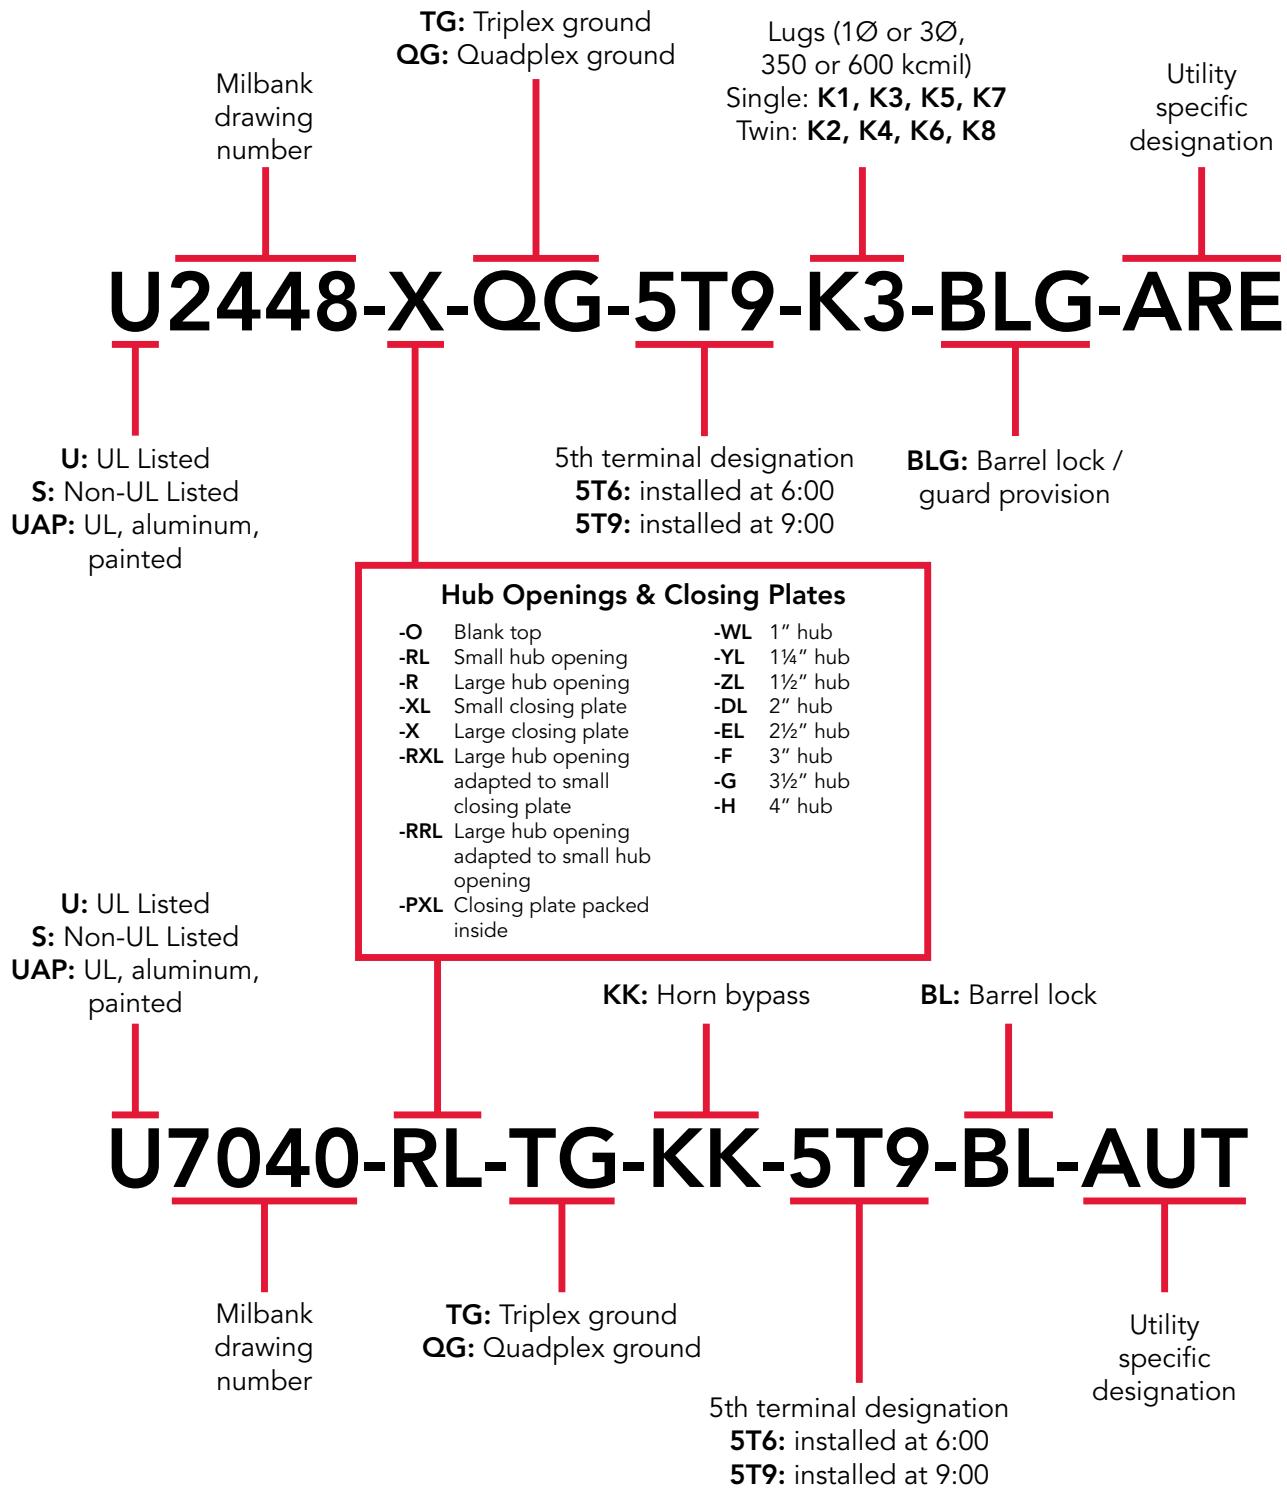

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Air Conditioner Disconnects

30 & 60 Amps | Fusible & Non-Fusible



U3802



U3812



U3832

Milbank's air conditioner disconnect has a removable hinged cover for ease of installation. Our compact design meets NEC wiring space requirements and also complies with NEC article 440-14. For safe working conditions, our disconnect pullers may be removed and reinstalled in the OFF position. Additionally, padlock provisions are included on the front cover. As with other Milbank products, our enclosure is constructed of G90U galvanized steel and electrostatically finished with an attractive, light gray, baked powder coating. Our epoxy/polyester resin blend offers a finish that is both durable and fade-resistant.

30–60 Amps | 1Ø 240 VAC | Air Conditioner Disconnects

Catalog Number	Amps	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
					CU	AL		D"	W"	H"	CU °C	AL °C
U3802	60	Non-Fusible	10	3.25	#14-#2	#12-#2	#14-4	2½	5	7½	60°/75°	60°/75°
U3812	60	Non-Auto	10	3.25	#14-#2	#12-#2	#14-4	2½	5	7½	60°/75°	60°/75°
U3832	30	Fusible	3	2.5	#14-#3	#14-#3	#14-3	2⅓	5	7	60°/75°	60°/75°
U3862	60	Fusible	10	3.3	#14-#3	#14-#3	#14-3	2⅓	5	9	60°/75°	60°/75°

Notes

- UL listed as Enclosed Pullout Switch
- Type 3R rainproof
- One-inch concentric knockouts



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Air Conditioner Disconnects

60 Amps | With 20 Amp GFCI Receptacle

7
AC
DISCONNECTS



U3822-20GWR

Specifications

- Meets NEC #210.63 requirements
- UL listed as Power Outlet
- Type 3R enclosure
- In-use cover*
- Duplex ground connector
- 1" concentric knockouts
- 1Ø, 240 volt
- 60 amp, non-fused
- 20 amp GFCI receptacle
- Reset/test button
- Weather and tamper resistant
- Meets NEC #406.8 requirements

60 Amps | 1Ø, 240 VAC | Air Conditioner Disconnect with GFCI Receptacle

Catalog Number	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
				CU	AL		D"	W"	H"	CU °C	AL °C
U3822-20GWR	Non-Fusible	10	6	#14-#2	#12-#2	#14-4	4½	5¼	7¾	60°/75°	60°/75°

Notes

- **Disconnect Pullouts:** To ensure the safest conditions, Milbank disconnect pullouts are reversible so they may be reinstalled in the OFF position.
- **Padlock Provision:** All units are designed with a padlock provision on the cover for security.
- ***In-Use Cover:** Cover is rated as an in-use cover (cover may be closed with cords plugged into receptacle).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Hot Tub Disconnects

Type 3R Enclosures



U4881-O-50GB



U4881-O-60GB

Specifications

- 240 volt ground fault protection
- UL listed, Type 3R rainproof
- 2-pole, 50 or 60 amp GFCI breaker protection
- Compact size
- Three or four wire installation
- 1Ø, 120/240 VAC
- Standard package of 12
- Two extra one-pole breaker spaces
- 100 amp overall rating
- Easy to install

100 Amps | Hot Tub Disconnect or Sub Panel Breaker Enclosure | Type 3R

Catalog Number	Breaker Amps	Type	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions		
				CU	AL		D"	W"	H"
U4881-O-50GB	50	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 $\frac{3}{4}$	7 $\frac{1}{2}$	8 $\frac{1}{2}$
U4881-O-60GB	60	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 $\frac{3}{4}$	7 $\frac{1}{2}$	8 $\frac{1}{2}$




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Single Position Sockets

100 Amps | 4 Terminals | Ringless | 600 VAC

9
100 AMP
SINGLE
POSITION
SOCKETS

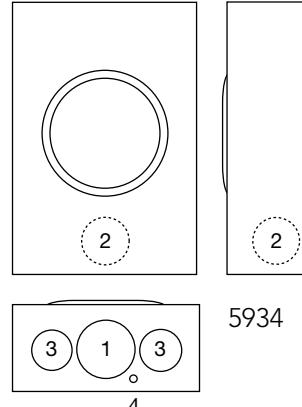

5934

U5934-XL-BLG

100 Amps | 4 Terminals | Ringless | Single Position | 103W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U5934-XL-BLG	OH/UG	C.P.	#12-1/0	#12-1/0	None	3 ⁵ / ₁₆	8	11 ¹ / ₂	2	1 ¹ / ₂	1 ¹ / ₄	1/4

Notes

- Hubs:** Accepts standard meter socket hubs.
- Construction:** Units are Type 3R for durable outdoor use, lockable and sealable.
- Connectors:** Connectors will accept #14-1/0 conductors.
- To isolate neutral remove bonding screw.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



10


125 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets

125 Amps | 4 Terminals | Ringless | 600 VAC



U7487-O-TG

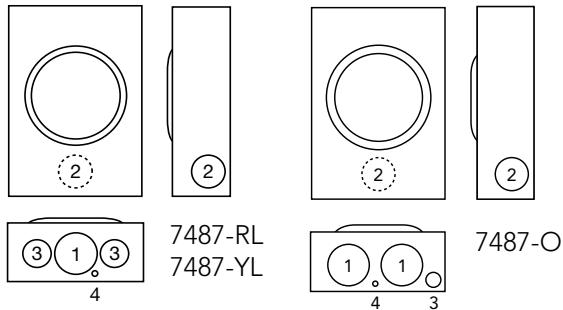

125 Amps | 4 Terminals | Ringless | Single Position | 103W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U7487-YL-TG	OH	1¼	#6-2/0	#6-2/0	None	3½	8	11½	2	1½	1¼	¼
U7487-RL-TG	OH/UG	H.O.	#6-2/0	#6-2/0	None	3½	8	11½	2	1½	1¼	¼
U7487-O-TG	UG	Blank	#6-2/0	#6-2/0	None	3½	8	11½	2	1½	¼, ½	¼

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For field-installed fifth terminal, order catalog number **5T8K2**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Ground:** Units are supplied with a triplex ground (-TG).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Single Position Sockets

200 Amps | 4 Terminals | Ringless | 600 VAC


1 1

200 AMP
SINGLE
POSITION
SOCKETS

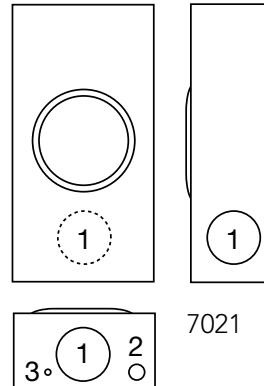

7021

U7021-RL-TG

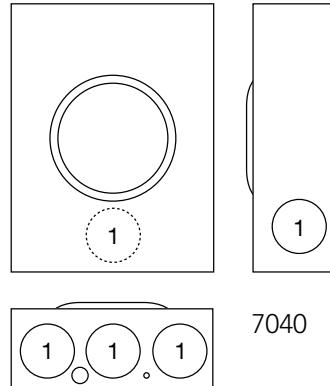

7040

U7040-O-TG

200 Amps | 4 Terminals | Ringless | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U7021-RL-TG	OH	H.O.	#6-350	None	4 1/8	8	15 1/2	2 1/2	1 1/2	1/4	—
U7040-XL-TG	OH/UG	C.P.	#6-350	None	4 7/8	11	15 1/2	2 1/2	1 1/2	1/4	—
U7040-O-TG	UG	Blank	#6-350	None	4 7/8	11	15 1/2	2 1/2	1 1/2	1/4	—

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- Ground:** Units supplied with triplex ground.
- Connectors:** Extruded aluminum connectors are tin plated.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



1 2


200 AMP
LEVER
BYPASS
SOCKETS

Single Position Sockets

200 Amps | 4 Terminals | Side Wireway | 600 VAC




U1980-O

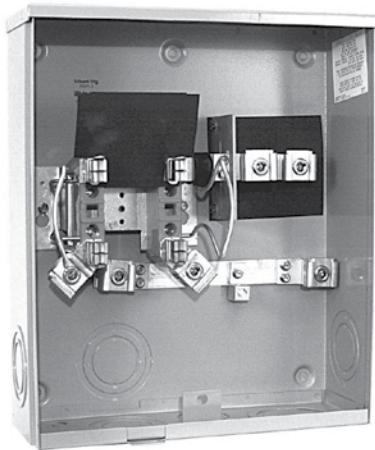


U4413-O-BL




U5777-O

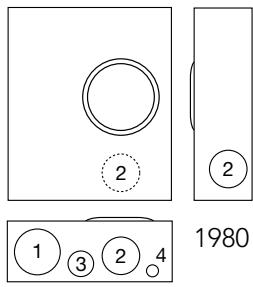

1980

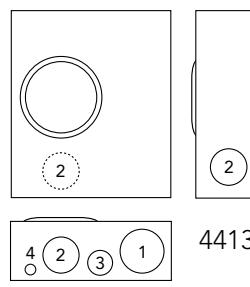

4413

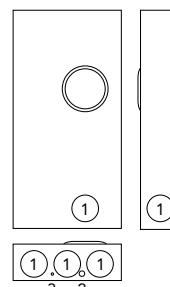

3 2

200 Amps | 4 Terminals | Ringless | Side Wireway | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U1980-O	UG	Blank	#6-350	#6-350	None	4½	10	18½	3	2½	¾	¼, ½
U4413-O-BL	UG	Blank	#6-350	#6-350	None	4½	10	18½	3	2½	¾	¼, ½
U5777-O	UG	Blank	¾-16 Studs	#2-350	None	4¾	13	19	3	2½	¼, ½	¼

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Connectors:** Extruded aluminum connectors are tin plated.
- Ground:** Units supplied with triplex ground.
- Fifth Terminal:** For field installed fifth terminal, order **K5T**.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Single Position


125 Amps | 5 & 7 Terminals | Ringless | 600 VAC

1 3

125 AMP
LEVER
BYPASS
SOCKETS




U2272-RL-5T9-BL

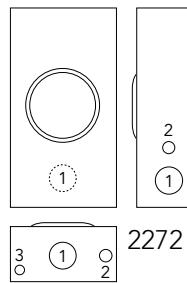

2272




U2860-XL-5T9-QG

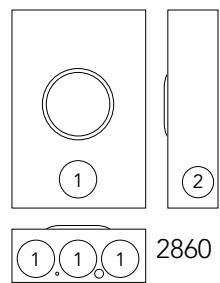

2860



U7573-RL

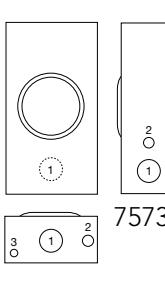

7573

125 Amps | 5 Terminals | Ringless | Lever Bypass | Single Position 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U2272-RL-5T9-BL	OH	H.O.	#6-2/0	#6-2/0	Lever	4 1/8	10	18 1/2	2	3/4	1/4, 1/2	—
U2860-XL-5T9-QG	OH/UG	C.P.	#6-2/0	#6-2/0	Lever	4 1/8	13	19	3	2 1/2	1/4, 1/2	1/4

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Lever Bypass:** The lever operates bypass device only; it is **not jaw clamping**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Fifth Terminal:** Factory installed in 9 o'clock position.

125 Amps | 7 Terminals | Ringless | Lever Bypass | Single Positions 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	
U7573-RL	OH	H.O.	#6-2/0	#6-2/0	Lever	4 1/8	10	18 1/2	2	3/4	1/4, 1/2	—

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Lever Bypass:** The lever operates bypass device only; it is not jaw clamping (medium duty).
- Connectors:** Extruded aluminum connectors are tin plated.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



14


200 AMP
LEVER
BYPASS
SOCKETS

Lever Bypass Single Position

200 Amps | 5 Terminals | Ringless | 600 VAC




U9318-RL

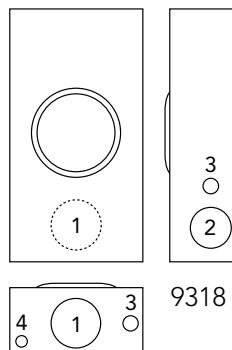

9318



U9319-XL

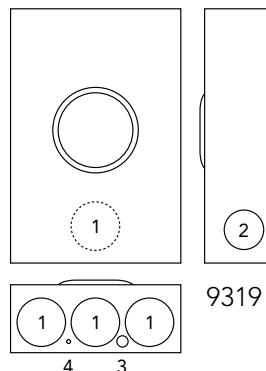

9319

200 Amps | 5 Terminals | Ringless | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U9318-RL	OH	H.O.	#6-350	Lever	4 $\frac{7}{8}$	10	18 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{4}, \frac{1}{2}$	—
U9319-XL	OH/UG	C.P.	#6-350	Lever	4 $\frac{7}{8}$	13	19	3	2 $\frac{1}{2}$	$\frac{1}{4}, \frac{1}{2}$	$\frac{1}{4}$	—

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Lever Bypass:** The lever operates bypass device only; it is **not jaw clamping** (medium duty).
- Connectors:** Extruded aluminum connectors are tin plated.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Single Position

200 Amps | 4 Terminals | Ringless | 600 VAC

15

200 AMP
LEVER
BYPASS
SOCKETS



U9800-RRL-QG-BL-NE




U9801-RXL-QG




U3924-XL




U4721-O-BL




9800



9801



3924



4721

200 Amps | 4 Terminals | Ringless | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	5
U9800-RRL-QG-BL-NE	OH	H.O.	#6-350	Lever	4 $\frac{1}{8}$	10	18 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{4}, \frac{1}{2}$	—
U9801-RXL-QG	OH/UG	C.P.	#6-350	Lever	4 $\frac{1}{8}$	13	19	3	2 $\frac{1}{2}$	$\frac{1}{4}, \frac{1}{2}$	$\frac{1}{4}$	—
U3924-XL	UG	C.P.	#6-350	Lever	4 $\frac{1}{8}$	14	20 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{1}{4}, \frac{1}{2}$	—	—
U4721-O-BL	UG	Blank	#6-350	Lever	5 $\frac{3}{4}$	16	22	4	3 $\frac{1}{2}$	2 $\frac{1}{2}$	1	$\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For field installed fifth terminal, order as extra **K3866** for the **U9800**, **U9801**, **U4721**, and **K3865** for the **U3924**.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Extruded aluminum connectors are tin plated.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



16


200 AMP
LEVER
BYPASS
SOCKETS

Lever Bypass Single Position


200 Amps | 5 Terminals | Ringless | 600 VAC



U9550-RRL-QG

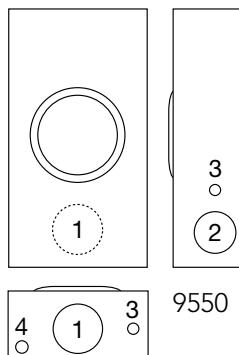

U9551-RXL-QG

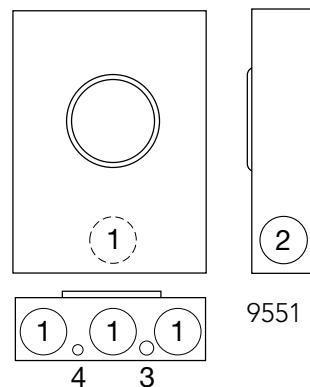

200 Amps | 5 Terminals | Ringless | Single Position | 1Ø3W or 3Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U9550-RRL-QG	OH	H.O.	#6-350	Lever	4 $\frac{1}{8}$	10	18 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{3}{4}$	$\frac{1}{4}, \frac{1}{2}$
U9551-RXL-QG	OH/UG	C.P.	#6-350	Lever	4 $\frac{1}{8}$	13	19	3	2 $\frac{1}{2}$	$\frac{1}{4}, \frac{1}{2}$	$\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Extruded aluminum connectors are tin plated.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Single Position

200 Amps | 7 Terminals | Ringless | 600 VAC

17

200 AMP
LEVER
BYPASS
SOCKETS




U9700-RRL-QG-BL




U9701-RXL-QG




U4910-O-BL

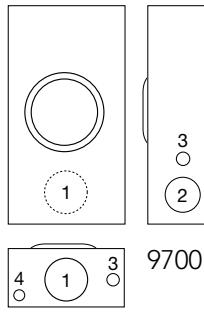

9700

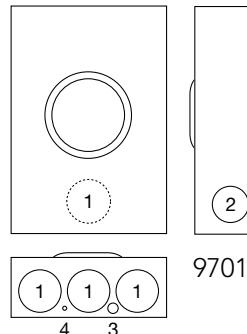

9701

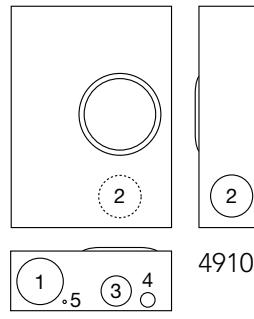

4910

200 Amps | 7 Terminals | Ringless | Single Position | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts				
					D"	W"	H"	1	2	3	4	4
U9700-RRL-QG-BL	OH	H.O.	#6-350	Lever	4 $\frac{7}{8}$	10	18 $\frac{1}{2}$	3	2 $\frac{1}{2}$	3 $\frac{1}{4}$	1 $\frac{1}{4}$, $\frac{1}{2}$	—
U9701-RXL-QG	OH/UG	C.P.	#6-350	Lever	4 $\frac{7}{8}$	13	19	3	2 $\frac{1}{2}$	1 $\frac{1}{4}$, $\frac{1}{2}$	1 $\frac{1}{4}$	—
U4910-O-BL	UG	Blank	#6-350	lever	5 $\frac{3}{4}$	16	22	4	3 $\frac{1}{2}$	2 $\frac{1}{2}$	1	1 $\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Extruded aluminum connectors are tin plated.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



18


320 AMP
LEVER
BYPASS
SOCKETS

Lever Bypass Single Position

320 Amps | 4 Terminals | Ringless | 600 VAC




U2448-X

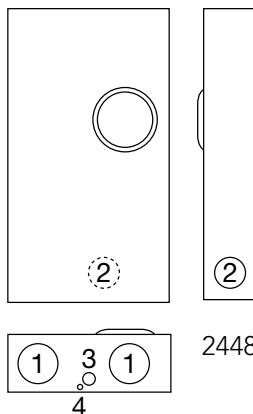

2448



U4778-X-BL

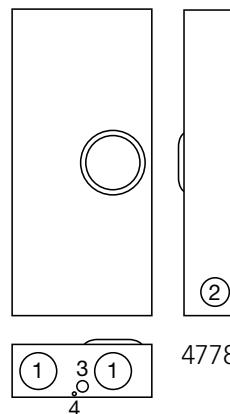

4778

320 Amps | 4 Terminals | Ringless | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U2448-X	OH/UG	C.P.	3/8" x 16 Studs	Lever	6 1/2	17 3/4	34 1/8	4	3	1	1/4
U4778-X-BL	OH/UG	C.P.	3/8" x 16 Studs	Lever	6 1/2	17 3/4	38 3/4	4	3	1	1/4

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Units are supplied with 3/8" x 16 hex nuts with Belleville washers. Order **K1540** (single, 600 kcmil) or **K1350** (twin, 350 kcmil). Order two kits to cover both line and load.
- Fifth Terminal:** For field-installed fifth terminal, order **K3865** as extra.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Single Position


320 Amps | 5 & 7 Terminals | Ringless | 600 VAC

19


320 AMP
LEVER
BYPASS
SOCKETS




U4611-X

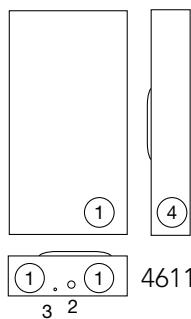

U4911-X-BL

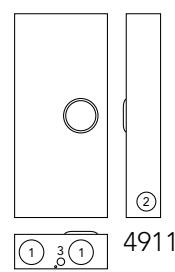

U2594-X

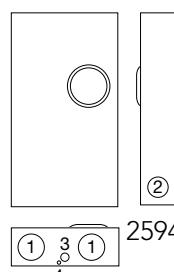

2594

320 Amps | 5 Terminals | Ringless | Single Position | 3Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U4611-X	OH/UG	C.P.	3/8" x 16 Studs	Lever	6½	17¾	31¼	4	1	¼	3

320 Amps | 7 Terminals | Ringless | Single Position | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U4911-X-BL	OH/UG	C.P.	3/8" x 16 Studs	Lever	6½	17¾	38¾	4	3	1	¼
U2594-X	OH/UG	C.P.	3/8" x 16 Studs	Lever	6½	19¾	34⅛	4	3	1	¼

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Units are supplied with 3/8" x 16 hex nuts with Belleville washers. Order **K3441** (single, 600 kcmil) or **K3442** (twin, 350 kcmil). Order two kits to cover both line and load.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



20

100-200 AMP
METER MAINS

Meter Mains

100–200 Amps | 4 Terminals | Ringless | 120/240 VAC



U3499-XL-100



U3989-XL-100




U3990-XL-150




U3798-O-200




U5757-O-200

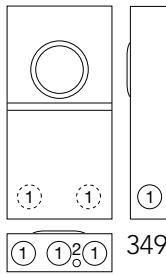


3499

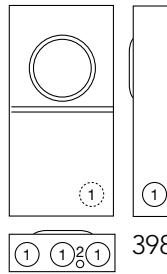


3989

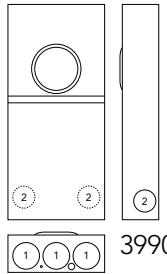

3990

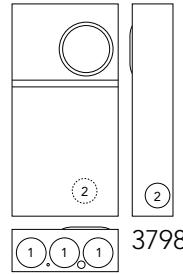

3798

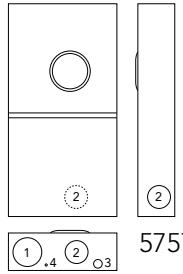

5757

4 Terminals | Ringless | Meter Mains | 103W

Catalog Number	Service	Amps	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U3499-XL-100	OH/UG	100	C.P.	#6-2/0	#6-1/0	None	3 $\frac{3}{4}$	11	22	2	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	—	—
U3989-XL-100	OH/UG	100	C.P.	#6-2/0	#6-1/0	None	3 $\frac{3}{4}$	11	22	2	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	—	—
U3990-XL-150	OH/UG	150	C.P.	#2-350	#1/0-300	None	4 $\frac{1}{8}$	13	29	3	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$
U3990-XL-200	OH/UG	200	C.P.	#2-350	#1/0-300	None	4 $\frac{1}{8}$	13	29	3	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$
U3798-O-200	UG	200	Blank	#2-350	#1/0-300	None	4 $\frac{1}{8}$	13	25 $\frac{13}{16}$	3	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$
U5757-O-200	UG	200	Blank	3 $\frac{1}{8}$ " - 16 Studs	#1/0-300	None	5 $\frac{1}{4}$	17 $\frac{1}{8}$	34	4	3	1	1 $\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Circuit Breakers:** The **U3499-XL-100** has a factory-installed 100 amp breaker. The **U3990-XL-150** and **U3990-XL-200** have factory installed Milbank **UQFB-(AMP)-X1** breakers. The **U3798-O-200** has a factory-installed UQFB-200-X1 breaker. The **U3989-XL-100** is supplied with a 100 amp plug-in style breaker and has provisions for two 1-pole breakers.
- Fifth Terminal:** For field-installed fifth terminal for **U3499** and **U3989**, order **5T8K2**. For **U3990** and **U3798**, order **K5T**. For **U5757**, order **K3865**.





Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Meter Mains



100–200 Amps | 4 Terminals | Ringless | 120/240 VAC




U3741-XL-100-BL

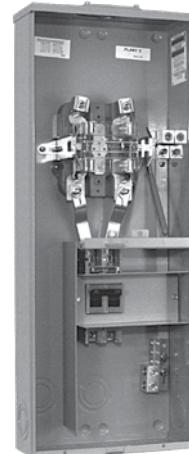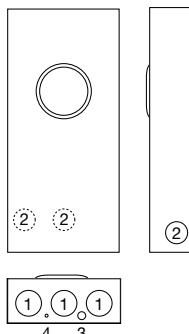

U3791N-RXL-200-BL

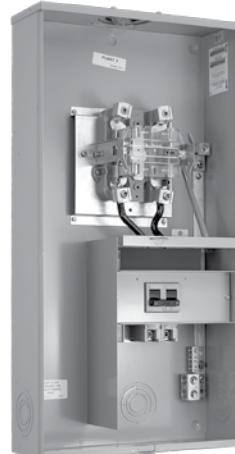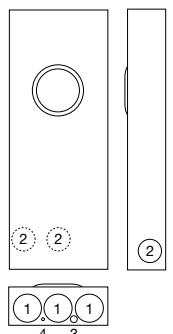

U5140-RXL-200-BL

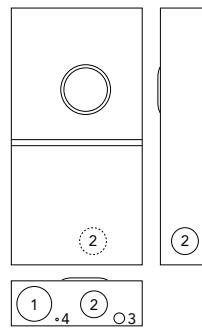

4 Terminals | Ringless | Meter Mains | 1Ø3W

Catalog Number	Service	Amps	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U3741-XL-100-BL	OH/UG	100	C.P.	#6-1/0	#6-1/0	Lever	4 $\frac{1}{8}$	13	28	2 $\frac{1}{2}$	2	$\frac{1}{4}, \frac{1}{2}$	$\frac{1}{4}$
U3791N-RXL-200-BL	OH/UG	200	C.P.	#6-350	#1/0-300	Lever	4 $\frac{1}{8}$	13	34	3	2 $\frac{1}{2}$	$\frac{1}{4}, \frac{1}{2}$	$\frac{1}{4}$
U5140-RXL-200-BL	OH/UG	200	C.P.	#6-350	#1/0-300	Lever	5 $\frac{1}{4}$	17 $\frac{1}{8}$	34	4	3	1	$\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Circuit Breakers:** The **U3741** is supplied with a factory-installed 2-pole, 100 amp plug-in breaker. The **U3791** unit is supplied with a factory installed Milbank **UQFB-200-X1** 2-pole, 200 amp bolt-in breaker.
- Fifth Terminal:** For field-installed fifth terminal, order **K3866**. For a **3W network**, use fifth terminal.
- Bypass:** The lever bypass on the **U3741** operates the sliding bypass only; it is not jaw clamping (medium duty). The lever bypass on the **U3791N** and **U5140** supplies clamping action on the meter spades and also operates the bypass device (heavy duty).
- Connectors:** Extruded aluminum connectors are tin plated.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




22
200 AMP
METER MAIN
WITH
LOAD CENTER

Meter Main with Load Center

100–200 Amps | 4 Terminals | Ringless




U3995-XL-200

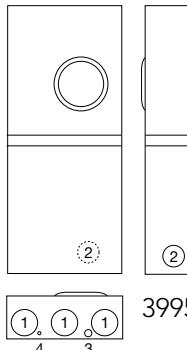


3995
4 3




U5168-XTL-200-BL-NE

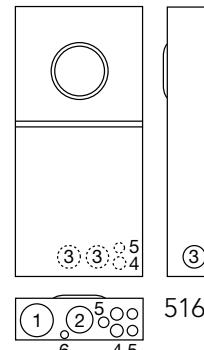


5168
6 4 5

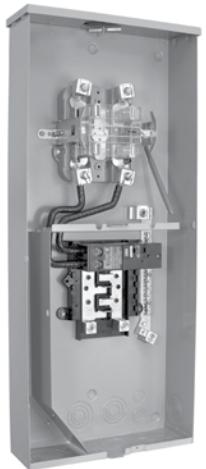


U5871-XL-200-BL

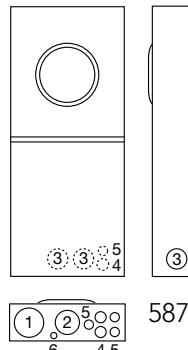

5871
6 4 5

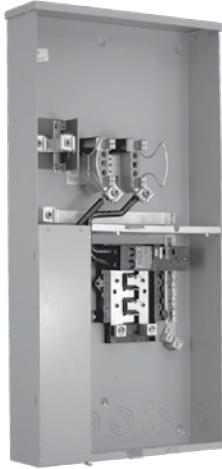

U5898-O-200-BL

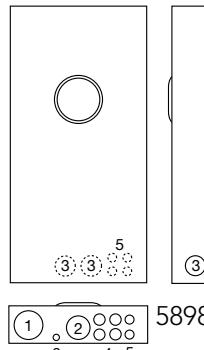

5898
6 5
3 3 3 3
1 2 5 0 0
6 4 5

4 Terminals | Ringless | Meter Main with Load Center | 1Ø3W

Catalog Number	Service	Amps	Hub	Circuits	Connectors CU/AL – Line	Bypass	Dimensions			Knockouts					
							D"	W"	H"	1	2	3	4	5	6
U3995-XL-200	OH/UG	200	C.P.	4	#6-350	Lever	4 $\frac{1}{8}$	16	35	3 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{2}$, $\frac{1}{4}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U5168-XTL-100-BL-NE	OH/UG	100	(2) C.P.	10	#6-350	None	4 $\frac{1}{2}$	14 $\frac{1}{8}$	32 $\frac{1}{8}$	3	2 $\frac{1}{2}$	2	1	1 $\frac{1}{2}$, $\frac{3}{4}$	1 $\frac{1}{4}$, $\frac{1}{2}$
U5168-XTL-200-BL-NE	OH/UG	200	(2) C.P.	8	#6-350	None	4 $\frac{1}{2}$	14 $\frac{1}{8}$	32 $\frac{1}{8}$	3	2 $\frac{1}{2}$	2	1	1 $\frac{1}{2}$, $\frac{3}{4}$	1 $\frac{1}{4}$, $\frac{1}{2}$
U5871-XL-200-BL	OH/UG	200	C.P.	8	#6-350	Lever	4 $\frac{1}{2}$	14 $\frac{1}{8}$	33 $\frac{1}{2}$	3	2 $\frac{1}{2}$	2	1	1 $\frac{1}{2}$, $\frac{3}{4}$	1 $\frac{1}{4}$, $\frac{1}{2}$
U5898-O-200-BL	UG	200	Blank	8	#6-350	None	4 $\frac{1}{2}$	17	34 $\frac{1}{2}$	3	2 $\frac{1}{2}$	2	1	1 $\frac{1}{2}$, $\frac{3}{4}$	1 $\frac{1}{4}$, $\frac{1}{2}$

Notes

- Fifth Terminal:** For a field-installable fifth terminal for **U5871** and **U3995**, order **K3865**. For the **U5168** and **U5898**, order **K5T**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Breakers:** The **U5168**, **U5871** and **U5898** are rated 22K AIC with **QN2200H** main breaker installed and have eight branch breaker provisions. The **U3995-XL-200** has a factory-installed **UQFB-M-200** breaker and provisions for (2) double pole or (4) single pole circuit breakers.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Lever Bypass Meter Mains

100–200 Amps | 7 Terminals | Ringless | 120/240 VAC




U3771-XL-100-BL

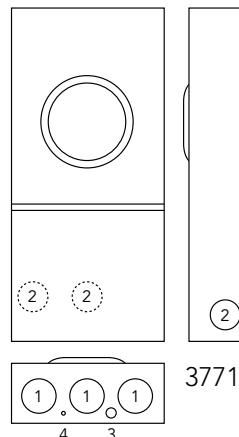

3771



U5750-RXL-200-BL

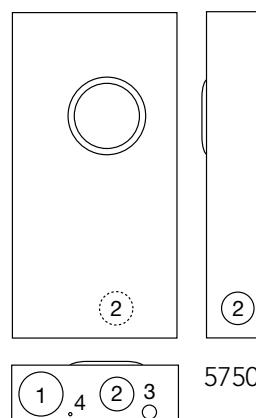

5750

7 Terminals | Ringless | Meter Mains | 3Ø4W

Catalog Number	Service	Amps	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U3771-XL-100-BL	OH/UG	100	C.P.	#6-2/0	#6-1/0	Lever	4 $\frac{1}{8}$	13	28	2 $\frac{1}{2}$	2	1 $\frac{1}{2}$	$\frac{1}{4}$
U5750-RXL-200-BL	OH/UG	200	C.P.	#6-350	#1/0-300	Lever	5 $\frac{3}{4}$	17 $\frac{1}{8}$	34	4	3	1	$\frac{1}{4}$

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** The lever on the **U3771** operates the bypass device only; it is not jaw-clamping (medium duty). The lever on the **U5750** supplies clamping action on the meter spades and also operates bypass device (heavy duty).
- Connectors:** Extruded aluminum connectors are tin plated.
- Breakers:** The **U3771** is supplied with a factory-installed 3-pole, 100 amp plug-in breaker. The **U5750** is supplied with a factory-installed Milbank **UQFB-3200** 3-pole, 200 amp bolt-on breaker.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



24


320 AMP
LEVER BYPASS
METER MAINS

Lever Bypass Meter Mains

320 Amps | 4 Terminals | Ringless




U4835-X-2/200-BL

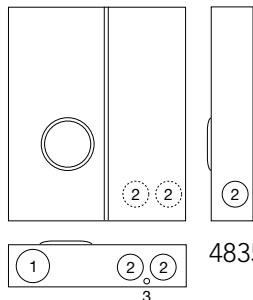

4835



U4031-O-2/200

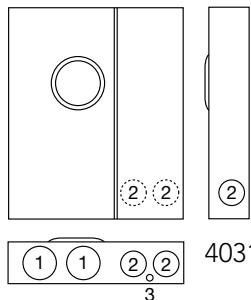

4031

320 Amps | 4 Terminals | Ringless | Meter Mains | 1Ø

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
			Line	Load		D"	W"	H"	1	2	3
U4835-X-2/200-BL	OH/UG	C.P.	¾"-16 Studs	#1/0-300	Lever	5¾	25	30	4	3	¼,½
U4031-O-2/200	UG	Blank	¾"-16 Studs	#1/0-300	Lever	5¾	25	30	4	3	¼,½

Notes

- Connectors:** The line wire section is supplied with 3/8"-16 studs with hex head nuts and captive Belleville washers. For single lug connector kits, order **K1539** (350 kcmil) or **K1540** (600 kcmil). For twin lug connector kits, order **K1350** (350 kcmil).
- Breakers:** The **U4031** and **U4835** are supplied with (2) bolt-on Milbank **UQFBH-200** breakers.
- Bypass:** The lever supplies clamping action on the meter spades and also operates the bypass device.
- Fifth Terminal:** For field-installed fifth terminal, order catalog number **K3865**.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Cold Sequence Meter Mains

200 & 400 Amps | For use on 480V services


25
COLD
SEQUENCE
METER MAINS

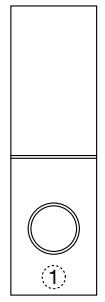


5767

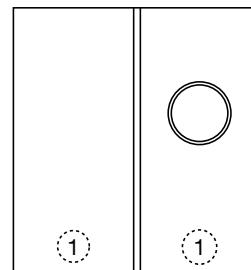

5787



5797

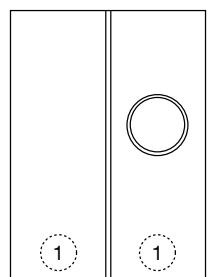

5799



U5799-O-400-CB-BL

U5767-X-200-CB-BL

200 Amps | 7 Terminals | Circuit Breaker Disconnect Ahead of Meter Socket | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	AIC Rating	Dimensions			Knockouts			
			Line	Load			D"	W"	H"	1	2	3	4
U5767-X-200-CB-BL	OH	C.P.	1/0-350	#6-350	Lever	*See note	4 ²⁷ / ₃₂	13	43	3	1 ₄ , ₁ / ₂	1/ ₄	—
U5787-O-200-CB	UG	Blank	1/0-350	#6-350	Lever	*See note	4 ²⁷ / ₃₂	26	28	4	1 ₁ , ₃ / ₄	1	1 ₁ , ₃ / ₄

400 Amps (320A Cont.) | 7 Terminals | Circuit Breaker Disconnect Ahead of Meter Socket | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	AIC Rating	Dimensions			Knockouts			
			Line	Load			D"	W"	H"	1	2	3	4
U5796-X-400-CB-BL	OH	C.P.	(2) 3/0-500	(2) 3/0-500	Lever	10K	6	13	56	3	1 ₄ , ₁ / ₂	1/ ₄	—
U5799-O-400-CB-BL	UG	Blank	(2) 3/0-500	(2) 3/0-500	Lever	10K	6	26	36	4 1/2	2 1/4	2 7/16	—

Notes

- *AIC Ratings: Circuit breaker rated 600V @ 22K AIC, 480V @ 35K AIC, and 240V @ 65K AIC.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




26


100 AMP
MULTI-
POSITION
SOCKETS

Vertical Multi-Position Sockets

100 Amps | 4 Terminals | Ringless | 300 VAC

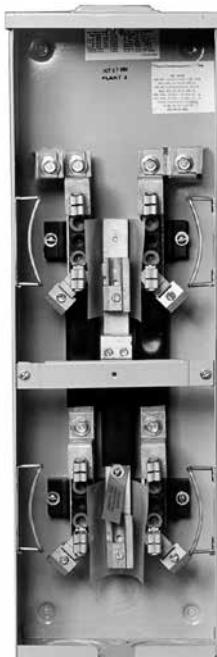

U2692-XL

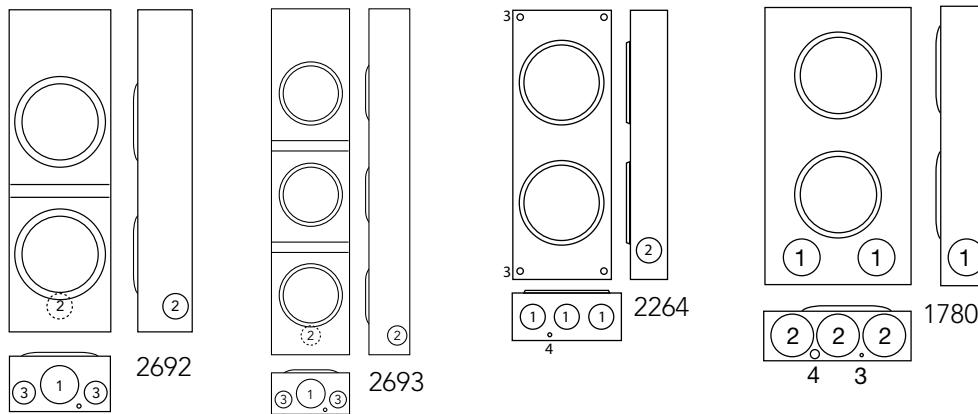

100 Amps | 4 Terminals | Multi-Position | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U2692-XL	2	OH/UG	C.P.	#2-350	#6-2/0	None	4½	8	25¼	2½	1½	1¼	¼
U2693-XL	3	OH/UG	C.P.	#2-350	#6-2/0	None	4⅞	26	28	2½	1½	1¼	¼
U2264-XL	2	OH/UG	C.P.	#2-350	#6-2/0	*	4⅞	11	30	2½	2½	—	¼

200 Amps upper socket & 100 Amps lower socket | 4 Terminals | Multi-Position | Ring Type

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U1780-O	2	OH/UG	Blank	#2-350	#6-2/0	None	4½	11	26	2½	2½	¼	¼,½

Notes


- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For a field-mounted fifth terminal, order catalog number **5T8K2**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** $\frac{1}{4} \times 1"$ aluminum bussing is supplied.
- * The **U2264-XL** upper meter socket has a medium duty lever bypass and upper socket is 200 Amps, and the lower socket is 100 Amps.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Multi-Position Sockets

100 Amps/Position | 4 Terminals | Ringless | 300 VAC

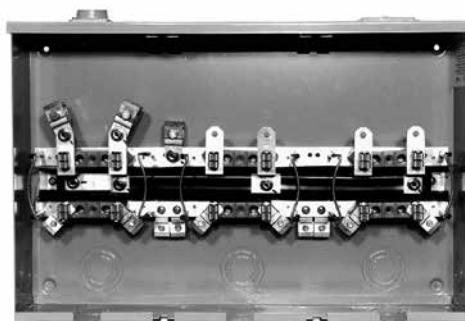

U7363-DL

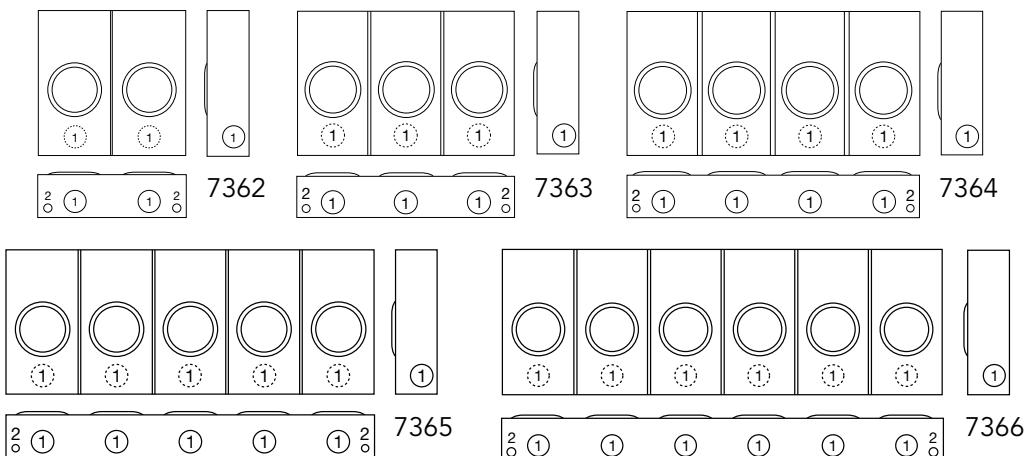

100 Amp/Position | 4 Terminals | Multi-Position | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts	
				Line	Load		D"	W"	H"	1	2
U7362-DL	2	OH	2"	#6-350	#6-2/0	None	4½	16½	16	2	¼,½
U7363-DL	3	OH	2"	#6-350	#6-2/0	None	4½	24½	16	2	¼,½
U7364-DL	4	OH	2"	#6-350	#6-2/0	None	4½	32½	16	2	¼,½
U7365-DL	5	OH	2"	#6-350	#6-2/0	None	4½	40	16	2	¼,½
U7366-DL	6	OH	2"	#6-350	#6-2/0	None	4½	49½	16	2	¼,½

Notes





- Hubs:** For proper hub selection, refer to the hub suffix chart on the Accessories page. Hub opening is supplied at each end. Extra opening is closed with a closing plate.
- Fifth Terminal:** For field mounted fifth terminal, order catalog number **K1815** for each meter position.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** Bussing is $\frac{5}{16}$ " x 1" aluminum.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





Multi-Position Sockets

100 Amps | 4 Terminals | Ringless | 300 VAC

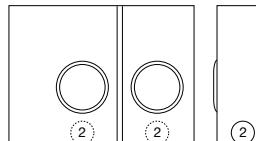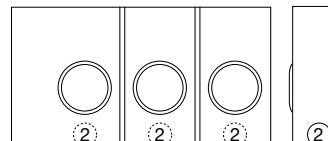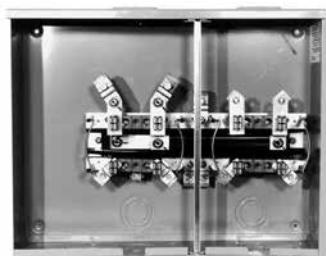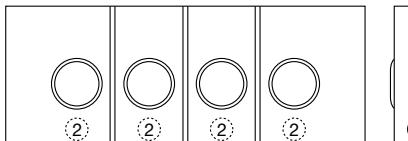8212
26018213
2601

U8212-XL

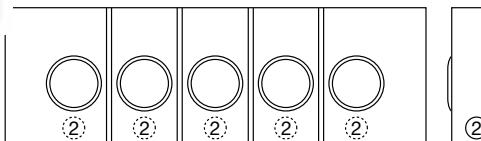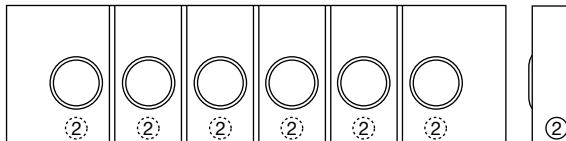8214
26018215
26018216
2601

100 Amp per Position | 4 Terminal | Multi-Position | End Wireway | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U8212-XL	2	OH	C.P.	#6-350	#6-2/0	4½	20½	16	2½	2	¼,½
U8213-XL	3	OH	C.P.	#6-350	#6-2/0	4½	28½	16	2½	2	¼,½
U8214-XL	4	OH	C.P.	#6-350	#6-2/0	4½	40½	16	2½	2	¼,½
U8215-XL	5	OH	C.P.	#6-350	#6-2/0	4½	48½	16	2½	2	¼,½
U8216-XL	6	OH	C.P.	#6-350	#6-2/0	4½	57½	16	2½	2	¼,½

100 Amp per Position | 4 Terminal | Multi-Position | End Wireway | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U2601-XL	2	OH	C.P.	#6-350	#6-2/0	4½	20½	16	2½	2	¼,½

Notes

- Hubs:** For proper hub selection, refer to the hub suffix chart on the Accessories page. Hub opening is supplied at each end. Extra opening is closed with a closing plate.
- Fifth Terminal:** For field mounted fifth terminal, order catalog number **K1815** for each meter position.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** Bussing is $\frac{1}{16}$ " x 1" aluminum.
- 2601 has 200 Amp




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Multi-Position Sockets

200 Amps/Position | 4 Terminals | Ringless | 300 VAC



U1252-X-K1

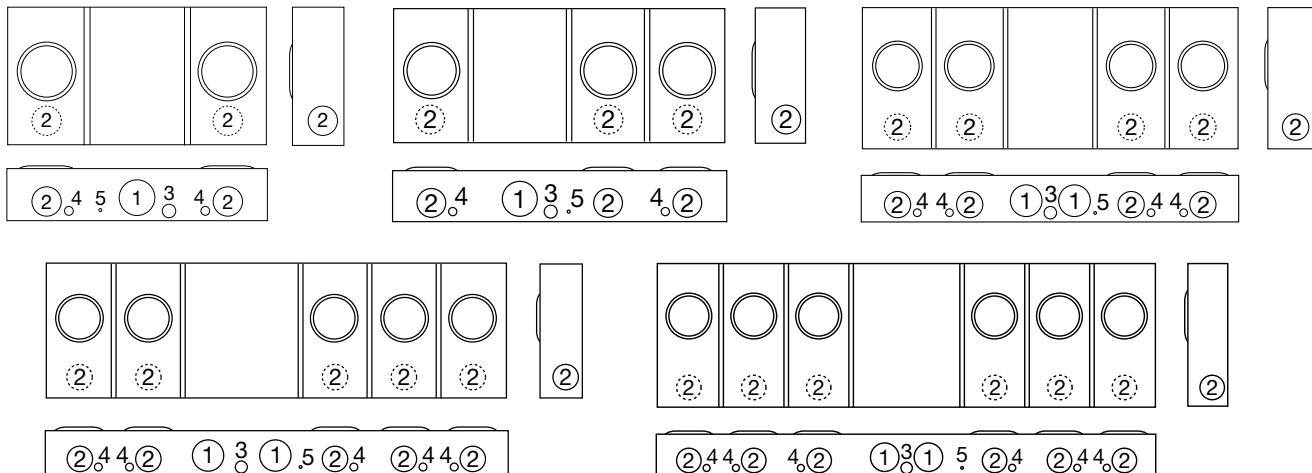

200 Amps | 4 Terminals | Multi-Position | Ringless | 103W

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions		Knockouts					
				Line	Load		D"	W"	H"	1	2	3	4	5
U1252-X-K1	2	OH/UG	C.P.	#6-350	#6-350	None	5 1/8	26 1/2	14	3	2 1/2	1	1/2	1/4
U1253-X-K3	3	OH/UG	C.P.	#4-600	#6-350	None	5 1/8	34 3/4	14	3	2 1/2	1	1/2	1/4
U1254-X-K3	4	OH/UG	C.P.	#4-600	#6-350	None	5 1/8	42 7/8	16	3	2 1/2	1	1/2	1/4
U1255-X-K4	5	OH/UG	C.P.	(2) #2-600	#6-350	None	5 1/8	54 7/8	16	3	2 1/2	1	1/2	1/4
U1256-X-K4	6	OH/UG	C.P.	(2) #2-600	#6-350	None	5 1/8	63 1/16	18	3	2 1/2	1	1/2	1/4

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For a field-mounted fifth terminal, order catalog number **K5T**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** $\frac{5}{16}$ " x 1" aluminum bussing is supplied in the **U1252**. $\frac{5}{16}$ " x 1" aluminum bussing is supplied in the **U1253-U1256**.
- Overhead Service:** Extention kits for 4, 5 & 6 gang sockets available. Consult factory.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




30

125 AMP
MULTI-
POSITION
SOCKETS

Multi-Position Sockets


125 Amps/Position | 4 Terminals | Ringless | 300 VAC

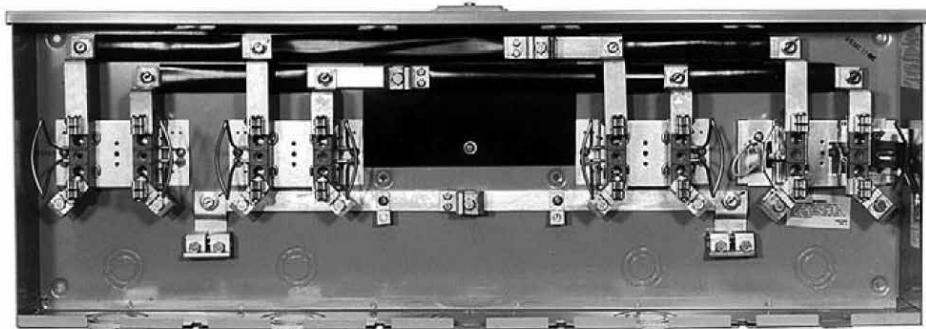


U3764-XL

NOTE


Each unit is supplied with a 125 amp non jaw-clamping lever bypass block assembly in the far right meter position only. All remaining positions are 125 amp with no bypass.

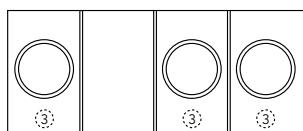

3763

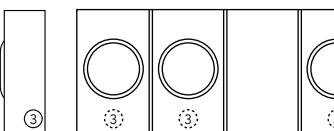

3764

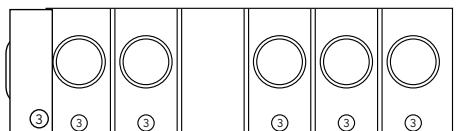

3765

100 Amps | 5 Terminals | Multi-Position | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U3763-XL	3	OH/UG	C.P.	#6-2/0	#2-350	See note	4½	33½	14	3	2½	1½	¼, ½
U3764-XL	4	OH/UG	C.P.	#6-2/0	#2-350	See note	4½	41½	14	3	2½	1½	¼, ½
U3765-XL	5	OH/UG	C.P.	#6-2/0	#2-350	See note	4½	49½	16	3	2½	1½	¼, ½

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For a field-mounted fifth terminal, order catalog number **5T8K2** for tenant positions, and order **K3356** for the far right house power lever bypass socket.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** ¼ x 1" aluminum bussing is supplied.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Vertical Lever Bypass Multi-Position Sockets

100 Amps/Position | 5 Terminals | Ringless | 300 VAC

3 1
100 AMP
LEVER BYPASS
MULTI-
POSITION
SOCKETS

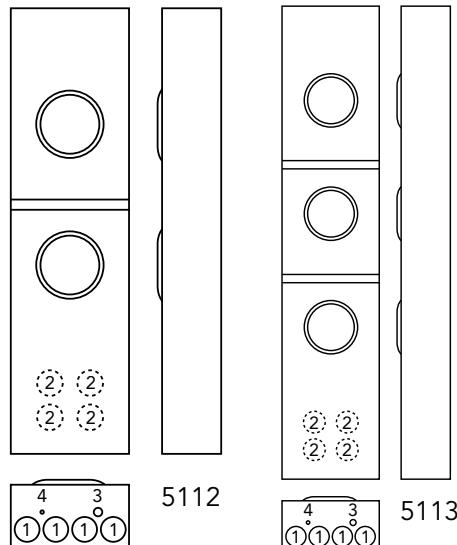

U5112-X-5T9-BL

100 Amps | 5 Terminals | Multi-Position | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U5112-X-5T9-BL	2	OH	C.P.	#6-350	#6-2/0	Lever	6	12	44½	2½	2	1¼	½
U5113-X-5T9-BL	3	OH	C.P.	#6-350	#6-2/0	Lever	6	12	58½	2½	2	1¼	¼

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Fifth Terminal:** For a field-mounted fifth terminal, order catalog number **5T8K2**.
- Connectors:** Extruded aluminum connectors are tin plated.
- Bussing:** $\frac{1}{4} \times 1$ " aluminum bussing is supplied.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



32
100 AMP
LEVER BYPASS
MULTI-
POSITION
SOCKETS


Lever Bypass Multi-Position Sockets

100 Amps/Position | 5 Terminals | Ringless | 600 VAC




U2754-X-5T9


(unit shown with connector kit -K1539, order as extra)

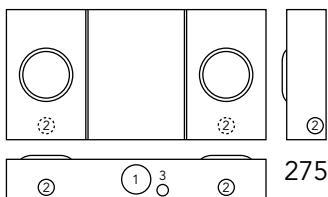


2752

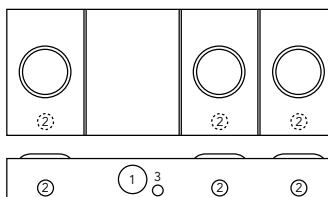


2753

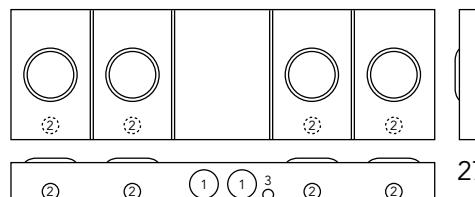

2754

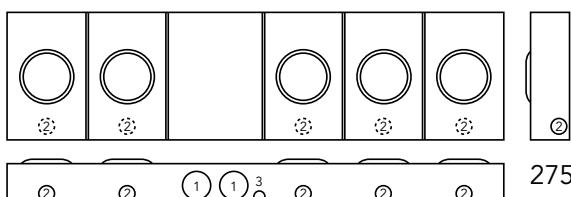

2755

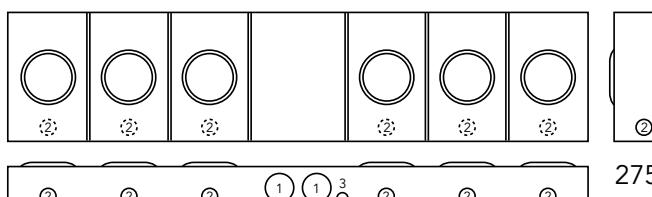

2756

100 Amps | 5 Terminals | Multi-Position | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
				Line	Load		D"	W"	H"	1	2	3
U2752-X-5T9	2	OH/UG	C.P.	¾ x 16 studs	#6-2/0	Lever	4⅞	32⅛	16	3	1½	1
U2753-X-5T9	3	OH/UG	C.P.	¾ x 16 studs	#6-2/0	Lever	4⅞	42¼	16	3	1½	1
U2754-X-5T9	4	OH/UG	C.P.	¾ x 16 studs	#6-2/0	Lever	4⅞	52¼	16	3	1½	1
U2755-X-5T9	5	OH/UG	C.P.	¾ x 16 studs	#6-2/0	Lever	4⅞	62¾	16	3	1½	1
U2756-X-5T9	6	OH/UG	C.P.	¾ x 16 studs	#6-2/0	Lever	4⅞	72¾	16	3	1½	1

Notes

- Fifth Terminal:** The fifth terminal is factory installed in the 9 o'clock position. May field-change to the 6 o'clock position.
- Connectors:** Aluminum extruded load side connectors are tin plated. For line side single lug connector kits, order **K1539** (350 kcmil) or **K1540** (600 kcmil) as extra. For twin lug connectors, order **K1350** (350 kcmil) or **K1541** (600 kcmil) as extra.
- Bussing:** ¼ x 1" aluminum bussing is supplied.
- Lever Bypass:** The lever operates bypass only; it is not jaw-clamping (medium duty).



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Lever Bypass Multi-Position Sockets

200 Amps/Position | 5 Terminals | Ringless | 600 VAC

33
200 AMP
LEVER BYPASS
MULTI-
POSITION




U2873-XT-5T9

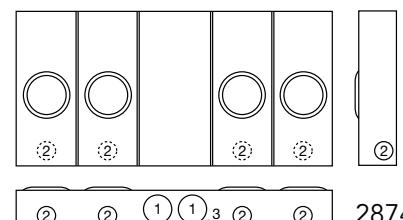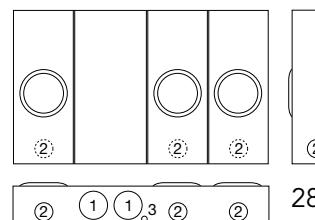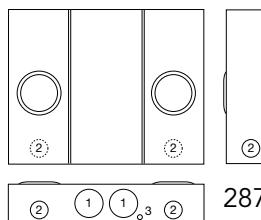


2872

2873

2874

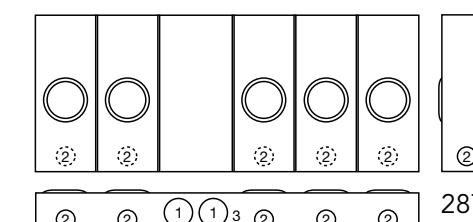

2875

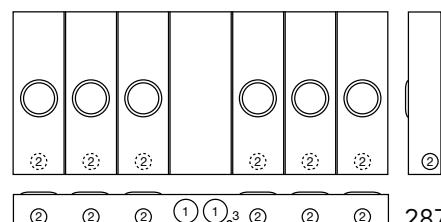

2876

200 Amps per Position | 5 Terminals | Multi-Position | Ringless | 1Ø3W

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
				Line	Load		D"	W"	H"	1	2	3
U2872-XT-5T9	2	OH	(2) C.P.	¾" x 16 Stud	#6-350	Lever	6	32½	25¼	4	2½	1¼, ½
U2873-XT-5T9	3	OH	(2) C.P.	¾" x 16 Stud	#6-350	Lever	6	42½	25¼	4	2½	1¼, ½
U2874-XT-5T9	4	OH	(2) C.P.	¾" x 16 Stud	#6-350	Lever	6	52½	25¼	4	2½	1¼, ½
U2875-XT-5T9	5	OH	(2) C.P.	¾" x 16 Stud	#6-350	Lever	6	62½	25¼	4	2½	1¼, ½
U2876-XT-5T9	6	OH	(2) C.P.	¾" x 16 Stud	#6-350	Lever	6	72½	31¼	4	2½	1¼, ½

Notes

- Hubs:** Units supplied with two closing plates. To order as extra, refer to the hub suffix chart in the Accessories section.
- Connectors:** Units supplied with ¾"-16 hex head nuts with Belleville washers on line side. Order connector kits **K1539** (350 kcmil), **K1540** (600 kcmil), **K1350** ((2) 350 kcmil) or **K1541** ((2) 600 kcmil).
- Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.
- Fifth Terminal:** The fifth terminal is factory-installed in the 9 o'clock position; may be field-changed to the 6 o'clock position.
- Bussing:** ¾" x 1" aluminum bussing is supplied.


Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




34
200 AMP
LEVER BYPASS
MULTI-
POSITION

Lever Bypass Multi-Position Sockets

200 Amps | 7 Terminals | Ringless | 600 VAC

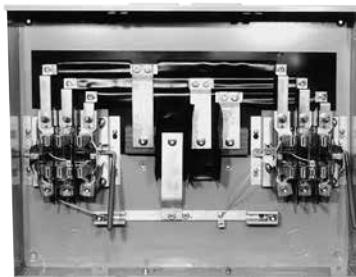

U2732-XT

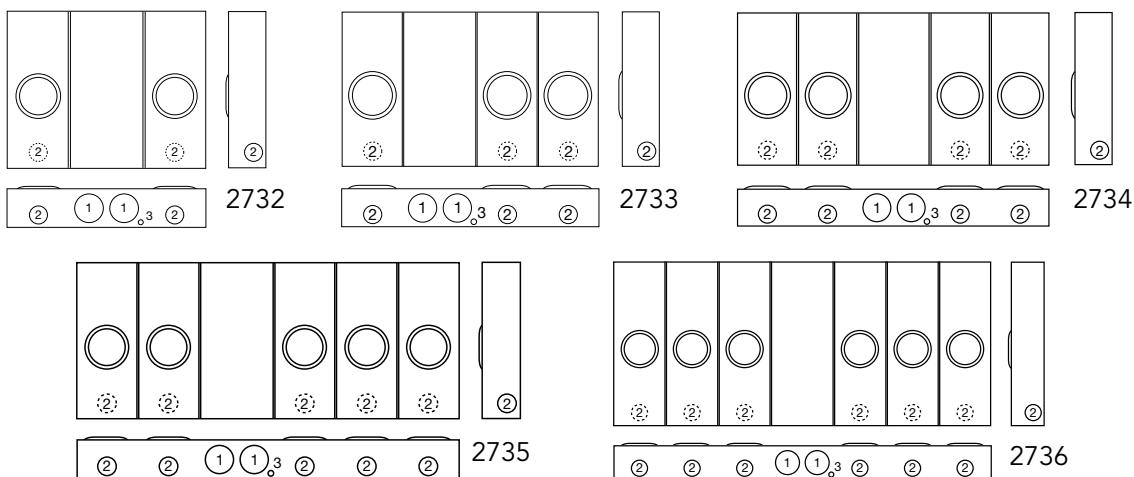

200 Amps per Position | 7 Terminals | Multi-Position | Ringless | 3Ø4W

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U2732-XT	2	OH/UG	(2) C.P.	3/8" x 16 Stud	#6-350	6	32 1/8	25 1/4	4	2 1/2	1/4, 1/2
U2733-XT	3	OH/UG	(2) C.P.	3/8" x 16 Stud	#6-350	6	42 3/16	25 1/4	4	2 1/2	1/4, 1/2
U2734-XT	4	OH/UG	(2) C.P.	3/8" x 16 Stud	#6-350	6	52 1/4	25 1/4	4	2 1/2	1/4, 1/2
U2735-XT	5	OH/UG	(2) C.P.	3/8" x 16 Stud	#6-350	6	62 5/16	25 1/4	4	2 1/2	1/4, 1/2
U2736-XT	6	OH/UG	(2) C.P.	3/8" x 16 Stud	#6-350	6	72 3/8	31 1/4	4	2 1/2	1/4, 1/2

Notes

- Hubs:** Units supplied with two closing plates. To order as extra, refer to the hub suffix chart in the Accessories section.
- Connector Kits:** For line side connector kits, order as extra **K3082** (350 kcmil), **K3441** (600 kcmil), **K3442** (twin 350 kcmil), or **K3083** (twin 600 kcmil). Line connectors can be reversed to change from overhead to underground service.
- Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.
- Bussing:** 3/8" x 1" aluminum bussing is supplied.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.







Multi-Position Meter Mains

125 Amps | 4 Terminal | Ringless | 120/240 VAC

35
125 AMP
MULTI-
POSITION
METER MAINS



U6123-X-BL

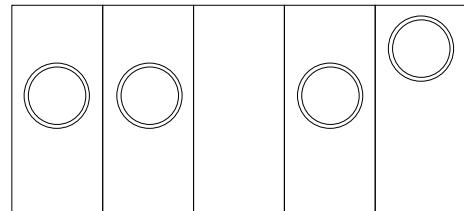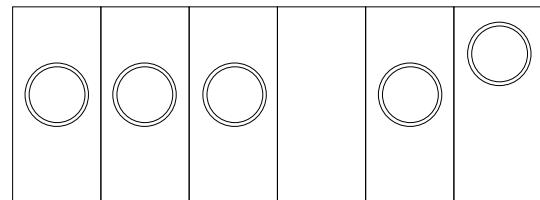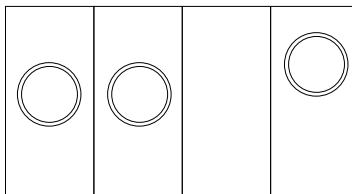

125 Amp Per Position | Multi-Position Meter Mains | Ringless

Catalog Number	Amps Per Position	Positions	Line Connector Size		Dimensions			Knockouts		
			Line	Load	D"	W"	H"	1	2	3
U6123-X-BL	125	3	¾" x 16 Stud*	C.B.	5³¹/₃₂	36½	30½	2½	3	1
U6124-X-BL	125	4	¾" x 16 Stud*	C.B.	5³¹/₃₂	44¹⁹/₁₆	30½	2½	3	1
U6125-X-BL	125	5	¾" x 16 Stud*	C.B.	5³¹/₃₂	53¹/₁₆	30½	2½	3	1

Notes

- AIC Rating:** All models are rated **22K AIC** when used with approved breakers rated at 22K.
- Hub:** Units supplied with one (1) closing plate. Order hubs separately, see Accessories page.
- Fifth Terminal:** For a field-mounted fifth terminal, order catalog number **K5T** for tenant positions, and order **K3865** for the far right house power lever bypass socket.

Manufacturer	Cutler Hammer	Siemens	G.E. (50 Amp Max)	Square D
125 Amps or Less	BR, HQP, QPGF	QP, QPH (22K)	THQL	Homeline

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




36


125 & 200 AMP
MULTI-
POSITION
METER MAINS

Multi-Position Meter Mains

125 & 200 Amps | 4 Terminal | Ringless | 120/240 VAC

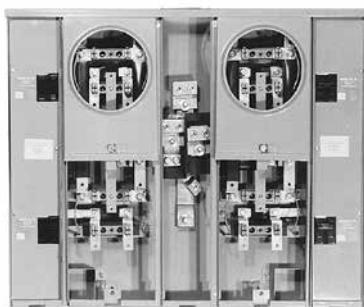

U2854-X

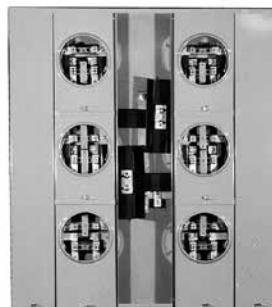

U2866-X

125 Amp Per Position | Multi-Position Sockets | Ringless

Catalog Number	Amps Per Position	Positions	Main Bus Rating	Line Connector Size	Dimensions		
					D"	W"	H"
U2852-X	125	2	200 Amp	3/8" x 16 Stud*	5 13/16	18	25
U2853-X	125	3	200 Amp	3/8" x 16 Stud*	5 13/16	18	37
U2854-X	125	4	400 Amp	3/8" x 16 Stud*	4 7/8	31	25
U2855-X	125	5	400 Amp	3/8" x 16 Stud*	4 7/8	31	37
U2856-X	125	6	400 Amp	3/8" x 16 Stud*	4 7/8	31	37

200 Amp Per Position | Multi-Position Sockets | Ringless

Catalog Number	Amps Per Position	Positions	Main Bus Rating	Line Connector Size	Dimensions		
					D"	W"	H"
U2288-X	200	1	200 Amp	#6-350 kcmil	4 27/32	13	21
U2862-X	200	2	250 Amp	3/8" x 16 Stud*	5 13/16	21	29
U2863-X	200	3	300 Amp	3/8" x 16 Stud*	5 13/16	21	41
U2864-X	200	4	400 Amp	3/8" x 16 Stud*	4 7/8	36	29
U2865-X	200	5	600 Amp	3/8" x 16 Stud*	4 7/8	36	41
U2866-X	200	6	600 Amp	3/8" x 16 Stud*	4 7/8	36	41

Connector Kits*

Size	Suffix	Kit Number	Compatible With	Wire Range
Single	-K1	K1539	U2852-56, U2862-66	#6-350
	-K3	K1540	U2854-56, U2864-66	#4-600
Twin	-K2	K1350	U2854-56, U2863-66	#6-350
	-K4	K1541	U2864-66	#2-600

Breaker Chart

Manufacturer	150–200 Amps	125 Amps or Less
Cutler Hammer	BJ, WBJ	Quicklag P, BR, HQP
Siemens	QNR	QP
Murray	MD	MP
G.E.		Q Line
Square D	—	Homeline

Notes

- Connectors:** For line wire connector kits, order separately.
- Fifth Terminal:** For field mounted fifth terminal, order catalog number **K2381**. Order one per meter position.
- Breakers:** Units have provision for one double pole main per meter position. Breakers not included.
- Short Circuit Current Rating:** 10K AIC. However, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.






Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Multi-Position Meter Mains

Knockout Information

37
125 & 200 AMP
MULTI-
POSITION
METER MAINS

Catalog Number	Knockouts			
	1	2	3	4
U2288-X	2½	4	¼,½	3
U2852-X	3	1¼	¼,½	—
U2853-X	3	1¼	¼,½	—
U2854-X	3	1¼	¼,½	—
U2855-X	3	1¼	¼,½	—
U2856-X	3	1¼	¼,½	—
U2862-X	3	2	¼,½	—
U2863-X	3	2	¼,½	—
U2864-X	3	2	¼,½	—
U2865-X	3	2	¼,½	—
U2866-X	3	2	¼,½	—

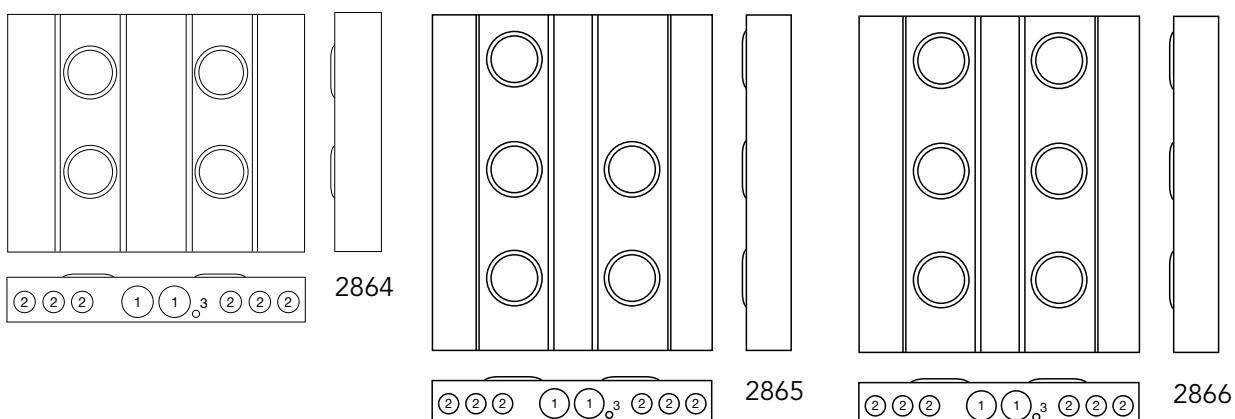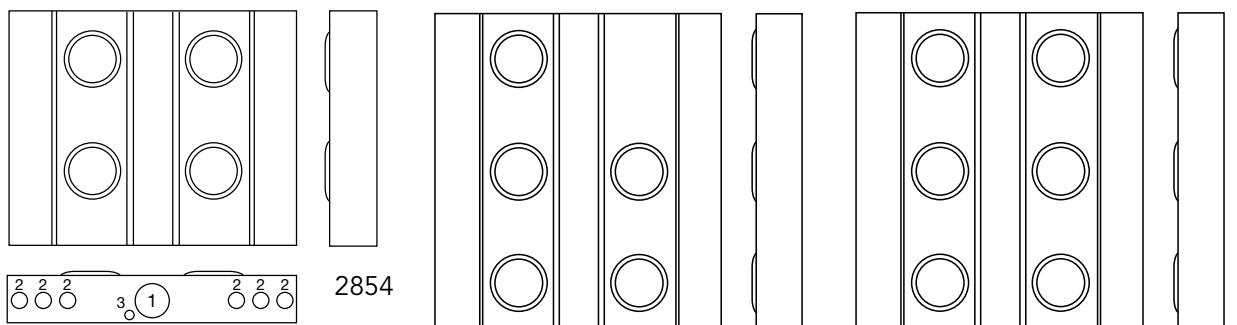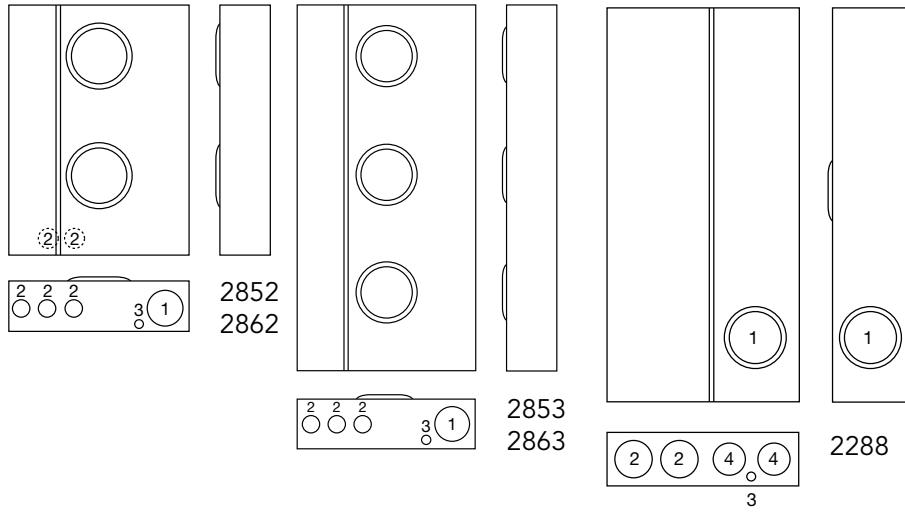

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



38


200 AMP
LEVER BYPASS
MULTI-
POSITION
METER MAINS

Lever Bypass Multi-Position Meter Mains


200 Amps | 5 Terminals | Ringless | 120/240 VAC




U4374-XT-5T9

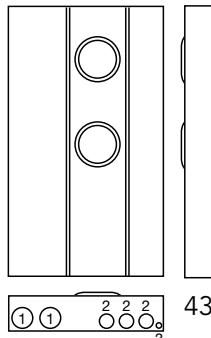


4372

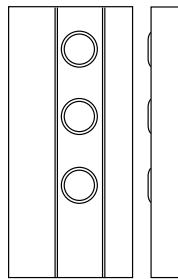

4373

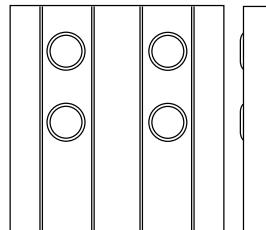

4374



4375



4376

200 Amps/Position | 5 Terminals | Lever Bypass Multi-Position Meter Mains | Ringless | 1Ø3W

Catalog Number	Positions	Main Bus Rating	Line Connector Size	Dimensions			Knockouts		
				D"	W"	H"	1	2	3
U4372-XT-5T9	2	320 Amps	3/8" x 16 Stud*	6	27 3/4	48	3	2	1/4, 1/2
U4373-XT-5T9	3	480 Amps	3/8" x 16 Stud*	6	27 3/4	60	3	2	1/4, 1/2
U4374-XT-5T9	4	640 Amps	3/8" x 16 Stud*	6	45	48	4	2	1/4, 1/2
U4375-XT-5T9	5	640 Amps	3/8" x 16 Stud*	6	45	60	4	2	1/4, 1/2
U4376-XT-5T9	6	640 Amps	3/8" x 16 Stud*	6	45	60	4	2	1/4, 1/2

Connector Kits*

Size	Suffix	Kit Number	Wire Range
Single	-K3	K1540	#4-600
Twin	-K2	K1350	#6-350
	-K4	K1541	#2-600

Breaker Chart

Manufacturer	150–200 Amps	125 Amps or Less
Cutler Hammer	BJ, WBJ	Quicklag P BR, HQP
Siemens (ITE)	QNR	QP
Murray	MD	MP
G.E.	—	Q Line
Square D	—	Homeline

Notes

- ***Connectors:** For line wire connector kits, order separately (see chart above).
- Breakers:** Units have provision for one double pole main per meter position. Breakers not included. Order as extra (see chart above).
- Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Plunger Bypass Transformer Rated Sockets

20 Amps | 6-13 Terminals | 600 VAC

39
20 AMP
TRANSFORMER
RATED SOCKETS

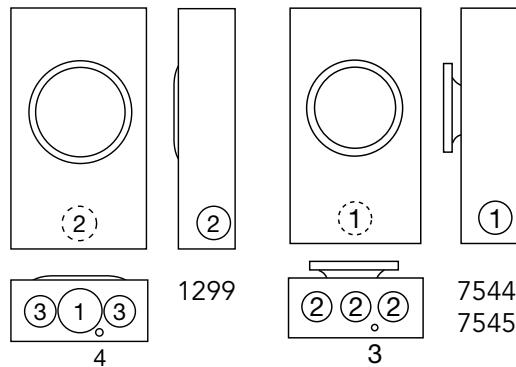

UC1299-XL



UC7545-RL

20 Amps | Transformer Rated Sockets

Catalog Number	Type	Terminals	Meter Form	Hub	Connectors CU	Bypass	Dimensions			Knockouts			
							D"	W"	H"	1	2	3	4
UC1299-XL	Ringless	6	4S	C.P.	#14 - 4	Plunger	3 $\frac{5}{16}$	8	14	2	1 $\frac{1}{2}$	1 $\frac{1}{4}$	$\frac{1}{4}$
UC7544-RL	Ring Type	8	5S	H.O.	#14 - 4	Plunger	3 $\frac{5}{16}$	8	14	1 $\frac{1}{2}$	1 $\frac{1}{4}$	$\frac{1}{4}$	—
UC7545-RL	Ring Type	13	6, 8, 9S & (ALT) 10S	H.O.	#14 - 4	Plunger	3 $\frac{5}{16}$	8	14	1 $\frac{1}{2}$	1 $\frac{1}{4}$	$\frac{1}{4}$	—

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Bypass:** Plunger type bypass automatically closes when meter is removed.
- Connectors:** Units are supplied with mechanical type connectors.
- Sealing Ring:** The ring-type UC7544 and UC7545 units include a **MR-2** snap type sealing ring.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



40
20 AMP
TRANSFORMER
RATED
SOCKETS

Transformer Rated Sockets

20 Amps | 6-13 Terminals | 600 VAC

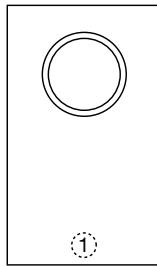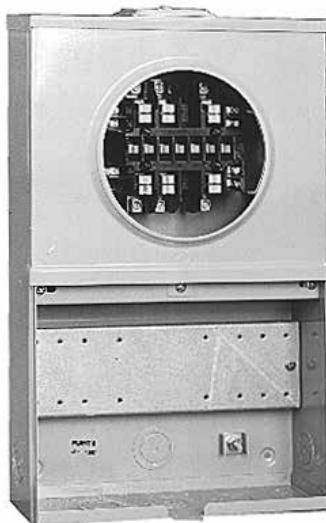

7448
7449
7532

U7449-XL

20 Amps | Transformer Rated Sockets | 2 Piece Cover

Catalog Number	Terminals	Meter Form	Hub	Connectors CU	Bypass	Dimensions			Knockouts	
						D"	W"	H"	1	2
UC7532-XL	6	4S	C.P.	#14 - 4	Test Switch Provision	4½	12	20	1¼	¼, ½
UC7448-XL	8	5S	C.P.	#14 - 4	Test Switch Provision	4½	12	20	1¼	¼, ½
UC7449-XL	13	6, 8, 9S & (ALT) 10S	C.P.	#14 - 4	Test Switch Provision	4½	12	20	1¼	¼, ½

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Connectors:** Supplied with tin plated mechanical connectors (#4 maximum).




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Transformer Rated Sockets


20 Amps | 6-13 Terminals | 600 VAC

4 1
20 AMP
TRANSFORMER
RATED
SOCKETS

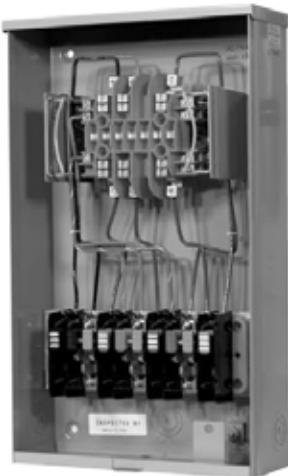

UC7445-O-311-NOE

①	①	①	①
① ① ① 2 O	7444 7445 7478	4964 4965 4966	

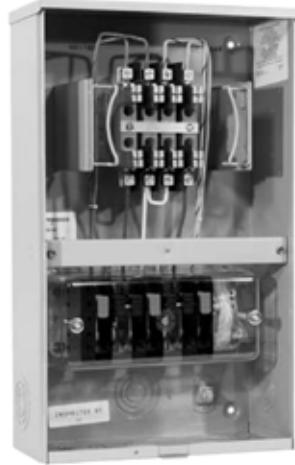

UC4965-O-WC-21-NST

20 Amps | Transformer Rated Sockets | With Pre-wired Test Switch | Approved for N.E. Utilities

Catalog Number	Terminals	Meter Form	Cover	Hub	Connectors CU	Bypass	Dimensions			Knockouts	
							D"	W"	H"	1	2
UC7478-O-81-NOE	6	4S	1 Piece	Blank	#14 - 4	Test Switch	4½	12	20	1¼	1¼, ½
UC7444-O-141-NOE	8	5S	1 Piece	Blank	#14 - 4	Test Switch	4½	12	20	1¼	1¼, ½
UC7445-O-311-NOE	13	6, 8, 9S & (ALT) 10S	1 Piece	Blank	#14 - 4	Test Switch	4½	12	20	1¼	1¼, ½

20 Amps | Transformer Rated Sockets | With Prewired Test Switch | Approved for NSTAR


Catalog Number	Terminals	Meter Form	Cover	Hub	Connectors CU	Bypass	Dimensions			Knockouts	
							D"	W"	H"	1	2
UC4964-O-WC-21-NST	6	4S	2 Piece	Blank	#14 - 4	Test Switch	5⅛	12	20	2	1¼, ½
UC4965-O-WC-21-NST	8	5S	2 Piece	Blank	#14 - 4	Test Switch	5⅛	12	20	2	1¼, ½
UC4966-O-WC-21-NST	13	6, 8, 9S & (ALT) 10S	2 Piece	Blank	#14 - 4	Test Switch	5⅛	12	20	2	1¼, ½

Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the Accessories page.
- Connectors:** Supplied with tin plated mechanical connectors (#4 maximum).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





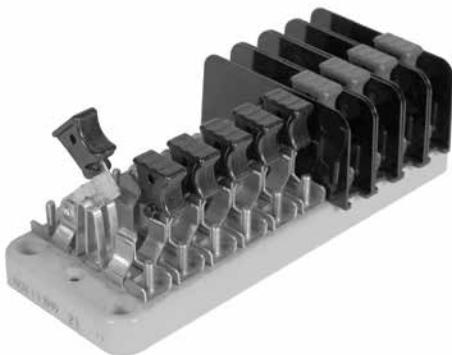

Catalog Number	4-Pole						
TS04-0101	X	P	[Pn]	X	C+	C	X
TS04-0102	X	[P]	C+	C	X	Pn	X
TS04-0103	X	P	[Pn]	X	C	C+	X
TS04-0104	X	C+	C	X	P	[Pn]	X

Notes

- 4-pole switches are also available on 10-pole bases. Contact Milbank for appropriate catalog numbers.

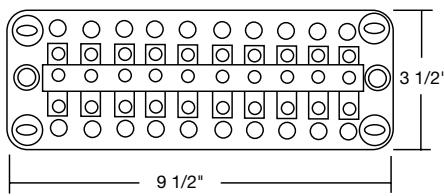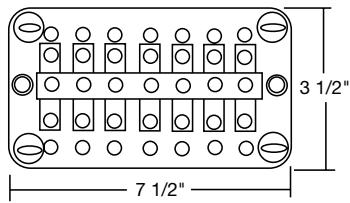

Key	
P	Potential Switch
C+	Line side current switch with short circuit assembly
C	Load side current switch with test jack assembly
N	Neutral bar (no switch)
Pn	Neutral Potential Switch
X	Unused Position on base
[]	Insulating barrier, isolates both sides of switch

Catalog Number	7-Pole						
TS07-0105	[P]	P	[Pn]	C+	C	C+	C
TS07-0106	[P]	C+	C	[P]	C+	C	[Pn]
TS07-0107	[P]	P	[Pn]	C	C+	C	C+
TS07-0108	C+	C	C+	C	[P]	P	[Pn]

Notes

- 4-pole switches are also available on 10-pole bases. Contact Milbank for appropriate catalog numbers.

Catalog Number	7-Pole on a 10-Pole Base								
TS07-0049	[P]	X	[P]	X	[Pn]	X	C+	C	C+
TS07-0018	[P]	X	[P]	X	[Pn]	X	C+	C	C+
TS07-0059	X	[P]	C+	C	[P]	C	C+	[Pn]	X
TS07-0022	P	X	P	X	Pn	X	C	C+	C

Catalog Number	10-Pole									
TS10-0109	P	[P]	P	[Pn]	C+	C	C+	C	C+	C
TS10-0110	[P]	C+	C	[P]	C+	C	[P]	C+	C	[Pn]
TS10-0111	P	[P]	P	[Pn]	C	C+	C	C+	C	C+
TS10-0112	C+	C	C+	C	C+	C	[P]	P	[P]	[Pn]



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Current Transformer Enclosures

400–1200 Amps

43
400–1200 AMP
CURRENT
TRANSFORMER
ENCLOSURES



U1855-O-NE

Current Transformer Enclosures

Catalog Number	Amperage Rating	Hub	Steel Gauge	Connectors CU/AL	Dimensions		
					D"	W"	H"
U1855-O-NE	400–800	Blank	12	3 connectors per phase	12	36	36
U1856-O-NE	800–1200	Blank	12	5 connectors per phase	12	48	48

Notes




- Features:** These enclosures have three-point locking handles, lift-off hinges with stainless steel pins and two doors. Type 3R rated.
- Connectors:** Minimum #4, maximum 600 mcm.
- U1855** and **U1856** both come from the factory with isolated neutrals. Bonding straps are included but not attached with each 1855 and 1856 if isolated neutral is not needed.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




44TEST
CABINET

Test Cabinet

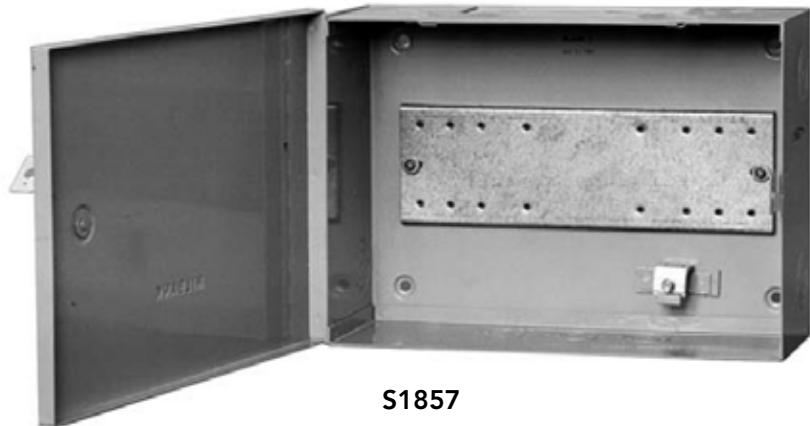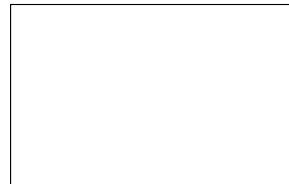With Pre-Drilled Test Switch Bridge**S1857**

1857

**Test Cabinet**

Catalog Number	Hub	Dimensions			Knockouts
		D"	W"	H"	
S1857	Blank	4 $\frac{1}{8}$	14	10	1 $\frac{1}{4}$

Notes

- Features:** Test cabinet has a piano-hinged cover and pre-drilled test switch bridge. The top of the enclosure has a rectangular knockout for bussing.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Polyphase Enclosures

For "A" Base Meters

45
POLYPHASE
ENCLOSURES



S2718-FB-XL-C



S3390-FB-XL-C7

Polyphase Enclosures

Catalog Number	Number of Positions	Hub	Dimensions		
			D"	W"	H"
S2718-FB-XL-C	1	C.P.	14	15	34 ¹ / ₆
S3390-FB-XL-C7	2	C.P.	11	28	34 ¹ / ₆

Notes

- Features:** Units are supplied with full board and one demand reset cover per meter position. Cover holding arms included.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



46


UNIVERSAL
METER
PEDESTAL
UNIT

Universal Meter Pedestal Unit


For Pad Mounting Applications



S3176-O

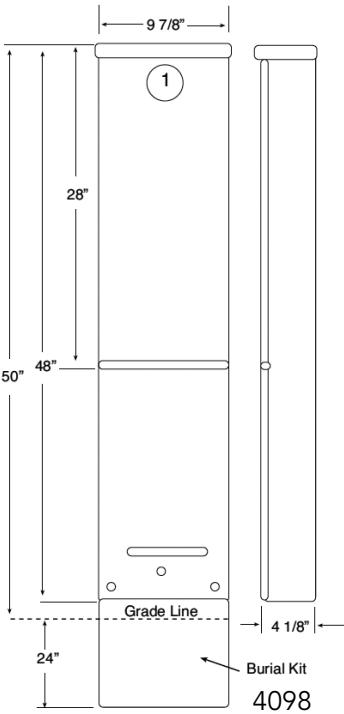

Penta Bolt locking mechanism

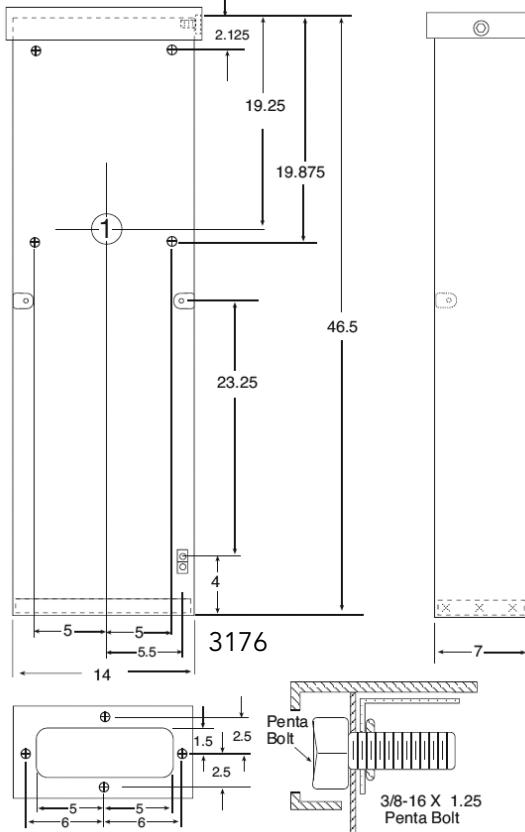

Universal Meter Pedestal Units for Pad Mounting

Catalog Number	Hub	Application	Service	Dimensions			Knockouts
				D"	W"	H"	
S3176-O	Blank	Pad mounted pedestal	UG	7	14	46 1/2"	1 1/4
S4098-O	Blank	See note below	UG	4 1/8	9 1/8	20	2 1/2

Notes

- Direct Burial Kit:** Direct burial kit K3236 and stabilizer foot K3188 are included. Pad mount sleeve K3237 must be ordered separately.
- Connectors:** Supplied with tin plated mechanical connectors (#4 maximum).



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Meter Main Pedestal

200 Amps | 4 Terminals | 120/240 VAC




U3730-O



**K3236/
K3188
Burial kit**



**K3237
Pad mount**

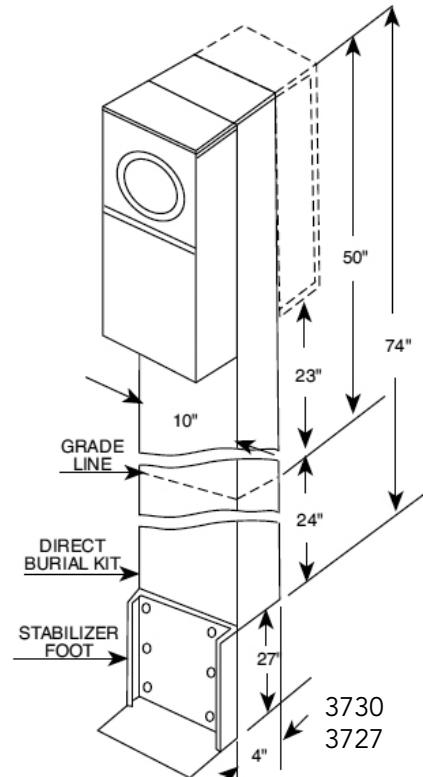

Universal Meter Pedestal Units for Pad Mounting

Catalog Number	Hub	Application	Service	Dimensions			Knockouts
				D"	W"	H"	
U3730-O	Blank	Pad mounted pedestal	UG	7	14	46½"	1¼
U3727-O	Blank	See note below	UG	4½	9½	20	2½

Notes

- Direct Burial Kit:** Direct burial kit K3236 and stabilizer foot K3188 are included. Pad mount sleeve K3237 must be ordered separately.
- Connectors:** Supplied with tin plated mechanical connectors (#4 maximum).


Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

48

200 AMP
METER MAIN
W/ LOAD CENTER
PEDESTALS

Meter Main w/ Load Center Pedestal

200 Amps | 4 Terminals | Lever Bypass | 120/240 VAC

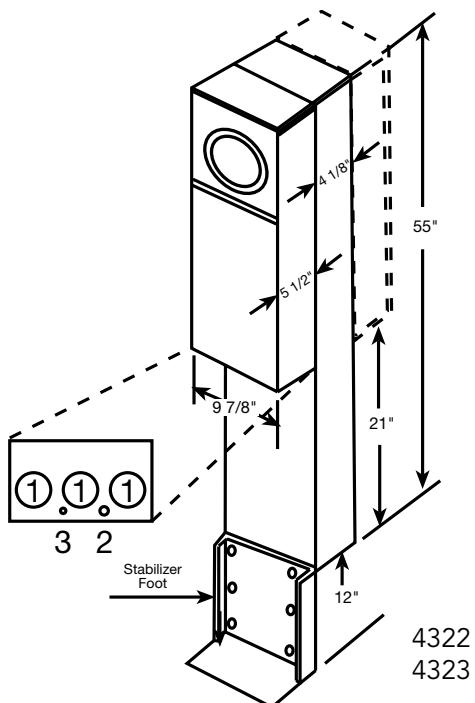

U4322-O-BL



U4323-O-BL

200 Amps | 4 Terminals | Meter Main Pedestals | Lever Bypass | Ringless

Catalog Number	Meter Positions	Bypass	Connectors CU/AL		Circuit Provisions	Knockouts			Dimensions		
			Line	Load		1	2	3	D"	W"	H"
U4322-O-BL	Single	Lever	Twin #6-350	CB	6	2	½	¼	9⅝	9⅜	55
U4323-O-BL	Double	Lever	Twin #6-350	CB	6	2	½	¼	15⅛	9⅜	55

Notes

- Lever Bypass:** Lever provides clamping action on meter spades and also operates bypass device
- Application:** The **U4322** & **U4323** pedestals are suitable for use as service equipment or mobile home service equipment. **K5081/K3188** for direct burial application is included with unit. **K5151** for pad mount application must be ordered as extra.
- Breakers:** These units are wired as parallel mains and have provisions for six circuits: 6 single-pole or 3 double-pole breakers.
- Short Circuit Current Rating:** 10K AIC. However, this rating is limited to the lowest interrupting capacity of any circuit breaker installed. Watthour meter not included in short circuit current rating.




Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


Temporary Power Units

125 Amp | 4 Terminal | Ringless | 120/240 VAC

49
125 AMP
TEMPORARY
POWER UNITS

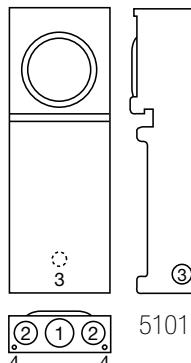

U5101-XL-11GR

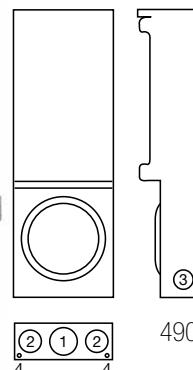

U4908-O-11GR

4 Terminal | Temporary Power Units | Ringless | 1Ø3W

Catalog Number	Amps	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U5101-XL-11GR*	125	OH	C.P.	#6-350	CB	5 $\frac{3}{16}$	8 $\frac{7}{8}$	25	2	1 $\frac{1}{2}$	1 $\frac{1}{4}$	$\frac{1}{4}$	—
U4908-O-11GR*	125	UG	Blank	#6-2/0	CB	5 $\frac{3}{16}$	9	25 $\frac{15}{16}$	2	1 $\frac{1}{2}$	1 $\frac{1}{4}$	$\frac{1}{4}$	—

Notes

- Interior:** Six circuit plated copper interior accepts standard plug-in type circuit breakers.
- Receptacle Bridge:** Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Included Parts: **U4908** and **U5101** come supplied with 2-20 amp single pole breakers and 2-20 amp GFCI receptacles (pre-wired and installed).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.





UQFP
UQFPH



UQFP-M
UQFPH-M



UQFB-X1



UQFBH

200 Amp Frame | Plug-In | 10,000 AIC & 22,000 AIC | Two-Pole - Common Trip

Amps	10K AIC Plug-In	22K AIC Plug-In	10K AIC Plug-In	22K AIC Plug-In	Wire Range	
					CU	AL
100	UQFP-100	UQFPH-100	UQFP-M-100	UQFPH-M-100	#3-#1	#1-1/0
125	UQFP-125	UQFPH-125	UQFP-M-125	UQFPH-M-125	#3-#1	#1-1/0
150	UQFP-150	UQFPH-150	UQFP-M-150	UQFPH-M-150	1/0-300	2/0-300
175	UQFP-175	UQFPH-175	UQFP-M-175	UQFPH-M-175	1/0-300	2/0-300
200	UQFP-200	UQFPH-200	UQFP-M-200	UQFPH-M-200	1/0-300	2/0-300

200 Amp Frame | Bolt-On | 10,000 AIC & 22,000 AIC | Two-Pole - Common Trip

Amps	10K AIC Bolt-On	22K AIC Bolt-On	10K AIC Bolt-On	22K AIC Bolt-On	Wire Range	
					CU	AL
100	UQFB-100	UQFBH-100	UQFB-100-X1	UQFBH-M-100	#3-#1	#1-1/0
125	UQFB-125	UQFBH-125	UQFB-125-X1	UQFBH-M-125	#3-#1	#1-1/0
150	UQFB-150	UQFBH-150	UQFB-150-X1	UQFBH-M-150	1/0-300	2/0-300
175	UQFB-175	UQFBH-175	UQFB-175-X1	UQFBH-M-175	1/0-300	2/0-300
200	UQFB-200	UQFBH-200	UQFB-200-X1	UQFBH-M-200	1/0-300	2/0-300

Notes

- **UL Listed:** For use with 60°C or 75°C wire.
- **UQFP:** For parallel main circuit breaker applications.
- **UQFP-M:** For series main circuit breaker applications Split load tab features allow for feed-through capability.
- **UQFB:** (2) 1/0-300 lugs provided on load and line side (cable-in, cable-out).
- **UQFB3:** Three-pole available. Consult factory.
- **UQFB-X:** (2) 1/0-300 lugs provided on load side and (2) line bar bus connections on line side.
- **UQFB-M:** For series main circuit breaker applications. Split load tab features allow for feed-through capability.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Circuit Breakers

QP (small frame) and QN (large frame) | 120/240 VAC

15–125 Amp Breaker

Plug-In Type | 1" Per Pole

Amps	Poles	10K AIC Plug-In	22K AIC Plug-In
15	Single	Q115	Q115H
15	Double	Q215	Q215H
20	Single	Q120	Q120H
20	Double	Q220	Q220H
25	Single	Q125	Q125H
25	Double	Q225	Q225H
30	Single	Q130	Q130H
30	Double	Q230	Q230H
35	Single	Q135	Q135H
35	Double	Q235	Q235H
40	Single	Q140	Q140H
40	Double	Q240	Q240H
50	Single	Q150	Q150H
50	Double	Q250	Q250H
60	Single	Q160	Q160H
60	Double	Q260	Q260H
70	Single	Q170	Q170H
70	Double	Q270	Q270H
80	Double	Q280	Q280H
90	Double	Q290	Q290H
100	Double	Q2100	Q2100H
125	Double	Q2125	Q2125H



QN2200H



QN2200RH



WBJ2200



Q250

200 Amp Frame | Plug-In | 10,000 AIC & 22,000 AIC | Two-Pole, Common Trip



Amps	10K AIC Plug-In	22K AIC Plug-In	Handle Location	Wire Range	
				CU	AL
150	QN2150	QN2150H	Left facing	#4-300	#4-300
200	QN2200	QN2200H	Left facing	#4-300	#4-300
150	QN2150R	QN2150RH	Right facing	#4-300	#4-300
200	QN2200R	QN2200RH	Right facing	#4-300	#4-300
150	WBJ2150	—	Centered	#2-300	#2-300
200	WBJ2200	—	Centered	#2-300	#2-300

Notes


- Load connectors supplied with breakers.
- UL Listed for use with 60°C or 75°C wire.
- Wire sizes shown are lug capacity. Consult NEC Article #310 for specific wire sizes.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



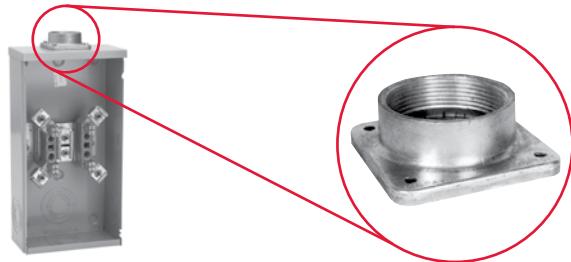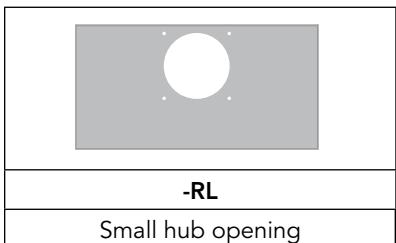

-WL A7514	-YL A7515	-ZL A7516	-DL A7517	-EL A7518	-XL A7551
1" hub	1 1/4" hub	1 1/2" hub	2" hub	2 1/2" hub	Small closing plate

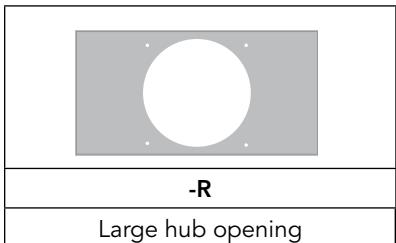

-F A8110	-G A8111	-H A8112	-X A9064	-RRL S8324
3" hub	3 1/2" hub	4" hub	Large closing plate	
				Large hub opening adapted to small hub oepning

Notes

- Suffix:** Add to catalog number for factory installation of hub.
- Packaging:** Individually packed units for field installation.
- Abbreviations:** H.O. (hub opening), C.P. (closing plate).
- Hub Mast rated



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Accessories

Connector Kits, Closing Kits & Generator Interlock

Connector Kits — For Use with $\frac{3}{8}$ "-16 Stud Type Units Only

					
Single	Twin				
Suffix	Part #	(3 per set) - 1Ø	Suffix	Part #	(3 per set) - 1Ø
K1	K1539	6-350	K2	K1350	6-350
K3	K1540	4-600 or (2) 1/0-250*	K2L	K1350L	6-350 (non rotating)
K3L	K1540L	4-600 or (2) 1/0-250* (non rotating)	K4	K1541	4-600
Suffix	Part #	(4 per set) - 3Ø	Suffix	Part #	(4 per set) - 3Ø
K5	K3082	6-350	K6	K3442	6-350
K7	K3441	4-600 or (2) 1/0-250*	K8	K3083	4-600

*For (2) 1/0-250, conductors must be of same size.

Closing Covers

	
Meter Closing Plate (Ring Type / Ring-less)	Metal Closing Plate (For Ringless Sockets)
6003 - Grey Plastic	CP-21
6116 - Clear Plastic	
6002 - Clear Plastic	

Disconnect Sleeve


M5-144
Do not use with lever bypass sockets

Isolated Neutral Kit



K1047

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.




Fifth Terminals, Tap Connectors & Block Assemblies

Fifth Terminals

			
K5T - 200 Amp "Plug-In"	K3865 - Heavy Duty Jaw Clamping (K3866 without Neutral Wire)	K3356	

Tap Connectors (3 per set)

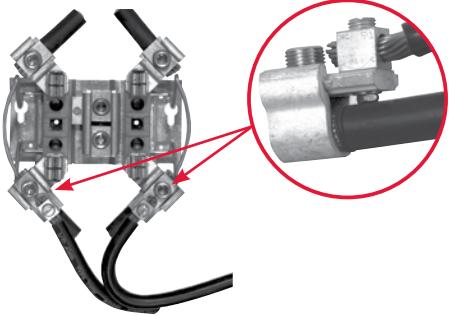	Replaces the load or line side slide-in nut assembly on Milbank 200 amp sockets. Allows for a 100 amp tap location in addition to the #6-350 kcmil load-side connector. K5022 includes safety barrier extensions for applications over 300 VAC. Three lugs per kit.
K4977-INT - Internal Hex	
K4977-EXT - External Hex	
K5022-INT - Internal Hex (set of 4 w/ barrier)	

Triplex Ground


K1190 (For factory installed triplex ground, add suffix -TG to catalog number)

100 Amp Blocks (single sockets only)


BL7474 - Block Assembly
Z904486-AO - Slotted Nut Assembly
Z802965-AC - Neutral without Nut
Z901925-AC - Hex Nut Set Screw

200 Amp Blocks (single sockets only)


K4527 - Internal Hex Block Assembly (w/ meter support)
K4528 - External Hex Block Assembly (w/ meter support)
Z916265-AO - Internal Nut Assembly
Z916264-AO - External Nut Assembly
Z814898-AC - Neutral without Nut



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

55
COMMERCIAL
PEDESTALS

Milbank Commercial Pedestals are pad-mounted, weatherproof electrical enclosures consisting of a utility pull section with optional meter socket, and a customer section containing distribution and control equipment. Milbank Commercial Pedestals are an attractive, secure, easy to install and cost-effective solution when underground remote site power distribution and control equipment is required, replacing unsightly, costly and inefficient strut and backboard structures.



Strut and backboard





Commercial pedestal

UL-listed as Industrial Control Equipment (File E113855)

Standard Features

- Type 3R rainproof, vandal-resistant cabinet of polyurethane powder-coated steel (aluminum or stainless steel also available)
- UL-listed as enclosed industrial control equipment (UL508)
- Isolated lockable and sealable utility metering and lug landing sections
- Lockable customer section for distribution and control equipment with internal deadfront
- Print pocket inside customer section door contains wiring schematics and installation instructions
- Most load centers are UL-listed for use with various manufacturers' circuit breakers
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws)



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Commercial Pedestals

Attractive | Easy to Install | Secure | Cost-Effective

These units are ideal for controlling and metering:

- Traffic signals
- Street lighting
- Irrigation and sprinkler systems
- Cell towers and telephone vaults
- Pump stations
- Temporary power for fairgrounds, swap meets, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances, etc.

Available Factory-Installed Options

- Meter sockets: ring type or ringless, up to 400 amp
- Main and branch breakers or T fuses
- Distribution: copper load centers and panel boards
- Clocks, timers and relays
- Photoelectric cells and controls
- Power receptacles: pin and sleeve, twist lock or straight blade
- Contactors: definite purpose, electrical or mechanically held, IEC and mercury types
- Surge protection and lightning arrestors
- Reserve inlet generator receptacle with interlocked circuit breakers
- Motor starters and relays
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers
- Available in steel, aluminum (unpainted, painted or anodized) or stainless steel construction with powder-coated finish available in eight standard colors or special-ordered RAL colors
- Available for applications up to 400 amp, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Generators

Home Standby, Commercial & Industrial and Portable

57
GENERATORS

Home Standby Generators

- 8-20kW Air-cooled
- 25-62kW Liquid-cooled



SynapSwitch™ Transfer Switches

- 100-200 Amp
- Vigilant™ 100-1250 Amp
- MTS 30-50 Amp



Commercial/Industrial Generators

- 80-150kW Gaseous
- 30-400kW Diesel



Portable Generators

- 1-1.8kW Digital Inverter
- 3.2-10kW Portable Generator



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.


MILBANK
ENERGY AT WORK

Milbank is proud to introduce the new SynapSwitch™ | Automatic Transfer Switch (ATS). Compatible with our 8-62kW home standby generators, the SynapSwitch™ will immediately signal your generator to start up in the event of a power outage - so when the power goes out, you won't be left in the dark.


FEATURES

- **Load Management** - The SynapSwitch™ can manage up to two electrical loads, or six when paired with remote modules, enabling you to receive whole-house power from a smaller generator.
- **Intelligent Synap Technology** - This switch uses state-of-the-art technology that constantly measures power and frequency – allowing the switch to predict and react to changes in demand, as well as prevent the generator from overloading.
- **Load Priority** - The switch intelligently selects managed loads based on priority or load size.
- **LED Status Indicator** - The indicator shows whether load is under utility or generated power and indicates which managed loads are on or off.
- **Certified to FCC Chapter 15 Part B** - The ATS adheres to the strictest code for electronic design to avoid interference with radio and Wi-Fi signals.
- **Generator Disconnect** - The disconnect allows the generator to be quickly taken out of service in the event of emergency shutoff.
- **NEMA 3R Cabinet** - This durable enclosure is suitable for indoor or outdoor installations.
- **Adaptability** - The intelligent switch automatically adapts to seasonal changes of the loads.



Watthour Meter Forms

Standard Forms | Transformer Rated or Self-Contained

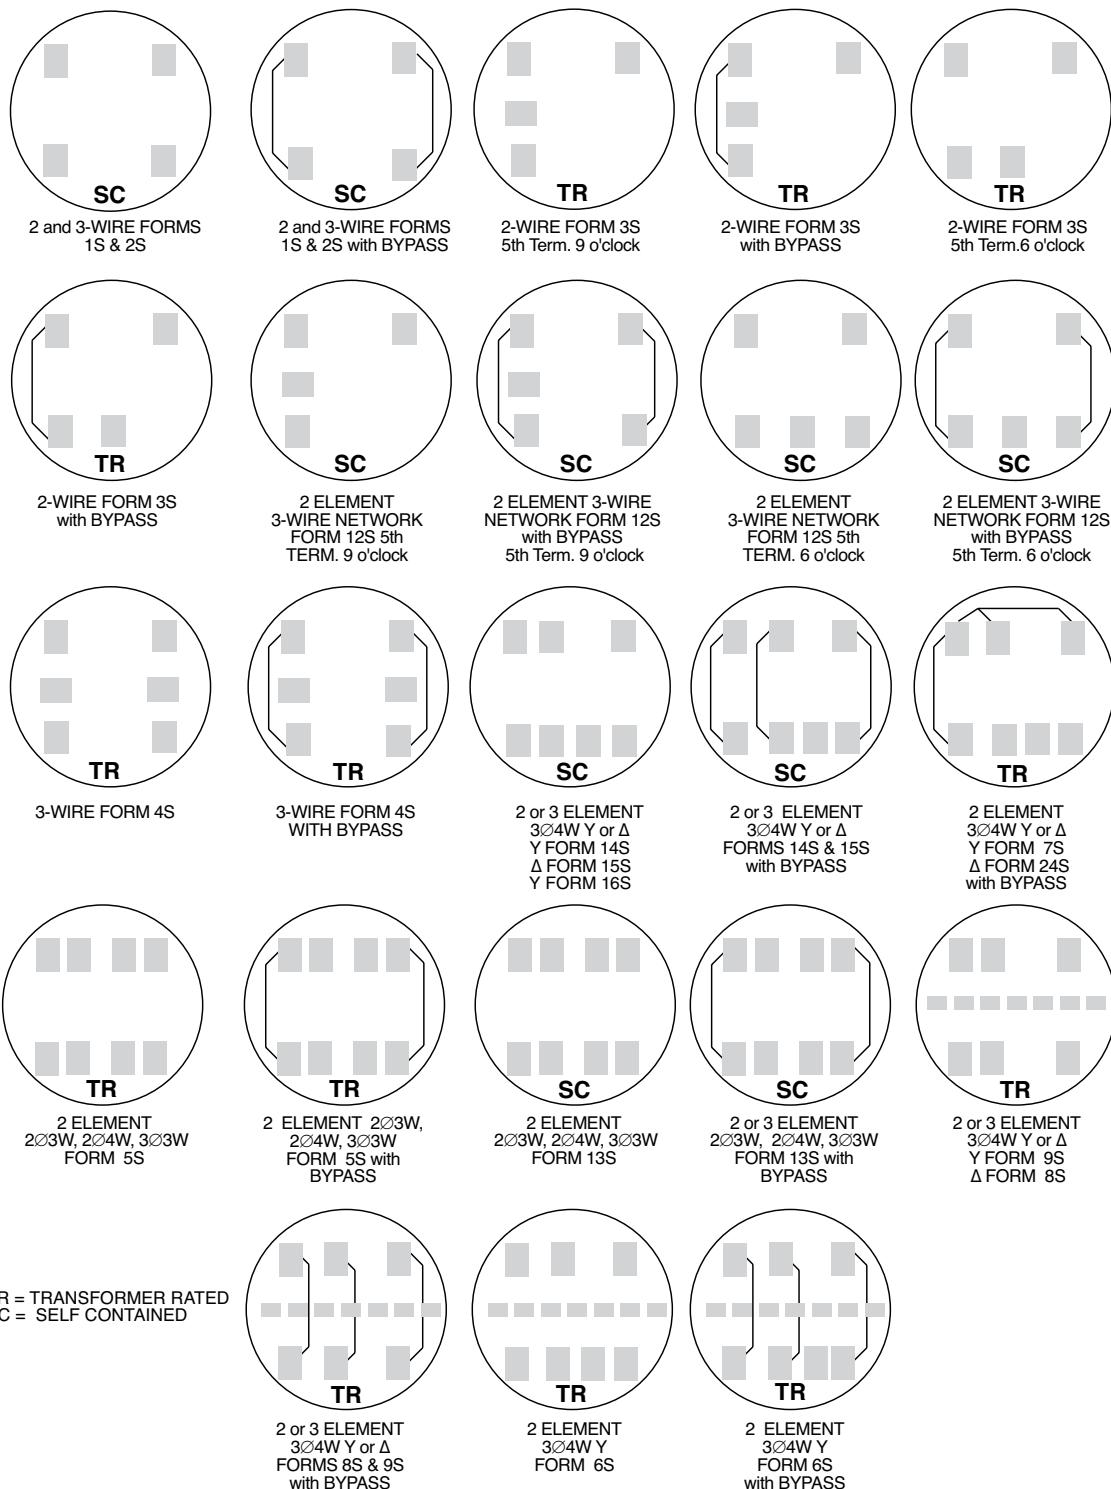

TR = TRANSFORMER RATED
SC = SELF CONTAINED

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Meter Forms

Reference Information

DIAGRAM A
1Ø2W with 1 P.T. & 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

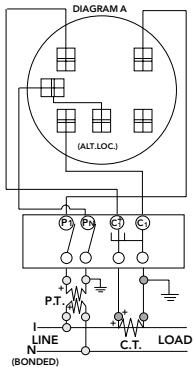


DIAGRAM B
1Ø3W with 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

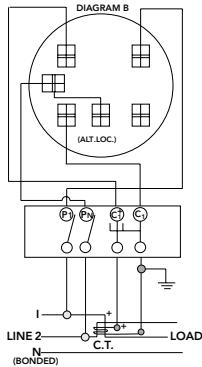


DIAGRAM C
1Ø3W with 2 C.T.'s
Single Stator Meter (3W1Ø) - Form 4S
6T Socket, Test Switch #TS07-0105

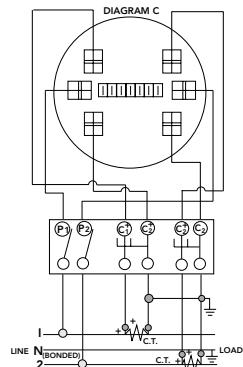


DIAGRAM D
1Ø3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

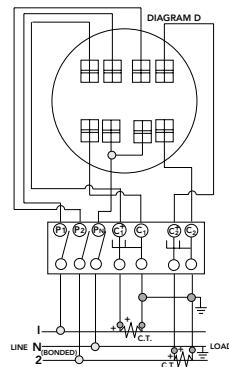


DIAGRAM E
3Ø3W "Δ" with 2 P.T.'s & 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

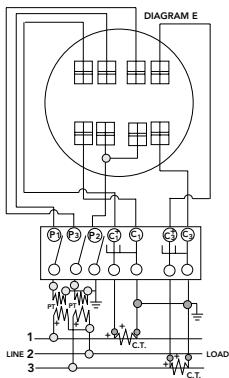


DIAGRAM F
3Ø3W "Δ" with 2 C.T.'s
2 ½ Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

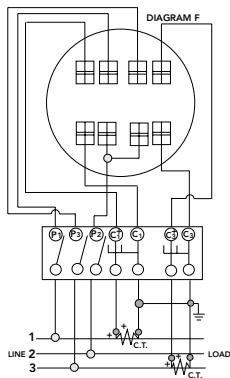


DIAGRAM G
3Ø4W "Y" with 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

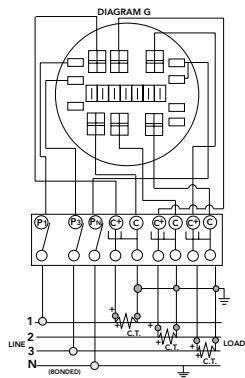


DIAGRAM H
3Ø4W "Y" with 2 P.T.'s & 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

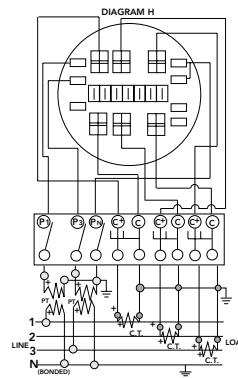


DIAGRAM I
3Ø4W "Y" or "Δ" with 3 C.T.'s
"Y" 3 Stator Meter - Form 9S
"Δ" 2 Stator Meter - Form 8S
13T Socket, Test Switch #TS10-0109


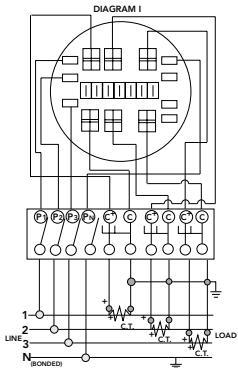


DIAGRAM J
3Ø4W "Y" with 3 P.T.'s & 3 C.T.'s
3 Stator Meter - Form 9S
13T Socket, Test Switch #TS10-0109

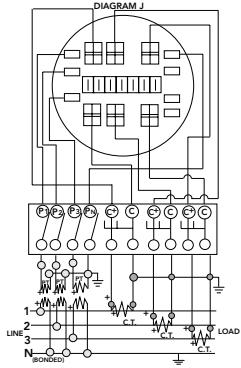

Prewiring: If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Conduit, Ampacity & SCCR

Reference Information

61
CONDUIT,
AMPACITY &
SCCR

MAXIMUM NUMBER OF CONDUCTORS IN CONDUIT

Table from 2008 NEC Code Reference: Rigid Metal Conduit

Type	Conductor Size (AWG/kcmil)	Conduit Trade Sizes (Inches)									
		1/8	3/16	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4
THHN, THWN, THWN-2	12	9	16	26	46	62	102	146	225	301	387
	10	6	10	17	29	39	64	92	142	189	244
	8	3	6	9	16	22	37	53	82	109	140
	6	2	4	4	12	16	27	38	59	79	101
	4	1	2	4	7	10	16	23	36	48	62
	3	1	1	3	6	8	14	20	31	41	53
	2	1	1	3	5	7	11	19	26	34	44
	1	1	1	1	4	5	8	12	19	25	35
	1/0	1	1	1	3	4	7	10	16	21	27
	2/0	0	1	1	2	3	6	8	13	18	23
	3/0	0	1	1	1	3	5	7	11	15	19
	4/0	0	1	1	1	2	4	6	9	12	16
XHH, XHHW, XHHW-2	4	1	2	4	7	10	16	24	37	49	63
	2	1	1	3	5	7	12	17	26	35	45
	1/0	1	1	1	3	4	7	10	16	22	28
	2/0	0	1	1	2	3	6	9	13	18	23
	4/0	0	1	1	1	2	4	6	9	12	16
	250	0	0	1	1	1	3	5	7	10	13
	350	0	0	1	1	1	2	3	6	7	10
	500	0	0	0	1	1	1	2	4	5	7
	750	0	0	0	0	1	1	1	3	4	5

This table is for concentric stranded conductors only. For cables with compact conductors refer to NEC. Refer to latest NEC Code or Local Codes for updated requirements.

* ALLOWABLE AMPACITIES OF INSULATED COPPER & ** ALUMINUM CONDUCTORS (3W IN CONDUIT) 75°C (167°F)

*CU		AL or **Cu-Clad AL	
A	B	A	C
18	—	—	—
16	—	—	—
14	20†	—	—
12	25†	12	20†
10	35†	10	30†
8	50	8	40
6	65	6	50
4	85	4	65
3	100	3	75
2	115	2	90
1	130	1	100
1/0	150	1/0	120
2/0	175	2/0	135
3/0	200	3/0	155
4/0	230	4/0	180
250	255	250	205
300	285	300	230
350	310	350	250
400	335	400	270
500	380	500	310
600	420	600	340
700	460	700	375
750	475	750	385

A = Size: AWG/MCM
B = Ampere Rating for Insulation Types:

FEPW, RH, RHW, THW,
THWN, XHHW, USE, 2W.

**C = Ampere Rating for Insulation Types:

RH, RHW, THW, THWN,
XHHW, USE

(Per NEC table 310-16)

Overall ampere ratings of U/L listed Milbank multiple position meter sockets are based on **2008 N.E.C.** Handbook Article 220-84 and ANSI / UL-414 (except where restricted by line connector size.) These requirements provide for a diversity factor / demand factor being utilized in determining the overall (main bus / lug) rating of a gang socket. All Milbank U/L listed gang sockets meet or exceed these diversity factor/demand factor requirements. Standard overall ampacity ratings for U/L listed and non U/L listed gang sockets are as shown in the chart below. Ampere ratings of meter sockets are based on the meter socket being wired with 75° C insulated wire conductor, sized in accordance with **Table 310-16** of the National Electric Code.

AMPACITY CORRECTION FACTORS

AMBIENT TEMP.°C	CORRECTION FACTOR	AMBIENT TEMP.°F
21 - 25	1.05	70 - 77
26 - 30	1.00	78 - 86
31 - 35	.94	87 - 95
36 - 40	.88	96 - 104
41 - 45	.82	105 - 113
46 - 50	.75	114 - 122
51 - 55	.67	123 - 131
56 - 60	.58	132 - 140
61 - 65	.33	141 - 158

GANG SOCKET OVERALL AMPACITIES

NO. OF METER POSITIONS	100A / POS. AMPACITY	125A / POS. AMPACITY	150A / POS. AMPACITY	200A / POS. AMPACITY
2	200A	200A	200A	200A #
3	200A	225A	225A	270A
4	200A	250A	270A	360A
5	225A	285A	338A	450A
6	270A	330A	396A	528A

† Unless otherwise permitted elsewhere in the Code, the overcurrent protection for conductor types marked with an obelisk (†) shall not exceed 15 amps for 14 AWG, 20 amps for 12 AWG, and 30 amps for 10 AWG copper; or 15 amps for 12 AWG and 25 amps for 10 AWG aluminum and copper-clad aluminum after any correction factors for ambient temperature and number of conductors have been applied.

Some constructions are rated at 400 amps overall. Contact your sales representative for more information. Refer to latest NEC Code or Local Codes for updated requirements.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Energization of Electrical Equipment

Important Information for Installers

Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing Milbank meter mounting equipment.

Before Energizing

1. Give equipment a thorough visual examination to determine that:
 - A. No shipping or installation damage exists.
 - B. Proper clearances have been maintained.
 - C. All connections have been made.
 - D. Equipment is clean and dry.
2. Make a thorough examination to:
 - A. Verify tightness of all bolted connections (see table below).
 - B. Manually operate all circuit breakers, switches, relays, etc.
 - C. Check rigidity of all mountings, bus bars and components.
 - D. Use test equipment to check continuity of circuitry and integrity of insulation.
3. All switches and circuit breakers should be in the "off" position.
4. Verify that manual meter bypass (if applicable) is in non-bypass position.
5. Install cover and/or close doors.
6. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

Use caution and follow established safety procedures:

- 1) Wear safety apparel.
- 2) Use safety equipment.
- 3) Take action to prevent injury to yourself and others in the event of failure of the installation.
- 4) Take action to prevent/decrease damage to property in the event of failure of the installation.
- 5) If you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

After Energizing

Secure the installation:

- 1) To prevent accidental contact with energized parts, cover all openings with approved filler devices.
- 2) To prevent unauthorized access, secure all covers and/or doors with approved security devices.
- 3) Attach/post information to advise others of potential hazards associated with the installation.

Recommended Torque for General Applications*

Nominal Size	Joint Description		Head Type	Torque (Inch Lbs.)
	Screw	Nut		
10	Brass	Brass Nut or Extruded Hole	All	20-25 inch lbs.
10	Steel	Copper or Aluminum Busbar \leq 1/8"	All	25-30 inch lbs.
10	Steel	Steel Nut or Extruded Hole; CU or AL Busbar $>$ 1/8"	All	30-35 inch lbs.
12	Steel	Aluminum Extruded Hole	All	30-35 inch lbs.
12	Steel	Steel Nut or Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Aluminum Extruded Hole	All	40-50 inch lbs.
1/4	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	All	50-60 inch lbs.
5/16	Steel	Aluminum Extruded Hole	Hex	60-70 inch lbs.
5/16	Steel	Steel Nut or Extruded Hole; CU or AL Busbar	Hex	100-150 inch lbs.
3/8	Steel	Steel Nut	Hex	150-200 inch lbs.
1/2	Steel	Steel Nut	Hex	200-250 inch lbs.

* Interior labels typically indicate the required torque for wire connectors and studs, and should be referenced first.
CU: Copper
AL: Aluminum



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Materials & Finishes

Reference Information

Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to afford the best possible weather proofing.
*American Iron and Steel Institute.

Steel Sheet

16 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90)
14 gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-Terminals: Alloy; 6061-T6, Tin-plated for CU/AL wire.
Bus Bar: Alloy; 6101-O & 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064-.125

Copper Sheet & Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant, thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather resistant finish, please contact the factory.

Metal Fastners

Zinc-coated with a chromate dip.

Ratings & Compliance

Ratings & Compliance

All Milbank electrical enclosures in this catalog are rated "Type 3R Enclosure" unless specified otherwise on the product's page. All enclosures with a UL designation are constructed per the appropriate UL Standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



6002.....	53	Q135H.....	51	TS04-0102	42
6003.....	53	Q140.....	51	TS04-0103	42
6116.....	53	Q140H.....	51	TS04-0104	42
5T8K2	54	Q150.....	51	TS07-0018	42
A7514	52	Q150H.....	51	TS07-0022	42
A7515	52	Q160.....	51	TS07-0049	42
A7516	52	Q160H.....	51	TS07-0059	42
A7517	52	Q170.....	51	TS07-0105	42
A7518	52	Q170H.....	51	TS07-0106	42
A7551	52	Q2100.....	51	TS07-0107	42
A8110	52	Q2100H.....	51	TS07-0108	42
A8111	52	Q2125.....	51	TS10-0109	42
A8112	52	Q2125H.....	51	TS10-0110	42
A9064	52	Q215.....	51	TS10-0111	42
BL7474	54	Q215H.....	51	TS10-0112	42
CP-21.....	53	Q220.....	51	U1252-X-K1	29
K1047	53	Q220H.....	51	U1253-X-K3	29
K1190	54	Q225.....	51	U1254-X-K3	29
K1190	54	Q225H.....	51	U1255-X-K4	29
K1350	36	Q230.....	51	U1256-X-K4	29
K1350	53	Q230H.....	51	U1780-O	26
K1350L	53	Q235.....	51	U1855-O-NE	43
K1539	36	Q235H.....	51	U1856-O-NE	43
K1539	53	Q240.....	51	U1980-O	12
K1540	36	Q240H.....	51	U2264-XL	26
K1540	53	Q250.....	51	U2272-RL-5T9-BL	13
K1540L	53	Q250H.....	51	U2288-X	37
K1541	36	Q260.....	51	U2448-X	18
K1541	53	Q260H.....	51	U2594-X	19
K3082	53	Q270.....	51	U2601-XL	28
K3083	53	Q270H.....	51	U2692-XL	26
K3356	54	Q280.....	51	U2693-XL	26
K3441	53	Q280H.....	51	U2732-XT	34
K3442	53	Q290.....	51	U2733-XT	34
K3865	54	Q290H.....	51	U2734-XT	34
K3866	54	QN2150.....	51	U2735-XT	34
K4527	54	QN2150H.....	51	U2736-XT	34
K4528	54	QN2150R.....	51	U2752-X-5T9	32
K4977-EXT	54	QN2150RH.....	51	U2753-X-5T9	32
K4977-INT	54	QN2200.....	51	U2754-X-5T9	32
K5022-INT	54	QN2200H.....	51	U2755-X-5T9	32
K5T	54	QN2200R.....	51	U2756-X-5T9	32
M5-144	53	QN2200RH.....	51	U2852-X	36
Q115.....	51	-R	52	U2852-X	37
Q115H.....	51	-RL	52	U2853-X	36
Q120.....	51	S1857.....	44	U2853-X	37
Q120H.....	51	S2718-FB-XL-C	45	U2854-X	36
Q125.....	51	S3176-O	46	U2854-X	37
Q125H.....	51	S3390-FB-XL-C7	45	U2855-X	36
Q130.....	51	S4098-O	46	U2855-X	37
Q130H.....	51	S8324.....	52	U2856-X	36
Q135.....	51	TS04-0101	42	U2856-X	37



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

U2860-XL-5T9-QG.....	13	U4911-X-BL	19	UC7478-O-81-NOE	41
U2862-X.....	36	U5101-XL-11GR*	49	UC7532-XL	40
U2862-X.....	37	U5112-X-5T9-BL.....	31	UC7544-RL	39
U2863-X.....	36	U5113-X-5T9-BL.....	31	UC7545-RL	39
U2863-X.....	37	U5140-RXL-200-BL.....	21	UQFB-100.....	50
U2864-X.....	36	U5168-XTL-100-BL-NE	22	UQFB-100-X1	50
U2864-X.....	37	U5168-XTL-200-BL-NE	22	UQFB-125.....	50
U2865-X.....	36	U5750-RXL-200-BL	23	UQFB-125-X1	50
U2865-X.....	37	U5757-O-200.....	20	UQFB-150.....	50
U2866-X.....	36	U5767-X-200-CB-BL.....	25	UQFB-150-X1	50
U2866-X.....	37	U5777-O.....	12	UQFB-175.....	50
U2872-XT-5T9.....	33	U5787-O-200-CB.....	25	UQFB-175-X1	50
U2873-XT-5T9.....	33	U5796-X-400-CB-BL.....	25	UQFB-200.....	50
U2874-XT-5T9.....	33	U5799-O-400-CB-BL	25	UQFB-200-X1	50
U2875-XT-5T9.....	33	U5871-XL-200-BL	22	UQFBH-100.....	50
U2876-XT-5T9.....	33	U5898-O-200-BL	22	UQFBH-125.....	50
U3499-XL-100.....	20	U5934-XL-BLG	9	UQFBH-150.....	50
U3727-O	47	U6123-X-BL	35	UQFBH-175	50
U3730-O	47	U6124-X-BL	35	UQFBH-200.....	50
U3741-XL-100-BL	21	U6125-X-BL	35	UQFBH-M-100.....	50
U3763-XL.....	30	U7021-RL-TG	11	UQFBH-M-125.....	50
U3764-XL.....	30	U7040-O-TG	11	UQFBH-M-150.....	50
U3765-XL.....	30	U7040-XL-TG	11	UQFBH-M-175.....	50
U3771-XL-100-BL	23	U7362-DL	27	UQFBH-M-200.....	50
U3791N-RXL-200-BL	21	U7363-DL	27	UQFP-100.....	50
U3798-O-200.....	20	U7364-DL	27	UQFP-125.....	50
U3802	6	U7365-DL	27	UQFP-150.....	50
U3812	6	U7366-DL	27	UQFP-175.....	50
U3822-20GWR	7	U7487-O-TG	10	UQFP-200.....	50
U3832	6	U7487-RL-TG	10	UQFPH-100	50
U3862	6	U7487-YL-TG	10	UQFPH-125	50
U3924-XL.....	14	U7573-RL.....	13	UQFPH-150	50
U3989-XL-100.....	20	U8212-XL.....	28	UQFPH-175	50
U3990-XL-150.....	20	U8213-XL.....	28	UQFPH-200	50
U3990-XL-200.....	20	U8214-XL.....	28	UQFPH-M-100.....	50
U3995-XL-200.....	22	U8215-XL.....	28	UQFPH-M-125.....	50
U4031-O-2/200	24	U8216-XL.....	28	UQFPH-M-150.....	50
U4322-O-BL.....	48	U9318-RL.....	15	UQFPH-M-175.....	50
U4323-O-BL.....	48	U9319-XL.....	15	UQFPH-M-200.....	50
U4372-XT-5T9.....	38	U9550-RRL-QG	16	UQFP-M-100	50
U4373-XT-5T9.....	38	U9551-RXL-QG	16	UQFP-M-125	50
U4374-XT-5T9.....	38	U9700-RRL-QG-BL.....	17	UQFP-M-150	50
U4375-XT-5T9.....	38	U9701-RXL-QG.....	17	UQFP-M-175	50
U4376-XT-5T9.....	38	U9800-RRL-QG-BL-NE	14	UQFP-M-200	50
U4413-O-BL.....	12	U9801-RXL-QG	14	WBJ2150	51
U4611-X.....	19	UC1299-XL	39	WBJ2200	51
U4721-O-BL.....	14	UC4964-O-WC-21-NST	41	Z802965-AC	54
U4778-X-BL	18	UC4965-O-WC-21-NST	41	Z814898-AC	54
U4835-X-2/200-BL	24	UC4966-O-WC-21-NST	41	Z901925-AC	54
U4881-O-50GB.....	8	UC7444-O-141-NOE	41	Z904486-AO	54
U4881-O-60GB.....	8	UC7445-O-311-NOE	41	Z916264-AO	54
U4908-O-11GR*	49	UC7448-XL	40	Z916265-AO	54
U4910-O-BL.....	17	UC7449-XL	40		

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.






Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

Notes

67
NOTES

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



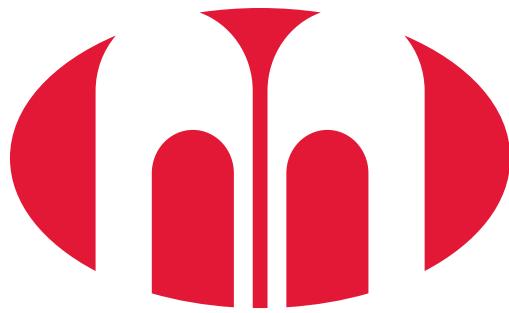

MILBANK®
ENERGY AT WORK

HOLBROOK-ASSOCIATED

Electrical Manufacturer's Representatives

35 Reservoir Park Drive, Rockland, MA 02370

p: 781.871.0011

1.800.322.9641 (New England Area Only)

f: 781.871.2956

holbrook-associated.com

