

# Top-SI Coax

HS240\_IB50FSJ 1.4




## GENERAL PRODUCT INFORMATION:




This product is ETL listed and suitable only for indoor dry locations and approved for use at any height above the finished floor.

**CAUTION - RISK OF FIRE**  
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**



## Install the Lamp

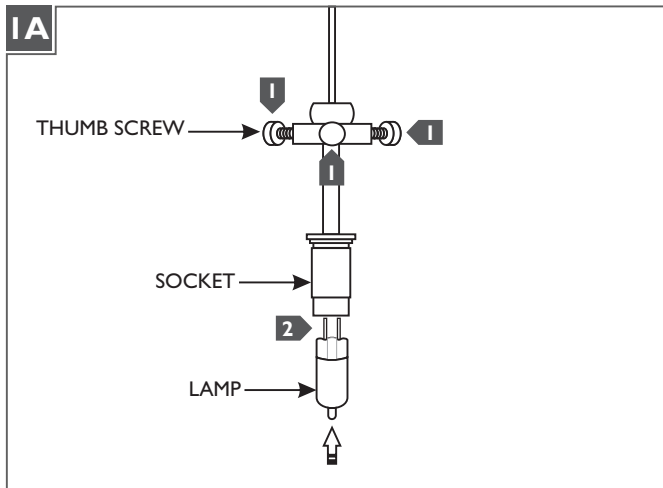

**1** Remove the three thumb screws.


**NOTE:** To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

**NOTE:** Use only your fingers and soft cloth to replace the lamp.

Use **MAX 50 Watt**, Type Xelogen (Xenon) Bi-Pin Lamp.


**2** Push the lamp pins completely into the socket holes.

**WARNING: RISK OF FIRE**  
 Never replace a Xenon (Xelogen) lamp with a regular Halogen lamp. A regular Halogen lamp requires a protective glass shield.

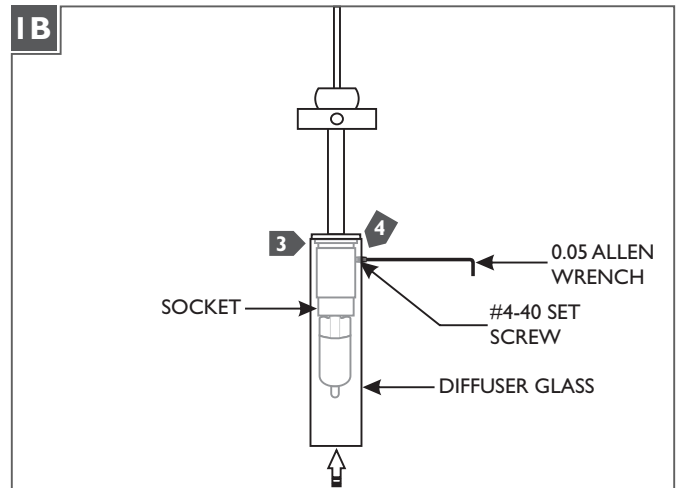


**3** Carefully slide the diffuser glass completely onto the socket, align the diffuser glass hole with the socket #4-40 set screw.

**4** Slightly back out the #4-40 set screw with the 0.05 Allen wrench to hold the diffuser glass in place.

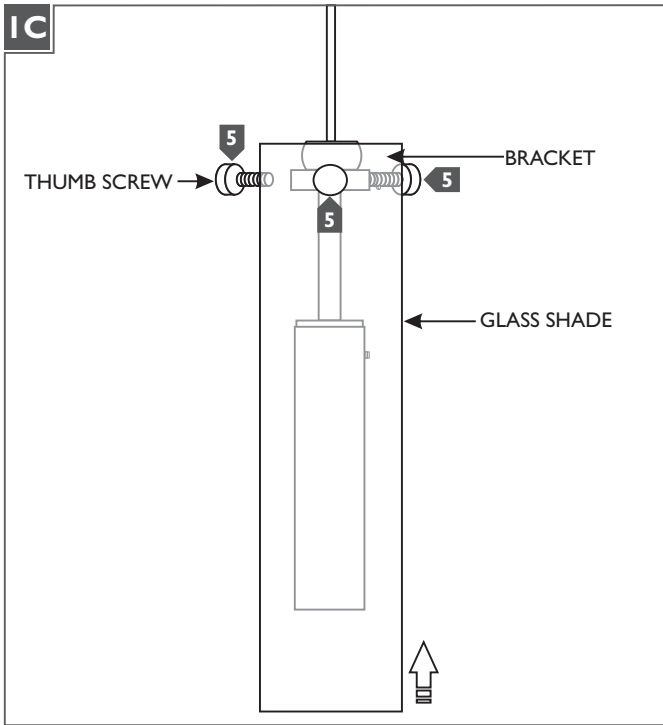


- 5** Align the glass shade holes with the bracket holes. Replace and tighten the three thumb screws to secure the glass shade in place. Adjust the thumb screws if the glass is not level.


## Adjust the Fixture Height

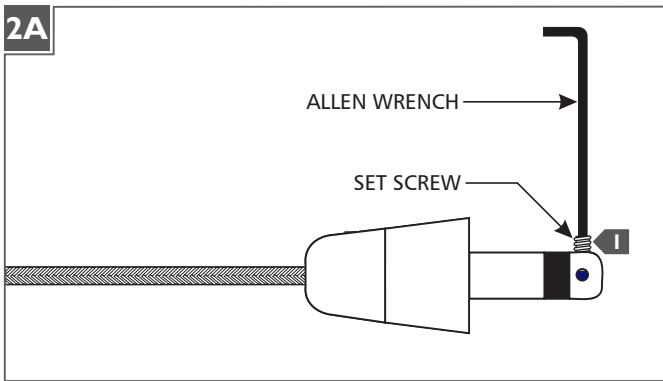


- 1** Back out (do not remove) the set screw on tip of the connector with the provided Allen wrench.

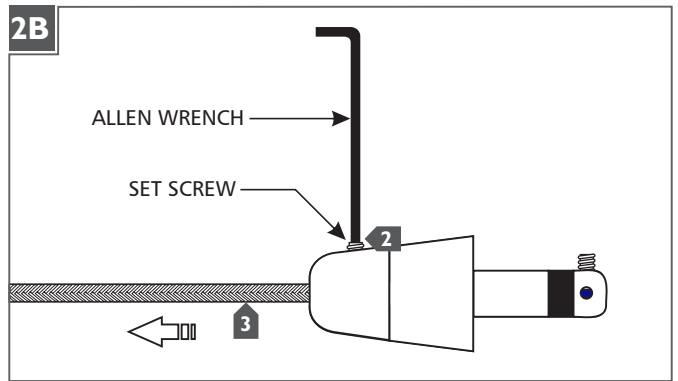


- 2** Back out (do not remove) the set screw on the conical connector with the provided Allen wrench.
- 3** Pull the coaxial cable out.

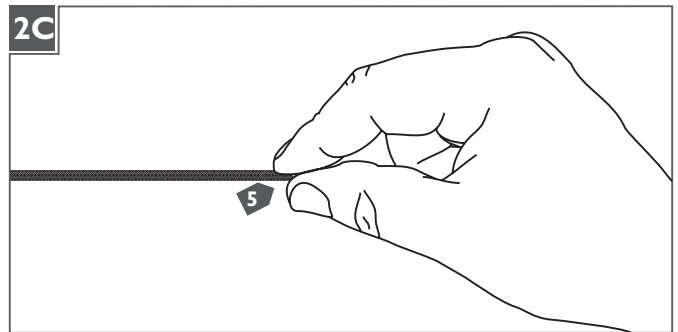


- 4** Cut the coaxial cable to the desired length.
- 5** Gently twist the end of the coaxial cable between thumb and forefinger.

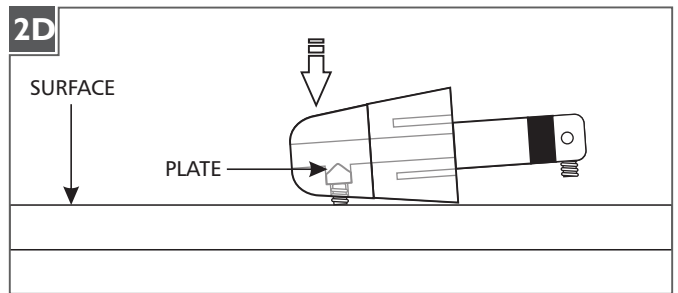


- 6** Tap the conical connector on a hard surface with the set screw facing down, so the plate inside drops into place.

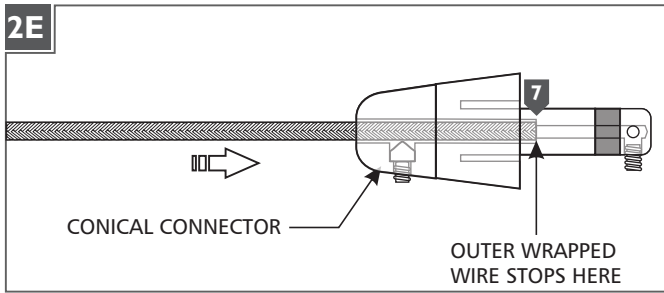

**7** Feed and push the coaxial cable into the conical connector. The coaxial cable will come to a stop point after being inserted 3/4" into the conical connector.

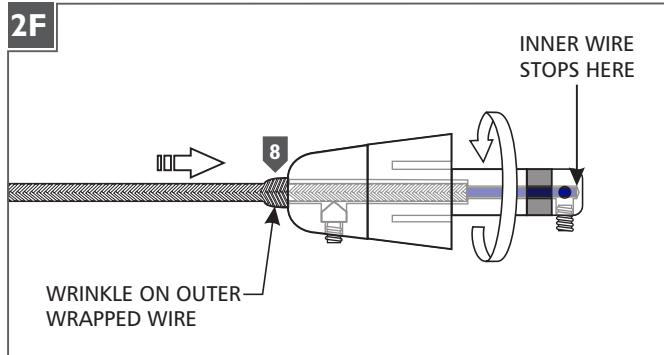


**8** Keep pushing the coaxial cable into the connector while rotating the connector to ease feeding the inner wire into the tip of the connector. The outer wrapped wire will start wrinkling while being inserted another 1/2" into the connector.

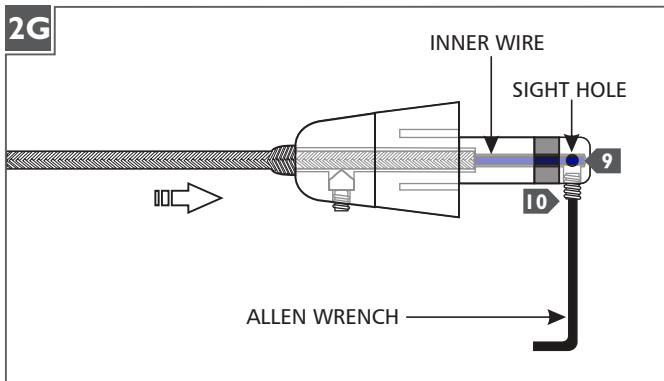


**9** Look into the sight hole on the top of the connector to make sure that the inner wire is contacting the end of the connector.

**10** Hold the coaxial cable in place and tighten the set screw on tip of the connector with the provided Allen wrench. Make sure this set screw connection is tight.

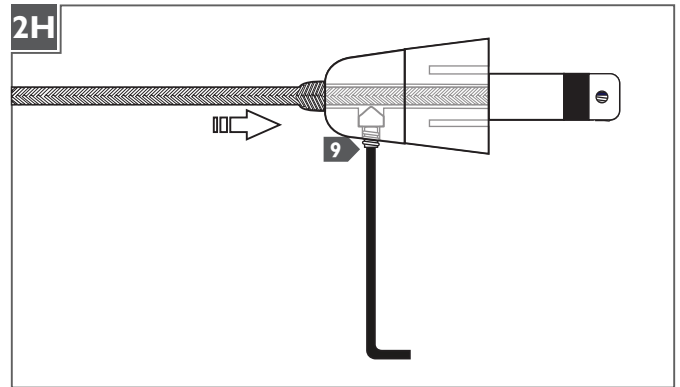

**11** Firmly tighten the set screw on the conical connector.

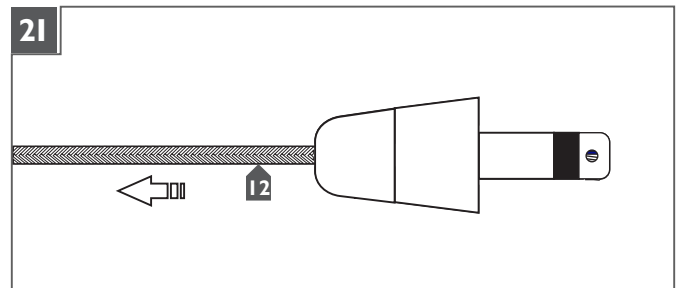

**12** Pull the coaxial cable toward the fixture to smooth the wrinkles.

**SAVE THESE INSTRUCTIONS!**

**LBL**

7400 Linder Ave, Skokie, IL 60077

800.323.3226 - 847.626.6300

**[www.lblighting.com](http://www.lblighting.com)**

© 2013 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company