

ILLUMATECH[™]

Cat. Nos.
IPI06-1L
IPI10-1L
IPM06-1L
IPM10-1L

Single Pole (One location) or
3-Way (Multi-location)

120VAC, 60Hz

Incandescent

Cat. No. IPI06-1L, 600W (Lighted)

Cat. No. IPI06-10, 600W

Cat. No. IPI10-1L, 1000W (Lighted)

Magnetic Low-Voltage

Cat. No. IPM06-1L, 600VA (Lighted)

Cat. No. IPM10-1L, 1000VA (Lighted)

INSTALLATION INSTRUCTIONS



PK-92943-10-00-0A

LIMITED 2 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for two years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such two year period the product is returned prepaid, with proof of purchase date, and a description of the problem to **Leviton Manufacturing Co., Inc., Att: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591** (In Canada send to **Leviton Mfg. of Canada Ltd., 165 Hymus Blvd., Point Claire, (Quebec), Canada H9R 1E9**). This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to two years. Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation. The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

For Technical Assistance Call:
1-800-824-3005 (U.S.A. Only)
1 800 405-5320 (Canada Only)
www.leviton.com

FEATURES

- Leviton's Decora[®] style design
- Minimum Brightness Adjustment
- Large ON/OFF switch
- Color conversion available
- ON/OFF indicates status of load

INSTALLATION INSTRUCTIONS

WARNING: TO BE INSTALLED AND/OR USED IN ACCORDANCE WITH APPROPRIATE ELECTRICAL CODES AND REGULATIONS.

WARNING: IF YOU ARE NOT SURE ABOUT ANY PART OF THESE INSTRUCTIONS, CONSULT A QUALIFIED ELECTRICIAN.

WARNING: TO AVOID OVERHEATING AND POSSIBLE DAMAGE TO THIS DEVICE AND OTHER EQUIPMENT, DO NOT INSTALL TO CONTROL A RECEPTACLE, FLUORESCENT LIGHTING, A MOTOR- OR A TRANSFORMER-OPERATED APPLIANCE OTHER THAN APPROPRIATE LOW-VOLTAGE LIGHTING.

CAUTION (For Incandescent Only): USE WITH INCANDESCENT OR 120V HALOGEN FIXTURES ONLY.

CAUTION (For Magnetic Low-Voltage Only):

1. USE WITH MAGNETIC LOW-VOLTAGE TRANSFORMERS, INCANDESCENT, OR 120V HALOGEN FIXTURES ONLY. USE A LEVITON ELECTRONIC LOW-VOLTAGE DIMMER TO CONTROL ELECTRONIC (SOLID STATE) LOW-VOLTAGE TRANSFORMERS.
2. WHEN A MAGNETIC LOW-VOLTAGE CIRCUIT IS OPERATED AT A DIM LEVEL, WITH ALL LAMPS INOPERATIVE, EXCESS CURRENT MAY FLOW THROUGH THE TRANSFORMER. TO AVOID POSSIBLE TRANSFORMER FAILURE DUE TO OVERCURRENT, USE A TRANSFORMER THAT INCORPORATES THERMAL PROTECTION OR A FUSE AT THE PRIMARY WINDINGS.

OTHER CAUTIONS:

1. USE ONLY ONE (1) DIMMER PER LOAD. THE SWITCH(ES) WILL TURN THE LIGHT ON AT THE BRIGHTNESS LEVEL SELECTED AT THE DIMMER.
2. DISCONNECT POWER WHEN SERVICING OR CHANGING LAMPS.
3. USE THIS DEVICE ONLY WITH COPPER OR COPPER CLAD WIRE. WITH ALUMINUM WIRE USE ONLY DEVICES MARKED CO/ALR OR CU/AL.

MULTI-GANG INSTALLATION:

When ganging dimmers, the side sections of the mounting strap must be removed. Use pliers to carefully bend side sections back and forth until they break off (see Figure 1). The side sections dissipate heat, so removing them requires a derating of the dimmer's capacity (see chart).

MAXIMUM BULB WATTAGE (For Magnetic Low-Voltage Only):

Low-voltage dimmers are rated in Volt-Amps (VA). The maximum bulb wattage is determined by the efficiency of the transformer in the low-voltage lighting system. Transformer efficiencies will vary from different manufacturers; consider 75% efficient as average. Use the chart to determine maximum bulb wattage for typical transformer efficiency ratings.

TO INSTALL:

1. **WARNING:** TO AVOID FIRE, SHOCK, OR DEATH; TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT POWER IS OFF BEFORE WIRING!
2. Remove existing wallplate and switch, if applicable.
3. Remove 3/4" (1.9 cm) of insulation from each circuit conductor. Make sure the ends of wires are straight.
4. Connect lead wires per appropriate WIRING DIAGRAM as follows: **WARNING: CONNECT A MAGNETIC LOW-VOLTAGE DIMMER ONLY TO THE PRIMARY (HIGH-VOLTAGE) SIDE OF A MAGNETIC LOW-VOLTAGE TRANSFORMER. Note: Common terminal of a 3-Way Switch is usually labeled AND/OR BLACK.** Twist strands of each lead tightly and, with circuit conductors push firmly into appropriate wire connector. Screw connectors on clockwise making sure that no bare conductor shows below the wire connectors. Secure each connector with electrical tape.

NOTE: For single pole applications, cap one BLACK lead with an appropriate size wire connector. Secure connector with electrical tape.


NOTE: This model incorporates a trim adjustment which will allow the installer to precisely set the low end of the dimming range to suit each installation. This adjustment is preset at the factory and should require no further adjustments for most installations. If adjustment is required proceed as follows, otherwise continue with step 8:

5. Restore power at circuit breaker or fuse. Press the ON/OFF push-button switch several times (see Figure 1). The GREEN LED will turn ON and OFF indicating power to the switch.

MAXIMUM LOAD PER DIMMER FOR MULTI-GANG			
Cat. No.	Single	Two Gang	More than 2 Gang
IPI06-1L	600W	500W	400W
IPI06-10	600W	500W	400W
IPI10-1L	1000W	800W	700W
IPM06-1L	600VA	500VA	400VA
IPM10-1L	1000VA	800VA	700VA

MAXIMUM BULB WATTAGE AT 75% EFFICIENCY			
Rating	Single	Two Gang	More than 2 Gang
600VA	450W	375W	300W
1000VA	750W	600W	525W

Figure 1 - Dimmer Functions

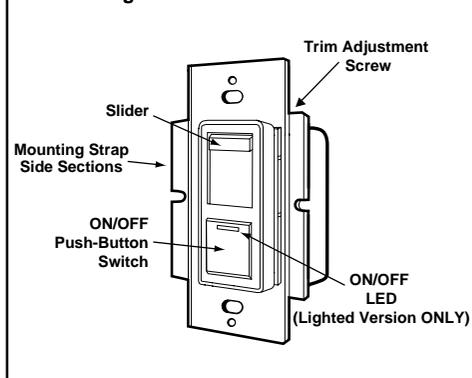

PK-92943-10-00-0A

Set the push-button to the ON position (GREEN LED OFF). Position the slider to the minimum brightness level (bottom of stroke).

- The brightness adjustment is located at the top of the dimmer back cover (see Figure 1). Using a small, insulated screwdriver, rotate the trim adjustment until the desired level of minimum brightness is obtained.
- Check for proper operation by raising the slider to its maximum position and returning to minimum (bottom of stroke). With slide at bottom, turn lights OFF then ON with push-button switch. Lights should come on at adjusted minimum brightness. If operation is not satisfactory, repeat step 6. When the brightness level is adjusted to satisfaction, **TURN OFF POWER**.
- Installation may now be completed by carefully positioning all wires to provide room in outlet box for dimmer. Mount dimmer into box with mounting screws supplied. Attach Decora® wallplate.
- Restore power at circuit breaker or fuse. **INSTALLATION IS COMPLETE.**

COLOR CONVERSION PROCEDURE

The color of this device can be changed to suit your interior design requirements. Simply obtain a color conversion kit of the appropriate color from your Leviton distributor and proceed as follows (please note that wallplate must be removed).

- Select the color of the face you desire.
- The frame has snaps on its sides. Using your fingers, grip around the Decora® frame and push on one side to release it from the strap (see Figure 2).
- Take the new frame and position it properly to the strap. Line up the plastic snaps with the square holes in the strap. Insert the snaps on one side of the frame into the strap.
- Firmly press sideways and down to slip the other snaps into place. The frame snaps in with a audible click. Ensure that all four snaps are secure.
- Moving the slider up or down will automatically engage the slider control mechanism. Replace Decora® wallplate. **The color conversion is complete.**


TO OPERATE

- GREEN LED will remain ON when the lights are OFF - Facilitates access to switch in the dark (**Lighted Device ONLY**).
- Depress push-button switch to ON position - Lights will turn ON (**GREEN LED will turn OFF - Lighted Device ONLY**).
- Move slider control lever - Lights will brighten or dim to level set.
- Depress push-button switch to OFF position - Lights will turn OFF (**GREEN LED will turn ON - Lighted Device ONLY**).
- Lights will turn ON at set brightness level (from either switch location in a 3-way installation).


TROUBLESHOOTING

- Light does not turn ON and ON/OFF LED does not turn ON
 - Circuit breaker or fuse has tripped.
 - Lamp is burned out.
 - Lamp is not connected to line Neutral.
- Lights Flickering
 - Lamp has a bad connection.
 - Wires not secured firmly with wire connectors.


Figure 2 - Color Conversion

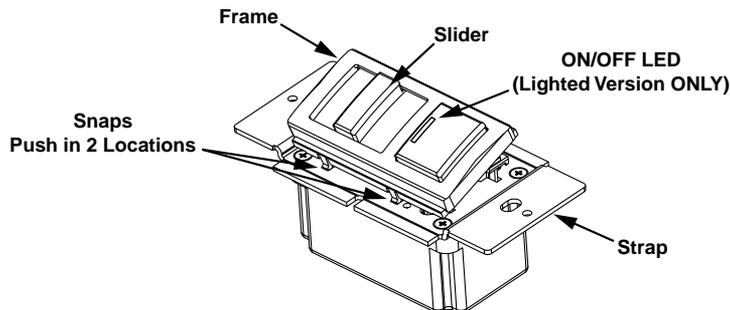

Wiring Diagram 1 - Single Location Control Application

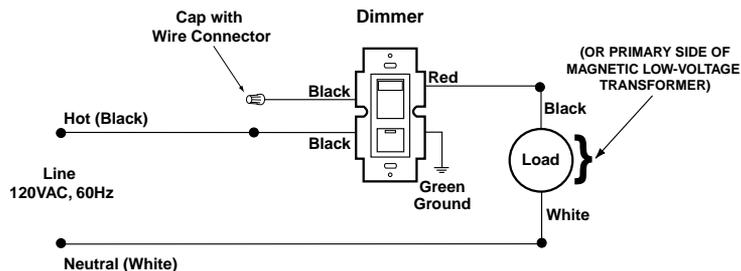

Wiring Diagram 2 - Two Location Control Application

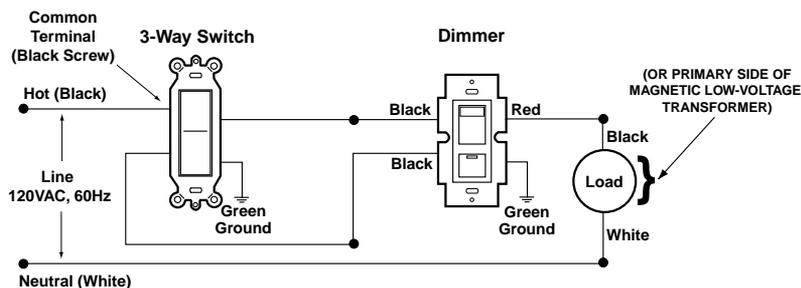

Wiring Diagram 3 - Three Location Control Application

