

### Warning, Cautions and operating instructions

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


### Warning: Risk of fire or electrical shock

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.


### Caution: Risk of injury

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.


### General Wiring Diagram

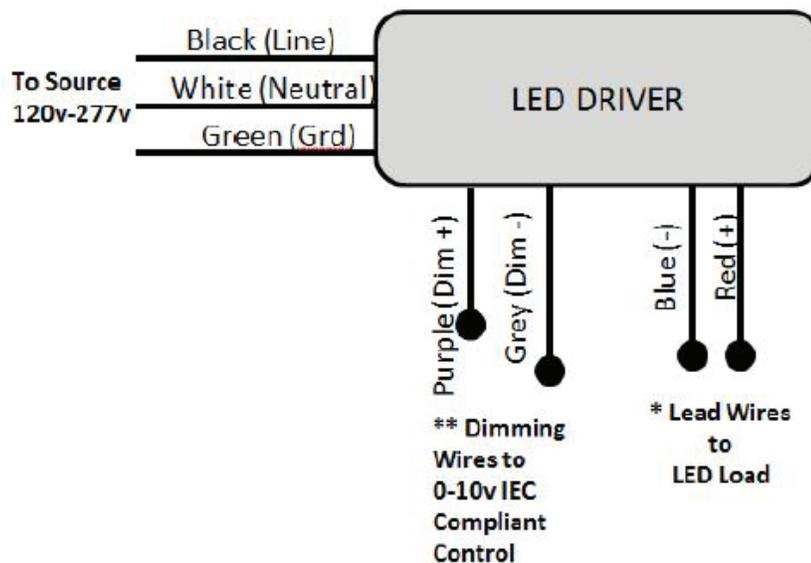

Model shown for reference only

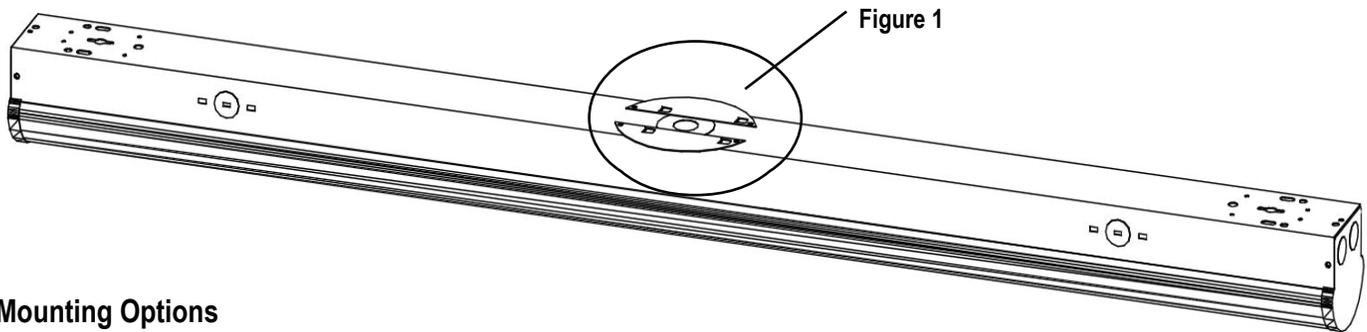

## Mounting Options

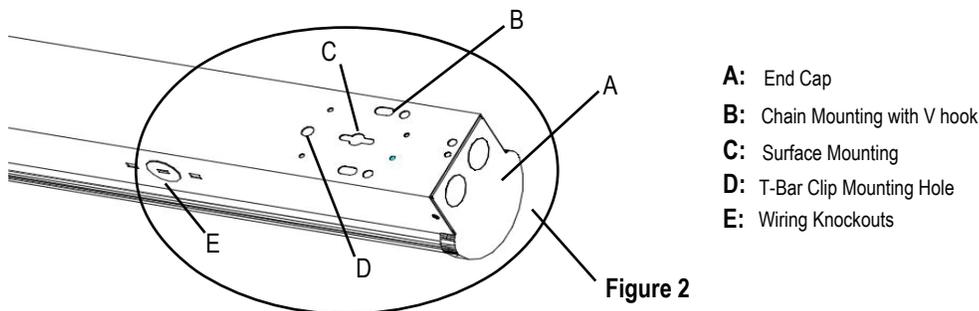

## Installation Step:

Always turn off the power supply from main circuit breaker first!

### **B:** Chain Mounting with V hook

Attach customer supplied V-Hooks to each end of the luminaire base. Attach customer supplied chain to the V-hooks and mounting surface.

### **C:** Surface Mounting

Secure luminaire base to mounting surface by inserting customer supplied #8 anchor screws, toggle bolts or suitable fasteners, depending on structural conditions, into key hole slots on the top side of the luminaire base.

### **D:** T-Bar Clip Mounting Hole

Attach customer supplied T-Bar clips to the designated opening on the luminaire as show in Figure 2. Bring luminaire into T-Bar ceiling grid and secure luminaire to grid.

**NOTE:** (Please see Figure 1, Rear of Base is provided with holes for mounting.)

