





IMPORTANT SAFETY INSTRUCTIONS

LUMATILT UPLIGHT ANGLE MOUNTING BRACKET

READ AND FOLLOW ALL SAFETY INSTRUCTIONS!
SAVE THESE INSTRUCTIONS AND DELIVER TO OWNER AFTER INSTALLATION

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Installation and service of luminaires should be performed by a **qualified licensed electrician**.
- Maintenance of the luminaires should be performed by person(s) familiar with the luminaires' construction and operation and any hazards involved. Regular fixture maintenance programs are recommended.
- It will occasionally be necessary to clean the outside of the refractor/lens. Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user. Refractor/lens should be washed in a solution of warm water and any mild, non-abrasive household detergent, rinsed with clean water and wiped dry. Should optical assembly become dirty on the inside, wipe refractor/lens and clean in above manner, replacing damaged gaskets as necessary.
- **DO NOT INSTALL DAMAGED PRODUCT!** This luminaire has been properly packed so that no parts should have been damaged during transit. Inspect to confirm. Any part damaged or broken during or after assembly should be replaced.
- If the lamp is marked (Hg) it contains Mercury. Follow all disposal laws. See www.lamprecycle.org.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to Acuity Brands Lighting, Inc.

 <div style="text-align: center; border: 1px solid black; padding: 5px; margin-bottom: 10px;"> WARNING RISK OF ELECTRIC SHOCK </div> <ul style="list-style-type: none"> ✓ Disconnect or turn off power before installation or servicing. ✓ Verify that supply voltage is correct by comparing it with the luminaire label information. ✓ Make all electrical and grounded connections in accordance with the National Electrical Code (NEC) and any applicable local code requirements. ✓ All wiring connections should be capped with UL approved recognized wire connectors. 	 <div style="text-align: center; border: 1px solid black; padding: 5px; margin-bottom: 10px;"> WARNING RISK OF BURN </div> <ul style="list-style-type: none"> ✓ Allow lamp/fixture to cool before handling. Do not touch hot lens, lamp, guard, or enclosure. ✓ Do not exceed maximum wattage marked on luminaire label. ✓ Follow all lamp manufacturer's warnings, recommendations and restrictions on lamp operation including but not limited to: ballast type, burning position, replacement, and recycling. ✓ Use only lamps that comply with ANSI standards.
 <div style="text-align: center; border: 1px solid black; padding: 5px; margin-bottom: 10px;"> CAUTION RISK OF INJURY </div> <ul style="list-style-type: none"> ✓ Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance. ✓ Avoid direct eye exposure to the light source while it is on. 	 <div style="text-align: center; border: 1px solid black; padding: 5px; margin-bottom: 10px;"> CAUTION RISK OF FIRE </div> <ul style="list-style-type: none"> ✓ Keep combustible and other materials that can burn away from lamp/lens. ✓ Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.

Please see product specific installation instructions for additional warnings or any applicable FCC or other regulatory statements.

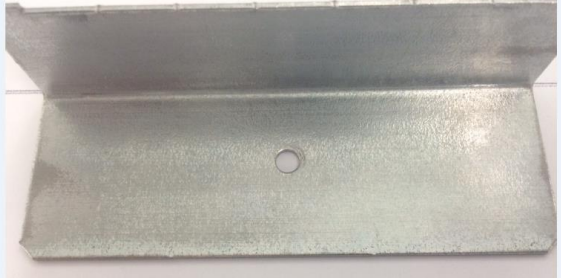
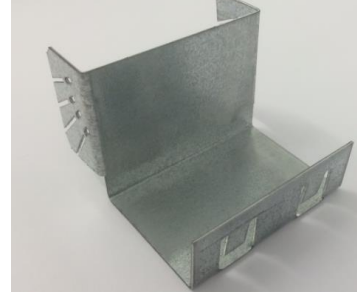
Failure to follow any of these instructions could void product warranties.

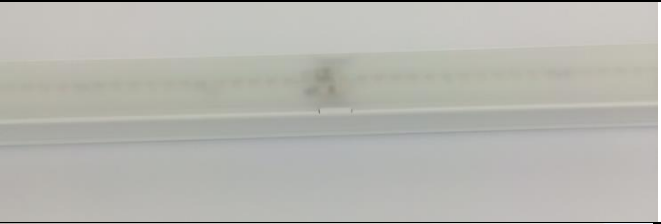


For a complete listing of product Terms and Conditions, please visit www.acuitybrands.com.

Our Brands	Indoor/Outdoor Lithonia Lighting Carandini Holophane RELOC Light Concepts	Indoor Lighting Gotham Mark Architectural Lighting Peerless Renaissance Lighting Winona Lighting	Outdoor Lighting American Electric Lighting Antique Street Lamps Hydrel Tersen	Controls DARK TO LIGHT LC&D ROAM Sensor Switch Synergy	Daylighting SunOptics
-------------------	---	--	---	--	---------------------------------

Acuity Brands Lighting, Inc. assumes no responsibility for claims arising out of improper or careless installation or handling of its products.

Warning: This is an upright angle mount bracket only. It is intended only for fixtures that are placed on a flat and stable surface facing the fixture upwards. The bracket will not work if the fixture is facing downwards, and will fall out of the bracket, and create a fall hazard. Do not use for ceiling mount, or wall mount. The surface can be any surface where the fixture will stay in spot without any mounting equipment. If the fixture falls or moves after you have let it go, then that surface is not flat, and this upright angle mount bracket is not intended for that surface.

	
<p>Mounting Bracket</p>	<p>Angle Bracket</p>

Instruction	Photo
<p>1. Place the fixture on the surface where the upright angle bracket will be installed. The surface should be a flat, where the fixture can rest on it without moving.</p>	
<p>2. Use a pen to mark one side of the fixture in order to align the mounting brackets to the fixture</p>	
<p>3. Draw two lines as shown in the photo.</p>	

4. Place one of the two L shaped mounting bracket on the line. The open side of the L should face the opposite direction of the direction the way Strip fixture will be angled.

Example: in this picture the open side of the L is facing left, so the light fixture will be angled to the right.



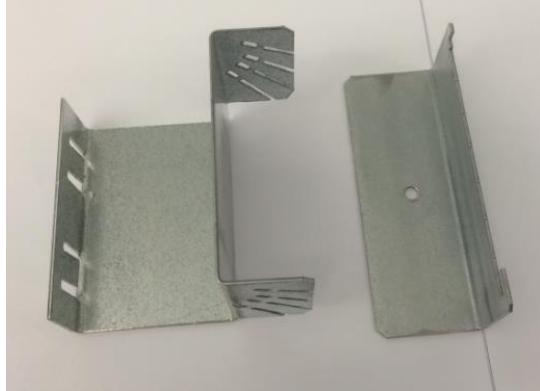
5. For a 4ft linear strip, place the second mounting bracket at least 12 inches apart for stability. In the photo, the brackets are separated by 2ft.



6. Secure the mounting bracket with screws suitable for mounting surface. (screws not provided)



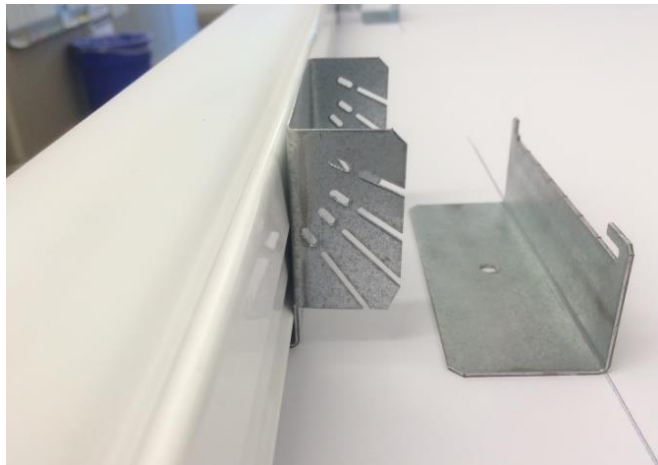
7. Place the angle bracket in front of the mounting bracket. Do that for both sets



8. Place the fixture facing up inside the angle bracket channel. Push the fixture down inside the angle bracket for a snug fit.



9. Once the strip fixture is inside the angle bracket, review the four slots in the angle bracket for the correct one for the desired angle – 35, 45, 55, and 65 degrees.



10. Slide down the chosen angle slot of the angle bracket onto the mounting bracket. Slide sideways to secure the fixture.



11. The fixture should now be facing at an angle in the chosen direction.

