Meter Pack



Contents

Description	Page
Systems for Residential and Commercial Applications	V1-T5-92
Meter Packs	
Type CCV 120/240V Tenant Main Circuit Breaker	V1-T5-99
Meter Packs—1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-100
Main Service Modules	V1-T5-103
Surge Metering	V1-T5-117
Residential Meter Stacks	V1-T5-118
1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-127
Phase Balanced Stack	V1-T5-128
Commercial Meter Stack Modules	V1-T5-129
Main Tenant Circuit Breakers	V1-T5-136


Meter Packs

Product Overview

- Eaton's 1MP units are self-contained (main terminal box included) for installations requiring up to six meter socket positions in a single enclosure
- Units are not gangable with any other metering device
- Approved by major power companies, UL listed, suitable as service equipment and meet the service and electrical requirements of EUSERC and CECHA
- Series rating up to 100 kAIC
- All ringless cover devices include fifth jaw as standard
- Ring type devices do not include fifth jaw as standard. Order 1MM5JK if needed

- Bondable neutral
- 120/240 Vac, single-phase three-wire metering device
- Up to 600A maximum horizontal bus rating
- Incoming lugs not included (phase A, phase B and neutral)
- Indoor/outdoor construction
- Provision for two-pole breaker (plug-on type for 125A sockets and bolt-on type for 200A sockets) circuit breakers not included
- Underground incoming feed
- Aluminum or copper bus

Catalog Number Selection

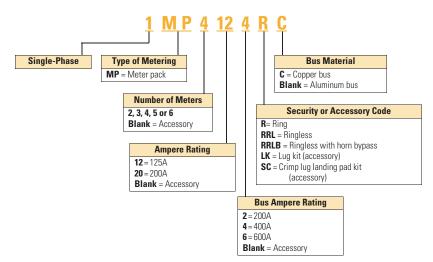

When Ordering:

- 1. Determine catalog number of the basic device.
- 2. Include Lug Kit for incoming section. See Page V1-T5-98.
- 3. Find quantity and catalog numbers for tenant circuit breakers. (Order one breaker per socket.) See Page V1-T5-98.
- 4. Select required accessories. See Page V1-T5-138.

Product Selection

Meter Packs

Aluminum Bus—Main Lugs Not Included—See Page V1-T5-98

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type (See Page V1-T5-98)	Catalog Number	Semi-Flush Flange Kit Catalog Number
Ring Style N	leter Socket Covers	3 ①			
125 ②	2 4	200	Plug-on type	1MP2122R 5®	1MPSFK1
125 ②	3	400	BR_	1MP3124R [®]	1MPSFK2
125 ^②	4	400	BRH_	1MP4124R [®]	1MPSFK2
125 ②	5 4	600	BRHH_	1MP5126R [®]	1MPSFK3
125 ②	6 4	600	_	1MP6126R ®	1MPSFK3
200 ③	2	400	Bolt-on type	1MP2204R ®	1MPSFK4
200 ③	3	600	CC2_X	1MP3206R [®]	1MPSFK5
200 ③	4	600	CHH2_H2X	1MP4206R ®	1MPSFK5
200 ③	5	600	CHH2_H4X	1MP5206R ®	1MPSFK6
200 ③	6	600	CHH_X	1MP6206R ®	1MPSFK6
Ringless Sty	le Meter Socket Co	vers ①			
125	2	200	Plug-on type	1MP2122RRL 58	1MPSFK1
125	3	400	BR_	1MP3124RRL ®	1MPSFK2
125	4	400	BRH_	1MP4124RRL ®	1MPSFK2
125	5	600	BRHH_	1MP5126RRL ®	1MPSFK3
125	6	600	_	1MP6126RRL ®	1MPSFK3
200	2	400	Bolt-on type	1MP2204RRL ®	1MPSFK4
200	3	600	CC2_X	1MP3206RRL ®	1MPSFK5
200	4	600	CHH2_H2X	1MP4206RRL ®	1MPSFK5
200	5	600	CHH2_H4X	1MP5206RRL ®	1MPSFK6
200	6	600	CHH_X	1MP6206RRL ®	1MPSFK6
Ringless Sty	le Covers with Hor	n Bypass ⑦			
125	2	200	Plug-on type	1MP2122RRLB 58	1MPSFK1
125	3	400	BR_	1MP3124RRLB 69	1MPSFK2
125	4	400	BRH_	1MP4124RRLB 69	1MPSFK2
125	5	600	BRHH_	1MP5126RRLB 69	1MPSFK3
125	6	600	_	1MP6126RRLB 69	1MPSFK3
200	2	400	Bolt-on type	1MP2204RRLB 69	1MPSFK4
200	3	600	CC2_X	1MP3206RRLB 69	1MPSFK5
200	4	600	CHH2_H2X	1MP4206RRLB 69	1MPSFK5
200	5	600	CHH2_H4X	1MP5206RRLB 69	1MPSFK6
200	6	600	CHH_X	1MP6206RRLB 69	1MPSFK6

Notes

- ① Ring Style Meter Packs do not come with fifth jaw. Order **1MM5JK** if needed.
- ② To change in field from ring to ringless—order 1MMRC125.
- ① To change from ring to ringless covers, the top socket only in 2, 5 and 6 socket designs—order 1MMRC125T. Top socket only.
- (a) Main lugs included. #6-300 kcmil. (Optional lugs are not available.)
- [®] For overhead use, order DS_H2 type hub.
- Fifth jaw factory installed at 9 o'clock position.
- ${}^{\circledR}$ For overhead use, order DS type hub.
- To order with raceway provision in bottom endwall, add "T" suffix to the catalog number. Trough accessory catalog number is 1008934CH.
- See Page V1-T5-98 for Main Lug Kit selection and Wire Sizes.