



Locking Devices

E

NEMA Locking Devices.....	E-2
15 Amp Locking Devices.....	E-5
20 Amp Locking Devices.....	E-7
30 Amp Locking Devices.....	E-10
Non-NEMA Locking Devices	E-14
15 Amp Non-NEMA Locking Devices	E-14
20 Amp Non-NEMA Locking Devices	E-15
30 Amp Non-NEMA Locking Devices	E-16
50 Amp Non-NEMA Locking Devices	E-17
Plug & Connector Boots.....	E-20
Watertight Wetguard® Plugs, Connectors, Inlets, Outlets & Receptacles	E-22
Midget Locking Devices	E-26
Combo Locking & Straight Blade Receptacles...	E-27
Integrated Devices.....	E-28




NEMA Locking Devices


Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

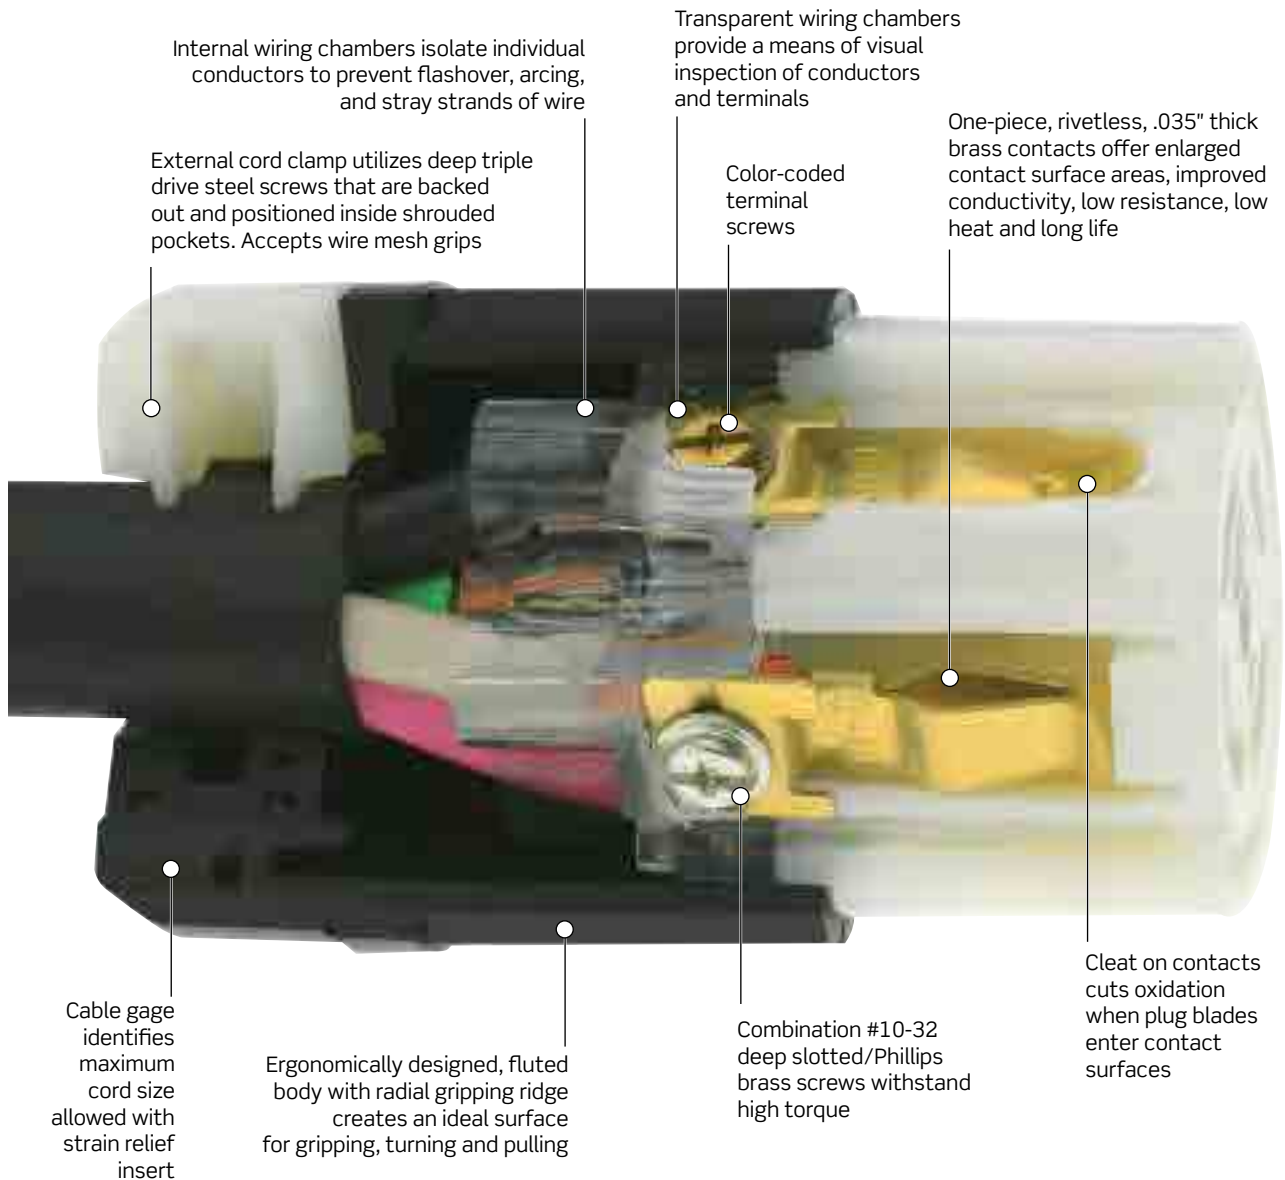

Exposed Plug

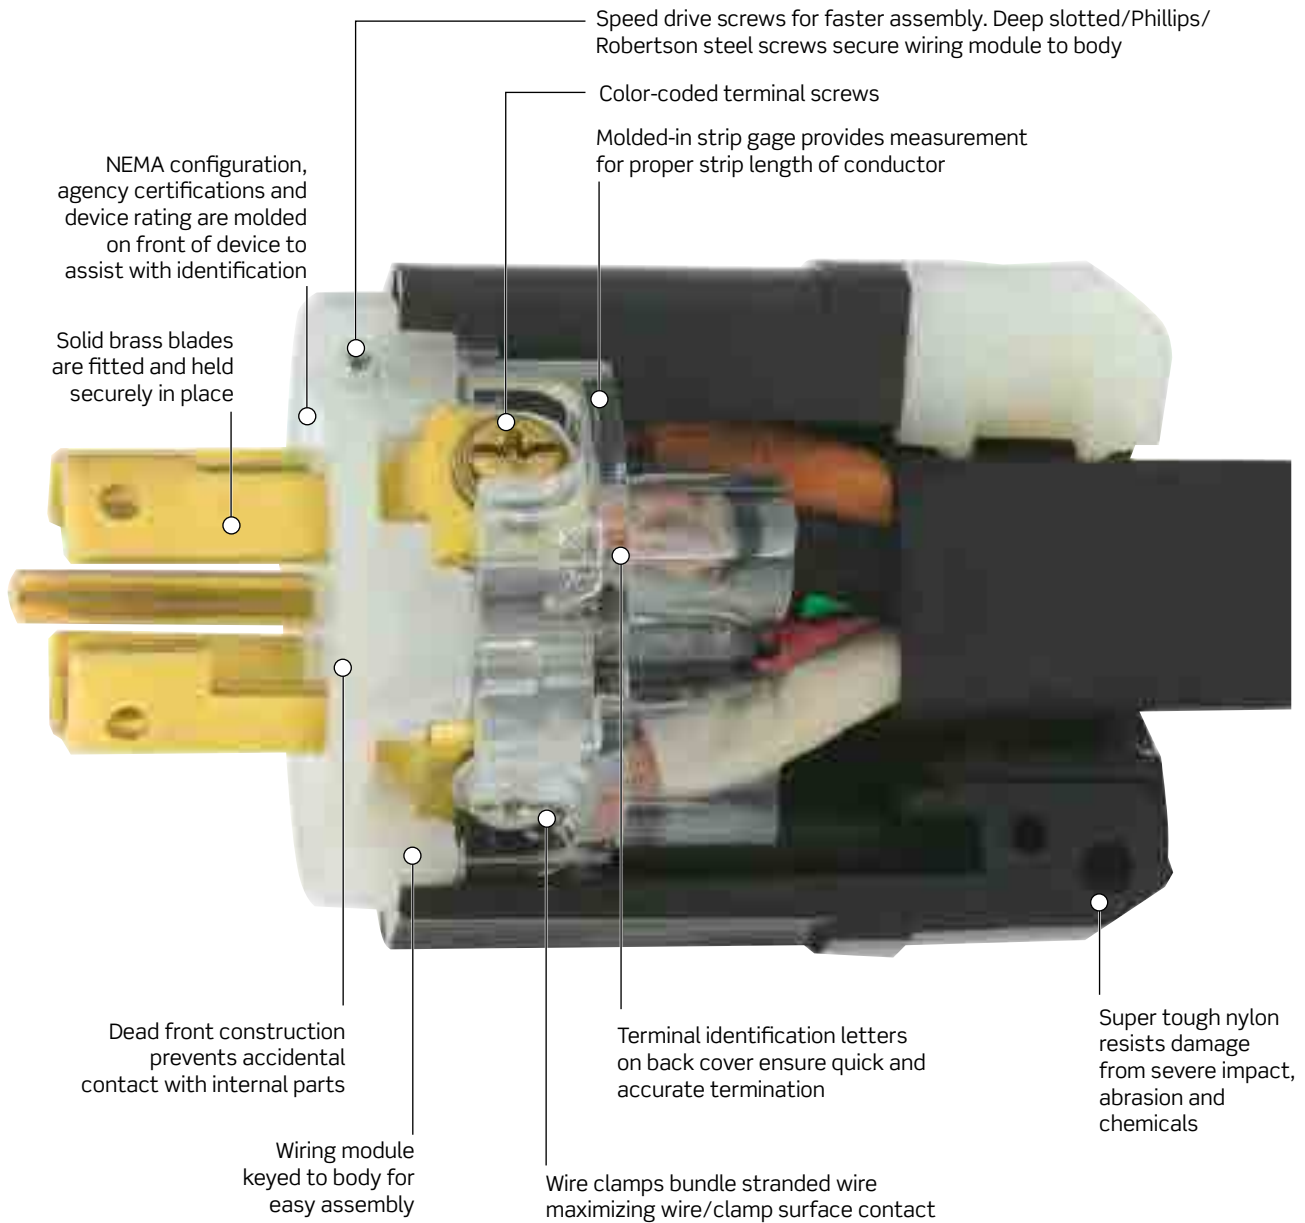

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.



Deep-funnelled, large wire wells guide conductors into termination position.


NEMA

Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-O flammability rating.

V-C-MAX®

**Sample
Receptacles**

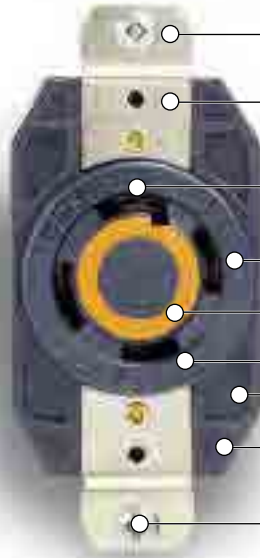

Extra thick .050" nickel-plated brass mounting strap

Stamped-in agency certifications

Molded-in amperage and voltage rating

NEMA configuration


Color-coded voltage rating

Manufacturer

Stability ribs

Uni-body face

Triple combination head mounting screws

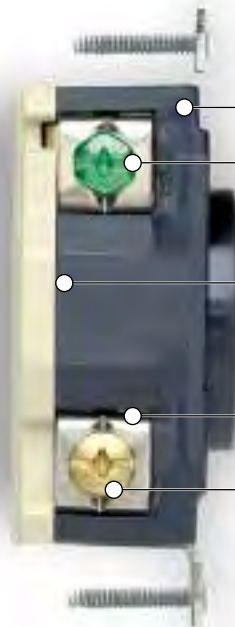

Molded-in terminal identification letters

Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors

Seam between front cover and back cover is far from contact working area

External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring

Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw

V-C-MAX®
FLUSH RECEPTACLES-UL V-O RATING

Color-Coded Voltage Ratings

		
125V	250V	277V AC
		
125/250V	3Ø250V	3Ø480V
		
		600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

15A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Features and Benefits

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring — accepts wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7 for 3.5 years)
- Power Indication™ 20A and 30A Locking Plugs & Connectors equipped with green LED rated at 100,000 hours (24/7 for 10 years)

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funnelled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps bundle stranded wire without cutting wire strands

Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impacts and harsh chemicals
- Double-wipe phosphor-bronze power contacts

V-O-Max® Locking Flush Receptacles

- UL 94 V-O flammability rating, the best rating of any material used in Industrial locking flush receptacles available today
- Extra-thick .050" nickel-plated brass mounting strap for high-abuse applications
- Designed for maximum durability: One-piece .040" brass, high copper-content contacts with nickel plated clamp-type terminals
- Color-coded voltage rating on face for easy identification

15A-125V

2-Pole, 2-Wire Non-Grounding  		
Rating	15A-125V	
NEMA	 L1-15P	 L1-15R
Description	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector
Black & White® Nylon Body	7545-C	7506-C
Flanged Outlet	—	7526-C
Receptacles		
Duplex Flush Receptacle	—	7540
Single Flush Receptacle	—	7535



7545-C

15A NEMA | Black & White®

Industrial Grade Black & White® Locking Devices

15A-125V, 250V and 277V AC

2-Pole, 3-Wire Grounding Ⓛ Ⓢ

Rating	15A-125V		15A-250V		15A-277V AC	
NEMA						
	L5-15P	L5-15R	L6-15P	L6-15R	L7-15P	L7-15R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	4720-C	4729-C	4570-C	4579-C	4770-C	4779-C
All Black Nylon Body	4720-CB	4729-CB	—	4579-B	4770-B	4779-B
Yellow Nylon Body	4720-CY	4729-CY	4570-CY	4579-CY	4770-CY	4779-CY
Power Indication™	4720-PLC	4729-PLC	4570-PLC	4579-PLC	4770-PLC	4779-PLC
Black & White® Nylon Body						
Angle Locking	4720-CA	—	4570-CA	—	4770-CA	—
Black & White® Nylon Body						
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	4716-C	4715-C	4586-C	4585-C	4786-C	4785-C
Receptacles						
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	—	4700	—	4550	—	4750
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired, 6" Green Ground Lead	—	4700-IG	—	4550-IG	—	4750-IG
Duplex Flush Receptacle w/2 Hot Feeds and 1 Neutral Return, Self Grounding, Back and Side Wired	—	4702-IIR	—	—	—	—
Duplex Flush Receptacle w/Split Feed - 2 Hot Feeds and 2 Neutral Returns, Self Grounding, Back and Side Wired	—	4703-IIR	—	—	—	—
Single Flush Receptacle	—	4710	—	4560	—	4760
Single Flush Receptacle, w/Short Strap	—	4710-SS	—	—	—	—
Single Flush Receptacle, Isolated Ground	—	4710-IG	—	4560-IG	—	4760-IG



4716-C



4560-IG



4700

Wallplates and Covers

302 Stainless Steel Single Receptacle

1.41" Dia. Opening



84004-40

302 Stainless Steel Duplex Receptacle



84003-40

Weather-Resistant Flip Lid Cover for Inlets and Outlets*

1.72" Dia. Opening IP64 Rated — Includes Gasket & Screws



WP1

*For use with 15A Locking devices



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors see page E-20. Find the right wallplate for any application. See section T for Wallplates & Weather-Resistant Covers.

20A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

20A-250V

2-Pole, 2-Wire Non-Grounding  			
Rating	20A-250V		
NEMA			
	L2-20P	L2-20R	
Description	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	
Black & White® Nylon Body	7102-C	7101-C	
Non-Polarized	7102-NP	—	
Receptacles			
Single Flush Receptacle	—	7210-B	



7102-C

20A-125V, 250V and 277V AC

2-Pole, 3-Wire Grounding  							
Rating	20A-125V		20A-250V		20A-277V AC		
NEMA							
	L5-20P	L5-20R	L6-20P	L6-20R	L7-20P	L7-20R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2311	2313	2321	2323	2331	2333	
All Black Nylon Body	2311-B	2313-B	—	2323-B	—	2333	
Yellow Nylon Body	2311-CY	2313-CY	2321-CY	2323-CY	—	—	
Power Indication™ Black & White® Nylon Body	2311-PLC	2313-PLC	2321-PLC	2323-PLC	2331-PLC	2333-PLC	
Power Indication™ All Black Nylon Body	2311-PLB	2313-PLB	—	—	—	—	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2315	2316	2325	2326	2335	2336	
Receptacles							
V-O-Max® Single Flush Receptacle	—	2310	—	2320	—	2330	
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2310-IG	—	2320-IG	—	2330-IG	



2311



2313



2310

20A NEMA | Black & White®

Industrial Grade Black & White® Locking Devices

20A-347V AC, 480V AC and 600V AC

2-Pole, 3-Wire Grounding  						
Rating	20A-347V AC		20A-480V AC		20A-600V AC	
NEMA						
	L24-20P	L24-20R	L8-20P	L8-20R	L9-20P	L9-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	3721	3723	2341	2343	2351	2353
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	—	3756	2345	2346	2355	2356
Receptacles						
V-O-Max® Single Flush Receptacle	—	3720	—	2340	—	2350
V-O-Max® Single Flush Receptacle, Isolated Ground	—	—	—	—	—	2350-IG



2341



2411

20A-125/250V, 3Ø 250V and 3Ø 480V

3-Pole, 3-Wire Non-Grounding  						
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
NEMA						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2361	2363	2371	2373	2381	2383
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2365	2366	2375	2376	2385	2386
Receptacles						
V-O-Max® Single Flush Receptacle	—	2360	—	2370	—	2380



2413



2433

20A-125/250V, 3Ø 250V and 3Ø 480V

3-Pole, 4-Wire Grounding  						
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
NEMA						
	L14-20P	L14-20R	L15-20P	L15-20R	L16-20P	L16-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2411	2413	2421	2423	2431	2433
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2415	2416	2425	2426	2435	2436
Receptacles						
V-O-Max® Single Flush Receptacle	—	2410	—	2420	—	2430
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2410-IG	—	2420-IG	—	—



2416

20A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 4-Wire Non-Grounding						
Rating	20A-3ØY 120/208V		20A-3ØY 277/480V		20A-3ØY 347/600V	
NEMA						
	L18-20P	L18-20R	L19-20P	L19-20R	L20-20P	L20-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2441	Connector 2443	Plug 2451	Connector 2453	Plug 2461	Connector 2463
Inlets and Outlets Flanged Device	Inlet 2445	Outlet 2446	Inlet 2455	Outlet 2456	Inlet 2465	Outlet 2466
Receptacles V-O-Max® Single Flush Receptacle	—	2440	—	2450	—	2460



2451



2453



2516

20A-3Ø 120/208V, 3Ø 277/480V and 3Ø 347/600V

4-Pole, 5-Wire Grounding						
Rating	20A-3Ø 120/208V		20A-3Ø 277/480V		20A-3Ø 347/600V	
NEMA						
	L21-20P	L21-20R	L22-20P	L22-20R	L23-20P	L23-20R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors Black & White® Nylon Body	Plug 2511	Connector 2513	Plug 2521	Connector 2523	Plug 2531	Connector 2533
Inlets and Outlets Flanged Device	Inlet 2515	Outlet 2516	Inlet 2525	Outlet 2526	Inlet 2545	Outlet 2546
Receptacles V-O-Max® Single Flush Receptacle	—	2510	—	2520	—	2530
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2510-IG	—	2520-IG	—	2530-IG

For NEMA L24-20 see page E-8

Wallplates and Covers

302 Stainless Steel Single Receptacle	Weather-Resistant Flip Lid Cover*	Weather-Resistant Flip Lid Cover*	Weather-Resistant Thermoplastic Cover***
1.60" Dia. Opening	2.24" Dia. Opening	1.60" Dia. Opening	1.60" Dia. Opening Self-Closing Lid
84020-40	**WP2-Y (Yellow) **WP2 (Gray)	***7420-CR (Yellow) ***7420-CRG (Gray)	4980-GY (Gray)

*IP64 Rated. Includes Gasket and Screws.

**For use with 20 and 30A 3, 4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors see page E-20. Find the right wallplate for any application. See section T for Wallplates & Weather-Resistant Covers.

30A NEMA | Black & White®

30A NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

30A-125V, 250V and 277V AC

2-Pole, 3-Wire Grounding Ⓛ Ⓢ

Rating	30A-125V		30A-250V		30A-277V AC	
NEMA						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2611	2613	2621	C2623	2631	2633
All Black Nylon Body	2611-B	2613-B	2621-B	C2623-B	—	—
Yellow Nylon Body	2611-CY	2613-CY	2621-CY	C2623-CY	—	—
Power Indication™ Black & White® Nylon Body	2611-PLC	2613-PLC	2621-PLC	C2623-PLC	2631-PLC	2633-PLC
Power Indication™ All Black Nylon Body	2611-PLB	2613-PLB	—	—	—	—
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2615	2616	2625F	2626F	2635	2636
Receptacles						
V-O-Max® Single Flush Receptacle	—	2610	—	2620	—	2630
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2610-IG	—	2620-IG	—	2630-IG



2620



2621-B



2625F



2650

30A-480V AC and 600V AC

2-Pole, 3-Wire Grounding Ⓛ Ⓢ

Rating	30A-480V AC		30A-600V AC	
NEMA				
	L8-30P	L8-30R	L9-30P	L9-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector
Black & White Nylon Body	2641	2643	C2651	C2653
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet
Flanged Device	2645	2646	2655	2656
Receptacles				
V-O-MAX® Single Flush Receptacle	—	2640	—	2650

30A-125/250V and 3Ø 250V

3-Pole, 3-Wire Non-Grounding  					
Rating	30A-125/250V		30A-3Ø 250V		
NEMA					
	L10-30P	L10-30R	L11-30P	L11-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2661	2663	2671	2673	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2665	2666	2675	2676	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2660	—	2670	



2671



2676

30A-3Ø 480V AC and 3Ø 600V AC

3-Pole, 3-Wire Non-Grounding  					
Rating	30A-3Ø 480V AC		30A-3Ø 600V AC		
NEMA					
	L12-30P	L12-30R	L13-30P	L13-30R	
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	
Plugs and Connectors	Plug	Connector	Plug	Connector	
Black & White® Nylon Body	2681	2683	2691	2693	
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	
Flanged Device	2685	2686	2695	2696	
Receptacles					
V-O-Max® Single Flush Receptacle	—	2680	—	2690	

SPOTLIGHT

Industrial Devices

For over 107 years, Leviton has been helping businesses power their equipment safely, reliably, and efficiently. The Leviton line of rugged industrial electrical products comprises devices rated up to 1100A at 1000V, and includes devices with watertight and dust-tight ratings. For more information on Industrial devices visit us online at www.leviton.com/industrial



30A NEMA | Black & White®

Industrial Grade Black & White® Locking Blade Devices

30A-125/250V and 3Ø 250V

3-Pole, 4-Wire Grounding  				
Rating	30A-125/250V		30A-3Ø 250V	
NEMA	 L14-30P	 L14-30R	 L15-30P	 L15-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2711	2713	2721	2723
All Black	2711-B	2713-B	2721-B	2723-B
Yellow Nylon Body	—	2713-CY	—	—
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet
Flanged Device	2715	2716	2725	2726
Receptacles				
V-O-Max® Single Flush Receptacle	—	2710	—	2720
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2710-IG	—	2720-IG
All Black Flush Mount Locking Receptacle	—	2710-B	—	—



2711



2710

30A-3Ø 480V AC and 3Ø 600V AC

3-Pole, 4-Wire Grounding  				
Rating	30A-3Ø 480V AC		30A-3Ø 600V AC	
NEMA	 L16-30P	 L16-30R	 L17-30P	 L17-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2731	2733	2741	2743
All Black	2731-B	2733-B	—	—
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet
Flanged Device	2735	2736	2745	2746
Receptacles				
V-O-Max® Single Flush Receptacle	—	2730	—	2740
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2730-IG	—	2740-IG
All Black Flush Mount Locking Receptacle	—	2730-B	—	—



2733



2736

30A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 4-Wire Non-Grounding						
Rating	30A-3ØY 120/208V		30A-3ØY 277/480V		30A-3ØY 347/600V	
NEMA						
	L18-30P	L18-30R	L19-30P	L19-30R	L20-30P	L20-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2751	2753	2761	2763	2771	2773
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2755	2756	2765	2766	2775	2776
Receptacles						
V-O-Max® Single Flush Receptacle	—	2750	—	2760	—	2770



2813



2810

30A-3ØY 120/208V, 3ØY 277/480V and 3ØY 347/600V

4-Pole, 5-Wire Grounding						
Rating	30A-3ØY 120/208V		30A-3ØY 277/480V		30A-3ØY 347/600V	
NEMA						
	L21-30P	L21-30R	L22-30P	L22-30R	L23-30P	L23-30R
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plugs and Connectors	Plug	Connector	Plug	Connector	Plug	Connector
Black & White® Nylon Body	2811	2813	2821	2823	2831	2833
Inlets and Outlets	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
Flanged Device	2815	2816	2825	2826	2835	2836
Receptacles						
V-O-Max® Single Flush Receptacle	—	2810	—	2820	—	2830
V-O-Max® Single Flush Receptacle, Isolated Ground	—	2810-IG	—	2820-IG	—	—

Wallplates and Covers

302 Stainless Steel Single Receptacle

1.60" Dia. Opening



84020-40

Weather-Resistant Flip Lid Cover*

2.24" Dia. Opening



**WP2-Y (Yellow)
**WP2 (Gray)

Weather-Resistant Flip Lid Cover*


1.60" Dia. Opening



***7420-CR (Yellow)
***7420-CRG (Gray)

Weather-Resistant Thermoplastic Cover***

1.60" Dia. Opening Self-Closing Lid



4980-GY (Gray)

*IP64 Rated. Includes Gasket and Screws.

**For use with 20 and 30A 3, 4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors see page E-20. Find the right wallplate for any application. See section T for Wallplates & Weather-Resistant Covers.

Non-NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Features and Benefits

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring — accepts all wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7) for 3.5 years
- 50 Amp devices, nylon housing provides excellent impact and chemical resistance

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funneled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps provide positive crimp lock without cutting wire strands
- 50 Amp devices designed in a steel flanged cup for high abuse applications

Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impact and harsh chemicals
- Double-wipe phosphor-bronze power contacts
- 50 Amp devices have a metal shroud and nylon construction

15A Non-NEMA Locking Devices

Non-NEMA 15A-125V/10A-250V

3-Pole, 3-Wire Non-Grounding

Rating	15A-125V/10A-250V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	7567-C	—
Locking Connector	—	7565-C
Locking Flanged Inlet	7556*	—
Locking Flanged Outlet	—	7557
Single Flush Receptacle	—	7582*

*Add (-G) for grounding devices.

Non-NEMA grounding devices are no longer UL Listed — for replacement use only.

Note: Cord Clamp Range: .240"-.700" #18-#10 AWG



7567-C



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page E-20**. Find the right wallplate for any application. **See section T for Wallplates & Weather-Resistant Covers.**

20A Non-NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Non-NEMA 20A-125/250V

3-Pole, 3-Wire Non-Grounding  		
Rating	20A-125/250V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	9965-C*	—
Locking Connector	—	7314-C*
Locking Flanged Inlet	3325-C*	—
Locking Flanged Outlet	—	3326-C
Single Flush Receptacle - Black	—	7310-B*

*Add (-G) for grounding devices



3525-C



9965-C



7411

Non-NEMA 20A-3ØY 120/208V

4-Pole, 4-Wire Non-Grounding  		
Rating	20A-3ØY 120/208V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	7411-C*	—
Locking Connector	—	7413-C*
Locking Flanged Inlet	7408-C*	—
Locking Flanged Outlet	—	7409-C*
Single Flush Receptacle Black	—	7410-B*

*Add (-G) for grounding devices

Non-NEMA 20A-125V AC/DC/10A-600V AC

4-Pole, 5-Wire Grounding  		
Rating	20A-125V AC/DC/10A-600V AC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug, Black & White® Nylon Body	3521-C	—
Locking Connector, Black & White® Nylon Body	—	3523-C
Locking Flanged Inlet	3524-C	—
Locking Flanged Outlet	—	3525-C
Single Flush Receptacle	—	3520

Wallplates and Covers

302 Stainless Steel Single Receptacle	Weather-Resistant Flip Lid Cover*	Weather-Resistant Flip Lid Cover*	Weather-Resistant Thermoplastic Cover***
1.60" Dia. Opening	2.24" Dia. Opening	1.60" Dia. Opening	1.60" Dia. Opening Self-Closing Lid
			
84020-40	**WP2-Y (Yellow) **WP2 (Gray)	***7420-CR (Yellow) ***7420-CRG (Gray)	4980-GY (Gray)

*IP64 Rated. Includes Gasket and Screws.

**For use with 20 and 30A 3, 4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A and 30A Single-Locking Receptacles

30A NON-NEMA | Black & White®

30A Non-NEMA Locking Devices Industrial Grade Black & White® Locking Devices

Non-NEMA 30A-125/250V

3-Pole, 3-Wire Non-Grounding ④ ⑥			
Rating		30A-125/250V	
Non-NEMA	 		
Description	Cat. No.	Cat. No.	
Locking Plug	3331-C*	—	
Locking Connector	—	3333*	
Locking Flanged Inlet	3334-C	—	
Locking Flanged Outlet	—	3335-C	
Single Flush Receptacle	—	3330*	

*Add (-G) for grounding devices



3330



3333



3431-C



3431-C

Non-NEMA 30A-3ØY 120/208V

4-Pole, 4-Wire Non-Grounding ④ ⑥			
Rating		30A-3ØY 120/208V	
Non-NEMA	 		
Description	Cat. No.	Cat. No.	
Locking Plug	3431-C*	—	
Locking Connector	—	3433-C*	
Locking Flanged Inlet	3434-C	—	
Locking Flanged Outlet	—	3435-C	
Single Flush Receptacle	—	3430*	

*Add (-G) for grounding devices



3431-C

SPOTLIGHT

Industrial Devices

For over 107 years, Leviton has been helping businesses power their equipment safely, reliably, and efficiently. The Leviton line of rugged industrial electrical products comprises devices rated up to 1100A at 1000V, and includes devices with watertight and dust-tight ratings. For more information on Industrial devices visit us online at www.leviton.com/industrial



50A Non-NEMA Locking Devices

Industrial Grade Black & White® Locking Devices

Non-NEMA 50A-250V DC/600V AC

2-Pole, 3-Wire Grounding

Rating	50A-250V DC/600V AC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	3763C	—
Locking Connector	—	3762C
Locking Flanged Inlet	3777	—
Single Locking Receptacle	—	3771



3763C



3765C

3-Pole, 4-Wire Grounding

Rating	50A-250V DC/600V AC		50A-250V DC/600V AC	
Non-NEMA				
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Locking Plug	7765C*	—	3765C	—
Locking Connector	—	7764C*	—	3764C
Locking Flanged Inlet	7958*	—	3775	—
Single Locking Receptacle	—	7379*	—	3769

*For replacement use in existing installation only

Wallplates and Covers

Weather-Resistant Flip Lid Cover for 50A Receptacles

IP64 Rated—Includes Gasket and Screws



7788-CR
Yellow Lexan



7770
Gray Metal



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page E-20**. Find the right wallplate for any application. **See section T for Wallplates & Weather-Resistant Covers.**

50A NON-NEMA | Black & White® California Style

Black & White® “California Style” CS Locking Devices

Features and Benefits

50A CS Locking Plugs and Connectors, Receptacles and Flanged Inlets

- Nylon housing for excellent impact resistance and secure gripping
- Color-coded wire entrance holes for simple, easy wiring
- Clamp-type wire terminals

Non-NEMA 50A-125V, 250V and 480V

2-Pole, 3-Wire Grounding  						
Rating	50A-125V		50A-250V		50A-480V	
Non-NEMA						
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Locking Plug	CS6361C	—	CS8265C	—	CS8465C	—
Locking Connector	—	CS6360C	—	CS8264C	—	CS8464C
Locking Flanged Inlet	CS6377	—	CS8275	—	CS8475	—
Single Locking Receptacle	—	CS6370	—	CS8269	—	CS8469



CS6365C



CS6364C



CS8375

Non-NEMA 50A-125/250V, 3Ø 250V and 3Ø 480V

2-Pole, 3-Wire Grounding  						
Rating	50A-125/250V		50A-3Ø 250V		50A-3Ø 480V	
Non-NEMA						
Description	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Locking Plug	CS6365C	—	CS8365C	—	CS8165C	—
Locking Connector	—	CS6364C	—	CS8364C	—	CS8164C
Locking Flanged Inlet	CS6375	—	CS8375	—	CS8175	—
Single Locking Receptacle	—	CS6369	—	CS8369	—	CS8169

Wallplates and Covers

Weather-Resistant Flip Lid Cover for 50A Receptacles

IP64 Rated—Includes Gasket and Screws



7788-CR
Yellow Lexan



7770
Gray Metal

50A Corrosion Resistant Devices

Features and Benefits

- Stainless steel shrouds on receptacles and plugs for corrosion resistance
- Stainless steel receptacle mounting screws

Non-NEMA 50A-125V

2-Pole, 3-Wire Grounding

Rating	50A-125V	
Non-NEMA	SS1	SS1
Description	Cat. No.	Cat. No.
Yellow Nylon Body and Cord Clamp	6361CR	6360CR
Locking Flanged Inlet	6377CR	—
Single Flush Receptacle	—	6370CR



6370CR
(Front and Back)

Non-NEMA 50A-125/250V

3-Pole, 4-Wire Grounding

Rating	50A-125/250V	
Non-NEMA	SS2	SS2
Description	Cat. No.	Cat. No.
Yellow Nylon Body and Cord Clamp	6365CR	6364CR
Locking Flanged Inlet	6375CR	—
Single Flush Receptacle	—	6369CR

Note: Cord Clamp Range: .650"-1.125" #10-#4 AWG



6377CR



6361CR

Wallplates and Covers

Weather-Resistant Flip Lid Cover for 50A Receptacles

IP64 Rated—Includes Gasket and Screws



7788-CR
Yellow Lexan



7770
Gray Metal



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors **see page E-20**. Find the right wallplate for any application. **See section T for Wallplates & Weather-Resistant Covers.**

15A, 20A and 30A, 50A | Locking Plug and Connector Boots

Locking Plug and Connector Boots

Thermoplastic Elastomer Construction

Features and Benefits

- Features triple seal action to protect locking plugs and connectors against dirt and moisture in harsh applications
- Plug and connector boots available in black and high-visibility yellow
- Fluted surface and grip-ring design provide a non-slip grip even in wet conditions
- Backed by a limited lifetime warranty

Boots for all 15A Industrial Locking Plugs and Connectors

Description	Cat. No.
Plug Boot, Black	6017-L
Plug Boot, High-Visibility Yellow	6017-LY
Connector Boot, Black	6018-L
Connector Boot, High-Visibility Yellow	6018-LY



6017-LY



6032



6033



6034

Boots for 3-Wire 20A & 30A Industrial Locking Plugs and Connectors

Description	Cat. No.
3-Wire Plug Boot, Black	6031
3-Wire Plug Boot, High-Visibility Yellow	6031-Y
3-Wire Connector Boot, Black	6032
3-Wire Connector Boot, High-Visibility Yellow	6032-Y

Boots for 4 and 5-Wire 20A & 30A Industrial Locking Plugs and Connectors

Description	Cat. No.
4 & 5-Wire Plug Boot, Black	6033
4 & 5-Wire Plug Boot, High-Visibility Yellow	6033-Y
4 & 5-Wire Connector Boot, Black	6034
4 & 5-Wire Connector Boot, High-Visibility Yellow	6034-Y

Boots and Covers for 50A Devices

Description	Cat. No.
Plug Boot, Black, IP55 Rated	7715-CR
Plug Boot, High-Visibility Yellow, IP55 Rated	7715-CRY
Connector Boot, Black, IP55 Rated	7717-CR
Connector Boot, High-Visibility Yellow, IP55 Rated	7717-CRY
Weather-Resistant Receptacle w/Flip Lid Cover, IP64 Rated, Yellow Lexan	7788-CR
Cast Aluminum Gray Receptacle w/Flip Lid Cover, IP64 Rated	7770



7715CR



7717CR

Locking Power Interrupting Devices

Non-NEMA 20A-125V

2-Pole, 3-Wire Grounding		
Rating	20A-125V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug HOSPITAL USE ONLY	23004-HG*	—
Locking Connector HOSPITAL USE ONLY	—	23001-HG*
Single Flush Receptacle with Thermoset Body	—	23000-HG*
Locking Plug	23034-A**	—
Locking Connector	—	23031-A**
Single Flush Receptacle	—	23030**

*UL and CSA listed.

UL for "Hospital Use Only" applications in non-hazardous locations.

**Also rated at 10A for 250V DC and 480V AC



23000-HG



23004-HG

Non-NEMA 30A-600V AC/20A-250V DC

3-Pole, 4-Wire Grounding		
Rating	30A-600V AC/20A-250V DC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	21415-B	—
Locking Connector	—	21414-B
Single Flush Receptacle	—	20403

4-Pole, 5-Wire Grounding		
Rating	30A-600V AC/20A-250V DC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	25415-B	—
Locking Connector	—	25414-B
Single Flush Receptacle	—	25403

15A | Watertight

Wetguard® Watertight Locking Plugs, Connectors, Inlets, Outlets and Receptacles

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking “tongue and groove” construction seals out water, moisture and dirt when plugs are mated with connectors
- Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector “hood” closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed
- Backed by a lifetime warranty

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

15A Wetguard® Locking Devices

Rating	15A-125V		15A-125V	15A-250V	15A-277V
Configuration	2P 2W		2P 3W	2P 3W	2P 3W
NEMA					
	L1-15	L5-15	L6-15	L7-15	
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	24W04	24W47*	24W49	24W34
Plug Cap		14W*	14W*	14W*	14W*
Connector		25W04	25W47*	25W49	25W34
Connector Cap		50W50*	50W50*	50W50*	50W50*
Single Outlet		95W04-S	95W47-S	95W49-S	95W34-S
Duplex Outlet		85W04-D	85W47-D	85W49-D	85W34-D
Single Inlet		64W04	64W47	64W49	64W34
Connector for Single Inlet		74W04-C	74W47-C	74W49-C	74W34-C
Single Receptacle		—	47CM-10	45CM-60	47CM-60
Receptacle Cover w/Gasket		—	60W03*	60W03*	60W03*



24W04



50W50

NEMA configuration diagrams represent plug blade configuration.
*Available in black. To order, add “-B” suffix to catalog number

SPOTLIGHT

Wetguard® Watertight Wiring Devices

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.



15/10A and 20A Wetguard® Locking Devices			
Rating	15A-125V 10A-250V		15A-125V
Configuration	3P 2W		2P 3W
NEMA	 Non-NEMA		 L5-15
Description	Color	Cat. No.	Cat. No.
Plug	Yellow	24W07	26W07
Plug Cap		14W*	14W*
Connector		25W07	27W07
Connector Cap		50W50*	50W50*
Single Outlet		95W07-S	97W07-S
Duplex Outlet		85W07-D	87W07-D
Single Inlet		64W07	66W07
Connector for Single Inlet		74W07-C	76W07-C
Single Receptacle		—	—
Receptacle Cover w/Gasket		—	—



24W07



85W07-D

20A and 20/10A Wetguard® Locking Devices							
Rating	20A-125V		20A-250V	20A-277V	20A-347V	20A-125/250V	20A-250V 10A-600V
Configuration	2P 3W		2P 3W	2P 3W	2P 3W	3P 3W	3P 3W
NEMA	 L5-20		 L6-20	 L7-20	 L24-20	 Non-NEMA	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W47*	26W48*	26W49	22W07	26W08	26W08-G
Plug Cap		26W*	26W*	26W*	26W*	26W*	26W*
Connector		27W47*	27W48*	27W49	23W07	27W08	27W08-G
Connector Cap		50W52*	50W52*	50W52*	50W52*	50W52*	50W52*
Single Outlet		97W47-S	97W48-S	97W49-S	93W07-S	97W08-S	—
Duplex Outlet		—	—	—	—	—	—
Single Inlet		66W47	66W48	66W49	68W29	66W08	—
Connector for Single Inlet		76W47-C	76W48-C	76W49-C	78W29-C	76W08-C	—
Single Receptacle		23CM-10	23CM-20	23CM-30	—	7310-B	—
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	—	60W04*	—



26W47



27W47

NEMA configuration diagrams represent plug blade configuration.
*Available in black. To order, add "B" suffix to catalog number

Continued on next page



Related Products

See section H for more information on the entire line of watertight wiring devices.

20A AND 20/10A | Watertight

Continued from previous page

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

20A and 20/10A Wetguard® Locking Devices					
Rating		20A-125/250V	20A-3Ø 250V	20A-3Ø 480V	20A-3ØY 120/208V
Configuration		3P 4W	3P 4W	3P 4W	4P 4W
NEMA		 L14-20	 L15-20	 L16-20	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W74	26W75*	26W76*	26W09
Plug Cap		26W*	26W*	26W*	26W*
Connector		27W74	27W75*	27W76*	27W09
Connector Cap		50W52*	50W52*	50W52*	50W52*
Single Outlet		97W74-S	97W75-S	97W76-S	97W09-S
Duplex Outlet		—	—	—	—
Single Inlet		66W74	66W75	66W76	66W09
Connector for Single Inlet		76W74-C	76W75-C	76W76-C	76W09-C
Single Receptacle		24CM-10	24CM-20	24CM-30	7410-B
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	60W04*
Rating		20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 347/600V	20A-250V 10A-600V
Configuration		4P 5W	4P 5W	4P 5W	4P 5W
NEMA		 L21-20	 L22-20	 L23-20	 Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	26W81*	26W82	26W83	26W10
Plug Cap		26W*	26W*	26W*	26W*
Connector		27W81*	27W82	27W83	27W10
Connector Cap		50W52*	50W52*	50W52*	50W52*
Single Outlet		97W81-S	97W82-S	97W83-S	97W10-S
Duplex Outlet		—	—	—	—
Single Inlet		66W81	66W82	66W83	66W10
Connector for Single Inlet		76W81-C	76W82-C	76W83-C	76W10-C
Single Receptacle		2510	2520	2530	—
Receptacle Cover w/Gasket		60W04*	60W04*	60W04*	60W04*

NEMA configuration diagrams represent plug blade configuration.

*Available in black. To order, add "-B" suffix to catalog number



26W74



66W76



26W



27W81



Related Products

See section H for more information on the entire line of watertight wiring devices.

30A Wetguard® Locking Devices					
Rating	30A-125V		30A-250V	30A-277V	30A-125/250V
Configuration	2P 3W		2P 3W	2P 3W	3P 3W
NEMA					
	L5-30		L6-30	L7-30	Non-NEMA
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W47*	28W48*	28W49	28W08
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W47*	29W48*	29W49	29W08
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W47-S	99W48-S	99W49-S	99W08-S
Single Inlet		68W47	68W48	68W49	68W08
Connector for Single Inlet		78W47-C	78W48-C	78W49-C	78W08-C
Single Receptacle		26CM-10	26CM-20	2630	3330
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*
Rating	30A-125/250V		30A-3Ø 250V	30A-3Ø 480V	30A-3ØY 600V
Configuration	3P 4W		3P 4W	3P 4W	3P 4W
NEMA					
	L14-30		L15-30	L16-30	L17-30
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W74	28W75	29W76*	28W77
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W74	29W75	29W76*	29W77
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W74-S	99W75-S	99W76-S	99W77-S
Single Inlet		68W74	68W75	68W76	68W77
Connector for Single Inlet		78W74-C	78W75-C	78W76-C	78W77-C
Single Receptacle		27CM-10	27CM-20	2730	2740
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*
Rating	30A 3ØY 120/208V		30A 3ØY 120/208V	30A 3ØY 277/480V	30A 3ØY 347/600V
Configuration	4P 4W		4P 5W	4P 5W	4P 5W
NEMA					
	Non-NEMA		L21-30	L22-30	L23-30
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Plug	Yellow	28W09	28W81	28W82	28W83
Plug Cap		28W*	28W*	28W*	28W*
Connector		29W09	29W81	29W82	29W83
Connector Cap		50W54*	50W54*	50W54*	50W54*
Single Outlet		99W09-S	99W81-S	99W82-S	99W83-S
Single Inlet		68W09	68W81	68W82	68W83
Connector for Single Inlet		78W09-C	78W81-C	78W82-C	78W83-C
Single Receptacle		3430	2810	2820	2830
Receptacle Cover w/Gasket		60W05*	60W05*	60W05*	60W05*

NEMA configuration diagrams represent plug blade configuration.
 *Available in black. To order, add "-B" suffix to catalog number



28W47



29W48



99W76



50W54

15A | Midget Locking

Midget Locking Devices

Features and Benefits

- Offers a smaller form factor for limited-space applications
- Locking plugs and connectors feature heavy-duty nylon construction for top performance in the environmental extremes of grueling industrial settings
- Flanged inlets and outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking
- Backed by a lifetime warranty

15A-125V

2-Pole, 2-Wire Non-Grounding

Rating	15A-125V	
NEMA	ML1	ML1
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML1-P	ML1-C
Angle	ML1-AP	ML1-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML1-PB	ML1-PER



ML1-P

2-Pole, 3-Wire Grounding

Rating	15A-125V	
NEMA	ML2	ML2
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML2-P	ML2-C
Angle	ML2-AP	ML2-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML2-PB	ML2-PER



ML1-AP



ML2-AP

15A-125/250V

3-Pole, 3-Wire Non-Grounding

Rating	15A-125/250V	
NEMA	ML3	ML3
Description	Cat. No. Plug	Cat. No. Connector
Locking	ML3-P	ML3-C
Angle	ML3-AP	ML3-AC
Inlets and Outlets	Inlet	Outlet
Nylon Flange	ML3-PB	ML3-PER



ML3-P

Combination Locking and Straight Blade Duplex Receptacles

Features and Benefits

- Impact-resistant black thermoplastic nylon face and body
- Smooth face does not collect dirt
- Large, triple-wipe brass “T” contacts for superior contact and conductivity
- Triple-combination terminal screws
- Back and side wire options accept #10-#14 AWG stranded or solid wire
- Backed by a limited 10-year warranty

15A-125V

2-Pole, 3-Wire Back and Side Wired, Grounding

Rating	15A-125V
NEMA	 
	L5-15R 5-15R
Description	Cat. No.
Duplex Combination Locking & Straight Blade Receptacle with Common Feed	4792
2 Hot Feeds, 1 Neutral Return	4794-1R
Split Feed — 2 Hot Feeds, 2 Neutral Returns	4795-2R



4792

Wallplates and Covers

302 Stainless Steel



84003-40

302 Stainless Steel

Thermoplastic



80703-E (Black)

Other Colors Available



Wallplates

Find the right wallplate for any application. See section T for Wallplates & Weather-Resistant Covers.

15A | Integrated Devices

Integrated Power Inlets and Outlets with Weather-Resistant Covers

Features and Benefits

- Engineered to IP 64 and NEMA 3R protection ratings
- Suitable for industrial indoor and outdoor use
- Gray, glass-filled thermoplastic cover and white, nylon device
- Glass-filled thermoplastic cover and plate provide outstanding impact resistance and durability
- Dual gaskets, one under plate and one under lid, for weather-resistant fit
- Stainless steel external hardware resists corrosive effects of moisture
- Large thumb-tab makes it easy to open cover with gloved hand
- Mounts to panels or FS/FD boxes
- UL Listed and CSA Certified for wet locations with cover closed
- Backed by a limited 2-year warranty

15A-125V and 15A-250V

2-Pole, 3-Wire

Rating	15A-125V		15A-250V	
NEMA				
	L5-15P	L5-15R	L6-15P	L6-15R
Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
Standard Wire Wells	4716-CWP	4715-CWP	4586-CWP	4585-CWP



4715-CWP

SPOTLIGHT

Wetguard® Watertight

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.

