

LED Tubes

Refit Solutions from GE



Description

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by a GE Lightech™ driver. *See reverse for LED tubes and Lightech driver product details.*

Features

- 4' tubes
- 2,100 to 2,200 lumen options available
- 100-105 total system lumens per watt (LPW)
- Choice of four color temperatures (3500°K, 4000°K, 5000°K, 6500°K)
- 50,000-hour rated life
- UL-approved technologies – in compliance with UL 1598 certification
- DLC listed

Savings Breakdown


Save 61% compared to standard T8 (4-lamp) light fixtures over a five-year period.

Provides 4200 lumens at 42W vs. 6600 lumens at 148W in a 4 lamp T12 system.

LED Tubes Ranking among Complete Refit Solutions Portfolio

	GOOD	BETTER	BEST
Initial Acquisition Costs		✓	
Installation Time/Cost			✓
Energy Costs			✓
Total Life Cycle Costs			✓
Light Distribution/Aesthetics	✓		

Cumulative Energy Costs

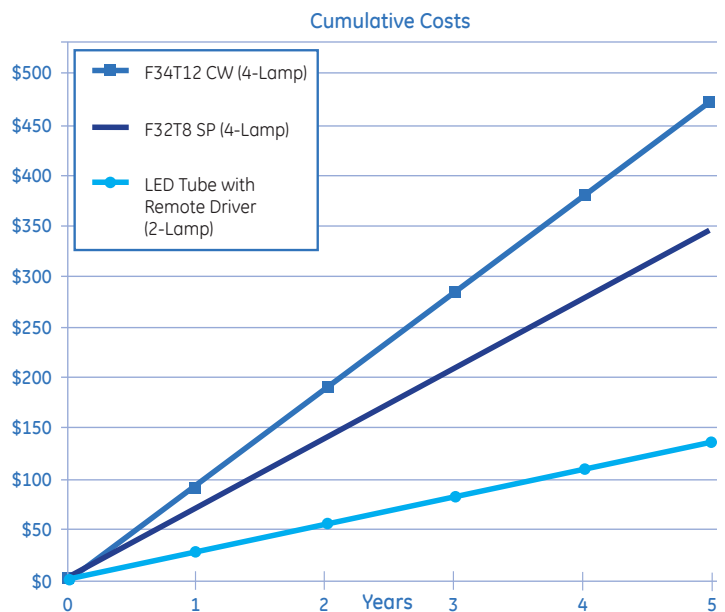

Savings calculations are based on energy costs using \$0.11 per kWh and 16 hours of daily operation.

Product Specifications

Refit LED Tubes

GE Product Code	Description	Bulb Shape	Base	Watts	Case Qty	Length (in)	Initial Lumens	Color Temp (°K)	CRI	Rated Life (L70)
94381	LED21T8/4/835	T8	Medium Bi-Pin (G13)	18	10	48	2100	3500	80	50,000
94382	LED21T8/4/840	T8	Medium Bi-Pin (G13)	18	10	48	2100	4000	80	50,000
94383	LED21T8/4/850	T8	Medium Bi-Pin (G13)	18	10	48	2200	5000	80	50,000
26059	LED21T8/4/865	T8	Medium Bi-Pin (G13)	18	10	48	2200	6500	80	50,000

Lightech Drivers - Non-Dimming

GE Product Code	Description	# of Lamps
94384	LED21T8/DR/1L	1
94385	LED21T8/DR/2L	2

Lightech Drivers - Dimming

GE Product Code	Description	# of Lamps
60041	LED21T8/DR/D/2L	2
62030	LED21T8/DR/D/4L	4

General Characteristics - Non-Dimming

Product Code	94384	94385
Output Current (A)	0.62	0.62*2
Input Wattage Range (W)	21	42
Input Voltage (V)	120-277V	
Input Frequency (Hz)	50/60Hz	
Efficiency (%)	> .9%	
Output Type	DC	
Output Voltage Range	27-33V	
Dimmability	No	
Ambient Temperature Min	-4°F	
Ambient Temperature Max	104°F	
Case Temperature	158°F	

General Characteristics - Dimming

Product Code	60041	62030
Output Current (A)	0.62*2	0.62*4
Input Wattage Range (W)	42	84
Input Voltage (V)	120-277V	
Input Frequency (Hz)	50/60Hz	
Efficiency (%)	> .9%	
Output Type	DC	
Output Voltage Range	27-33V	
Dimmability	0 - 10V	
Ambient Temperature Min	-4°F	
Ambient Temperature Max	104°F	
Case Temperature	158°F	

Dimensions - Non-Dimming

Product Code	94384	94385
Weight	1.01	1.08
Casing Length (in)	9.5	
Casing Width (in)	1.3	
Casing Height (in)	1	
Lead Exit Length (in)	26	
Input Wire Length (in)	36	
Output Wire Length (in)	38	

Dimensions - Dimming

Product Code	60041	62030
Weight	1.01	1.08
Casing Length (in)	9.5	9.5
Casing Width (in)	1.3	1.7
Casing Height (in)	1	1
Lead Exit Length (in)	26	26
Input Wire Length (in)	36	36
Output Wire Length (in)	38	42



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2014 GE.

14671 (Rev 10/14/14)