

## Trulux Standard Tape Light

Build an economical and versatile layered lighting system with Standard Trulux. Light output ranges from 140-155 lumens per foot, with easy to work with run lengths up to 32.8 feet. Wall controls include dial or touch versions; also pair with the Trulux App for even greater control freedom.

### Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 140-155 lumens per foot performance
- Consuming only 2.7 watts per foot
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 32.8 feet (24V) and 27 feet (12V)
- Cuttable every 6.56" (24V) and 3.94" (12V) while maintaining cULus Listing
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed

### Applications

- Edge lighting
- Cabinetry
- Shelving
- Coves
- Staircases
- Toe kicks
- Display cases
- Light boxes

### Trulux Wireless Controllers

Complete your tape light install with our exclusive Trulux controllers. Featuring a battery operated design perfect for remodel applications.

See pages (16-17) for details



High 94+ CRI LEDs

Cuttable every 6.56" (24V) / 3.94" (12V)

1.30" LED spacing



**2400K**  
Deluxe Warm White  
2.7W per ft / 140Lm per ft

**2700K**  
Ultra Warm White  
2.7W per ft / 146Lm per ft

**3000K**  
Warm White  
2.7W per ft / 150Lm per ft

**4000K**  
White  
2.7W per ft / 155Lm per ft

**KITS**



**STL-UWX** (16.4ft)  
**STL-UWX-33** (32.8ft)

**STL-UWW** (16.4ft)  
**STL-UWW-33** (32.8ft)

**STL-WW** (16.4ft)  
**STL-WW-33** (32.8ft)

**STL-WH** (16.4ft)  
**STL-WH-33** (32.8ft)



**STL65-UWX** (16.4ft)

**STL65-UWW** (16.4ft)

**STL65-WW** (16.4ft)

**STL65-WH** (16.4ft)

**REELS**



Unavailable

**STL-UWW-100** (100ft)

**STL-WW-100** (100ft)

Unavailable



Unavailable

Unavailable

**STL-WW-100-12V** (100ft)

Unavailable

**CUSTOM CUT**



**STL-UWX-CC**

**STL-UWW-CC**

**STL-WW-CC**


**STL-WH-CC**

STL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT. STL65 (IP65) Kits include: (1) Male (1) Female connectors / (3) TL-CONKIT

**Building a Single Color Trulux System?**

See pages (16-17) for compatible single color Trulux controllers and accessories


**WIRELESS SINGLE ZONE SETUP**



Push Dial Controller  
(Single zone)




LED-DR 12V / 24V Driver  
(30W, 60W, 100W, 150W)




Trulux RF Receiver  
(Required)


**WIRELESS 4 ZONE SETUP**



Touch Slider Controller  
(4 zone)




LED-DR 12V / 24V Driver  
(30W, 60W, 100W, 150W)

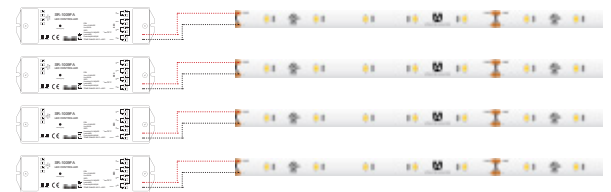

Trulux RF Receivers  
(Receiver required per zone)

**PRIMARY SIDE DIMMING**



Standard Dimmer



ELV 12V / 24V Driver  
(30W, 45W, 60W, 80W)



# TRULUX™ HIGH OUTPUT



## Trulux High Output Tape Light

Use high output Trulux tape light and extrusions to build your own task lighting systems or custom linear lighting fixtures. Light output ranges from 285-310 lumens per foot, with easy to work with run lengths up to 22 feet.

### Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 285-310 lumens per foot performance
- Consuming only 4.6 watts per foot
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 22 feet
- Cuttable every 3.94" while maintaining cULus safety rating
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed


### Applications

- Edge lighting
- Task lighting
- Shelving
- Coves
- Staircases
- Toe kicks
- Railings
- Cabinetry

### Trulux 4 zone Controller

The Trulux 4 zone allows for you to control multiple areas of your home from a single control


See pages (16-17) for details

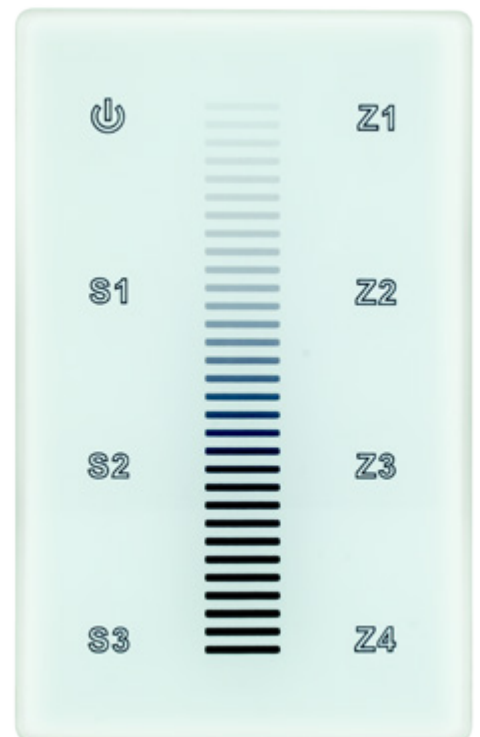

High 94+ CRI LEDs

Cuttable every 3.94"

0.63" LED spacing



**2400K**  
Deluxe Warm White  
4.6W per ft / 285Lm per ft

**2700K**  
Ultra Warm White  
4.6W per ft / 285Lm per ft

**3000K**  
Warm White  
4.6W per ft / 300Lm per ft

**4000K**  
White  
4.6W per ft / 310Lm per ft

**KITS**



**HTL-UWX** (16.4ft)

**HTL-UWW** (16.4ft)

**HTL-WW** (16.4ft)

**HTL-WH** (16.4ft)



Unavailable

**HTL65-UWW** (16.4ft)

**HTL65-WW** (16.4ft)

Unavailable

**REELS**



Unavailable

**HTL-UWW-100** (100ft)

**HTL-WW-100** (100ft)

Unavailable

**CUSTOM CUT**



**HTL-UWX-CC**

**HTL-UWW-CC**

**HTL-WW-CC**


**HTL-WH-CC**

HTL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT  
HTL65 (IP65) Kits include: (1) Male (1) Female connectors / (3) TL-CONKIT

## Building a Single Color Trulux System?

See pages (16-17) for compatible single color Trulux controllers and accessories


### WIRELESS SINGLE ZONE SETUP



Push Dial Controller  
(Single zone)




LED-DR 24V Driver  
(30W, 60W, 100W, 150W)



Trulux RF Receiver  
(Required)


### WIRELESS 4 ZONE SETUP



Touch Slider Controller  
(4 zone)




LED-DR 24V Driver  
(30W, 60W, 100W, 150W)

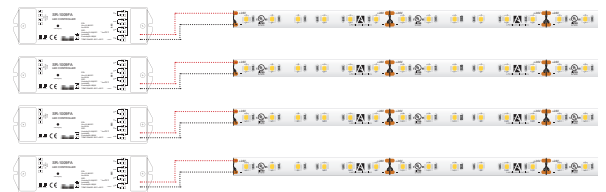

Trulux RF Receivers  
(Receiver required per zone)

### PRIMARY SIDE DIMMING



Standard Dimmer



ELV 24V Driver  
(30W, 45W, 60W, 80W)



## Trulux Spec Grade Tape Light

At full brightness our Specification tape offers up to 570 lumens per foot and can be used for both task or ambient lighting when dimmed with our Trulux controls. The superior light output is best used in large, open spaces in both residential or commercial applications.

### Features

- Excellent color rendering (94+ CRI)
- Color temperatures available from 2400K to 4000K
- 480-570 lumens per foot performance
- Dimmable with most electronic low voltage (ELV) dimmers
- Run lengths up to 13.1 feet
- Cuttable every 1.97" while maintaining cULus Listing
- 2835 LEDs last up to 50,000 hours rated life
- Available in (IP54) unjacketed and (IP65) jacketed versions



Unjacketed



Jacketed

### Applications

- Edge lighting
- Cabinetry
- Shelving
- Coves
- Staircases
- Toe kicks
- Display cases
- Light boxes

### Trulux Mobile App

Download our mobile app and sync to any Trulux system for complete lighting control in your home from a single device

See pages (42-43) for details



High 94+ CRI LEDs

Cuttable every 1.97"

0.31" LED spacing



**2400K**  
Deluxe Warm White  
7.8W per ft / 480Lm per ft

**2700K**  
Ultra Warm White  
7.8W per ft / 485Lm per ft

**3000K**  
Warm White  
7.8W per ft / 525Lm per ft

**4000K**  
White  
7.8W per ft / 570Lm per ft

**KITS**



**SPTL-UWX** (13.1ft)

**SPTL-UWW** (13.1ft)

**SPTL-WW** (13.1ft)

**SPTL-WH** (13.1ft)



**SPTL65-UWX** (13.1ft)

**SPTL65-UWW** (13.1ft)

**SPTL65-WW** (13.1ft)

**SPTL65-WH** (13.1ft)

**CUSTOM CUT**



**SPTL-UWX-CC**

**SPTL-UWW-CC**

**SPTL-WW-CC**


**SPTL-WH-CC**

SPTL (IP54) Kits include: Attached 3ft lead wires / (3) TL-CONKIT  
SPTL65 (IP65) Kits include: (1) Male / (1) Female connectors / (3) TL-CONKIT


## Building a Single Color Trulux System?

See pages (16-17) for compatible Tunable CCT Trulux controllers and accessories


### WIRELESS SINGLE ZONE SETUP



Push Dial Controller  
(Single zone)




LED-DR 24V Driver  
(30W, 60W, 100W, 150W)




Trulux RF Receiver  
(Required)


### WIRELESS 4 ZONE SETUP



Touch Slider Controller  
(4 zone)




LED-DR 24V Driver  
(30W, 60W, 100W, 150W)

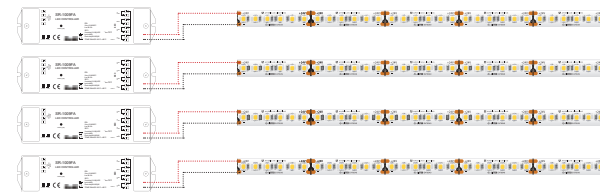

Trulux RF Receivers  
(Receiver required per zone)

### PRIMARY SIDE DIMMING



Standard Dimmer



ELV 24V Driver  
(30W, 45W, 60W, 80W)

# TRULUX™ SINGLE COLOR CONTROL

1-100% full range dimming via dial or touch slide wall controls let you have full control over your Trulux system featuring ultra sensitive glass faceplates for full clarity even when used for years. No flickering, no signal wiring, no input wiring. Simply mount to the wall and sync with Trulux receivers.



## SRF-BATT

Trulux Push Dial Wall Control  
(Single Color / Single Zone)

- Push dial On/Off control dimmer
- Full range dimming (1-100%)
- Glass faceplate with satin nickel dial
- Wireless installation - No power wire
- Pair multiple receivers to a single control
- RF signal (up to 65 feet)
- Battery powered (CR2032)
- Requires Trulux receiver for install



## SRF-4Z-3P

Trulux Touch Slider Wall Control  
(Single Color / 4 Zones / 3 Scenes)

- Touch On/Off control
- Touch slider full range dimming (1-100%)
- Glass faceplate with back-lit buttons
- Wireless installation - No power wire
- 3 programmable scenes
- 4 dedicated zone selection
- Pair multiple receivers to a single control
- RF signal (up to 65 feet)
- Battery powered (CR2032)
- Requires Trulux receiver for install



## TRULUX MOBILE APP


Multi Zone Trulux Controller  
(Multi Color / Multi Room or Zones)

- Mobile Phone or Tablet App ready
- Interactive dial controls
- Set up to 8 dedicated rooms or zones
- Create and save custom settings
- Control all single color, Tunable CCT, and RGB/RGB+WW installations simultaneously
- Use in addition to any Trulux controllers or as a standalone system
- Requires TruHub (RF-WIFI-8) router and receivers for 2 to 8 zone installations; or the RF to Wifi receiver (REC-5A-4Z-WIFI) for single zone applications

Available on Google Play & App Store:



## TRULUX™ MOBILE APP For more details see pages (42-43)

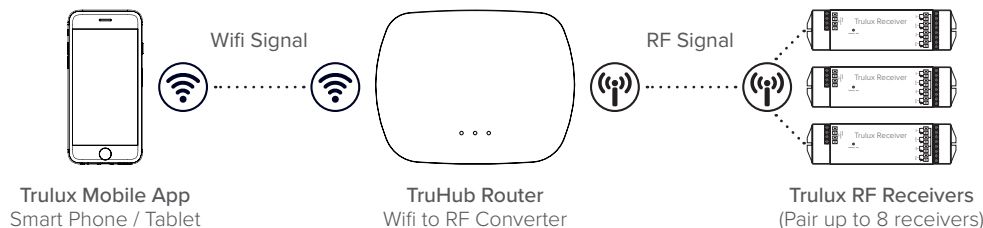

# TRULUX™ SINGLE COLOR ACCESSORIES

Building a Trulux system is easy! Our Trulux controllers feature wireless technology that makes installation a breeze. All that's required is a 120V power source to a 24V driver which is then fed to a Trulux receiver. Wire your tape to the receiver, sync the receiver to the controller, and you're all set.

## TRULUX SINGLE ZONE



Single Zone Push Dial  
Wireless RF Wall Controller  
**SRF-BATT**



LED-DR 24V Driver  
**LED-DR30-24** (30W)  
**LED-DR60-24** (60W)  
**LED-DR100-24** (100W)  
**LED-DR150-24** (150W)




Trulux RF Receiver  
(Required)  
**REC-5A-4Z**

## TRULUX 4 ZONE



4 Zone Touch Slider  
Wireless RF Wall Controller  
**SRF-4Z-3P**



LED-DR 24V Driver  
**LED-DR30-24** (30W)  
**LED-DR60-24** (60W)  
**LED-DR100-24** (100W)  
**LED-DR150-24** (150W)



Trulux RF Receiver  
(Receiver required per zone)  
**REC-5A-4Z**

## TRULUX APP MULTI ZONE



Trulux Mobile App  
Mobile Phone / Tablet  
(Control up to 8 rooms/zones)



LED-DR 24V Driver  
**LED-DR30-24** (30W)  
**LED-DR60-24** (60W)  
**LED-DR100-24** (100W)  
**LED-DR150-24** (150W)



Trulux TruHub  
Wifi to RF Wireless Router  
(Required for 2 - 8 zone installations)  
**WIFI-RF-8**




Trulux RF Receiver  
(Receiver required per zone)  
**REC-5A-4Z**

For more on the Trulux App  
see pages (42-43)

## ALTERNATE DIMMING



Primary Side Dimming  
Standard Dimmer



ELV 24V Driver  
**ELV-30-24** (30W)  
**ELV-45-24** (45W)  
**ELV-60J-24** (60W)  
**ELV-80J-24** (80W)

For more on Trulux receivers and power supplies,  
see pages (44-45) for additional information

## ADDITIONAL ACCESSORIES



**TL-CONKIT**  
Trulink 4-in-1  
Connector Kit  
(Qty of 10)



**TL-BLKS**  
Trulink 4-in-1  
Connector Block  
(Qty of 10)



**TL-2SPL** Splice Connector  
**TL-2L** (L) Snap connector  
**TL-2T** (T) Snap connector  
**TL-2X** (X) Snap connector



**TL-2JUMP-.5** (6")  
**TL-2JUMP-1** (12")  
**TL-2JUMP-2** (24")  
Single Color  
IP54 - Jumper



**TL-2DC**  
Snap connector  
to DC jack



**TL-2JUMP65-.5** (6")  
**TL-2JUMP65-1** (12")  
**TL-2JUMP65-2** (24")  
Single Color  
IP65 - Jumper