


U4142-XT-LIS

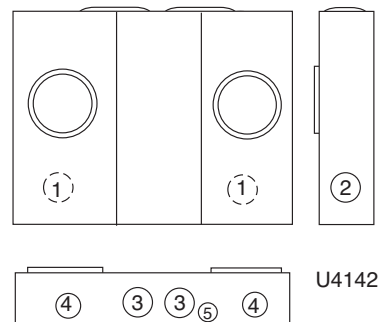

MULTIPLE POSITION

100 / 200 AMP PER POSITION-5 TERMINAL-RESIDENTIAL / COMMERCIAL

AMP	CATALOG NUMBER	NO. OF POS.	HUB	SERVICE	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
					LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
100/200	U4142-XT-LIS	2	C.P.	OH/UG	3/8 x 16" STUDS	#6-350 kcmil	LEVER	6	32 ¹ / ₈	25 ¹ / ₄	2 ¹ / ₂	2 ¹ / ₂	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	—
100/200	U4143-XT-LIS	3	C.P.	OH/UG	3/8 x 16" STUDS	#6-350 kcmil	LEVER	6	42 ³ / ₁₆	25 ¹ / ₄	2 ¹ / ₂	2 ¹ / ₂	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	—
100/200	U4144-XT-LIS	4	C.P.	OH/UG	3/8 x 16" STUDS	#6-350 kcmil	LEVER	6	52 ¹ / ₄	25 ¹ / ₄	2 ¹ / ₂	2 ¹ / ₂	4	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	—

HUBS: Units are supplied with two closing plates as standard. To order hubs as extra refer to the hub chart on the accessory page.

LEVER BYPASS: Lever supplies clamping action on meter spades and also operates bypass device.

CONNECTORS: Line wire sections are supplied with 3/8" – 16 hex head nuts with Belleville washers. For single lug connector kits, order as extra: **K1539** (350 kcmil) or **K1540** (600 kcmil). For twin lug connectors: **K1350** (350 kcmil) or **K1541** (600 kcmil).

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment in this catalog.