

# ASSEMBLY & INSTALLATION INSTRUCTIONS FOR OL1007 & OL1008 (POST LANTERN)


REV. 8/98

**IMPORTANT: TURN OFF POWER AT THE MAIN FUSE OF CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION.**

1. Carefully unpack & identify all parts.
2. Assemble hex nut and lock washer onto threaded pipe. Twist threaded pipe onto coupler of lantern housing.
3. Place formed box, die cast roof, middle break, bottom half of top font, top half of top font and rubber washer over the threaded pipe. Secure all with finial.
4. Electrical installation onto post: If you are replacing an existing fixture, disconnect and remove the old fixture.
  - 4A) Slip lantern base over post. Mark position of holes in post cup on post.
  - 4B) Remove lantern base and expose the supply wiring from above post. Drill 1/8" diameter pilot holes in post at places where marked.
  - 4C) Make wire connections. (Wire connectors not provided). Refer to chart below for correct connections. Wire supply wires to fixture wires accordingly.


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black Fixture Wire or	White Fixture Wire or
*Parallel cord (round & smooth)	* Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wire (SPT 1 & SPT 2) is used. One wire is square shaped or ridged and the other wire will be round in shape or smooth. (See Illustration)



TRACER WIRE

- 4D) Connect ground wire from supply source to fixture ground wire with connector. Never connect ground wire to black or white power supply wires. Carefully place wires inside post.
  - 4E) Slip lantern base onto post. Align holes in post cup with holes in post. Attach post cup to post with #8 sheet metal screws. (Not provided).
5. (For OL1008 only: Install candle tubes over candle sockets)
  6. To finish installation or replace bulb:  
(TURN OFF POWER AT THE MAIN FUSE OF CIRCUIT BREAKER BOX BEFORE BEGINNING)  
Attach lantern housing to lantern base by threading four (4) lantern base assembly screws through arms of lantern base and into threaded inserts on bottom triangular supports of lantern housing until secure.

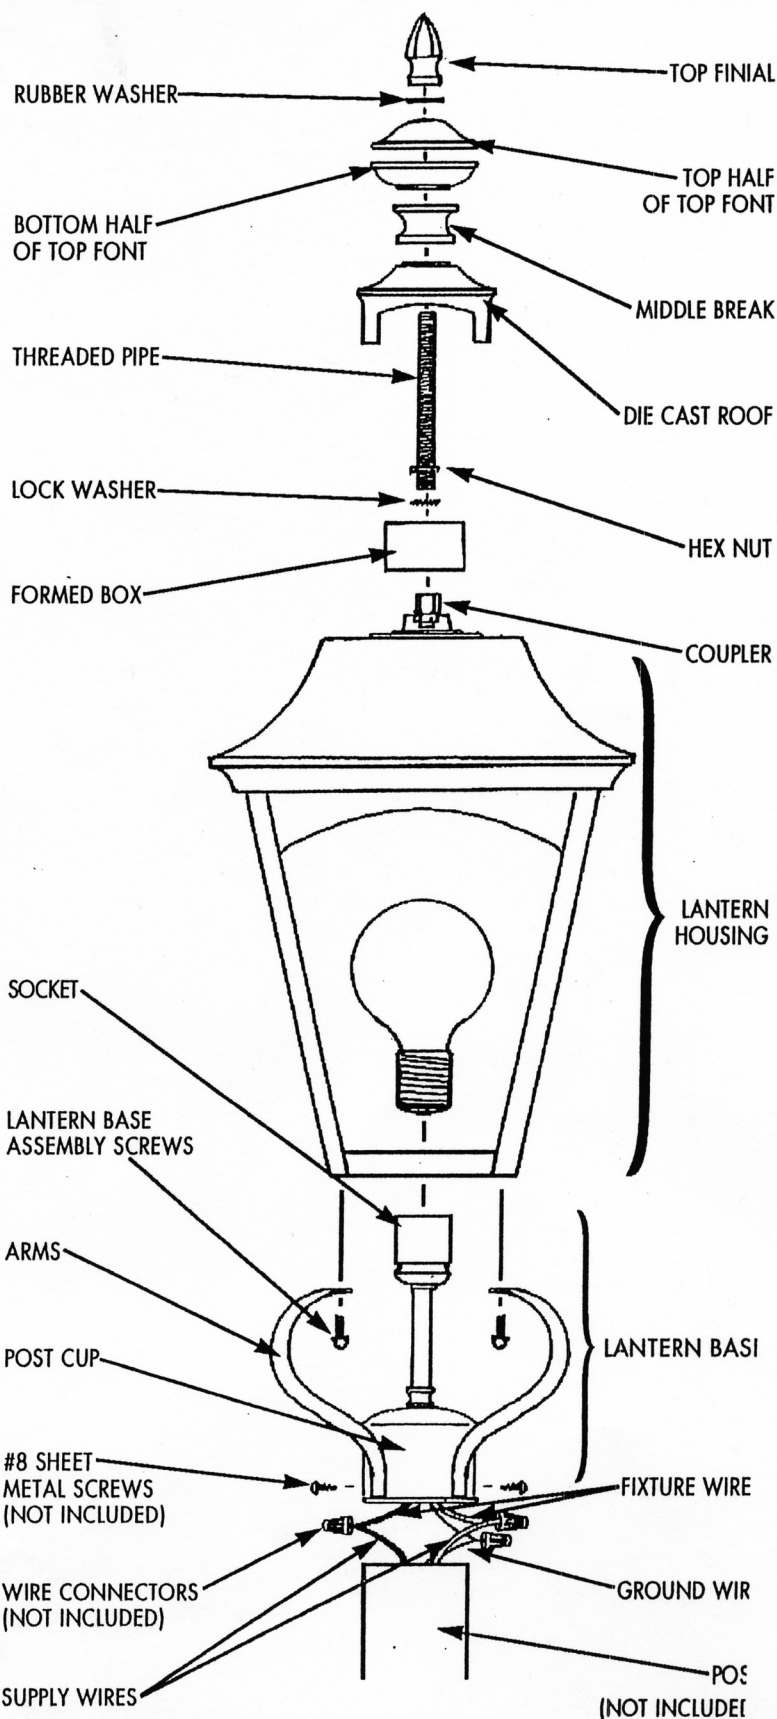

# MURRAY FEISS