GREENCREATIVE LAMPS

2016 SUMMER LAMPS BROCHURE

PAR LINE

REFINE SERIES

PATENT PENDING REFINE OPTIC

WATCH THE VIDEO

High CRI 90, R9 50 & R13 90

High candela to lumen ratio

Suitable for use in enclosed fixtures

• Black finish

Lamp Line	Model	Product	CCT	Lumens (lm)	CBCP (cd)	Equiv.	ENERGY STAR
PAR38 17W	18.5PAR38G4DIM/927SP15	16147	2700K	950	10,500	100W	✓
	18.5PAR38G4DIM/927NF25	16148	2700K	1105	5800	120W	✓
	17PAR38G4DIM/927FL40	16149	2700K	1105	2400	120W	✓
	18.5PAR38G4DIM/930SP15	16150	3000K	1000	11,000	100W	✓
	18.5PAR38G4DIM/930NF25	16151	3000K	1150	5900	120W	✓
	17PAR38G4DIM/930FL40	16152	3000K	1150	2500	120W	✓
	17PAR38G4DIM/940FL40	16155	4000K	1200	2650	120W	✓
	18.5PAR38G4DIM/930SP15/B •	16256	3000K	1000	11,000	100W	✓
	18.5PAR38G4DIM/930NF25/B •	16257	3000K	1150	5900	120W	✓
	17PAR38G4DIM/930FL40/B •	16258	3000K	1150	2500	120W	✓
PAR38 17W 277V	17PAR38G4/930FL40/277V	16161	3000K	1150	2500	120W	✓
	17PAR38G4/940FL40/277V	16164	4000K	1200	2650	120W	✓
PAR38 17W GU24	17PAR38G4DIM/927FL40/GU24	16303	2700K	1105	2400	120W	✓
	17PAR38G4DIM/930FL40/GU24	16306	3000K	1150	2500	120W	✓
PAR30 12.5W	14.5PAR30G4DIM/927SP15	16111	2700K	725	6155	75W	✓
	12.5PAR30G4DIM/927NF25	16112	2700K	815	3350	75W	✓
	12.5PAR30G4DIM/927FL40	16113	2700K	815	1750	75W	✓
	14.5 PAR30G4DIM/930SP15	16114	3000K	760	6250	75W	✓
	12.5PAR30G4DIM/930NF25	16115	3000K	850	3600	75W	✓
	12.5PAR30G4DIM/930FL40	16116	3000K	850	1850	75W	✓
	12.5PAR30G4DIM/940FL40	16119	4000K	900	2050	75W	✓
	14.5PAR30G4DIM/930SP15/B •	16208	3000K	760	6250	75W	✓
	12.5PAR30G4DIM/930NF25/B •	16209	3000K	850	3600	75W	✓
	12.5PAR30G4DIM/930FL40/B •	16210	3000K	850	1850	75W	✓
PAR30 12.5W 277V	12.5PAR30G4/930FL40/277V	16125	3000K	850	1850	75W	✓
	12.5PAR30G4/940FL40/277V	16128	4000K	900	2050	75W	✓
PAR30 12.5W GU24	12.5PAR30G4DIM/927FL40/GU24	16279	2700K	815	1750	75W	✓
	12.5PAR30G4DIM/930FL40/GU24	16282	3000K	850	1850	75W	✓
	12.5PAR30G4DIM/927FL40/GU24/B •	16291	2700K	815	1750	75W	✓
PAR30SN 11W	14PAR30SNG4DIM/927SP15	16129	2700K	700	6155	75W	✓
	11PAR30SNG4DIM/927NF25	16130	2700K	705	2910	75W	✓
	11PAR30SNG4DIM/927FL40	16131	2700K	705	1400	75W	✓
	14PAR30SNG4DIM/930SP15	16132	3000K	725	6200	75W	✓
	11PAR30SNG4DIM/930NF25	16133	3000K	740	2910	75W	✓
	11PAR30SNG4DIM/930FL40	16134	3000K	740	1450	75W	✓
	11PAR30SNG4DIM/940FL40	16137	4000K	780	1500	75W	✓
	14PAR30SNG4DIM/930SP15/B •	16232	3000K	725	6200	75W	✓
	11PAR30SNG4DIM/930NF25/B •	16233	3000K	740	2910	75W	✓
	11PAR30SNG4DIM/930FL40/B •	16234	3000K	740	1450	75W	✓
PAR20 7W	7PAR20G4DIM/927FL40	16108	2700K	460	600	50W	✓
	7PAR20G4DIM/930FL40	16109	3000K	480	650	50W	✓
	7PAR20G4DIM/940FL40	16110	4000K	505	700	50W	✓
	7PAR20G4DIM/930FL40/B •	16202	3000K	480	650	50W	✓

Lamp Line		Model	Product	CCT	Lumens (lm)	CBCP (cd)	Equiv.	ENERGY STAR
PAR CORE LINE	PAR38 14W	14PAR38DIM/827FL40	57807	2700K	1000	1900	90W	✓
		14PAR38DIM/830FL40	57809	3000K	1050	2000	90W	✓
	PAR30 8.5W	8.5PAR30DIM/827FL40	57795	2700K	650	1700	75W	✓
		8.5PAR30DIM/830FL40	57797	3000K	700	1750	75W	✓
	PAR20 5.5W	5.5PAR20DIM/827FL40	57789	2700K	450	750	50W	✓
		5.5PAR20DIM/830FL40	57791	3000K	500	800	50W	✓
MR16 LINE	MR16 7.5W	7.5MR16G4DIM/927SP15	40804	2700K	410	5500	75W	✓
		7.5MR16G4DIM/927NF25	40805	2700K	485	2600	75W	✓
		7.5MR16G4DIM/927FL36	40806	2700K	485	1400	75W	✓
		7.5MR16G4DIM/930SP15	40807	3000K	430	5500	75W	✓
		7.5MR16G4DIM/930NF25	40808	3000K	505	2600	75W	✓
		7.5MR16G4DIM/930FL36	40809	3000K	505	1400	75W	✓
		7.5MR16G4DIM/840SP15	40810	4000K	485	5700	75W	✓
		7.5MR16G4DIM/840NF25	40811	4000K	625	2800	75W	✓
		7.5MR16G4DIM/840FL36	40812	4000K	625	1600	75W	✓
	MR16 7W	7MR16G4DIM/827FL36	40758	2700K	525	1255	50W	✓
		7MR16G4DIM/830FL36	40759	3000K	560	1265	50W	✓
		7MR16G4DIM/840FL36	40760	4000K	580	1285	50W	✓
	MR16 6W	6MR16G4DIM/827FL36	40755	2700K	425	900	35W	✓
	GU10 6W	6GU10G4DIM/827FL36	40716	2700K	425	900	50W	✓
		6GU10G4DIM/830FL36	40717	3000K	450	925	50W	✓
	PAR16 6W	6PAR16G4DIM/827FL36	40723	2700K	425	900	60W	✓
		6PAR16G4DIM/830FL36	40724	3000K	450	925	60W	✓
	MR11 3W	3MR11G4/827NF30	40713	2700K	200	600	20W	N.A.
		3MR11G4/840NF30	40715	4000K	220	620	20W	N.A.

Economical retrofit solution

ENCLOSED FIXTURE RATED

ENCLOSED

75W HALOGEN REPLACEMENT
MR16 7.5W HIGH CRI



Degree	Candela
0	2600
5	1886
15	445
25	118
35	25
45	10

75W, 50W, 35W & 20W replacements

Industry leading efficacy

Compact 1:1 halogen form factor

Lamp Line	Model	Product	CCT	Lumens (lm)	CBCP (cd)	Equiv.	ES / DLC
PAR38 HO							
Superior 10,000+ candela	PAR38 19W HO 277V	19PAR38HO/827NF25/277V	97769	2700K	1725	10,000	250W	✓
		19PAR38HO/830NF25/277V	97772	3000K	1775	10,200	250W	✓
		19PAR38HO/840NF25/277V	97778	4000K	1850	10,400	250W	✓
HID LED LINE							
ENCLOSED FIXTURE RATED	HID LED 80W	NEW! 80HID/850/277V/EX39	57949	5000K	9600	N.A.	175-250W HID	✓
	HID LED 45W	NEW! 45HID/830/277V/EX39	57938	3000K	5040	N.A.	100-175W HID	✓
		45HID/840/277V/EX39/R	57939	4000K	5350	N.A.	100-175W HID	Aug.
		45HID/850/277V/EX39	57940	5000K	5400	N.A.	100-175W HID	✓
	HID LED 45W E26	NEW! 45HID/840/277V/E26	58008	4000K	5350	N.A.	100-175W HID	N.A.
		45HID/850/277V/E26	57994	5000K	5400	N.A.	100-175W HID	N.A.
	HID LED 27W	NEW! 27HID/830/277V/EX39	57935	3000K	3020	N.A.	70-100W HID	✓
		27HID/840/277V/EX39/R	57936	4000K	3150	N.A.	70-100W HID	Aug.
		27HID/850/277V/EX39	57937	5000K	3200	N.A.	70-100W HID	✓
	HID LED 27W E26	NEW! 27HID/840/277V/E26	58006	4000K	3150	N.A.	70-100W HID	N.A.
		27HID/850/277V/E26	57993	5000K	3200	N.A.	70-100W HID	N.A.
Designed for post top applications Direct line voltage 120-277V EX39 & E26 versions	HID LED 18.5W HO 277V	18.5A21/830/277V	97734	3000K	2000	N.A.	50-70W HID	✓
		18.5A21/840/277V	97735	4000K	2000	N.A.	50-70W HID	Aug.
		18.5A21/850/277V	97736	5000K	2050	N.A.	50-70W HID	✓
HID LED ACCESSORIES							
For use with HID LED products 10kV surge protector E26 lamp extender for HID LED 18.5W	SURGE PROTECTOR 10KV	NEW! 10SURGE/277V	97718	N.A.	N.A.	N.A.	N.A.	N.A.
	E26 LAMP EXTENDER	E26 EXTENDER	16325	N.A.	N.A.	N.A.	N.A.	N.A.

Lamp Line		Model	Product	CCT	Lumens (lm)	Equiv.	ENERGY STAR
SURFACE MOUNT DL LINE	SMDL 6” 14.5W	14.5SMDL6G4DIM/927	40842	2700K	950	85W	✓
		14.5SMDL6G4DIM/930	40843	3000K	950	85W	✓
		14.5SMDL6G4DIM/840	40847	4000K	1150	100W	✓
RESIDENTIAL DL LINE	DL 5-6” 17.5W HO	17.5DL6DIM/830	97760	3000K	1150	100W	✓
		17.5DL6DIM/840	97761	4000K	1200	100W	✓
	DL 5-6” 12W	12DL6DIM/927	97765	2700K	720	65W	✓
		12DL6DIM/930	97766	3000K	750	65W	✓
	DL 5-6” 10W	10DL6DIM/827	97756	2700K	700	65W	✓
		10DL6DIM/830	97757	3000K	700	65W	✓
	DL 4” 12W	12DL4DIM/927	97762	2700K	600	50W	✓
		12DL4DIM/930	97763	3000K	650	50W	✓
BR LINE	BR40 14W	14BR40G4DIM/827	40636	2700K	1065	85W	✓
		14BR40G4DIM/830	40637	3000K	1100	85W	✓
	BR40 9W	9BR40G4DIM/824	40626	2400K	650	65W	N.A.
		9BR40G4DIM/827	40627	2700K	700	65W	✓
	BR30 8W	8BR30G4DIM/824	40770	2400K	585	65W	N.A.
		8BR30G4DIM/827	40771	2700K	650	65W	✓
		8BR30G4DIM/830	40772	3000K	685	65W	✓
		8BR30G4DIM/840	40773	4000K	710	65W	✓
	BR30 11W	11BR30G4DIM/927	40644	2700K	750	65W	✓
	BR30 11W GU24	11BR30G4DIM/927/GU24	40646	2700K	750	65W	✓
	R20 6.5W	6.5R20G4DIM/827	40612	2700K	500	45W	✓

CLICK DESIGN

Fits most 4” J-boxes

WET LOCATION & HIGH CRI
DL 5-6” 12W & DL 4” 12W

WET LOCATION

HIGH CRI
LED TECHNOLOGY

High output 1150 lumen version
Installs in minutes – no rewiring
GU24 connector available

CLOUD DESIGN

HIGH CRI E26 & GU24 VERSIONS

Revolutionary CLOUD design
Industry leading efficacy
Suitable for enclosed fixtures

T8 DIR LINE

DIRect

INSTALLATION & FEATURES

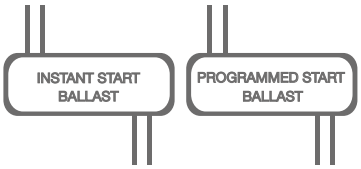



Plug & Play DIRect installation

Compatible with electronic ballasts

Dimmable – 0-10V & TRIAC

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	DLC
T8 15W 4FT. DIR	15T8/4F/840/DIR	97833	4000K	2050	32W	✓
	15T8/4F/850/DIR	97834	5000K	2050	32W	✓
T8 12W 4FT. DIR	12T8/4F/830/DIR	97737	3000K	1600	32W	✓
	12T8/4F/835/DIR	97738	3500K	1600	32W	✓
	12T8/4F/840/DIR	97739	4000K	1650	32W	✓
	12T8/4F/850/DIR	97740	5000K	1650	32W	✓
T8 10W 3FT. DIR	10T8/3F/830/DIR	57828	3000K	1100	25W	N.A.
	10T8/3F/835/DIR	57829	3500K	1100	25W	N.A.
	10T8/3F/840/DIR	57830	4000K	1150	25W	N.A.
T8 8W & 10W 2FT. DIR	8T8/2F/830/DIR	97741	3000K	1050	17W	✓
	8T8/2F/835/DIR	97742	3500K	1050	17W	✓
	8T8/2F/840/DIR	97743	4000K	1100	17W	✓
	10T8G4/2F/850/DIR	40803	5000K	1100	17W	N.A.
T8 U-BENT 16W DIR	16T8U6G4/830/DIR	40707	3000K	1650	32W	N.A.
	16T8U6G4/840/DIR	40848	4000K	1800	32W	N.A.
	16T8U6G4/850/DIR	40849	5000K	1800	32W	N.A.

T8 BYP LINE

BYPass

INSTALLATION & FEATURES



BYPass installation

Meets NSF requirements

GOLD version filters out wavelengths <520nm

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	DLC
T8 17.5W 4FT. BYP	17.5T8/4F/840/BYP	97829	4000K	2000	32W	✓
	17.5T8/4F/850/BYP	97830	5000K	2000	32W	✓
T8 14.5W 4FT. BYP	14.5T8/4F/830/BYP	97720	3000K	1600	32W	✓
	14.5T8/4F/835/BYP	97721	3500K	1650	32W	✓
	14.5T8/4F/840/BYP	97722	4000K	1700	32W	✓
	14.5T8/4F/850/BYP	97723	5000K	1700	32W	✓
T8 8.5W & 9W 2FT. BYP	8.5T8/2F/830/BYP	97724	3000K	900	17W	✓
	8.5T8/2F/835/BYP	97725	3500K	950	17W	✓
	8.5T8/2F/840/BYP	97726	4000K	1000	17W	✓
	9T8G4/2F/850/BYP	40789	5000K	1000	17W	✓
T8 17.5W 4FT. GOLD BYP	17.5T8/4F/GOLD/BYP	57840	GOLD	1100	32W	N.A.

T5 DIR LINE

DIRect

INSTALLATION & FEATURES

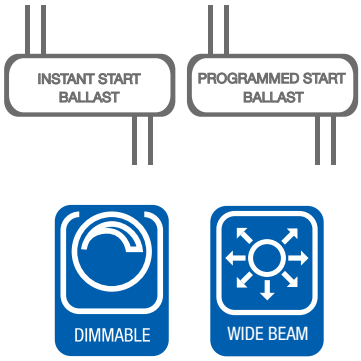

Plug & Play DIRect installation

Compatible with electronic ballasts

Dimmable – 0-10V & TRIAC

PLS HYB & BYP LINE

PL EDGE SERIES

GX23 HYB Replaces 13W | GX23 HYB Replaces 13W | GX23 HYB Replaces 13W

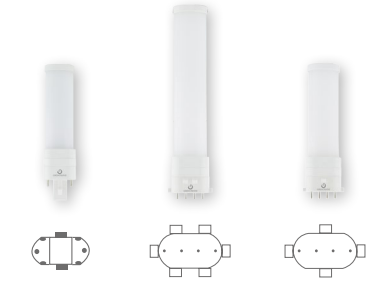

G23 HYB Replaces 7-9W | 2GX7 BYP Replaces 13W | 2G7 BYP Replaces 7-9W

HYBrid installation – DIRect or BYPass

DIRect installation – Magnetic ballasts

BYPass installation – 120-277V

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	DLC
T5 HO 24W 4FT. DIR	NEW! 24T5HO/4F/830/DIR	57836	3000K	3000	54W	✓
	24T5HO/4F/835/DIR	57837	3500K	3000	54W	✓
	24T5HO/4F/840/DIR	57838	4000K	3050	54W	✓
	24T5HO/4F/850/DIR	57839	5000K	3200	54W	✓
T5 HE 15W 4FT. DIR	NEW! 15T5HE/4F/830/DIR	57859	3000K	1700	28W	✓
	15T5HE/4F/835/DIR	57860	3500K	1750	28W	✓
	15T5HE/4F/840/DIR	57861	4000K	1800	28W	✓
T5 HE 12W 3FT. DIR	NEW! 12T5HE/3F/830/DIR	57954	3000K	1420	21W	N.A.
	12T5HE/3F/835/DIR	57955	3500K	1420	21W	N.A.
	12T5HE/3F/840/DIR	57956	4000K	1500	21W	N.A.
T5 HE 8W 2FT. DIR	NEW! 8T5HE/2F/830/DIR	57958	3000K	950	14W	N.A.
	8T5HE/2F/835/DIR	57959	3500K	950	14W	N.A.
	8T5HE/2F/840/DIR	57960	4000K	1020	14W	N.A.
PLS 5.5W HYB GX23	NEW! 5.5PLS/827/HYB/GX23	57820	2700K	450	13W	N.A.
	5.5PLS/830/HYB/GX23	57821	3000K	500	13W	N.A.
	5.5PLS/835/HYB/GX23	57822	3500K	500	13W	N.A.
	5.5PLS/840/HYB/GX23	57823	4000K	520	13W	N.A.
PLS 6W HYB GX23	NEW! 6PLS/827/HYB/GX23	57962	2700K	520	13W	N.A.
	6PLS/830/HYB/GX23	57963	3000K	550	13W	N.A.
	6PLS/835/HYB/GX23	57964	3500K	550	13W	N.A.
	6PLS/840/HYB/GX23	57965	4000K	560	13W	N.A.
PLS V 7W HYB GX23	NEW! 7PLSV/827/HYB/GX23	57931	2700K	550	13W	N.A.
	7PLSV/830/HYB/GX23	57932	3000K	550	13W	N.A.
	7PLSV/835/HYB/GX23	57933	3500K	560	13W	N.A.
	7PLSV/840/HYB/GX23	57934	4000K	570	13W	N.A.
PLS 3.5W HYB G23	NEW! 3.5PLS/835/HYB/G23	57814	3500K	300	7-9W	N.A.
PLS 5.5W BYP 2GX7	NEW! 5.5PLS/835/BYP/2GX7	57826	3500K	500	13W	N.A.
PLS 3.5W BYP 2G7	NEW! 3.5PLS/835/BYP/2G7	57818	3500K	300	7-9W	N.A.

Lamp Line		Model	Product	CCT	Lumens (lm)	Equiv.	DLC
PLL DIR LINE PL EDGE SERIES Wide beam design – compact driver	 **PLL 17W DIR**	17PLL/830/DIR 17PLL/835/DIR 17PLL/840/DIR	97745 97746 97747	3000K 3500K 4000K	2000 2050 2100	40W 40W 40W	N.A. N.A. N.A.
	 PLL 14.5W DIR	14.5PLL/835/DIR	97750	3500K	1550	36W	N.A.
PL H DIR LINE PL EDGE SERIES  Horizontal Installation G24q/GX24q DIR Replaces 26W G24q/GX24q DIR Replaces 13-18W ROTATABLE BASE 310° 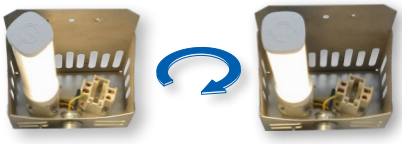 Plug & Play DIRect installation Compatible with electronic ballasts Dimmable – 0-10V	 **PL H 9.5W DIR**	NEW! 9.5PLH/827/DIR 9.5PLH/830/DIR 9.5PLH/835/DIR 9.5PLH/840/DIR	57899 57900 57901 57902	2700K 3000K 3500K 4000K	870 920 920 935	26W 26W 26W 26W	N.A. N.A. N.A. N.A.
	 PL H 10.5W DIR	NEW! 10.5PLH/930/DIR	57903	3000K	890	26W	N.A.
	 PL H 5.5W DIR	NEW! 5.5PLH/827/DIR 5.5PLH/830/DIR 5.5PLH/835/DIR 5.5PLH/840/DIR	57895 57896 57897 57898	2700K 3000K 3500K 4000K	520 550 550 560	13-18W 13-18W 13-18W 13-18W	N.A. N.A. N.A. N.A.
PL V DIR LINE PL EDGE SERIES Vertical Installation G24q/GX24q DIR Replaces 26W G24q/GX24q DIR Replaces 13-18W PATENTED ROUND DIFFUSER Plug & Play DIRect installation Compatible with electronic ballasts Dimmable – 0-10V	 **PL V 10W DIR**	NEW! 10PLV/827/DIR 10PLV/830/DIR 10PLV/835/DIR 10PLV/840/DIR	57914 57915 57916 57917	2700K 3000K 3500K 4000K	950 1000 1000 1020	26W 26W 26W 26W	N.A. N.A. N.A. N.A.
	 PL V 11W DIR	NEW! 11PLV/930/DIR	57918	3000K	920	26W	N.A.
	 PL V 6.5W DIR	NEW! 6.5PLV/827/DIR 6.5PLV/830/DIR 6.5PLV/835/DIR 6.5PLV/840/DIR	57910 57911 57912 57913	2700K 3000K 3500K 4000K	570 600 600 620	13-18W 13-18W 13-18W 13-18W	N.A. N.A. N.A. N.A.

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	DLC
PL H BYP LINE	NEW!					
	10.5PLH/827/BYP	57906	2700K	870	26W	N.A.
	10.5PLH/830/BYP	57907	3000K	920	26W	N.A.
	10.5PLH/835/BYP	57908	3500K	920	26W	N.A.
	10.5PLH/840/BYP	57909	4000K	935	26W	N.A.
PL H 10.5W BYP	NEW!					
	6PLH/835/BYP	57904	3500K	550	13-18W	N.A.
	6PLH/840/BYP	57905	4000K	560	13-18W	N.A.
PL H 6W BYP	NEW!					
	6PLH/830/BYP/E26	57925	3000K	550	13W	N.A.
	6PLH/835/BYP/E26	57926	3500K	550	13W	N.A.
	6PLH/840/BYP/E26	57927	4000K	560	13W	N.A.
PL H 6W BYP E26	NEW!					
	6PLH/830/BYP/GU24	57928	3000K	550	13W	N.A.
	6PLH/835/BYP/GU24	57929	3500K	550	13W	N.A.
	6PLH/840/BYP/GU24	57930	4000K	560	13W	N.A.
PL H 6W BYP GU24						
PL V BYP LINE	NEW!					
	11.5PLV/827/BYP	57921	2700K	950	26W	N.A.
	11.5PLV/830/BYP	57922	3000K	1000	26W	N.A.
	11.5PLV/835/BYP	57923	3500K	1000	26W	N.A.
	11.5PLV/840/BYP	57924	4000K	1020	26W	N.A.
PL V 11.5W BYP	NEW!					
	7PLV/835/BYP	57919	3500K	600	13-18W	N.A.
	7PLV/840/BYP	57920	4000K	620	13-18W	N.A.
PL V 7W BYP						

PL EDGE SERIES



Horizontal Installation

G24d/GX24d HYB*
G24q/GX24q BYP
Replaces 26W

G24d/GX24d HYB*
G24q/GX24q BYP
Replaces 13-18W

*When replacing a 2-pin CFL, the lamp can function using the existing magnetic ballast as a plug & play replacement or the ballast can be bypassed

E26 BYP
Replaces 13W

GU24 BYP
Replaces 13W

HYBrid installation – DIRect or BYPass
DIRect installation – Magnetic ballasts
BYPass installation – 120-277V

PL EDGE SERIES

Vertical Installation

G24d/GX24d HYB*
G24q/GX24q BYP
Replaces 26W

G24d/GX24d HYB*
G24q/GX24q BYP
Replaces 13-18W

*When replacing a 2-pin CFL, the lamp can function using the existing magnetic ballast as a plug & play replacement or the ballast can be bypassed

HYBrid installation – DIRect or BYPass
DIRect installation – Magnetic ballasts
BYPass installation – 120-277V

A19 / A21 LINE

ENCLOSED FIXTURES
100W & 75W REPLACEMENTS

HIGH CRI & ENCLOSED FIXTURES
100W & 75W REPLACEMENTS

GU24 BASE
100W & 60W REPLACEMENTS

A21 3-WAY

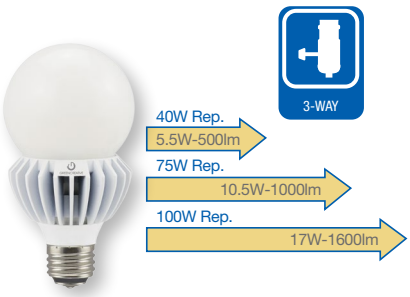

Fully omnidirectional

100W, 75W, 60W & 40W replacements

Exceptional efficacy

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	ENERGY STAR
A21 17W	17A21G4DIM/827	16179	2700K	1600	100W	✓
	17A21G4DIM/830	16180	3000K	1650	100W	✓
	17A21G4DIM/840	16181	4000K	1700	100W	✓
A21 17W GU24	17A21DIM/827/GU24	16332	2700K	1600	100W	✓
A19 12W	12A19G4DIM/827	16175	2700K	1100	75W	✓
	12A19G4DIM/830	16176	3000K	1150	75W	✓
	12A19G4DIM/840	16177	4000K	1180	75W	✓
A19 8.5W	8.5A19DIM/827	57856	2700K	800	60W	✓
	8.5A19DIM/830	57857	3000K	800	60W	✓
	8.5A19DIM/840	57858	4000K	850	60W	✓
A19 9.5W	9.5A19/827	97815	2700K	750	60W	N.A.
A19 9W GU24	9A19DIM/827/GU24	57831	2700K	800	60W	✓
	9A19DIM/830/GU24	57832	3000K	800	60W	✓
	9A19DIM/840/GU24	57833	4000K	850	60W	✓
A19 6W	6A19DIM/827	97731	2700K	450	40W	✓
	6A19DIM/830	97732	3000K	450	40W	✓
2015 PROGRESS Report SELECTION; A21 18.5W; HIGH CRI LED TECHNOLOGY	18.5A21DIM/927	16329	2700K	1600	100W	✓
A21 3-WAY 5.5/10.5/17W	17A21G4/827/3WAY	16335	2700K	500 1000 1600	40W 75W 100W	✓
2015 PROGRESS Report SELECTION; A21 15W; HIGH CRI LED TECHNOLOGY	15A21DIM/927	16326	2700K	1100	75W	✓
A19 9W 277V	9A19G4/827/277V	40750	2700K	800	60W	✓
	9A19G4/830/277V	40751	3000K	800	60W	✓
	9A19G4/840/277V	40752	4000K	850	60W	✓
2015 PROGRESS Report SELECTION; A19 9W; HIGH CRI LED TECHNOLOGY	9A19G4DIM/927	40746	2700K	800	60W	✓
2015 PROGRESS Report SELECTION; A19 11W GU24; HIGH CRI LED TECHNOLOGY	11A19G4DIM/927/GU24	40739	2700K	800	60W	✓

FILAMENT LED LINE

ST19
40W REPLACEMENTS

A19
60W & 40W REPLACEMENTS

G25
40W REPLACEMENTS

CANDLE
40W REPLACEMENTS

MICRO-DESIGNED DRIVER &
FULLY DIMMABLE

DIMMABLE

Fully omnidirectional

Designed for decorative applications

Eligible products meet ES standards

Lamp Line	Model	Product	CCT	Lumens (lm)	Equiv.	ENERGY STAR
ST19 5W AMBER	NEW! 5FST19DIM/824/A	57892	2400K	380	40W	N.A.
A19 4.5W AMBER	NEW! 4.5FA19DIM/824/A	57890	2400K	380	40W	N.A.
G25 4.5W AMBER	NEW! 4.5FG25DIM/824/A	57894	2400K	380	40W	N.A.
BA10 3.5W AMBER	NEW! 3.5FBA10DIM/824/FT/A	57887	2400K	280	40W	N.A.
A19 7.5W CLEAR	NEW! 7.5FA19DIM/827	57891	2700K	800	60W	✓
A19 4.5W CLEAR	NEW! 4.5FA19DIM/827/R	57971	2700K	450	40W	✓
A19 4.5W CLEAR	NEW! 4.5FA19DIM/827	57889	2700K	450	40W	N.A.
G25 4.5W CLEAR	NEW! 4.5FG25DIM/827	57893	2700K	450	40W	✓
B10 3.5W CLEAR	NEW! 3.5FB10DIM/827	57886	2700K	320	40W	✓
B11 3.5W E26 CLEAR	NEW! 3.5FB11DIM/827/E26	57888	2700K	320	40W	✓

Lamp Line		Model	Product	CCT	Lumens (lm)	Equiv.	ENERGY STAR
WARM DIM LINE	BR30 9W WARM DIM	NEW! 9BR30DIM/8CCTD	57885	2700K-2200K	650	65W	✓
	A19 9.5W WARM DIM	NEW! 9.5A19DIM/8CCTD	57883	2700K-2200K	800	60W	✓
	B11 5W WARM DIM	NEW! 5B11DIM/8CCTD	57884	2700K-2200K	300	40W	✓
DECORATIVE LINE	G25 6W	6G25DIM/827	97729	2700K	450	40W	✓
	B11 5.5W E12 & E26	5.5B11DIM/827	97823	2700K	500	60W	✓
		5.5B11DIM/827/E26	97824	2700K	500	60W	✓
	B11 5W E12	5B11G4DIM/827/FR	40730	2700K	350	40W	✓
	B11 4.5W E12 & E26	4.5B11DIM/827	97817	2700K	300	40W	✓
		4.5B11DIM/827/E26	97818	2700K	300	40W	✓
	B11 4.5W E12	4.5B11G4DIM/824	40725	2400K	275	40W	N.A.

2700K – 2200K WARM DIM

2700K 2200K WARM DIM

WARM DIM

Incandescent style warm dimming

Exceptional efficacy

BR30, A19 & Candle versions

INNOVATIVE CROWN LENS

60W & 40W Inc. replacements

Innovative crown lens

Available in E12 & E26 bases

Ref.#: LF-026-PROD

GREEN CREATIVE
1200 Bayhill Drive, Suite 220
San Bruno, CA 94066

Tel / Fax: (866) 774-5433
info@greencreative.com
www.greencreative.com

/ GREENCREATIVELED
/ GClightingLED
/ GREEN CREATIVE