




877.870.WAVE (9283) • www.wavelighting.com

#### **DIRECT BURIAL LAMP POSTS**

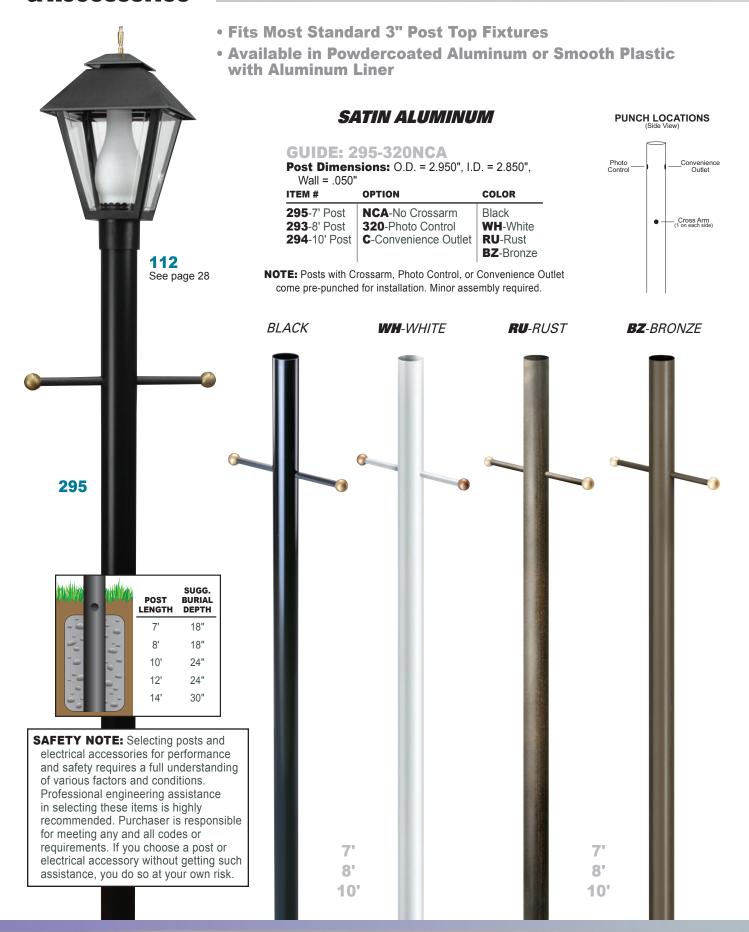

#### DIRECT BURIAL LAMP POSTS

#### Lamp Posts & Accessories

## SMOOTH PLASTIC WITH ALUMINUM LINER

#### **GUIDE: 308C-320NCA**

**Post Dimensions:** O.D. = 2.950", I.D. = 2.850", Wall = .050"

ITEM#	OPTION	COLOR
<b>310</b> -10' Post	NCA-No Crossarm 320-Photo Control C-Convenience Outlet	Black <b>WH</b> -White

### SATIN FLUTED ALUMINUM

**GUIDE: 297-688NCA-WH** 

**Post Dimensions:** O.D. = 2.950", I.D. = 2.660", Wall = .050"

ITEM#	OPTION	COLOR
<b>297</b> -7' Post	NCA-No Crossarm	<b>BK</b> -Black
	<b>688NCA</b> -Photo Control	<b>WH</b> -White
	& No Crossarm	

<sup>\*</sup>Crossarm unavailable with Satin Fluted Aluminum Posts.

NOTE: Posts with Crossarm, Photo Control, or Convenience Outlet come pre-punched for installation. Minor assembly required.



#### ADDRESS LITE



CAL

120V Post Mount
Cast Aluminum Address Lite
4" Vinyl Number Kit
(2) 8W Candelabra Lamps (Not Included)
Crossarm mounting holes required
Available in (**BK**) Black or (**WH**) White

#### **PHOTO CONTROLS**



320

EZEE-Change™ Photo Control
120V, 1 3/8" Dia. mounting hole required
Available in (B) Black or (W) White



688

6 77

Button Photo Control 120V, 11/16" Dia. mounting hole required Only available in Black

#### **CONVENIENCE OUTLET**



338

IP.

**Grounded Convenience Outlet** 120V, 1 3/8" Dia. mounting hole required Available in **(B)** Black or **(W)** White

**SEE SAFETY NOTE ON PAGE 38** 

#### SURFACE MOUNT LAMP POSTS





O.D. = 3", I.D. = 2.8" Wall = .100", L = 6' **Base Dimensions:** 

H = 21", W = 10 1/4"

#### C8P2-BK

**Post Dimensions:** O.D. = 3", I.D. = 2.8" Wall = .100", L = 8'

**Base Dimensions:** H = 28 1/2", W = 11 5/8" 2"x4" Access Plate

#### **C10P2-BK**

**Post Dimensions:** O.D. = 3", I.D. = 2.8" Wall = .100", L = 10' **Base Dimensions:** 

H = 37", W = 16 5/8" 2"x4" Access Plate



- Fits Most Standard 3" **Post Tops**
- Constructed of **Non-Corrosive Polymer** with PVC Core
- Available in Black Only

ITEM# COLOR S6P1 **BK**-Black



**S6P1-BK** 

**Post Dimensions:** O.D. = 3", I.D. = 2" 1 = 6'

**Base Dimensions:** H = 25 1/2", W = 10 5/8"

NOTE: Includes anchor bolts and templates. Post and Base are two piece system that ship separately. Posts accommodate Photo Control 688. See page 39. Photo Controls sold seperately.

#### LIGHT COMMERCIAL LAMP POSTS

# Lamp Posts & Accessories

#### DIRECT BURIAL AND SURFACE MOUNT ALUMINUM LAMP POSTS

#### **DIRECT BURIAL**

Includes Inlet Hole

**GUIDE: 2514-BK-320** 

Post Dimensions: O.D. = 2.950", Wall = .072"

ITEM#	COLOR	OPTION
<b>2500</b> -8' <b>2510</b> -10' <b>2512</b> -12' <b>2514</b> -14'	<b>BK</b> -Black <b>WH</b> -White <b>BZ</b> -Bronze	<b>320</b> -Photo Control <b>HH*</b> -2"x4" Hand Hole

**GUIDE: 2592-WH-HH** 

Post Dimensions: O.D. = 2.950", Wall = .125"

ITEM #	COLOR	OPTION
<b>2590</b> -10'	<b>BK</b> -Black	HH*-2"x4" Hand Hole
<b>2592</b> -12'	<b>WH</b> -White	
<b>2594</b> -14'	<b>BZ</b> -Bronze	

#### SURFACE MOUNT

Flange Sold Separately

**GUIDE: 2600-BZ** 

Post Dimensions: O.D. = 2.950", Wall = .072"


ITEM#	COLOR	OPTION
<b>2600</b> -8' <b>2610</b> -10' <b>2612</b> -12'	<b>BK</b> -Black <b>WH</b> -White <b>BZ</b> -Bronze	<b>320</b> -Photo Control <b>HH*</b> -2"x4" Hand Hole

**GUIDE: 2694-BK-HH** 

Post Dimensions: O.D. = 2.950", Wall = .125"

ITEM#	COLOR	OPTION
<b>2690</b> -10' <b>2692</b> -12'	<b>BK</b> -Black <b>WH</b> -White <b>BZ</b> -Bronze	HH*-2"x4" Hand Hole

\*In order to meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug.



SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended.

Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

#### BRACKET DRILLING CONFIGURATION

POST BRACKET

To order Cast Aluminum Post Bracket (1736 page 43), specify position of Post Bracket desired by adding the appropriate position code, as a letter suffix, to the Post Catalog Number. 1736 designed for 3" Posts.

**Example:** If ordering post drilled for 2 post brackets @ 90°, add "-C".

"2510-BK-320-C"











Post Bracket sold separately. See page 43 for specifications.

NOTE: MAX. GLOBE SIZE for Configurations -C, -D & -F is 12" Diameter, -E is 14" Diameter.


#### FLANGE POST BASES



2410 Spun Aluminum Base Cover for **2403** 



Die Cast Aluminum Flange base for 8' -12' x 2.950" O.D. Posts



1736

Contemporary post bracket for

most 3" post mount fixtures.


See page 36 for installed view.

2411 Spun Aluminum Base Cover for **2405** 

See page 43 for specifications.



2405 Heavy Duty Welded Steel Flange base for 12' x 2.950" O.D. Posts



NOTE: It is recommended that a (2405) Flange Base be used on any surface mount post that utilizes multiple H.I.D. Post Brackets. Allen Set Screws, 3/8" x 12" Zinc Plated Anchor Bolts, and Template are included with Flange Base. Flange Post Base sold separately.

#### H.I.D. POSTLINE BALLASTS



- Magnetic High Power Factor, 120V
- Designed to Fit Inside Most 3" Posts
- Provided with a Metal Hanger Strap for Suspension
- Ground Wire

# O.D.:

2.532"

MAX Case Temp:
90°C

Nipple:

1/2" NPT-14

#### **HIGH PRESSURE SODIUM**

ITEM#	WATTAGE	MAX. LENGTH
898	35W	8"
899	50W	13"
912	70W	13"
916	100W	19"
920	150W	19"

#### **METAL HALIDE**

ITEM#	WATTAGE	MAX. LENGTH
886	50W	13"

For Integral Ballasted H.I.D. Fixtures, see pages 34-37. CP-689 required to use Photo Control, see page 43.

#### **POST ACCESSORIES**

#### **Photo Controls & Outlets**



120V for 3" Post with Ezee Change Plug, 1 3/8" Dia. mounting hole required Up to 300W Inc., 39W Fluor., 100W H.I.D. SPECIFY: (B) Black (W) White

338

c **SN**® US

688

120V Button Photo Control

11/16" Dia. mounting

hole required

Up to 300W Inc., 39W Fluor., 100W H.I.D.

120V Grounded Convenience Outlet 1 3/8" Dia. mounting hole required SPECIFY: (B) Black (W) White

SEE SAFETY NOTE ON PAGE 38

#### **Fitters**

#### MOUNTING HARDWARE INCLUDED

Consult factory when ordering replacement fitters for fixtures with options: Refractors, Cylinders, etc.

#### **Die Cast Aluminum**

4Kv Medium Base Porcelain Socket **Specify Option: (MG)** Mogul Socket, **(G)** GU24 Socket



1721 Black 1720 White For 10"-16" Globes & 11" x 17" Acorns with 5 1/4" Opening Powdercoated Finish

I.D. = 3"

1724 Black 1724W White For 18" Globes with 5 1/4" Opening Powdercoated Finish I.D. = 3"

#### **Polycarbonate**

Medium Base Phenolic Socket Specify Option: (G) GU24 Socket Example: 1721P-G



**1721P** Black **1720P** White For 10"-16" Globes with 5 1/4" Opening I.D. = 3"

#### **POST ACCESSORIES**

#### Lamp Posts & Accessories

#### **Cast Aluminum Post Bracket**



1736

Contemporary Post Bracket for 3" Post Mount Fixture Designed to mount to 3" Posts Max. Globe size: 16". I.D. =3" Available in Black Powdercoated Finish. See page 36 for installed view. See page 41 for post drilling configurations.

See pages 28-37 for fixtures.

#### **Cast Aluminum Wall Bracket**



#### 1737

Contemporary Wall Bracket for 3" Post Mount Fixture Max. Globe size: 16". I.D. =3" Available in Black Powdercoated Finish. See page 36 for installed view.

See pages 28-37 for fixtures.

#### Flange Bases & Covers



**2403** 

Die Cast Aluminum Flange base Powdercoated Finish for 8' -12' x 2.950" O.D. Posts only



2405

Heavy Duty Welded Steel Flange base Powdercoated Finish for 12' x 2.950" O.D. Posts only

See page 41 for bolt mounting patterns.



2410

Spun Aluminum Base Cover for **2403**Powdercoated Finish



2411

Spun Aluminum Base Cover for **2405**Powdercoated Finish


#### **Post Fixture Adapters**



348

3" Stub Post for use with **347** Surface Mount Adapter **SPECIFY:** (6" 12"

**SPECIFY:** (6", 12", 18" 24" or 30" Length)



⊢3 1/8" **─ CP-689** 

120V Button Photo Control with Adapter for 3" Posts

#### **Post Accessories**



#### **Polyethylene Bases & Covers**



2420

Polyethylene Decorative Base Cover for Standard 3" Post I.D. = 3"

SPECIFY: (B) Black (W) White

2425

Polyethylene 9' Long Ribbed Cover for Standard 3" Posts I.D. = 3"

SPECIFY: (B) Black (W) White

#### REPLACEMENT LENSES & DIFFUSERS





#### **COLONIAL, SAXONY & VANGUARD COMPANION SIZE LANTERNS**

**ACRYLIC** \*144-Clear Beveled Diamond 145-Amber Beveled Diamond 146-Clear Beveled 147-Frosted Beveled



#### **COMPANION SIZE EVERSTONE™ LANTERNS**

**ACRYLIC** 1301724-Clear 1301725-Opal \*1301726-Frosted



**WALL PACK EVERSTONE**<sup>TM</sup> **LANTERNS** 

**ACRYLIC** \*1301727-Clear Prismatic 1301728-Opal



**VICTORIAN LANTERN** 

**ACRYLIC** \*1300371-Opal



**COLONIAL, SAXONY & VANGUARD FULL SIZE LANTERNS** 

**ACRYLIC** 

148-Clear Beveled 149-Frosted Beveled \*153-Amber Beveled Diamond 154-Clear Beveled Diamond



**FULL SIZE EVERSTONETM LANTERNS** 

**ACRYLIC** 1301733-Clear 1301734-Frosted \*1301735-Opal



LANTERN **CHIMNEY** 

GLASS \*130316-Frosted



**VICTORIAN** LANTERN

**ACRYLIC** \*1300365-Clear Lens \*1300369-Trim Ring (Lens and Ring sold assembled)

# REPLACEMENT GLOBES & ACORNS



#### 5 1/A" NECKI ECC ODENING



\*Item Shown











	ILUNLLUU	

POLYCARBONATE POLYCARBONATE



**CLEAR** 

1256-12"

**1456**-14"

**1656**-16"

**1856**-18"

**ACRYLIC** 

1066-10"

**1266**-12"

1466-14"

**1666**-16"

1866-18"



**OPAL** 

1255-12"

**1455**-14"

**1655**-16"

**1855**-18"

**ACRYLIC** 

**1065**-10"

**1265**-12"

1465-14"

**1665**-16"

1865-18"

SMOKE	
OLVCARRON	/17

**1268**-12"

**1468**-14"

**1668**-16"

1868-18"

SMOKE	CLEAR PRISMATIC
<b>1258</b> -12"	<b>POLYCARBONATE</b> 1859-18"
<b>1458</b> -14" <b>1658</b> -16" <b>1858</b> -18"	<b>ACRYLIC 1069</b> -10"
<b>ACRYLIC</b> 1068-10"	1269-12" 1669-16" 1869-18"

**CLEAR TEXTURED** 

**CLEAR TEXTURED POLYCARBONATE POLYCARBONATE** 1756-For 2017CL **2067**-For 2018CL

# SUGGES'

TED MAX	WATTAGES

SIZE	ACRYLIC			POLYCARBONATE		
GLOBES	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
10"	75W	18W		-	18W	
12"	100W	18W		100W	18W	
14"	150W	32W		150W	32W	
16"	150W	32W	70W	300W	32W	70W
18"	150W	32W	100W	300W	32W	100W
ACORNS	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
1756				150W	32W	70W
2067				150W	32W	70W

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.