



PROJECT NAME

PART NUMBER

Our most versatile and stylish linear fixture can be ceiling or wall mounted. Built to take abuse. The curved lens is captured to the fixture base using a high strength method so that it cannot be vandalized. Includes all of the mounting hardware and electrical connections required. Optional integrated occupancy sensor dims fixture to low energy mode when space is unoccupied.

PART NUMBER BUILDER

MANUFACTURER	MODEL NUMBER	SIZE	LUMENS	COLOR TEMP	OPTIONS
RPT	LIVC	24IN 48IN	1800LM 2800LM	3000K 4000K	OCC HI/LO VARIABLE OCCUPANCY SENSOR EMG EMERGENCY BATTERY BACKUP

ORDERING EXAMPLE

RPT-LIVC-24IN-1800LM-3000K-OCC

STYLE C LIGHT ENGINE



INSTALLATION GUIDE

- Turn off power to the fixture.
- Wire and install fixture to wall.
- Replace LED tray. Replace lens.
- Turn on power.

Simplified instructions. Reference full installation guide for more details. Only qualified personnel should perform installation.

QUICK SPECS

INPUT VOLTAGE	100-277V AC
EFFICACY	>150 LPW (light engine)
OPERATING TEMP	-30°C to 45°C
MAX CASE TEMP	50°C
POWER FACTOR/THD	>0.90 Power Factor, THD<10%
CRI	83+
WARRANTY	5 years


CERTIFICATIONS



PERFORMANCE LISTINGS



DIMENSIONS

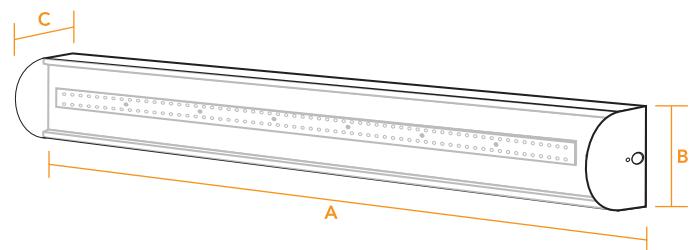


DIMENSIONS (INCHES)	A	B	C
RPT-LIVC-24IN	24	5.165	4
RPT-LIVC-48IN	48	5.165	4

ORDERING GUIDE

QUICK SHIP	DLC E*	PART #	FIXTURE LUMEN OUTPUT (LM)	WATTAGE (W)	CCT (K)	VOLTAGE RANGE (V AC)	WARRANTY (YRS)	TRADITIONAL EQUIVALENT	WATTS SAVED (W)
	DLC	RPT-LIVC-24IN-1800LM-4000K	1800	15	4000	120-277	5	2 x 25W FL	35
	DLC	RPT-LIVC-24IN-1800LM-4000K-OCC	1800	15hi/3lo	4000	120-277	5	2 x 25W FL	35hi/47lo
	DLC	RPT-LIVC-48IN-1800LM-4000K	1800	15	4000	120-277	5	1 x 25W FL	17
	DLC	RPT-LIVC-48IN-1800LM-4000K-OCC	1800	15hi/3lo	4000	120-277	5	1 x 25W FL	17hi/29lo
	DLC	RPT-LIVC-48IN-2800LM-4000K	2800	25	4000	120-277	5	2 x 32W FL	34
	DLC	RPT-LIVC-48IN-2800LM-4000K-OCC	2800	25hi/3lo	4000	120-277	5	2 x 32W FL	39hi/61lo

OPTIONAL FACTORY INSTALLED OCC SENSOR

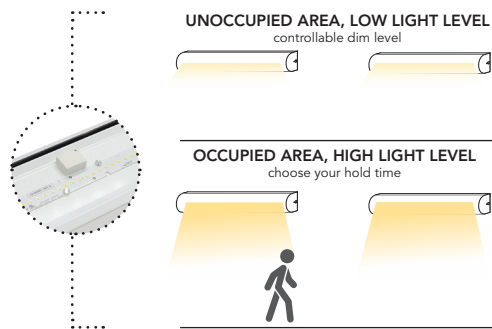

The LIVC can be paired with our integral occupancy sensor for maximum energy savings. Unlike traditional passive infrared or ultrasonic occupancy sensors, this high-frequency sensor can be hidden behind the lens of an existing fixture, eliminating the need for external sensors and providing a clean look.

OPTIONAL FACTORY INSTALLED EMG BACKUP



The fixture can be paired with an Emergency battery backup. Provides over 90 minutes of safe light levels when power goes out. Battery backup is installed in fixture housing without the need for increasing fixture height.