



2mni
LED
LEDS by CREE

Arrow
LEDS by CREE

GO GREEN



DL-42-LEDM
LED MODULE
DIRECTIONAL LIGHT

NEW



BQ-08-QCS
QUICK CONNECT
BARBECUE LIGHT

NEW



ALL NEW LED FLAT PANEL
AREA LIGHTS PAGE 4




NEW



ALL NEW LED FLAT PANEL
PATH LIGHTS PAGE 10



NEW

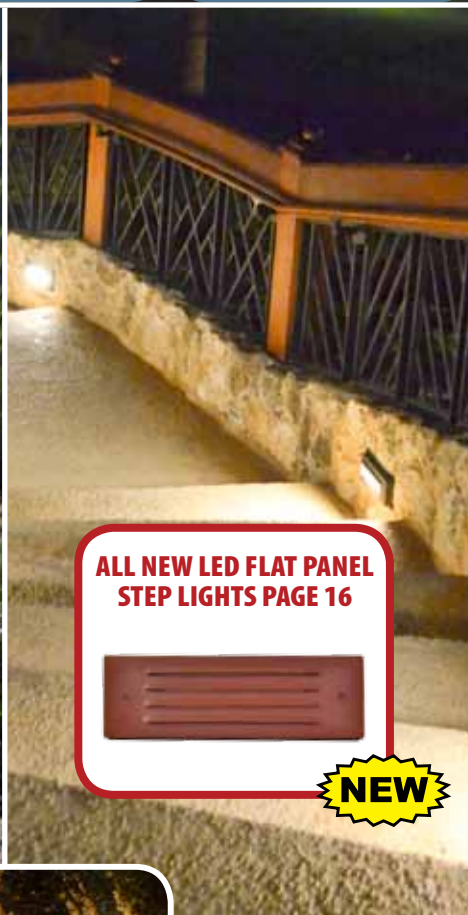

ALL NEW LED FLAT PANEL
STEP LIGHTS PAGE 16




NEW



NATURAL GAS OR
PROPANE TIKI TORCH

NEW

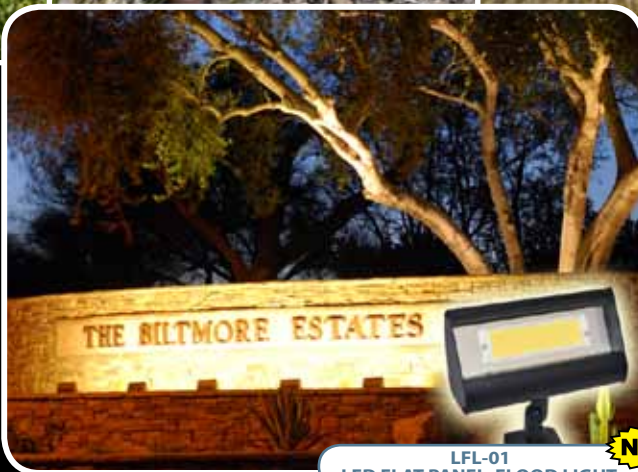

LFL-01
LED FLAT PANEL FLOOD LIGHT

NEW



DL-15SM-LEDPR4
LED FLAT PANEL
FLOOD LIGHT

NEW



RXD-08-LED
MR16 LED
DIRECTIONAL LIGHT

NEW



RXP-03-LED
MR16 LED
PATH LIGHT

NEW

landscape • entertainment • architectural • hospitality • illumination

VISUAL PRODUCT INDEX

APRIL 2013

Area Lights	2-4
Directional Lights	5-7
Flex Lights	8
Path Lights	9-10
Fluorescent Lights	11
Specialty Lights	12-13
Putting Green Lights	14
Well Lights	14
Step, Brick Surface	15-16
Underwater Lights	17
Barbecue & Tiki Lights	18
Umbrella Lights	18
Power Supplies	19-20
Accessories	21-23
LEDs	24

Area Lighting

12v / 120v

LED ORDER GUIDE PG.3

12v



LED Panel



120v



Catalog #	Height (H)	Width (W)	Std. Material	Opt. Material	Lamp Supplied	LED Opt.	Max	Options (pg.22)
AL-01-AH	14.00"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-01-SM-AH	11.00"	3.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLM
AL-03	14.00"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-3T	16.00"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-4T	17.50"	6.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-10	14.25"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-3T-10	16.25"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-03-4T-10	18.00"	10.00" dia.	alum.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-04-AH	14.00"	7.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-05-AH	17.25"	10.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-06-AH	16.00"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-06-SM-AH	11.00"	3.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-07-AH	14.00"	7.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-08	31.00"	3.00" dia.	ABS	brass, cop., alum.	S8, 18w #1141	R/P	25w	ABCDEHKLMS
AL-08-SM-DM	16.00"	1.75" dia.	cop.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-08-SM	23.00"	1.75" dia.	cop.	—	S8, 18w #1141	R/P	25w	ABEKLMS
AL-09	25.50"	7.00" x 7.00"	brass, ABS post	brass, alum. post	S8, 18w #1141	R/P	25w	ABCEHKLMPS
AL-10	10.50"	7.00" x 7.00"	stamped brass	—	S8, 18w #1141	R/P	25w	ABCEHKLMPS
AL-10-LGP	9.00"	12.00" x 12.00"	stamped brass	—	S8, 18w #1141	R/P	50w	ABCEHKLMNPS
AL-12-AH	22.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
RXA-01*	17.00"	6.00" dia.	cop.	alum., ss	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-01-2T	17.25"	6.00" dia.	cop.	alum., ss	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-02*	16.00"	3.50" dia.	cop.	alum., ss	T4, 20w Halogen (10K)	R	20w	ADEKLMS
RXA-03	18.00"	10.00" dia.	cop.	alum.	S8, 18w #1141	R	25w	ADEKLMS NEW!
AL-14-AH	23.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-15-AH	19.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-15-SM-AH	13.50"	5.75" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-16-AH	19.00"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	ABCEJKLMS
AL-17-SM-AH	13.50"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-17-SM2-AH	13.50"	5.50" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-17-AH	19.75"	8.00" dia.	alum.	brass	T3, 20w Halogen (10K)	R/P	25w	BCEKLMS
AL-19-SM-HH-AH*	17.00"	5.50" dia.	cop.	—	T3, 20w Halogen (10K)	R	25w	AEKLMS NEW!
AL-19-HH-AH*	18.00"	8.00" dia.	cop.	—	T3, 20w Halogen (10K)	R	25w	AEKLMS NEW!
AL-20-SM-AH	17.00"	5.50" dia.	cop.	alum.	T3, 20w Halogen (10K)	R	25w	AEKLMS NEW!
AL-20-AH	18.00"	8.00" dia.	cop.	alum.	T3, 20w Halogen (10K)	R	25w	AEKLMS NEW!

* Add (-F) into catalog # for Finial

Models shown:
RXA-02F-LED2-COP



AL-01-AH
-LED2-BLT



AL-01-SM
-LEDP-BAR



AL-03-BLT



AL-03-10-BLT



AL-04-AH
-LED2-BAR



AL-05-AH-BAR



AL-06-AH
-LED2-BRS



AL-06-SM
-AH-BLT



AL-07-AH
-BLT



TOP VIEW



AL-08-SM-DM
-COP



AL-08-SM
-COP



AL-08-BLT



AL-08-ALUMCAM



AL-09-LEDP-BAV



AL-10-BRS
(3" post mount)



AL-10-LGP-BAV
(Pedestal mount)



AL-12-AH
-LED2-BRS



AL-14-AHLED2-BAV



AL-15-AH
-LED2-BAV



AL-15-SM
-AH-BAR



AL-16-AH
-LED2-BAR



AL-17-AH
-LED2-CAM

Hammered Copper
China Hat

Saturn Rings
Copper China Hat



BAMBOO

Simulated Brass

Simulated PVC



AL-17-SM
-AHLED2-BAR



AL-17-SM2
-AHLED2-BRS



AL-19-SM
-HH-AH-LED2-COP



AL-19-HH
-AH-COP




AL-20-SM
-AH-CAR



AL-20-AH-CAR



-BB



-SB

For AL-01/AL-04/AL-05/AL-15/AL-15-SM
AL-17/AL-17-SM/AL-17-SM2



RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT

NEW

NEW



Pagoda Area Lighting 12v /120v

* Supplied without stem



AL-03-3T-CAM FAL-03-5 (120v)* IAL-03-NL (120v)*	AL-03-3T-10-ATV FAL-03-5-10 (120v)* IAL-03-10-NL (120v)*	AL-03-4T-BLT FAL-04-5,7,9 (120v)* IAL-04-NL (120v)*	AL-03-4T-10-RST FAL-04-5,7,9-10 (120v)* IAL-04-10-NL (120v)*	AL-03-3T-TRC FAL-03-5-3 (120v)* IAL-03-NL-3 (120v)*	AL-03-3T-10-3-CAM FAL-03-5-10-3 (120v)* IAL-03-NL-10-3 (120v)*	AL-03-4T-3-RBV FAL-04-5-3 (120v)* IAL-04-NL-3 (120v)*	AL-03-4T-10-3-ATV FAL-04-5-10-3 (120v)* IAL-04-NL-10-3 (120v)*
---	--	---	--	---	--	---	--

Catalog #	Height (H) ¹	Diameter (D)	Standard Material	Lamp Supplied ²	LED Opt.	Options (pg.22)
FAL-03-5-120V	7.00"	6.00"	cast aluminum	5w CFL	R/P	B N AA
IAL-03-NL-120V	7.00"	6.00"	cast aluminum	A-19 60w maximum (not supplied)	R/P	B E AA
FAL-03-5-10-120V	7.25"	10.00"	cast aluminum	5w CFL	R/P	B N AA
IAL-03-10-NL-120V	7.25"	10.00"	cast aluminum	A-19 60w maximum (not supplied)	R/P	B E AA
FAL-04-5,7,9-120V	8.50"	6.00"	cast aluminum	5w, 7w, 9w CFL	R/P	B E N AA
IAL-04-NL-120V	8.50"	6.00"	cast aluminum	A-19 100w maximum (not supplied)	R/P	B E AA
FAL-04-5,7,9-10-120V	9.00"	10.00"	cast aluminum	7w, 9w CFL	R/P	B E N AA
IAL-04-10-NL-120V	9.00"	10.00"	cast aluminum	A-19 100w maximum (not supplied)	R/P	B E AA

¹ For: 10", 13", 16", 21" & 26" extension wands see accessories pg.18 ² For 4-tier only: Also available in quad lamps. Consult factory for price and availability.
4w Flat Panel LED available add (-LEDP) to catalog # For 120v, 240v, 277v add -120v, -240v, -277v Can mount driver in 3" post, for 1/2" NPS pagoda must mount driver in Jbox or FA-26
CFL Spirals are available: 13, 18 & 26w 27K only. Specify at time of order.* Order stem for the above 120v pagodas based on desired height. See pg. 22 for stem options.
12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

LED ORDERING GUIDE

Retrofit LEDs can be factory installed in fixtures or easily installed in the field by simply changing the light bulb.



Retrofit LED Model Add to part number

12v OMNI-2..... LED2
12v Arrow MR16(BAB)..... LED
12v Arrow MR16(ESX)..... LEDESX
12v Arrow Saver MR16 40°..... LAS
12v Arrow Saver MR16 15°..... LAS15
12v Arrow MR11 40°..... LED
12v Arrow MR11 15°..... LED15
12v MR8 LED..... LED
12v Arrow AR111 40°..... LEDAR11140
12v Arrow AR111 15°..... LEDAR11115

Retrofit LED Model Add to part number

120v Arrow MR16(BAB).....LED120V
120v Arrow MR16(ESX).....LED120VESX
120v Arrow PAR20 40°.....LEDP2040
120v Arrow PAR20 15°.....LEDP2015
120v Arrow PAR30 40°.....LEDP3040
120v Arrow PAR30 15°.....LEDP3015
120v Arrow PAR38 40°.....LEDP3840
120v Arrow PAR38 15°.....LEDP3815

Flat Panel LEDs are factory installed in fixtures. Field installed LEDP Kits available for some fixtures. See back page for details.



Flat Panel LED Model Add to part number

4w, 5w or 8w Rectangle, 3000K.. LEDP
4w, 5w or 8w Rectangle, 5200K.. LEDP52
4w or 8w Round, 3000K..... LEDPR
4w or 8w Round, 5200K..... LEDPR52

Module LEDs are factory installed in fixtures. Field installed LEDM Kits available for some fixtures. See back page for details



LED Module Model Add to part number

3w, 3 LED Module..... LEDM
7w, 6 LED Module 40° Optic..... LEDM740
7w, 6 LED Module 15° Optic..... LEDM715
7w, 6 LED Module (no optics).... LEDM7



LED Strip is factory installed. Field Installed LEDS Kit available for SL-44 Series Paver Lights

LED Strip Model..... Add to part number

2w LED Strip.....LEDS



AREA LIGHT FLAT PANEL LEDS

Completely Re-Engineered Hub

For Use With 4w LED Panel

The Most Efficient LED Area Lighting On The Market

ONLY FROM FOCUS

4w / 300 Lumens/ Optional 120v to 277v*

Remote Driver Supplied

Brighter Than a 20w Halogen

Available in 3000K Warm White or

5200K Cool White**

50,000 Hour Round LED Panel


5 Year Warranty

*Must use FA-26 mounting post or junction box

**320 Lumens at 5200K



AVAILABLE ON THE FOLLOWING FOCUS AREA LIGHT MODELS




AL-01-LEDP



AL-01SM-LEDP




AL-03-LEDP (All Models) *




AL-04-LEDP



AL-05-LEDP



AL-06-LEDP



AL-06SM-LEDP



AL-07-LEDP



AL-09-LEDP *



AL-10-LEDP *



AL-10LGP-LEDP *



AL-12-LEDP



AL-14-LEDP



AL-15-LEDP



AL-15SM-LEDP



AL-16-LEDP



AL-17-LEDP



AL-17SM-LEDP



AL-17SM2-LEDP



* Hub not required

Directional Spot Lighting 12v /120v 12v



RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT

LED ORDER GUIDE PG.3



**RXD-01-LED-BAR
MR16**



**RXD-02-LED-COP
MR16**



**RXD-02-TS-LED-COP
MR16**



**RXD-02-CAM
MR16**



**RXD-03-LED-COP
MR11**



**RXD-03-TS-LED-COP
MR11**



**RXD-04-LED-COP
MR8**



**RXD-04-TS-LED-COP
MR8**

NEW



**RXD-08-LED-BRS
MR16**

NEW



**RXD-09-LED-BRS
MR11**

NEW



**RXD-10-LED-BAR
MR8**



DL-03-WBR



DL-13-LED-BRS



DL-14-LED-BRS



DL-17-LED-BAR



DL-17-RB-SS



**DL-20-AC-MR16-BLT
CDL-20-AC-MR16**



**DL-20-AR70-BLT
CDL-20-AR70**



DL-21-LED-BRS



**DL-21-LED-BLT
CDL-21**



DL-22-CWM-2-LED-COP



DL-22-CWM-LED-COP



DL-22-LED-SS



DL-22-LED-BAV



DL-22-XEC-LED-CAM



DL-23-LED-BRS



DL-23-CSM-LED-CAM



DL-42-LEDM7-BRS

NEW

7w 50,000 Hour LED Module

Directional Flood Lighting

LED ORDER
GUIDE PG.3

12v

LED
Module

LED
Panel



120v



DL-04 Models Now available with 4w 50,000 Hour LED PANEL



DL-04LEDP4W-WBR



DL-04-HBP-BRS



DL-04-XSS



DL-04-XCOP



DL-04-H-HE-BLT



DL-08-LED2-WBR

Note: -HE Models in Aluminum Only




DL-09-LED2-BAR



DL-09-SM-LED2-BRS



DL-10-H-WTX



DL-10-H-HE-BLT



DL-15-H-CAM
CDL-15

DL-15/-SM Models Now available with 4w 50,000 Hour LED PANEL



DL-15-LEDP412V-
WBR



DL-15-SM
-LEDPR412V-BLT



DL-40-2H20-CAM



DL-41-XBP10
-BRT



DL-41-VERT
-BRS



DL-41-HOR
-BRS

Catalog #	(H)	(W)	(D)	Std. Mat.	Opt. Mat.(s)	10K. Std.	LED opt.	Lamp Supp. ¹	Max	Options (pg.22)
RXD-01	7.50"	2.50" dia.	—	cast brass	—	OPT	R	MR16, 20w FL (BAB)	50w	EFIQRBB
RXD-02	5.50"	2.125" dia.	—	alum.	alum.	OPT	R	MR16, 20w FL (BAB)	35w	EFIQRBB
RXD-02-TS	5.50"	2.125" dia.	—	cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	EFIQRBB
RXD-03	4.75"	1.75" dia.	—	alum.	—	OPT	R	MR11, 20w FL (FTD)	20w	EFIQRBB
RXD-03-TS	4.75"	1.75" dia.	—	alum.	—	OPT	R	MR11, 20w FL (FTD)	20w	EFIQRBB
RXD-04	3.50"	1.40" dia.	—	alum.	—	—	R	MR8, 20w FL	20w	EFIZ
RXD-04-TS	3.50"	1.40" dia.	—	alum.	—	—	R	MR8, 20w FL	20w	EFIZ
RXD-08	3.50"	2.25" dia.	—	brass	—	—	R	MR16, 20w FL (BAB)	20w	EFIQR
RXD-09	3.50"	2.25" dia.	—	brass	—	—	R	MR11, 20w FL (FTD)	20w	EFIQR
RXD-10	3.50"	2.25" dia.	—	brass	—	—	R	MR8, 20w FL	20w	EFIZ
DL-03	8.00"	5.00" x 4.50"	—	cast alum.	brass	—	—	PAR36, 36w QWFL	50w	BCE
DL-04	9.50"	3.50" x 2.50"	—	ext. alum.	brass, cop, ss	OPT	R/P	S8, 18w #1141	35w	ABCDEFGHIJKLMSSAA
DL-04-HE	10.50"	3.70" x 3.50"	—	ext. alum.	—	—	R/P	20w T3 / S.C. halogen	35w	ABCDEFGHIJKLMSSAA
DL-08	10.50"	5.13" dia. cast alum.	—	brass	—	OPT	R/P	S8, 18w #1141	25w	ABCEFKLMS
DL-09	10.50"	5.50" dia. cast alum.	—	brass	—	OPT	R/P	S8, 18w #1141	25w	ABCEFKLMS
DL-10-H	9.00"	5.10" x 3.00"	—	ext. alum.	—	—	R/P	35w T4/DC (H)	50w	ABCEFKLMO
DL-10-H-HE	10.50"	5.10" x 3.00"	—	ext. alum.	—	—	R/P	35w T4/DC (H)	50w	ABCEFKLMO
DL-13	6.50"	2.60" dia. cast alum.	—	brass	—	OPT	R	MR16, 20w FL (BAB)	50w	BCEFIQRBB
DL-13-SC	6.50"	2.60" dia. cast alum.	—	brass	—	OPT	R	S8 18w #1141	25w	BCEFIKLMS
DL-14	12.00"	2.60" dia. cast alum.	—	brass	—	OPT	R	MR16, 20w FL (BAB)	50w	BCEFIQRBB
DL-15	7.50"	5.25" x 3.75"	—	cast alum.	brass	—	R/P	35w T4/DC (H)	75w	ABCEFKLMOAA
DL-15-SM	4.25"	3.25" x 3.75"	—	cast alum.	brass	—	R/P	20w T4 BP (H)	20w	ABCEFKLMOAA
CDL-15	7.50"	5.25" x 3.75"	—	comp	—	—	R/P	35w T4/DC (H)	75w	A EFKLMOAA
DL-17	4.50"	2.00" dia. cast alum.	—	brass, cop, ss	—	OPT	R	MR11, 20w FL (FTD)	35w	BCDEFIX
DL-20-MR16	5.25"	3.50" dia. cast alum.	—	brass	—	OPT	R	MR16, 75w FL (EYC)	75w	BCEFIQRBB
CDL-20-MR16	5.25"	3.50" dia. comp	—	—	—	OPT	R	MR16, 75w FL (EYC)	75w	BCEFIQRBB
CDL-20-AR-70	5.25"	3.50" dia. comp	—	—	—	OPT	—	50w AC-70 FL	50w	BCEFI
C/DL-20AC-MR16	8.75"	3.50" dia. cast alum.	—	brass, comp	—	OPT	R	MR16, 75w FL (EYC)	75w	BCEFIQRBB
C/DL-20AC-AR70	8.75"	3.50" dia. cast alum.	—	brass, comp	—	OPT	—	50w AC-70 FL	50w	BCEFI
DL-21	4.50"	3.00" dia. cast alum.	—	brass	—	OPT	R	MR16, 20w FL (BAB)	50w	BCEFIQR
CDL-21	4.50"	3.00" dia. comp	—	—	—	OPT	R	MR16, 20w FL (BAB)	20w	EFIQR
DL-22	5.50"	2.60" dia. cast alum.	—	ss, brass	—	OPT	R	MR16, 20w FL (BAB)	50w	BCDEFGIQRBB
DL-22FC-CWM	5.00"	2.375" dia.	—	cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	BCEFIQRBB
DL-22-CWM	5.00"	2.375" dia.	—	cop	alum.	OPT	R	MR16, 20w FL (BAB)	35w	BCEFIQRBB
DL-23	3.50"	1.50" dia. cast alum.	—	brass	—	—	R	MR8, 20w FL	20w	BCDEFIZ
DL-23-CSM	3.50"	1.50" dia. cast alum.	—	brass	—	—	R/P	MR8, 20w FL	20w	BCDEFIZ
DL-40-2H20	8.25"	7.25" dia. cast alum.	—	brass	—	—	R/P	2x 20w T3 halogen	40w	BCDEFI
DL-40-2H35	8.25"	7.25" dia. cast alum.	—	brass	—	—	R/P	2x 35w T4 halogen	100w	BCDEFI
DL-40-2H50	8.25"	7.25" dia. cast alum.	—	brass	—	—	R/P	2x 50w T4 halogen	100w	BCDEFI
DL-40-2X20	8.25"	7.25" dia. cast alum.	—	brass	—	—	R/M	2x 20w T2.5 xenon	40w	BCDEFI
DL-41-XBP10	3.875"	2.00"	—	ext. alum.	brass	—	R/M	10w G4 bi-pin xenon	10w	BCE
DL-41-VERT	8.00"	2.00"	—	ext. alum.	brass	—	R/M	10w G4 bi-pin xenon	10w	BCEU
DL-41-HOR	9.00"	4.25"	—	ext. alum.	brass	—	R/M	10w G4 bi-pin xenon	10w	BCEU
DL-42-LEDM7	4.25"	3.00" dia. cast alum.	—	brass	—	—	—	7w LED Module	7w	BCE NEW!



Model shown:
DL-15-SMLEDPR412V-CPR



Model shown:
DL-42-LEDM740-BAV

Optional light bulbs: for DL-10 & DL-15; 35 & 50w bi-pin (see pg. 22). For halogen add: -H (10w or 20w) or -HBP and wattage (5, 10, 20, 35, 50, or 75w) to catalog number.

For xenon single contact or bi-pin, add -X (10w or 20w) or -XBP and wattage (5, 10 or 20w) to catalog number. -HE models in aluminum only

For 120v T4/T7/T8 light bulbs, consult factory for price, wattage and availability. 12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.

For use with Focus CPC or hub supplied by others.

Directional Lighting

LED ORDER GUIDE PG.3



120v/277v
H.I.D./Incandescent /Halogen/
PAR20/PAR30/PAR38



Model shown:
DL-16-MH-100-BRT

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Ma.I	Lamp Supplied	LED Opt.	Max	Options (pg.22)
DL-16-NLHPS	8.00"	11.00" x 11.00"		cast aluminum		none, ED17 available		150w	B F
DL-16-NLMH	8.00"	11.00" x 11.00"		cast aluminum		none, ED17 available		175w	B F
C/DL-20-NL	5.25"	3.50" diameter		composite/aluminum	brass	none, Par20 available		50w	B C V
C/DL-20-NL-AC	8.75"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B C F I V
C/DL-20-NL-HID	5.25"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B C F I V
C/DL-20-NL-AC-HID-D	8.75"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B C F I V
C/DL-20-NL-EC	5.80"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B C F I V
C/DL-20-NL-AC-HID	5.80"	3.50" diameter		composite/aluminum	brass	none, Par20 available	R	50w	B C F I V
DL-30-NL	7.25"	4.50" diameter		cast aluminum	brass	none, Par30 available		75w	B C V
DL-30-NL-AC	13.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	75w	B C F I N V
DL-30-NL-EC	8.13"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	75w	B C F I N V
DL-30-NL-HID	7.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	100w	B C F I V
C/DL-30-NL-AC-HID	13.25"	4.50" diameter		cast aluminum	brass	none, Par30 available	R	100w	B C F I V
C/DL-38-NL	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available		150w	B C F V
C/DL-38-NL-AC	15.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	150w	B C F H I N V
C/DL-38-NL-EC	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	150w	B C F H I N V
C/DL-38-NL-HID	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B C F I V
C/DL-38-NL-HID-D	7.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B C F I V
C/DL-38-NL-EC-L	9.13"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B C F H I N
C/DL-38-NL-EC-FL-13,26	9.13"	5.50" diameter		composite/aluminum	brass	none, 13/26w CFL avail.		26w	B C F H I N
C/DL-38-NL-AC-HID	15.75"	5.50" diameter		composite/aluminum	brass	none, PAR38 available	R	175w	B C F H I N V
DL-40-NL-MH39	6.25"	8.25" diameter		cast aluminum	brass	none, T6 MH* available		39w	B C F I
DL-40-NL-MH70	6.25"	8.25" diameter		cast aluminum	brass	none, T6 MH* available		70w	B C F I
DL-40-NL-MH70	6.25"	8.25" diameter		cast aluminum	brass	none, T6 MH* available		70w	B C F I
RXD-05-NL	9.25"	3.00" diameter		cast aluminum	brass,copper	none, PAR20 available	R	50w	B C F I V NEW!
RXD-05-NL-TS	9.25"	3.00" diameter		cast aluminum	brass,copper	none, PAR20 available	R	50w	B C F I V NEW!

Note: For HID ballast information, consult ballast section pg. 13.

Note: For Downlights, add -D to catalog number. Downlights supplied with no weep hole or cap & sealed swivel.

Note: DL-16 & DL-40 supplied with integral ballast.

Note: ARROW LED PAR20/30/38 may only be used with fixtures that have either an extended cap (-EC) or angle collar (-AC) with lens installed.



DL-16-NL
HPS (High Pressure Sodium)
MH (Metal Halide)



DL-40-NL-MH39-CAM
(Metal Halide*)



C/DL-20-NL-HID-D-BLT
C/DL-20-NL-D-BLT



DL-20-NL-AC-LEDP2040-BLT
DL-20-NL-AC-HID-BLT



DL-20-NL-TRC



DL-20-NL-EC-BRS
DL-20-NL-HID-BRS



DL-30-NL-HID-D-BLT
DL-30-NL-D-BLT




DL-30-NL-BRS



DL-30-NL-AC-BRS
DL-30-NL-AC-HID-BRS



DL-30-EC-LEDP3040-BLT
DL-30-NL-HID



DL-38-NL-D-BRS
DL-38-NL-HID-D-BRS



DL-38-NL-BRS
C/DL-38-NL



DL-38-AC-LEDP3840-BLT
C/DL-38-NL-AC
C/DL-38-NL-AC-HID



C/DL-38-NL-EC-L-BLT
C/DL-38-NL-HID
C/DL-38-NL-EC-L-CFL-13, 26



NEW

RX SERIES/ PAR20



RXD-05-BRT
PAR20



RXD-05-TS-LEDP2040-WTX
PAR20



Model shown:
DL-38-NL-EC-HTX



ALL LED PROJECT 

Flex Path

Flex Flood & Spot Lights

12v

LED ORDER
GUIDE PG.3



FPL-02-LED2-BRS



FPL-04-LED2-RBV



FDL-11-LED2-BLT



FDL-12-LED2-BLT



FDL-17-LED-BRS



FDL-22-LED-BLT



FDL-23-LED-BLT



Model shown:
FDL-23-BAV

Catalog #	Arm Length ¹	Diameter	Standard Material	Optional Material(s)	Lamp Supplied	LED opt.	Max	Options (pg.14)
FPL-02	36" std.	4.50"	spun aluminum	brass, copper, ss	S8, 18w #1141	R	25w	A B C D E G J K L M S
FPL-04	36" std.	4.50"	cast aluminum	brass	S8, 18w #1141	R	25w	A B E J K L M S
FDL-11	12" std.	7.00"	cast aluminum	—	S8, 18w #1141	R	25w	A B E J K L M S
FDL-12	12" std.	6.00"	cast aluminum	—	S8, 18w #1141	R	25w	A B E J K L M S
FDL-17	24" std.	2.00"	cast aluminum	brass, copper	20w MR11 (FTD)	R	35w	B C D E F I X
FDL-22	24" std.	2.50"	cast aluminum	brass	20w MR16 FL (BAB)	R	50w	B C D E F G I Q R B B
FDL-23	24" std.	1.50"	cast aluminum	brass	20w MR8 FL	R	20w	B C D E F I Z

¹For 24" flex arms, add -24 to catalog number. For 36" flex arms, add -36 to catalog number. 12" lengths available on some models. Consult factory for prices and availability.

Note: Stake mount is for 12v fixtures only. 120v must be mounted to FA-26 or J-box.

12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.



Model shown:
FDL-17-36-BRS



Models shown:
DL-04-LEDM-CPR
PL-17-LED2-CPR

ALL LED PROJECT 



Model shown:
RXD-02-COP

Path Lighting


12v / 120v

LED ORDER GUIDE PG.3

12v



120v

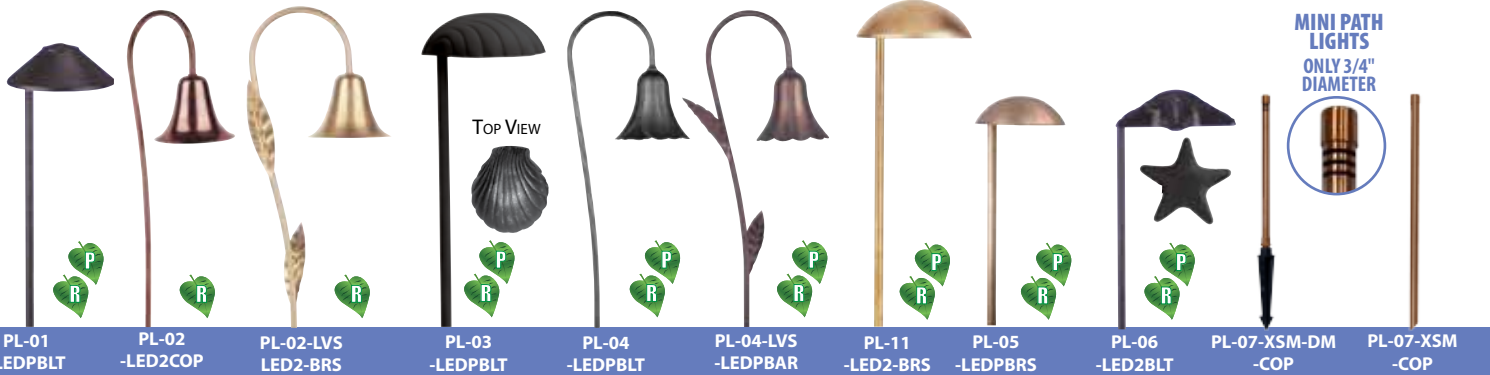

BAMBOO
For PL-01/PL-20/PL-21
Simulated PVC or brass
bamboo stems available



Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Optional Material(s)	Lamp Supplied	LED opt	Max	Options (pg.22)
PL-01	19.00"	5.13" diameter		cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-02	22.00"	4.50" diameter		cast alum.	brass, copper	S8, 18w #1141	R/P	25w	ABCDEGKLMS
PL-02-LVS	22.00"	4.50" diameter		cast alum.	brass, copper	S8, 18w #1141	R	25w	ABCDEGKLMS
PL-03	19.00"	5.50" diameter		cast alum.	—	S8, 18w #1141	R	25w	ABCEFKLMS
PL-04	22.00"	4.50" diameter		cast alum.	brass	S8, 18w #1141	R	25w	ABCEFKLMS
PL-04-LVS	22.00"	4.50" diameter		cast alum.	brass	S8, 18w #1141	R	25w	ABCEFKLMS
PL-05	19.00"	5.50" diameter		cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-06	21.50"	7.00" diameter		cast alum.	—	S8, 18w #1141	R/P	25w	ABCEFKLMS
PL-07-XSM-DM	16.50"	.75" diameter		extruded copper	—	T3 10w bi-pin xenon	—	10w	B
PL-07-XSM	24.00"	.75" diameter		extruded copper	—	T3 10w bi-pin xenon	—	10w	B
PL-07	31.00"	3.00" diameter		ABS	alum., brass, copper	S8, 18w #1141	R/P	25w	ABCDEHKLMS
PL-07-L-Add H	36"/48"	4.50" diameter		ABS	alum., brass	1-5 x 5w T3	R/P	25w	ABCDEHKLMS
PL-07-LGX-CL-BRS	31.00"	4.00" diameter		cast alum./custom logo	brass, copper	20w S.C. xenon	R/P	25w	ABCEHKLMS
PL-09	29.00"	7.00" x 10.00"		stamped brass	—	S8, 18w #1141	R/P	25w	ABEKLMS
PL-11	24.00"	8.00" diameter		cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEHKLMS
PL-12	31.50"	8.00" diameter		cast alum.	brass	S8, 18w #1141	R/P	25w	ABCEKLMS
PL-13	26.50"	5.00" diameter		copper, brass accents	—	S8, 18w #1141	R	25w	ABCEKLMS
PL-14	16.25"	5.25" x 5.25"		stamped brass	—	S8, 18w #1141	R	25w	ABEKLMS
PL-15	20.50"	5.5" diameter		copper	—	S8, 18w #1141	R	25w	ABEKLMS
PL-16	24.00"	5.5" diameter		copper	—	S8, 18w #1141	R	25w	ABEKLMS
PL-17	20.00"	5.00" diameter		extruded alum.	brass	T3 20w S.C. halogen	R/P	20w	ABCKSMLS
PL-18	24.00"	4.50" x 4.50"		solid brass w/ 24" wood post	—	S8, 18w #1141	R	25w	ABKLMS
PL-19	22.00"	5.50" diameter		spun brass	—	S8, 18w #1141	R	25w	ABCKLM
PL-20	20.00"	5.75" diameter		cast alum.	brass	S8, 18w #1141	R	25w	ABCE NEW! S
PL-21	24.50"	5.75" diameter		cast alum.	brass	S8, 18w #1141	R	25w	ABCE NEW! S
RXP-01	26.00"	2.125" diameter		cast alum.	copper	MR16, 20w FL(BAB)	R	50w	EFIQ NEW!
RXP-02	26.00"	2.125" diameter		cast alum.	copper	2x MR16, 20w FL(BAB)	R	50w	EFIQ NEW!
RXP-03	25.00"	2.25" diameter		cast brass	—	MR16, 20w FL(BAB)	R	20w	EFIQ NEW!
RXP-04	25.00"	2.25" diameter		cast brass	—	2x MR16, 20w FL(BAB)	R	40w	EFIQ NEW!

Optional light bulbs: PL-01 to PL-16, PL-20 & PL-21 (#93, 12w) or (#1156, 25w). For halogen, add -H or -HPB and wattage to catalog number. For xenon add -X or -XBP and wattage to catalog number. For 120v T7 or T8 light bulbs, consult factory for price and availability. 12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others. Simulated PVC or brass bamboo stems options for: PL-01/PL-20/PL-21. For brass stem add -BB to catalog number. For simulated PVC stem add -SB to catalog number.



PATH LIGHT FLAT PANEL LEDS

Newly Engineered Bracket

For Use With 4w LED Panel

The Most Efficient LED Area Lighting On The Market

ONLY FROM FOCUS

4w / 300 Lumens/ Optional 120v to 277v*

Remote Driver Supplied

Brighter Than a 20w Halogen

Available in 3000K Warm White or

5200K Cool White

50,000 Hour Round LED Panel

5 Year Warranty

*Must use FA-26 mounting post or junction box

AVAILABLE ON THE FOLLOWING FOCUS PATH LIGHT MODELS




PL-01-LEDP



PL-03-LEDP



PL-04-LEDP



PL-05-LEDP



PL-06-LEDP



PL-09-LEDP



PL-11-LEDP



PL-12-LEDP



PL-20-LEDP



PL-21-LEDP



3 Lens Options:

Clear (Std.) | Sand Blast reduces light output by 10%; warms to 2900K
White reduces light output by 20%; warms to 2700K



LED & Fluorescent Lighting

120v/277v

NEW!

NEW!



Model shown:
LFL-01-LEDP812V-BLT
FLAT PANEL LED
FLOOD LIGHT

NEW



Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Material	Lamp Supplied ¹	Options (pg.22)
FFL-5,7	4.50"	6.00"	3.00"	extruded aluminum	—	5w or 7w CFL	B F
FFL-5,7-HE	6.30"	6.10"	3.00"	extruded aluminum	—	5w or 7w CFL	B F
FFL-9,13	4.50"	8.25"	3.00"	extruded aluminum	—	9w or 13w CFL	B F D
FFL-9,13-HE	6.30"	8.35"	3.00"	extruded aluminum	—	9w or 13w CFL	B F D
CFL-13	3.00"	8.25"	3.00"	black ABS housing	bronze ABS	13w CFL	F
FFL-26	4.50"	8.25"	3.00"	extruded aluminum	—	2 x 13w CFL	B F
FFL-26-HE	6.30"	8.35"	3.00"	extruded aluminum	—	2 x 13w CFL	B F
FFL-13,26-CST ²	6.25"	8.25"	3.00"	cast aluminum	brass	13w or 2x 13w CFL	B C F
FFL-26,32,42-3T-CST/-HE ²	6.25"	8.25"	3.00"	cast aluminum	brass	26, 32, 42w, triple tube	B C F
FFL-52/-HE	4.50"	36.00"	3.00"	extruded aluminum	—	4 x 13w CFL	B F
FFL-78/-HE	4.50"	48.00"	3.00"	extruded aluminum	—	6 x 13w CFL	B F
FFL-24-T5HO-30K/-HE*	4.50"	24.00"	3.00"	extruded aluminum	—	1 x 24w (30K) T5HO	B F
FFL-39-T5HO-30K/-HE*	4.50"	35.00"	3.00"	extruded aluminum	—	1 x 39w (30K) T5HO	B F
FFL-54-T5HO-30K/-HE*	4.50"	47.00"	3.00"	extruded aluminum	—	1 x 54w (30K) T5HO	B F
CFL-24-T5HO-30K	3.00"	24.00"	3.00"	black ABS housing	bronze ABS	1 x 24w (30K) T5HO	F
CFL-39-T5HO-30K	3.00"	35.00"	3.00"	black ABS housing	bronze ABS	1 x 39w (30K) T5HO	F
FFL-17-T8-30K*	3.00"	26.00"	3.00"	extruded aluminum	—	1 x 17w (30K) T8	B F
FFL-25-T8-30K*	3.00"	38.00"	3.00"	extruded aluminum	—	1 x 25w (30K) T8	B F
FFL-32-T8-30K*	3.00"	50.00"	3.00"	extruded aluminum	—	1 x 32w (30K) T8	B F
LFL-01-LEDP812VBLT	4.50"	8.25"	3.00"	extruded aluminum	—	8w 12v LED PANEL	B F D NEW!
LFL-01-HELEDP812VBLT	6.30"	8.25"	3.00"	extruded aluminum	—	8w 12v LED PANEL	B F D NEW!
LFL-01-LEDP8120VBLT	4.50"	8.25"	3.00"	extruded aluminum	—	8w 120v LED PANEL	B F D NEW!
LFL-01-HELEDP8120VBLT	6.30"	8.25"	3.00"	extruded aluminum	—	8w 120v LED PANEL	B F D NEW!
LFL-02-HE2727	9.00"	12.50"	7.55"	brass	aluminum	27w 120v LED PANEL, 2700K	B NEW!
LFL-02-HE2753	9.00"	12.50"	7.55"	brass	aluminum	27w 120v LED PANEL, 5300K	B NEW!

* Above fixtures also available in 3500K, 4100K, Specify at time of order. For two lamp models add -2L to catalog number.

Note: Also available in 240v and 277v models. Add -HE into catalog # for hood extension. (For FFL-24/39/54)

¹Above fixtures are supplied with cool white (4100K) lamps. For warm white (2700K) add -WW to catalog number. Other Kelvin temperatures available, consult factory. ² CFL = 4100K & 10,000 hours average rating / Triple Tube = 4100K & 12,500 hours average rating Note: CFL are standard black ABS for bronze ABS add -BRT to catalog number.

NEW
NEW FLAT PANEL LED & LED LIGHT ENGINE FLOODLIGHTS
8w or 27w • 50,000 HOURS AVERAGE RATING

LFL-01-BLT LFL-02-HE2753-BRT

FFL-5, 7-CAM

FFL-5, 7-HE-HTX

FFL-9,13-BRT



FFL-9,13-HE-RST



FFL-13-CST-CAM



FFL-32-3T-CST-BRT



CFL-13-BLT



FFL-26-BLT



FFL-26-HE-BLT



FFL-52-CAM



FFL-78-BLT



FFL-24-T5HO-BLT / FFL-17-T8-BLT
CFL-24-T5HO-BLT/-BRT

T8
FLUORESCENTS

T5
HIGH OUTPUT
FLUORESCENTS



FFL-39-T5HO-WBR / FFL-25-T8-WBR
CFL-39-T5HO-BLT /-BRT



FFL-54-T5HO-BLT / FFL-32-T8-BLT

12v / 120v Down Lights • Hanging and Surface

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Optional Material(s)	Lamp Supplied	Led opt.	Max	Options (pg.22)
SL-05	4.75"	4.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	AB C D E G K L M S
SL-05-WM	9.75"	4.50" x 8.50"		aluminum hat	brass	S8, 18w #1141	R	25w	AB C E K L M S
SL-06	4.25"	4.50" diameter		cast aluminum	brass	S8, 18w #1141	R	25w	AB C E K L M S
SL-06-XBAS	4.25"	4.50" w/ 18.00" chain		cast aluminum	brass	S8, 18w #1141	R	25w	AB C E K L M S
SL-06-WM	9.75"	4.50" x 8.50"		aluminum hat	brass	S8, 18w #1141	R	25w	AB C E K L M S
SL-09	3.00"	2.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	AB C D E K L M S
SL-09-AB	3.00"	2.50" diameter		spun aluminum	brass, copper	S8, 18w #1141	R	25w	AB C D E K L M S
SL-09-ALR12	3.00"	2.50" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	B C D E
SL-09-ALR12-AB	3.00"	2.50" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	B C D E
SL-10-ALR18	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	B C D E
SL-10-ALR18-AB	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	B C D E
SL-12	8.50"	7.00" x 7.00"		stamped brass	copper	S8, 18w #1141	R/P	25w	AB E H K L M S A A
SL-12-LG	8.50"	13.00" x 8.00"		stamped brass	—	S8, 18w #1141	R/P	50w	AB E H K L M S A A
SL-13	11.50"	4.00" x 9.10"		stamped brass	—	S8, 18w #1141	R/P	25w	AB C E K L M S A A
SL-13-LG	8.50"	13.00" x 8.00"		stamped brass	—	S8, 18w #1141	R/P	50w	AB C E H K L M N S A A
SL-14	5.90"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	AB C D E K L M Q S
SL-15	5.90"	2.50" diameter		extruded aluminum	brass, copper	S8, 18w #1141	R	25w	AB C D E K L M Q S
SL-16	5.00"	2.50" x 4.70"		extruded aluminum	brass	S8, 18w #1141	R	25w	AB C E M S
SL-16-MR16-SS	5.50"	2.50" x 3.25"		stainless steel	brass	2x20w MR16 FL(BAB)	R	40w	E F I Q R NEW!
SL-16-DMR16-SS	3.625"	3.00" x 3.25"		stainless steel	brass	20w MR16 FL(BAB)	R	20w	E F I Q R NEW!
SL-16-DMR11	3.00"	2.50" x 2.50"		brass	—	20w MR11 FL(BAB)	R	20w	B E F I R X
SL-16-DMR8	3.00"	2.50" x 2.00"		brass	—	20w MR8 FL(BAB)	R	20w	B E F I R Z NEW!
SL-22	5.25"	2.50" diameter		cast aluminum	brass	20w MR16 FL(BAB)	R	20w	B C E F I Q R B B
SL-23	4.50"	2.00" diameter		cast aluminum	brass	20w MR11 FL(FTD)	R	20w	B C E F I X
SL-25	5.25"	2.50" diameter		cast aluminum	brass	20w MR16 FL(BAB)	R	20w	B C D E F I Q R B B
SL-25-XEC	5.25"	2.50" diameter		cast aluminum	brass	20w MR16 FL(BAB)	R	20w	B C D E F I Q R B B
SL-26	4.75"	2.00" diameter		cast aluminum	brass	20w MR11 FL(FTD)	R	20w	B C D E F I X
SL-27	3.00"	2.00" diameter		spun aluminum	brass, copper	20w ALR12 (FL)	—	20w	B C D E
SL-28	4.00"	3.00" diameter		spun aluminum	brass, copper	50w ALR18 (FL)	—	50w	B C D E
SL-29	3.38"	1.50" diameter		cast aluminum	brass	20w MR8 FL	—	20w	B C D E F I Z
RXS-01	5.25"	3.27" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	AB E Q R B B NEW!
RXS-02	4.75"	1.87" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	AB E X NEW!
RXS-03	3.50"	1.50" diameter		unfinished copper	—	20w MR8 FL	R	20w	AB E Z NEW!
RXS-04	5.25"	2.25" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	AB E Q R B B NEW!
RXS-05	4.75"	1.75" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	AB E X NEW!
RXS-06	3.50"	1.50" diameter		unfinished copper	—	20w MR8 FL	R	20w	AB E Z NEW!
RXS-07	5.25"	2.25" diameter		unfinished copper	—	20w MR16 FL(BAB)	R	35w	AB E Q R B B NEW!
RXS-08	4.75"	1.75" diameter		unfinished copper	—	20w MR11 FL(FTD)	R	20w	AB E X NEW!
RXS-09	3.50"	1.25" diameter		unfinished copper	—	20w MR8 FL	R	20w	AB E Z NEW!
RXS-10	8.50"	3.15" diameter		unfinished copper	aluminum, brass	none	R	50w	AB E NEW!
RXS-11	8.50"	3.15" diameter		unfinished copper	aluminum, brass	none	R	50w	AB E NEW!
RXS-12	3.50"	2.25" diameter		unfinished copper	—	none	R	50w	AB E NEW!
SL-39	3.50"	1.50" diameter		cast aluminum	brass	20w MR8 FL	—	20w	B C E F I Z
SL-46	8.00"	6.00" diameter		hammered copper	—	20w T4 halogen	R	25w	B D E I J M S NEW!
SL-48	8.00"	5.75" diameter		cast brass	—	20w T4 halogen	R	25w	B C E I J M S NEW!
SL-49	8.00"	5.75" diameter		cast brass	—	20w T4 halogen	R	25w	B C E I J M S NEW!

Note: All hanging fixtures supplied with 18" brass baby oval chain and mini J-Box (FA-111-SM-H). White fixtures are supplied with white 18/2 lead wires.



Model shown:
SL-06-XBAS-WBR

HANGING PRODUCTS WALL LIGHTING



Specialty Lighting

LED ORDER GUIDE PG.3



ARROW LED
PAR20/30/38

12v / 120v Down Lights • Hanging and Surface Continued



SL-09-BLT



SL-09-ALR12
-AB-WBR



SL-10-AB
-WTX



SL-10-BRS



SL-25-BLT



SL-25-XEC-CAM



SL-26-BRT

SL-25 through SL-28 available without mini j-box (FA-111-SM) for low mounting profile mounting.



SL-29-BRT



SL-27-CAM



SL-28-BLT

NEW



SL-46-LED2-COP

NEW



SL-48-LED2-BRS

NEW



SL-49-LED2-BRS



NEW

RX SERIES/ THE REMEDY/ FOCUS QUALITY AT A REDUCED PRICE POINT



RXS-01-COP
MR16



RXS-02-COP
MR11



RXS-03-COP
MR8



RXS-04-LED-COP
MR16



RXS-05-LED-COP
MR11



RXS-06-LED-COP
MR8



NEW



RXS-07-LED-COP
MR16



RXS-08-LED-COP
MR11



RXS-09-LED-COP
MR8



RXS-10-LEDP2040-WTX
PAR20



RXS-11-LEDP2015-WTX
PAR20

NEW

Model shown:
RXS-11-LEDP2040-WTX



Models shown:
RXS-01-LED-COP
RXS-02-LED-COP
RXS-03-LED-COP



Model shown:
SL-48-LED2-BAV



Specialty Lighting 12v/120v Putting Green Lights

LED ORDER GUIDE PG.3

LED Panel

ARROW LED

MR16

T3

T4

T2.5

MR16

MR16

MR16

MR16

MR16

MR16

MR16

MR16

MR16

MR16

MR16

Model shown: PGL-LEDP-04

Now Available w/ FLAT PANEL LED

PGL-04 Supplied with 2 putter holders and a drink and ball holder.

PGL-05 cup lights shown with optional clear acrylic flag FA-FLAG

Model shown: PGL-05-RED Includes PVC Sleeve Cup not supplied

Catalog #	Height (H)	Width (W)	Depth (D)	Standard Material	Opt. Material	Lamp Supplied	LED Opt.	Options (pg.22)
PGL-01	15.00"	5.13"	3.20"	cast aluminum	brass	35w MR16 VWFL (60")	—	B C E F L Q R
PGL-02	27.25"	2.50"	4.50"	extruded aluminum	brass	35w T4/ DC Halogen	R/P	B C E F K L M O
PGL-03	12.50"	3.00"	4.50"	cast aluminum	brass	35w MR16 VWFL (60")	R	B C E F Q R
PGL-04	41.00"	8.25"	11.00"	extruded aluminum	—	13w Compact Fluorescent	P	B F A A
PGL04-2H20-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 20w T3 / SC Halogen	—	B F A A
PGL04-2H35-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 35w T3/ DC Halogen	—	B F A A
PGL04-2X20-BLT	41.00"	8.25"	11.00"	ABS post w/ alum. fixture	—	2x 20w T2.5/ SC Xenon	—	B F A A
PGL-05	4.75"	4.25"	4.25"	cast brass	—	20w MR16-ESX	R	F Q R B B
FA-FLAG	18.00"	4.00"	2.50"	clear acrylic flag for use with PGL-05	—	Specify number when ordering	—	—

PGL-01-CAM PGL-02-BLT PGL-03-BLT PGL-04-BLT PGL-05 PGL-05-BLUE PGL-05-GREEN PGL-05-RED PGL-05-YELLOW

Residential Well Lights

12v

REVERSIBLE

120v

NEW! NEW! NEW!

ARROW LED MR16/ALR111

PAR36 PAR20 PAR30 PAR38

ED17

NEW! ARROW LED PAR20/30/38

LED ORDER GUIDE PG.3

Grate for SL-21 FA-14-3 GRATE

Catalog #	Height (H)	Diameter	Standard Material	Optional Material	Lamp Supplied	LED Opt.	Max	Opt(pg.22)
SL-01	8.00"	5.50"	ABS/aluminum	brass (inside only)	PAR36, 36w (QWFL)	—	50w	B C E F G
SL-01-SS	8.00"	5.50"	ABS/aluminum	SS (inside only)	PAR36, 36w (QWFL)	—	50w	B C E F G
SL-01-SP	8.00"	5.50"	ABS/aluminum	brass (inside only)	PAR36, 36w (QWFL)	—	50w	B C E F G
SL-03	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-03-AC/EC-AC	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-20SM-L/G-MR16 (12v) ²	5.25"	4.50"	bronze composite	—	MR16 20w FL (BAB)	R	50w	E F I Q R
SL-20SM-L/G-PAR20 (120v) ²	5.25"	4.50"	bronze composite	—	none	R	50w	E F I V
SL-20SM-M-MR16 (12v) ²	5.25"	4.50"	bronze composite	aluminum,brass	MR16 20w FL (BAB)	R	50w	E F I Q R B B NEW!
SL-20SM-M-PAR20 (120v) ²	5.25"	4.50"	bronze composite	aluminum,brass	none	R	50w	E F I V NEW!
SL-20MDL/G-PAR36 (12v) ²	9.25"	7.25"	bronze composite	—	PAR36, 36w (QWFL)	—	50w	E F I
SL-20MD-L/G-PAR36T (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	PAR36, 36w (QWFL)	—	50w	E F I
SL-20MD-L/G-NL (120v) ²	9.25"	7.25"	bronze composite	—	none, PAR 20,30,38	R	150w	E F I V
SL-20MD-L/G-MR16 (12v) ²	9.25"	7.25"	bronze composite	—	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/G-MR16T (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/GFL-13, 26 (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	13w, 2 x 13w CFL	—	26w	E F I
SL-20MD-L/G-NL-CFLS (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	CFL spiral	—	26w	E F N I
SL-20MD-L/G-NL-HID (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	none, PAR (HID)	R	100w	E F I V
SL-20LG-L/G-NL-HID (120v) ¹	15.00"	9.00"	bronze composite	—	none, PAR (HID)	—	100w	E F I V
SL-20LG-L/G-NL-HID (120v) ¹	15.00"	9.00"	bronze composite	—	none, ED17	—	100w	E F I V
SL-21	8.00"	3.00"	PVC/aluminum	—	MR16, 20w FL (BAB)	R	20w	B E F I Q R B B

Commercial Well Lights

12v / 120v

MR16 MR16

SL-20SM-L with optional FA-135-SM (Eyebrow)

SL-20MD-L with optional FA-135 (Eyebrow)

SL-20LG-L with optional FA-135-LG (Eyebrow)

INTERNAL BALLAST

For HID light sources, Metal Halide, and High Pressure Sodium

Catalog #	Height (H)	Diameter	Standard Material	Optional Material	Lamp Supplied	LED Opt.	Max	Opt(pg.22)
SL-01	8.00"	5.50"	ABS/aluminum	brass (inside only)	PAR36, 36w (QWFL)		50w	B C E F G
SL-01-SS	8.00"	5.50"	ABS/aluminum	SS (inside only)	PAR36, 36w (QWFL)		50w	B C E F G
SL-01-SP	8.00"	5.50"	ABS/aluminum	brass (inside only)	PAR36, 36w (QWFL)		50w	B C E F G
SL-03	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-03-AC/EC-AC	7.50"	4.50"	ABS/aluminum	brass	MR16, 20w FL (BAB)	R	35w	B C E F I Q R B B
SL-20SM-L/G-MR16 (12v) ²	5.25"	4.50"	bronze composite	—	MR16 20w FL (BAB)	R	50w	E F I Q R
SL-20SM-L/G-PAR20 (120v) ²	5.25"	4.50"	bronze composite	—	none	R	50w	E F I V
SL-20SM-M-MR16 (12v) ²	5.25"	4.50"	bronze composite	aluminum,brass	MR16 20w FL (BAB)	R	50w	E F I Q R B B NEW!
SL-20SM-M-PAR20 (120v) ²	5.25"	4.50"	bronze composite	aluminum,brass	none	R	50w	E F I V NEW!
SL-20MDL/G-PAR36 (12v) ²	9.25"	7.25"	bronze composite	—	PAR36, 36w (QWFL)		50w	E F I
SL-20MD-L/G-PAR36T (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	PAR36, 36w (QWFL)		50w	E F I
SL-20MD-L/G-NL (120v) ²	9.25"	7.25"	bronze composite	—	none, PAR 20,30,38	R	150w	E F I V
SL-20MD-L/G-MR16 (12v) ²	9.25"	7.25"	bronze composite	—	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/G-MR16T (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	MR16, 20w FL (BAB)	R	75w	E F I Q R B B
SL-20MD-L/GFL-13, 26 (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	13w, 2 x 13w CFL		26w	E F I
SL-20MD-L/G-NL-CFLS (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	CFL spiral		26w	E F N I
SL-20MD-L/G-NL-HID (120v) ^{1,2}	9.25"	7.25"	bronze composite	—	none, PAR (HID)	R	100w	E F I V
SL-20LG-L/G-NL-HID (120v) ¹	15.00"	9.00"	bronze composite	—	none, PAR (HID)		100w	E F I V
SL-20LG-L/G-NL-HID (120v) ¹	15.00"	9.00"	bronze composite	—	none, ED17		100w	E F I V
SL-21	8.00"	3.00"	PVC/aluminum	—	MR16, 20w FL (BAB)	R	20w	B E F I Q R B B

NEW DRIVE OVER MARKER LIGHT

SL-20-SMM SERIES

Shown: SL-20-SMM-MR16LED-BRT

NEW

Optional light bulbs for SL-01 series: #4414 (18w), VWFL (25w), or any PAR-36 lamp. Optional light bulbs for SL-03 series: any MR16 (35w max.)

SL-20-SM (50w max.), SL-20MD (100w max.) & SL-20-LG (100w max.)

¹ Fixtures are supplied with internal ballast or transformer.

² Add -LF for flat glass lens.

12v fixtures: 25 foot 16/2 fixture lead wire available; add -2SF to catalog number. For use with Focus CPC or hub supplied by others.

Specialty Lighting

12v / 120v Step, Brick and Surface Lights

LED ORDER GUIDE PG.3

LED Panel



T10

T10

T10

T10

T10

T10

T10

T10

T10

T10



T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

T10

NEW

Step/ Brick Lighting Flat Panel LED's

No Back Box • Residential Grade Stamped

12v
LED Panel



SL-02-LEDP-CAR



SL-02AL-LEDP-COP



SL-021L-LEDP-CAM



SL-04-LEDP-CAR



SL-04AL-LEDP-BRS



SL-041L-LEDP-WBR

SL-02-LEDP Series

- 4.75" (W) x 3.00" (H) x .75" (D)
- 4w 12v DC integrated flat panel LED
- 350 Lumens / 380 Lumens 5200K*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

ONLY .75" DEEP



SL-04-LEDP Series

- 8.25" (W) x 3.25" (H) x .75" (D)
- 8w 12v DC integrated flat panel LED
- 630 Lumens / 680 Lumens 5200K*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

* For 5200K add -52 to catalog # eg: SL-04-LEDP52-RST

NEW

Step/ Brick Lighting Flat Panel LED's

No Back Box • Commercial Grade Cast

12v
LED Panel



SL-50 Series

- 7.25" (W) x 2" (H) x 1.125" (D)
- 5w 12v DC integrated flat panel LED
- 350 Lumens / 380 Lumens 5200K*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

ONLY 1.125" DEEP



SL-08-LEDP Series

- 8.25" (W) x 3.25" (H) x .875" (D)
- 8w 12v DC integrated flat panel LED
- 630 Lumens / 680 Lumens 5200K*
- 3000K Warm White or 5200K Cool White
- Remote Driver Supplied
- 50,000 Hour LED Panel / 5 Year Warranty

ONLY .875" DEEP



LED Flat Panels
50,000 Hours
5 Year Warranty
3000k or 5200k



4w LED Panel



5w LED Panel



8w LED Panel

* For 5200K add -52 to catalog # eg: SL-04-LEDP52-RST

COMING SOON ON THESE COMMERCIAL GRADE CAST FIXTURES



SL-17-LEDP-BRS



SL-17AL-LEDP-BRS



SL-30-LEDP-BAV



SL-31-LEDP-BRS

Specialty Lighting 12v

12v Copper Recessed Deck / Patio Cover / Fence Lights

LED ORDER GUIDE PG.3



Models shown:
SL-37-MR8 SL-37-MR11
SL-37-MR16

Catalog #	Height (H)	Diameter	Material	Lamp Supplied ¹	Options (pg.22)
SL-36-MR8/AC	7.00"	1.25"	copper	20w MR8 (FL)	E F I AA (angle collar is 2.25" long)
SL-36-MR11/AC	7.50"	1.75"	copper	20w MR11 (FTD)	E F I X (angle collar is 3.0" long)
SL-36-MR16/AC	7.50"	2.25"	copper	20w MR16 (BAB)	E F I Q R BB (angle collar is 3.0" long)
SL-37-MR8	3.25"	2.00"	copper	20w MR8 (FL)	E F I AA
SL-37-MR11	3.25"	2.50"	copper	20w MR11 (FTD)	E F I X
SL-37-MR16	3.75"	3.00"	copper	20w MR16 (BAB)	E F I Q R BB

NEW STEPPED GLASS FOR UP LIGHT APPLICATIONS



Can be used for up-lighting or down-lighting

12v fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number. For use with Focus CPC or hub supplied by others.

12v Copper Stake Lights

SL-37-MR8-CAR SL-37-MR11-CAR SL-37-MR16-CAR SL-37-MR16LED-CAR



Model shown:
SL-36-MR16LED-AC

SL-36-MR8 SL-36-MR8-AC SL-36-MR11 SL-36-MR11-AC SL-36-MR16 SL-36-MR16-AC SL-36-MR16-LED-CAR

Underwater Lights 12v

LED ORDER GUIDE PG.3



Catalog #	Height (H)	Diameter	Material	Lamp Supplied	Options (pg. 18)
SL-11	3.50"	5.75" diameter	cast brass	25w PAR36 VWFL	E F
SL-11-AB	4.20"	5.75" diameter	cast brass	25w PAR36 VWFL	E F
SL-40-ULT	2.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AB-ULT	2.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AB-AC-ULT	3.75"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-AC-ULT	3.75"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-SM-AC-ULT	3.75"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-40-SM-ULT	2.50"	2.50" diameter	cast brass	10K 20w MR11 FL (FTD)	E F
SL-33-ULT	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AB-ULT	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AB-AC-ULT	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-AC-ULT	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-SM-AC-ULT	5.38"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
SL-33-SM-ULT	3.50"	3.38" diameter	cast brass	10K 20w MR16 FL (BAB)	E F Q R BB
*FA-H20-JB	3.00"	5.00" width	cast brass	N/A	

FA-35 Series plastic filters: blue, red, green, amber, white for SL-11



SL-11

SL-11-AB

**NOW AVAILABLE
IN BLACK ACID
TREATMENT (-BAT)**

Model shown:
SL-33-AB-AC-ULT-BAT

Underwater fixtures available with black acid treatment. Add -BAT to catalog number. Underwater fixtures available with brass acid rust treatment. Add -BAR to catalog number.

* Specify number of ports (8 fixtures max.) at time of order plus 1 feed for 12/2 lead wire. eg: 4H=3 fixture ports + 1 lead wire port.

For aiming bracket add -AB to catalog number. For side mount add -SM to catalog number. For angle collar add -AC to catalog number. ¹ 6w Arrow LED side mount only

NEW AVAILABLE WITH MR11 LED OPTION

FA-11 Glass Color Filters Available for SL-33 & SL-40 Series



SL-40 & SL-33 SERIES
20w 10,000 Hours
STANDARD



SL-40-AB-AC-ULT-BAR SL-40-AB-ULT SL-40-SM-AC-ULT SL-40-AC-ULT SL-40-SM-ULT SL-40-ULT



SL-33-AB-AC-ULT SL-33-LED-ESX-AB-BAR SL-33-SM-AC-ULT SL-33-AC-ULT SL-33-SM-ULT SL-33-ULT



Octopus shown with 8 fixtures



For 25/50/75/100 ft of 12v 12/2c supply cable
add -25F/-50F/-75F/-100F to cat #
Specify number of ports (8 fixtures max.) at time of order plus 1 feed for 12/2 lead wire.
eg: 4H=3 fixture ports + 1 lead wire port.

**CAN HOUSE CONNECTIONS FOR UP TO
EIGHT 12v UNDERWATER FIXTURES!**

Barbecue Lights

LED ORDER GUIDE PG.3

12v

LED Panel



12v /120v Flex Clamp/Flex Deck Series

Catalog #	Arm Length ¹	Diameter	Std. Mat.	Opt. Mat.	Lamp Supplied ²	LED Opt.	Options (pg.22)
BQ-03-FC/-FD/-QC	24" std.	4.50"	spun alum.	brass, cop., ss	20w T4/SC	R	B C D E G M S
BQ-07-FC/-FD/-QC	24" std.	4.50"	extruded alum.	brass, cop., ss	20w T4/SC	R/P	B C D E F G I M S
BQ-08-FC/-FD/-QC/-WB	24" std.	2.60"	cast alum.	brass, cop., ss	35w MR16 FL(BAB)	R	B C D E F G I Q R B B
BQ-09-FC/-FD/-QC	24" std.	1.50"	cast alum.	brass, cop., ss	20w MR11 FL(FTD)	R	B C D E F I X
Tiki Torch Lights	Height	Diameter	Std. Mat.	Opt. Mat.	Lamp Supplied		Options (pg.22)
AL-18-LG-AH ³	77"	7.00"	cop.	—	20w T4 SC.	R	B D F S
AL-18-LG-AHHH ³	77"	7.00"	cop.	—	20w T4 SC	R	B D F S
AL-18-SM-AH	25"	4.50"	cop.	—	20w T4 SC.	R	B D F S
AL-18-SM-AHHH	25"	4.50"	cop.	—	20w T4 SC.	R	B D F S
SL-47	11"	4.50"	cop.	—	20w T4 SC.	R	B D F S
SL-47-HH	11"	4.50"	cop.	—	20w T4 SC.	R	B D F S
Umbrella Lights	Height	Diameter	Std. Mat.	Opt. Mat.	Lamp Supplied		Options (pg.22)
UL-03	3.50"	2.50"	alum.	brass, cop.	3x10w MR8 FL	R	B C E F I Z

Note: Alum. models supplied with black flex sleeve. ¹For 36" flex arms, add -36" to catalog number. Note: FC= Flex Clamp. Supplied with plug and cord. 36" Flex arm not available on -WB & -QC models. ²Add(-NB) for natural or (-BB) for brass bamboo stem. ³Add(-NG) for natural gas or (-P) for propane (Note: no area light on -NG & -P models).

Model shown:
BQ-08-FD-SS



Flex Clamp
Mounting System

#1 Selling Model
BQ-08FD-120V-SS

BQ-03-FC-SS BQ-07-FC-WIR BQ-08-FC-WBR BQ-09-FC-WBR
FLEX CLAMP SERIES

BQ-03-FD-BLT BQ-07-FDLEDP-WIR BQ-08-FD-SS BQ-09-FD-CAM
FLEX DECK SERIES

Quick Connect



Quick Connect BQ Lamps Are Now available with On/Off Switch. Add -QCS into catalog #
NEW QUICK CONNECT SYSTEM ALLOWS PLUG N' PLAY EASE OF USE



BQ-03-QC(S)-SS BQ-07-QC(S)-SS BQ-08-QC(S)-SS BQ-09-QC(S)-SS
FA-BQ-SP receptacle allows one fixture to be used in multiple application areas (reading, dining etc)

Portable



BQ-08-WB-SS WEIGHTED BASE RBQ-08-FD120MR16SS RETAIL PACKAGING

Barbecue / Umbrella Power Supplies

12v /120v



75w Hardwire Transformer



75w Plug-in Transformer



WM-Charger WB-12-BBQ

TIKI
TORCH LIGHTS



Model shown:
AL-18-LG-HH-NG

NEW

NATURAL GAS (-NG) OR
PROPANE (-P) VERSION



AL-18 Series Enhancements:



Simulated or Brass Bamboo Stems & Hammered Hats



NEW

NEW

NEW

AL-18-LG-AH-AH-SB-CAR

NEW TIKI TORCH AREA LIGHTS • PROVIDES AMBIANCE & LIGHTING FOR YOUR OUTDOOR LIVING ENVIRONMENT

AL-18-SM-AH-COP
Stands 25" TALL


AL-18-LG-AH-AH-SB-CAR
Stands 77" TALL

Umbrella Lighting

Spring Tension System (S.T.S.)
Adapts to pole sizes 1.25"-1.75"


CONSULT FACTORY FOR LARGE DIAMETER POLES, PALAPAS ETC

Umbrella Applications 1




Hardwire to 12v landscape lighting cable / system

2



Direct Connect to FOCUS Portable 12v Battery (WM-12-BBQ)

3



Plug In Transformer to 120v Receptacle



NEW

NOW WITH OPTIONAL MR8 LED UL-03-LED-COP



RXT CONTROL OPTIONS



Astro Timer (-RXTAT)



Digital Timer (-RXTDT)



Mechanical Timer (-RXTT)



Astro Timer (-AT)



Digital Timer (-DT) & Photo Cell (-RXTPC)



Timer Ready (Standard)

LED's draw less wattage so you can save money by using smaller, lower wattage transformers.
Power requirement comparison
LED vs Traditional Halogen

LED	=	TRADITIONAL
60w	=	300w
120w	=	600w
180w	=	900w



Interchangeable faceplates with 3 selections of timers can be installed at factory, distribution level or in the field.

Simple installation with only a Phillips screwdriver - no special tools required.

MATERIAL/FEATURES


- 60, 120, 180, 300 and 600 watt output models available
- UL 1838 listed, the standard for low voltage landscape lighting systems
- Multi Voltage output (12.5, 13.5 & 14.5 Volts)
- Super Terminal Lugs with capacity of 3 x #8, 5 x #10 or 7 x #12 gauge wire
- 304 Stainless Steel enclosure with #4 brushed finish
- Removable Stainless Steel hinged door is lockable and weather sealed
- Above grade, NEMA 3R rated, rain tight enclosure
- LED indicators for instant recognition of 120v and 12v power
- Timer Ready standard (for plug in timers supplied by others)
- Optional Mechanical Timer (-T), Digital Timer (-DT) and Astro Timer (-AT) face plates can be factory or field installed
- Photocell Ready with quick connector
- Supplied with two 1/2" conduit (trade size) holes & one 1-1/2" inlet with plugs in bottom panel plus 2 side panel 1/2" conduit (trade size) holes with plugs
- Flip down bottom panel swings down for easy access wiring
- 11 gauge cold rolled steel 'L' brackets for stable mounting
- Mounting plate and hardware included

FINISH

- Brushed Stainless Steel

ELECTRICAL

- Long life, high temperature 266°F (130°C) class 'B' rated transformer core
- Copper shielded isolation/insulation; No contact between 120v and 12v windings
- 1500v Isolation between all windings and ground
- Grade M19 electric grade steel for superior electrical and magnetic properties
- Strip copper secondary windings for lower temperature rise
- Single phase, open core and coil
- E.L. laminated core has concentric winding and is protected by 130°C thermal switch.
- Vacuumed impregnated with black slate flour
- Filled varnish for superior heat dissipation and noise reduction - Class 180°C
- 120v primary, 12.5v secondary 50/60 Hertz/cycle (standard)
- 6 foot 18/3 SJT-WA weatherproof grounded power cord (120v)
- ON/OFF control via rocker switch
- Extra heavy duty (80 amp) terminal lugs
- Resettable circuit breaker for overload and short circuit protection

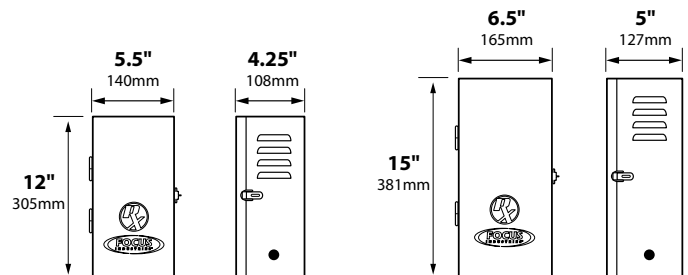

RXT-12-60MV
RXT-12-120MV
RXT-12-180MV

RXT-12-300MV
RXT-12-600MV

CONTROL OPTIONS

- T Mechanical Timer
- AT Astronomical Timer
- RXTRPC Remote Photocell
- DT Digital Timer
- RXTPC Photocell

CATALOG NO.	DESCRIPTION	CIRCUITS
RXT-12-60MV	60 watt MV transformer, timer ready	1
RXT-12-120MV	120 watt MV transformer, timer ready	1
RXT-12-180MV	180 watt MV transformer, timer ready	1
RXT-12-300MV	300 watt MV transformer, timer ready	1
RXT-12-600MV	600 watt MV transformer, timer ready	2
RXT-12-60MVAT	60 watt MV transformer, astro timer	1
RXT-12-120MVAT	120 watt MV transformer, astro timer	1
RXT-12-180MVAT	180 watt MV transformer, astro timer	1
RXT-12-300MVAT	300 watt MV transformer, astro timer	1
RXT-12-600MVAT	600 watt MV transformer, astro timer	2
RXT-12-60MVDT	60 watt MV transformer, digital timer	1
RXT-12-120MVDT	120 watt MV transformer, digital timer	1
RXT-12-180MVDT	180 watt MV transformer, digital timer	1
RXT-12-300MVDT	300 watt MV transformer, digital timer	1
RXT-12-600MVDT	600 watt MV transformer, digital timer	2
RXT-12-60MVT	60 watt MV transformer, mechanical timer	1
RXT-12-120MVT	120 watt MV transformer, mechanical timer	1
RXT-12-180MVT	180 watt MV transformer, mechanical timer	1
RXT-12-300MVT	300 watt MV transformer, mechanical timer	1
RXT-12-600MVT	600 watt MV transformer, mechanical timer	2

Power Supplies

120v

WT Series Aluminum Transformers

Nema 3R • UL 1838/1598



1 CIRCUIT	2 CIRCUITS	3 CIRCUITS	4 CIRCUITS
WT-12-60/-MV	WT-212-200	WT-312-900	WT-412-1200
WT-12-100	WT-212-300	(3 x 300w)	(4 x 300w)
WT-12-200	WT-212-600		
WT-12-300			



WT-212-300-R



WT-12-100/200

WT-12-100-PC

FEATURES

- Rocker switch on/off control
- Extra heavy-duty terminal block easily handles extra sets of cable
- Heavy-duty extruded aluminum housing (.115") with slide locking cover
- Easily programmable 3L
- Quality circuit protection through circuit breaker; mini push-to-reset
- Long-life, high temperature (130°C) rated transformers
- Isolation-type transformers. No contact between 120v and 12v windings
- Single-phase, open core and coil transformers, 120v primary, 12.5v secondary, 60 Hz
- Available in 100w, 200w, 300w, 600w, 900w and 1200w
- 1, 2, 3 or 4 circuit output
- 6-foot weather-resistant grounded flat power cord
- Attractive, durable, black semi-gloss powder coat finish
- Full range dimmer and dusk-to-dawn photocell options
- Remote photocell or remote motion sensor with 15' cord (up to 50') and mounting hub (FA-111)
- Built-in 24v VAC relay unit to be controlled by irrigation time clock (12v available)
- Made in the U.S.A.
- For other input voltages 220v, 240v, and 277v consult factory.

OPTIONS

- Integral timer (-T)
- **Astro timer** (-AT) **NEW!**
- Digital timer (-DT)
- Attached photocell (-PC)
- Remote photocell 15' cord (-RPC)
- Full phase dimmer (draws 1v) (-D)
- 24v VAC relay to irrigation controller... (-R) (12v relay also available)
- Remote motion sensor (-RMS)
- Multi-voltage output (300w increments only) 12.5v, 13.5v, 14.5v (-MV)
- Timer-ready or X10-ready (-TR)

NEMA 3R

M Series Stainless Steel Transformers UL 1838/1598



WT-212-300-RPC-T-D-CAM

WT-412-1200-4T

MST Series

MST/MAS-12-200
MST/MAS-12-300/-MV
MST/MAS-2-12-200
MST/MAS-2-12-300
MST/MAS-212-600/-MV

MLT Series

MLT-312-900/-MV
MLT-412-1200/-MV

Stainless steel enclosure with removable hinged locking door

FACTORY INSTALLED OPTIONS:

- Integral Timer (-T)
- **Astro Timer** (-AT) **NEW!**
- Digital timer (-DT)
- Attached photocell (-PC)
- Remote photocell 15' cord (-RPC)
- Full phase dimmer (draws 1v) (-D)
- 24v VAC relay to irrigation controller (-R)
- Multi-voltage output (12.5v, 13.5v, 14.5v taps) (-MV)
- Timer-ready or X10-ready (-TR)



Model shown:
MLT-412-1200-2DT-RPC
5" D x 16" H x 12" W

LED indicators for 120v power on and 12v power to terminal

Both series are available in timer-ready or X10-ready. Both enclosures available in aluminum.
Add -MAS/-MAL into catalog # (outer enclosure powder coated semi-gloss black)
Optional powder coat finishes are available. See page 19.

Removable Door

Site Information Log

ASTRO-TIMER AVAILABLE (add-AT)

Digital Timer

Photocell Ready Quick Connector

Removable Bottom

Flat plug

Model shown:
MST-212-600-DT
5" D x 16" H x 6" W

NEW GRAY SUPER LUGS

LUG CAPACITY
3 x #8
5 x #10
7 x #12

Direct Burial Composite Transformers Nema 12 • UL 1598/1838

DB-SM-12-25M/75E/150E/LED8 4.5" x 5.5"; max. load: 25w/75w/150w or 8w LED driver **NEW!**

DBS-12-25M/75E/100M/150E/2-LED8 6" x 6" x 6"; max. load: 25w/60M/75w/100w/150w **NEW!**

DB-12-60M/75E/100/2-8D 7.25" x 8.75"; max. load: 60w/75w/100w

DB-12-200/300 10" x 10" x 7.75"; max. load: 200w/300w

DB-212-600/312-900/412-1200 13" x 13" x 8.25"; max. load: 2 x 300w for 600w; 3x 300w for 900w; 4x 300w for 1200w

- Bronze composite housing
- 1/2" & 3/4" hubs, 120v input
- 2 ft. of 12/2 DB cable for outputs (12.5v connection)
- 2-3, 1/2" NPS hubs top mount available for fixture or photocell. Add (-PC) for photocell
- Magnetic circuit breaker for secondary overload /short circuit protection
- 60w units available in multi-voltage (12.5v, 13.5v, 14.5v)

NEW



NEW



DB-SM-12-25M/75E/150E/LED8

DB-12-60M/75E/100M/150E/100-PC/2-LED8

DBS-12-25M/60M/75E/100M/150E/2-LED8

DB-12-120M/200/300/212-300

D = DRIVER

M = MAGNETIC

E = ELECTRONIC

MUST BE INSTALLED BY A LICENSED ELECTRICIAN PER LOCAL CODES!

NEMA 12

Power Supplies

HV Series Stainless Steel Transformers

Nema 3R • UL 506



HV-500-SS-PC
5" D x 16" H x 6" W

LUG CAPACITY
3 x #8
5 x #10
7 x #12

Watts	Commons	Output/Taps
500	3	7
600	3	7
900	4	7
1200	6	2x7
(Taps 12v, 13v, 14v, 15v, 16v, 18v & 21v)		



HV-1200-SS-TL- RPC
5" D x 16" H x 12" W

Stainless steel enclosure
with hinged removable & locking door

FACTORY INSTALLED OPTIONS:


- Photocell attached (either side) (-PC)
- Remote photocell 15' cord (-RPC)
- 24v AC relay to irrigation controller (-R)
- Irrigation control relay (-RKIT)

HV Series

HV-500-SS-TL
HV-600-SS-TL
HV-900-SS-TL
HV-1200-SS-TL


NEMA 3R

Central Point Connection (CPC)



FA-CPC recommended for use with HV (High Voltage) series transformers for optimum voltage levels at CPC. Consult factory for use with MV (Multi Voltage) transformers.

Designed for grouping multiple fixture lead wires into one weatherproof junction box for easy access, connections, easy voltage metering, quick installation, and to help distribute even voltage to each fixture.

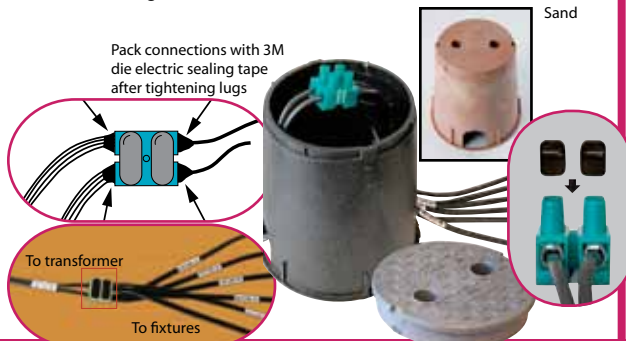

FA-CPC-COLOR (-GRAY or -SAND)

H.I.D. Ballast Enclosures

NEMA

Metal Halide • High Pressure Sodium

PAR38; Metal Halide - 70w R40 or PAR38, 100w PAR 38, 175w R40 or PAR38, 35w 39w or 50w PAR20, 20w, 39w or 70w PAR30, 70w, 100w or 150w PAR38

HPS: ED17- (35w-150w HPS)

WT-120-MH/HPS:

5" W x 10" H Weatherproof ballast enclosure (above grade)

DB-120-MH/HPS:

10" W x 10" H x 7.75" D Direct burial ballast enclosure

Single above grade NEMA 3R



Single below grade NEMA 12



* Dual ballast available. Consult factory, enclosure is larger.

WT-120-MH/HPS

DB-120-MH/HPS

Field Installed Kits-MST/MLT Control Devices

1. Integral timer kit(-T KIT)
2. Digital timer kit(-DT KIT)
3. Photocell kit(-PC KIT)
4. Remote photocell kit(-RPC KIT)
5. Full phase dimmer kit(-D KIT)
6. 12v or 24v VAC relay kit for control via irrigation time clock.....(-R KIT)



Mechanical



Digital



Photo Cell



Remote Photo Cell



Full Phase Dimmer

NOTE: DRAWS 1 VOLT



Irrigation Controller Relay

Plug-In

Retrofit Transformers

Hardwire

Max. load: 75w; molded thermal plastic. Overload protection/ dimmable 120v input/11.5v output. 10' run max.

DO NOT USE WITH LED

2.75" H x 1.75" W x 1" D

2.125" H x 1.25" W x .75"D

PL-12-75

HW-12-75/-150

OPTIONS FOR DIRECT BURIAL TRANSFORMERS

- Attached photocell(-PC)
- Remote photocell 19' cord(-RPC)
- 24v VAC relay to irrigation controller.....(-R)
- Multi-voltage output (300w increments only) (12.5v, 13.5v, or 14.5v)-MV)
- Multi-voltage input (options: 277v 60hz or 220v/240v 80hz 300VA only)consult factory



DB-212-600/312-900/412-1200



DIRECT BURIAL



NEW

RAT-01-BLK

2 Transformer Timing Control Device

- Control 1 or 2 transformers from this easy to use plug and play Astro Timer Control Device.
- 1800w (15A) @ 120v compatible with all types of lighting transformers.
- Includes 2 grounded receptacles

-AT

Upgrade transformers with Astronomical Timer

- Automatic sunrise/sunset activation
- Setting based on latitude/longitude coordinates
- Automatically adjusts for daylight savings time
- Never needs reprogramming
- Built in memory protects against power failure



RAT-01-BLK / -AT

Accessories

12v 1/2" Female NPS Mounting Spikes



Hex Cell Mini Louvers

Catalog #	Shape	Fixture(s)
FA-06-5, 7	■ FFL-5, 7	
FA-06-9, 13	■ FFL-13	
FA-06-26	■ DL-40 Series, FFL-13/26/26-3T, 32-3T/ 42-3T-CST	
FA-07	■ DL-04	
FA-07-15	■ DL-15	
FA-07-16	■ DL-16-NL	
FA-07-26	■ DL-10, DL-10-HE	
FA-08	● DL-02	
FA-08-06	● DL-06, DL-20 & SL-20SM series, SL-21 RXD & RXS-PAR series	
FA-08-SL20	● SL-20MD series	
FA-08-SL20LG	● SL-20LG series	
FA-08-17	● DL-17, RXD-03, RXS-05/-08 SL-23	
FA-08-21	● DL-13, DL-14, DL-21, DL-22, RXD-01, RXD-02, RXS-04/-07, SL-03, SL-16-SS, SL-21, SL-22	
FA-08-23	● DL-23, RXD-04, RXS-06/-09, SL-39	
FA-08-23-C	● DL-23-COP, SL-23-COP	
FA-08-30	● DL-30 series	
FA-08-36C-8	● SL-36-MR8	
FA-08-36C-11	● SL-36-MR11	
FA-08-36C-16	● SL-36-MR16	
FA-08-38	● DL-38 series	

Colored Flat Tempered Glass Lenses

Catalog #	Shape	Fixture(s)
FA-10-BLUE/GREEN	● DL-04	
FA-10-06-BLUE/GREEN	● DL-02	
FA-10-15-BLUE/GREEN	■ DL-15	
FA-10-17-BLUE/GREEN	● DL-17, RXD-03, RXS-05/-08, SL-23, SL-26	
FA-10-20-BLUE/GREEN	● SL-21, DL-20, RXD & RXS-PAR series, SL-20-MD series	
FA-10-SL20-CLEAR/BLUE/GREEN	● DL-23, RXD-04, RXS-06/-09, SL-39	
FA-10-23-BLUE/GREEN	● DL-23-COP	
FA-10-23-C-BLUE/GREEN	● DL-30 series	
FA-10-30-BLUE/GREEN	● DL-38 series	
FA-10-38-BLUE/GREEN	● DL-02, DL-13, DL-14, DL-21, DL-22, RXD-01	
FA-11-AMBER/RED	● DL-02, DL-13, DL-14, DL-21, DL-22, RXD-01, SL-03, SL-14, SL-21, SL-22	
FA-11-BLUE/GREEN	■ DL-10, DL-10-HE	
FA-11-26-BLUE/GREEN	● RXD-02, RXS-04/-07, SL-16SS, SL-33	
FA-11-SL-33-AMBER/RED/WHITE	● RXD-02, SL-16SS, SL-33	
FA-11-SL-33-BLUE/GREEN	● SL-40	
FA-11-SL-40-AMBER/RED/WHITE	● SL-40	
FA-11-SL-40-BLUE/GREEN	● SL-36-MR8	
FA-11-36C-8-BLUE/GREEN	● SL-36-MR11	
FA-11-36C-11-BLUE/GREEN	● SL-36-MR16	
FA-11-36C-16-BLUE/GREEN		

Linear Spread Flat Tempered Glass Lenses

Catalog #	Shape	Fixture(s)
FA-98	●	DL-02, DL-13, DL-14, DL-21, DL-22, SL-22, RXD-01, SL-25
FA-98-17	●	DL-17, RXD-03, SL-26 RXS-05/-08 SL-23,
FA-98-20	●	DL-06, DL-20, RXD-PAR, RXS-PAR series, SL-21
FA-98-23	●	DL-23, SL-29, SL-39 RXD-04, RXS-06/-09
FA-98-23-C	●	DL-23-COP
FA-98-30	●	DL-30 series
FA-98-36-C-8	●	SL-36-MR8
FA-98-36-C-11	●	SL-36-MR11
FA-98-36-C-16	●	SL-16/SL-36-MR16
FA-98-33	●	RXD-02, RXS-04/-07
FA-98-38	●	DL-38 series

Wide Spread Flat Tempered Sand Blasted Glass Lens Softener

Catalog #	Shape	Fixture(s)
FA-104	●	DL-02, DL-13, DL-14, DL-21, DL-22, RXD-01, SL-16-SS, SL-22, SL-22, SL-25
FA-104-17	●	DL-17, SL-23, SL-26 RXD-03, RXS-05/-08,
FA-104-20	●	DL-06, SL-21 DL-20 series, RXD & RXS-PAR series,
FA-104-23	●	DL-23, SL-29, SL-39 RXD-04, RXS-06/-09
FA-104-23-C	●	DL-23-COP
FA-104-30	●	DL-30 series
FA-104-36-C-8	●	SL-36-MR8
FA-104-36-C-11	●	SL-36-MR11
FA-104-36-C-16	●	SL-36-MR16
FA-104-33	●	RXD-02, RXS-04/-07
FA-104-38	●	DL-38 series

Clear Convex Tempered Glass Lenses for Bullet Fixtures

Catalog #	Shape	Fixture(s)
FA-99	●	DL-02, DL-13, DL-14, DL-21, DL-22, RXD-01, SL-16-SS, SL-22, SL-22, SL-25
FA-99-17	●	DL-17, RXD-03 SL-23, SL-26
FA-99-20	●	DL-06, DL-20 series,
FA-99-23	●	DL-23,
FA-99-30	●	DL-30 series
FA-99-38	●	DL-38 series
FA-99-RX02	●	RXD-02
FA-99-20SM-SG*	●	SL-20-SM series
FA-99-20MD-SG*	●	SL-20-MD series
FA-99-36-SG-8/11/16*	●	SL-36-MR8/11/16
FA-99-37-SG-8/11/16*	●	SL-37-MR8/11/16

Plastic Color Filters

FA-09-5, 7-BLUE/GREEN	■ FFL-5, 7
FA-09-9, 13-BLUE/GREEN	■ FFL-13
FA-09-26-BLUE/GREEN	■ FFL-26
Acrylic Colored Lenses	
FA-35-BLUE/GREEN	● SL-11
FA-35-AMBER/RED/WHITE	● SL-11
Holiday Enhancements for SL-44 Series Paver Lights	
FA-35SL44-RED/WHITE/ORANGE/BLUE/GREEN	SL-44
FA-35SL44-66-RED/WHITE/ORANGE/BLUE/GREEN	SL-44-66
FA-35SL44-69-RED/WHITE/ORANGE/BLUE/GREEN	SL-44-69

Clear and Colored Convex Tempered Glass Lenses for Well Lights

Catalog #	Shape	Fixture(s)
FA-10-20-BLUE/GREEN	●	SL-21
FA-10-SL-20-Series/ BLUE/GR*	●	SL-20-SM/-MD/-LG
FA-12	●	SL-01
FA-13-BLUE/GREEN	●	SL-01
FA-15	●	SL-03
FA-16-BLUE/GREEN	●	SL-03


* For FA-10-SL-20 specify -SM, MD or -LG when ordering

Well Light Holders/Grates/Eyebrow Available in Aluminum (-AL) or Brass (-BRS)



1/2" NPS Extension Wand and Coupler

Available without coupler, add -NC suffix to catalog number. Subtract 1" from length below.

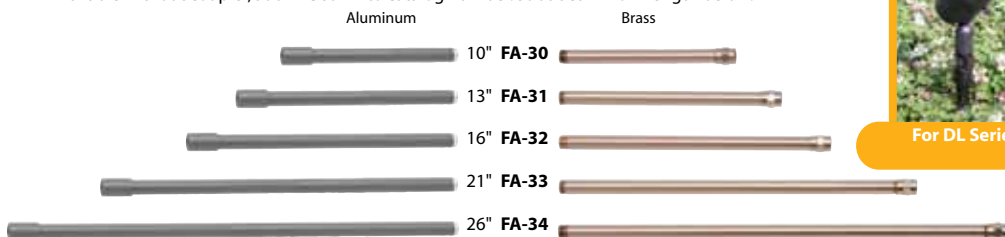

For DL Series CFA-30-4/CFA-30-8 Black PVC Riser

12v Quick Connector

To connect 18/2 fixture wire to main cable. 12/2, 10/2, 8/2



FA-05

Glare/Sprinkler Shield

For AL-01,-04,-05,-06,-07,-11,-12,-14,-15,-16-17,-18,-19



FA-97 +CAT #

Key to Available Options

A. Available in Halogen 10w or 20w SC T3 (Add -H and wattage into catalog #)
B. Available in optional powder coat finishes (See pg. 19) (Add -Color into catalog #)
 Note: Optional acid treatments available.
 (Add -BAT, -BAR, -BAV, -CAR, -CAV into catalog #)
C. Available in unfinished brass
 (Add -BRS into catalog #)
D. Available in unfinished copper
 (Add -COP into catalog #)
E. Available in other wattages and/or beam spreads.
F. Available with hex louvers and/or colored lenses
G. Available in stainless steel (Add -SS into catalog #)

H. Available in CFL (Specify K Temperature)
I. Available with specialty lenses (Spread, Convex or Softener)
J. Available with adjustable hub (Standard lamp 20w SC halogen)
K. Available with bi-pin Halogen lamps (Add -HBP into catalog #)
L. Available in bi-pin 10,000 hrs Xenon 10w or 20w (Add -XBP and wattage into catalog #)
M. Available in single contact 10,000 hrs Xenon 10w/20w (Add -X and wattage into catalog #)
N. Available with GU24 base CFL Spiral lamps in 13,18 or 26w (Add -13S, 18S, 26S into catalog #)
O. Available in 50w DCT3 Halogen (Add -H50 into catalog #)
P. Available with gold incandescent lenses

Q. Available in 10 or 18,000 hrs MR16 (Add -ULTRA or -TITAN into catalog #)
R. Available with 4w ARROW MR16 LED or 4w ARROW SAVER MR16 LED (-LED, -LEDAS)
S. Available with 2.2w Omni 2 LED (-LED)
T. Available with 26w, 32w, & 42w Triple Tube (Supply wattage into catalog #)
U. Available with 3w LED Module (-LEDM)
V. Available with ARROW PAR LED (-LED)
W. Available with 7w LED Module (-LEDM7)
X. Available with 2w ARROW MR11 LED (-LED)
Y. Available with 2w LED STRIP (-LED5)
Z. Available with 1.5w MR8 LED (-LED)
AA. Available with LED Flat Panel (-LEDP)
BB. Available with 6w MR16 LED (-LED6W)

Accessories

Flat Lens Caps (-EC) and Angle Caps (-AC)

For DL-38



FA-36-BRS

For DL-38



Fits EC and AC

FA-99-38

For DL-20



Available in aluminum, brass or composite

FA-38-BRS

For DL-30



Available in aluminum or brass

FA-40-BRS

Angle Cap for DL-20 available in aluminum, brass or composite



C/FA-38-AC-BRS

Angle Cap for DL-30 available in aluminum & brass



FA-40-AC-BLT

Angle Cap for DL-38 available in aluminum, brass or composite



C/FA-36-AC-BLT

Add -99 for Convex Lens; -LF for Flat Lens to catalog number. For brass, add -BRS to catalog number.

Surface Canopies

NEW



FA-24-MD-CSTPC-BRS



FA-24-MD-CST-BAR

FA-24-MD-CST-POST-BLT

FA-24-MD-CST-POST-BRT

SL-20 SERIES CONCRETE FORMS



FA-FORM-SL20SM
Ø4.75" x 4"



FA-FORM-SL20MD
Ø7.50" x 4"



FA-FORM-SL20LG
Ø9.25" x 4"

Single 1/2" NPS Hole Commercial Mounting Pedestals

Caps available in aluminum, composite and brass. Custom lengths available-consult factory.



CFA-25-BRT



FA-25-BRS (12v)
FA-26-BRS (120v)

FA-26-GFIC
-BLT

FA-26-R-BRS with
120v receptacle

FA-26-75W-BLT with
75w transformer

FA-39-BLT
(120v)

FA-26-TMS1-BLT (For 1 transformer)
FA-26-TMS2-BLT (For 2 transformers)

NOW AVAILABLE WITH BRONZE ABS EXTRUDED POSTS!

JUNCTION BOXES & ADAPTERS FOR ONE OR MORE FIXTURES



"Y" Adapter
FA-YAD-BLT
(2) 1/2" NPS Holes



FA-111-SM-H-COP



FA-TAD-WBR
(2) 1/2" NPS Holes



FA-111-SM-BRT



FA-111-MD-BRT



120v
FA-JBOX-BRS
In-Ground
Die Cast Brass
Junction Box

FA-JBOX-BRS

Junction Boxes/Tree Mounts



FA-22-T-BRT
12/120v



FA-111-TAD-BAR
12v / 120v



FA-111-BRT
12/120v



FA-24-MDCST-BAR
12v

NOTE: Fixtures are not included with Junction Boxes/Tree Mounts

Adjustable Tree Mounts with Rubber Strap and Canopy

FA-24-TC-BRS

NEW

FA-22-T-BLT

10"; stretches to 15"
15"; stretches to 22"
21"; stretches to 30"
31"; stretches to 45"
41"; stretches to 61"

FA-24-Strap

FA-111-T-BRS FA-24-T-BRS FA-24-MDCST-T-WBR

NEW FOCUS TOOLS



• STOP Beating Up Your Lighting Fixtures
• Works with most manufacturers mounting stakes
• Prevents costly damage to your landscape lighting fixtures
Includes Bottle Opener



The FT-02 tool works with any fixture from any manufacturer to make removing and installing lamps faster and easier.

Small suction cup installs & removes lamps as small as MR8.
Large suction cup installs & removes large size lamps like Par36.

FT-02

Voltage Regulator System 13v to 28v • Maintains 11.8 volts to each fixture.

LED INDICATORS: Green - Voltage above 11.8v • Red - At or below 11.8v

No Voltage Meters Required • Soft start with 75w max

Note: Must use Magnetic MV or HV Transformer or any magnetic power supply outputting 13v to 28v



FA-VRS

VRS
www.vrs.com

PEACE OF MIND
INNOVATIVE Power
Delivery SOLUTIONS

POWDER COAT FINISHES

Standard Black Texture (-BLT)	White Texture (-WTX)	Bronze Texture (-BRT)	Rust (-RST)	Antique Verde (-ATV)	Rubbed Verde (-RBV)	Hunter Texture (-HTX)	Weathered Brown (-WBR)
Stucco (-STU)	Terra Cotta (-TRC)	Weathered Iron (-WIR)	Camel Tone (-CAM)	Chrome Powder (-CPR)	Brass or Copper Acid Verde (-BAV)(-CAV)	Brass or Copper Acid Rust (-BAR)(-CAR)	Black Acid Treatment (-BAT)

FOR BRASS OR COPPER ONLY

NOTES:


1. Conforms to UL 1838 and 1598, 506, 153 Standards.
2. All fixtures are supplied with mounting FA-03 spikes except the following: Step, Brick, Well, Hanging, Up/Down, Underwater and 120v fixtures.
3. Standard finish is black texture polyester powder coat.
4. Acid treatment finishes available for brass and copper only.
5. All fixtures include lamp except those with -NL and SL-08-T10 series.
6. Consult factory to convert 12v fixtures to 120v.
7. To order fixtures without lamp add -NL to catalog.#
8. To order fixtures without stake add -NS to catalog.#
9. For custom products/finishes consult factory.



4w & 8w LED FLAT PANEL RETROFIT KIT

Surface Light Conversion To FOCUS LED Panels

There are millions of energy wasting surface fixtures in hallways, corridors, stairwells and entrances that need to be replaced. FOCUS has the LED solution. Easily convert any incandescent or fluorescent surface lamp to energy saving LED with FOCUS Surface Lamp Retrofit Kits

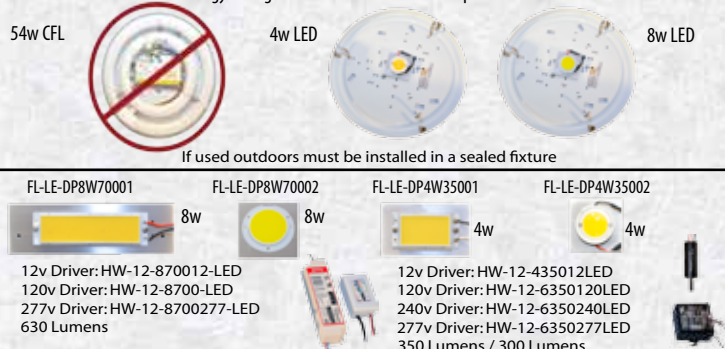


4w & 8w LED FLAT PANEL RETROFIT KIT

Simply Insert The Kit Directly Into Any Existing Back Box

12v, 120v or 277v Driver Included:
Easily Retrofits into ANY Manufacturers Brick Lights • **4w & 8w / 50,000 hours**
Minimum Inside Dimensions of Back Box
Small: 4" (w) x 2" (h) x 2.5" (d)-or Large: 6.25" (w) x 2" (h) x 2.5" (d)
Custom Brackets Available to Fit Larger Back Boxes

FA-LEDP-412S (12v)
FA-LEDP-4120S (120v)
FA-LEDP-4277S (277v)
350 Lumens

FA-LEDP-812B (12v)
FA-LEDP-8120B (120v)
FA-LEDP-8277B (277v)
630 Lumens

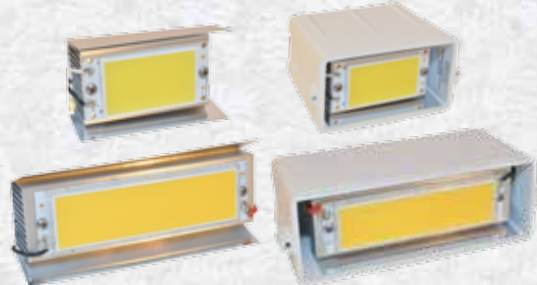

LED SOLUTIONS

LED LIGHT SOURCE OPTIONS FROM 12v-277v

4 EXCITING TECHNOLOGIES

RETROFIT/ MODULE / FLAT PANEL / STRIP

GO GREEN



MOST FOCUS LED's ARE 50,000 HOURS AVERAGE RATING & 2700K-3100K WARM WHITE COLOR
Flat Panel LED's Available in 3000K Warm White or NEW 5200K Cool White

Catalog Number	Description	Volts	Hours	Driver(s)	Watts	Warranty
FL-LED-OMNI2-27K	SC base LED	12v	50,000		2.2w	5 years
FL-LED-OMNI2BP-27K	Bi-Pin LED	12v	50,000		2.2w	5 years
FL-LED-MR16-BAB	MR16 5.3 bi-pin LED 35" (BAB) Flood	12v	50,000		4w	10 years
FL-LED-MR16-ESX	MR16 5.3 bi-pin LED 12" (ESX) Spot	12v	50,000		4w	10 years
FL-LED-MR16-AS40	MR16 5.3 bi-pin LED 40" (BAB) Flood	12v	40,000		4w	5 years
FL-LED-MR16-AS15	MR16 5.3 bi-pin LED 15" (ESX) Spot	12v	40,000		4w	5 years
FL-LED-MR16W40	MR16 5.3 bi-pin LED 40" (BAB) Flood	12v	50,000		6w	5 years
FL-LED-MR11-40	MR11 GU4 bi-pin LED 40" (FTD) Flood	12v	50,000		2w	5 years
FL-LED-MR11-15	MR11 GU4 bi-pin LED 15" (FTB) Spot	12v	50,000		2w	5 years
FL-LED-AR111-15	AR111 LED 15" Spot	12v	50,000		13w	5 years
FL-LED-AR111-40	AR111 LED 40" Flood	12v	50,000		13w	5 years
FL-LED-120V-MR16-BAB	MR16 GU10 bi-pin LED 35" (BAB) Flood	120v	50,000		4w	10 years
FL-LED-120V-MR16-ESX	MR16 GU10 bi-pin LED 12" (ESX) Spot	120v	50,000		4w	10 years
FL-LED-P2015-27K	PAR20 LED 15" Spot	120v	50,000		9w	5 years
FL-LED-P2040-27K	PAR20 LED 40" Flood	120v	50,000		9w	5 years
FL-LED-P3015-27K	PAR30 LED 15" Spot	120v	50,000		15w	5 years
FL-LED-P3040-27K	PAR30 LED 40" Flood	120v	50,000		15w	5 years
FL-LED-P3815-27K	PAR38 LED 15" Spot	120v	50,000		21w	5 years
FL-LED-P3840-27K	PAR38 LED 40" Flood	120v	50,000		21w	5 years
Consult factory for available fixtures	Flat panel LED	12v	50,000	12v-277v	4w/8w	5 years
Consult factory for available fixtures	LED Module	12v	50,000	12v-277v	3w/7w	5 years

Note: All FOCUS LED's are for use with a magnetic power supply only. LED Module, MR16, MR11 AR111 & PAR series LED's must be installed in a sealed fixture.
Non-dimmable. DOE LM79 tested / LM80 compliant. Power factor >90%.

★ FOCUS INDUSTRIES®, INC.

WORLD HEADQUARTERS

25301 Commercentre Drive, Lake Forest, CA 92630

Phone: (949) 830-1350 • Toll free: (888) 882-1350

www.focusindustries.com

E-mail: focus@focusindustries.com To order (distributors only) orders@focusindustries.com



Made in the U.S.A.



REGIONAL DISTRIBUTION CENTERS

1 NORTH CAROLINA 705 S. Railroad Street, Unit 1, Salisbury, NC 28144

2 PENNSYLVANIA 11500 Roosevelt Blvd., Unit G-1, Philadelphia, PA 19116

Ph (704) 642-0280 • Fax (704) 642-0804 • sales@pricemarketing.com

Ph (215) 677-6870 • Toll Free (800) 468-0801 • Fax (215) 677-1261 • Armand@associatedmarketing.net

Focus Industries® strives to continually improve its product line. We reserve the right to modify product from that pictured. Not responsible for typographical or misprint errors.

FSA-09 \$4.00 032613

© 2013 Focus Industries,® Inc. • All Rights Reserved.