



KAXW LED Wall Luminaire




Specifications

Length: 14"
(35.6 cm)

Width: 12"
(30.5 cm)

Height: 5"
(12.7 cm)

Weight (max): 19.7 lbs
(8.9 kg)

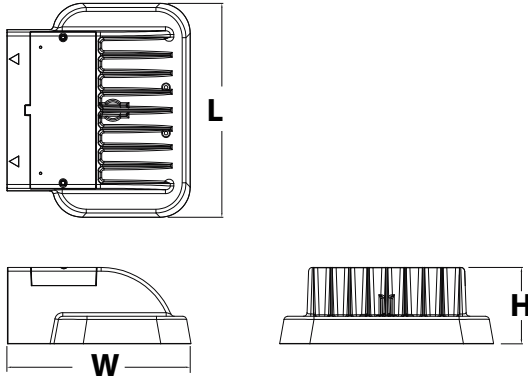

A+ Capable options indicated by this color background.

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**¹

To learn more about A+, visit www.acuitybrands.com/aplus.

1. See ordering tree for details.

Ordering Information

EXAMPLE: KAXW LED P3 40K R3 MVOLT DDBXD

Series	Performance package	Color temperature	Distribution	Voltage	Mounting	Control options	Other options	Finish (required)
KAXW LED	P1	30K 3000 K	R3 Type 3	MVOLT ¹	Shipped included (blank) Surface mounting bracket	Shipped installed PER NEMA twist-lock receptacle only (controls ordered separate) ^{3,4} PER5 Five-wire receptacle only (controls ordered separate) ^{4,5} PER7 Seven-wire receptacle only (controls ordered separate) ^{4,5} PIR 180° motion/ambient light sensor, <15' mtg ht ⁶ FAO Field adjustable output ⁷ PIRH ⁶ PIR1FC3V ⁶ PIRH1FC3V ⁶	Shipped installed SF Single fuse (120, 277 or 347V) ⁸ DF Double fuse (208, 240 or 480V) ⁹ HS House-side shield ¹⁰ LCE Left Conduit Entry ¹¹ RCE Right Conduit Entry ¹¹ Shipped separately BSW Bird-deterrent spikes ¹⁰ EGS External glare shield ¹⁰	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone
	P2	40K 4000 K	R4 Type 4	120 ¹				
	P3	50K 5000 K	208 ¹	240 ¹				
			277 ¹	347 ²				

- NOTES**
- 1 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
 - 2 Not available in the P1 performance package.
 - 3 Not available with ROAM®. See PER5 or PER7 option.
 - 4 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See Accessories information.
 - 5 If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls.
 - 6 Specifies the Sensor Switch MSOD-7-ODP control; see [Outdoor Control Technical Guide](#) for details. Dimming driver standard. Not available with PER5 or PER7. Must specify 120V or 277V. Requires PER or separate on/off.
 - 7 Not available with PER5 or PER7 options.
 - 8 Must specify 120, 277, or 347V option.
 - 9 Must specify 208, 240, or 480V option.
 - 10 Also available as a separate accessory; see Accessories information.
 - 11 Requires a contractor supplied ½" EMT raintight fitting.
 - 12 Requires luminaire to be specified with PER, PER5 or PER7 option. Ordered and shipped as a separate line item from Acuity Brands Controls.

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ¹²
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ¹²
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ¹²
DSHORT SBK U	Shorting cap
KAXWHS U	House-side shield
KAXWBSW U	Bird-deterrent spikes
KAXWEGS U	External glare shield



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	29W	R3	3,322	1	0	1	115	3,545	1	0	1	122	3,607	1	0	1	124
		R4	3,415	1	0	1	118	3,643	1	0	1	126	3,707	1	0	1	128
P2	49W	R3	5,731	1	0	1	117	6,115	1	0	1	125	6,222	1	0	1	127
		R4	5,891	1	0	1	120	6,285	1	0	1	128	6,396	1	0	1	131
P3	79W	R3	8,852	1	0	1	112	9,445	2	0	2	120	9,611	2	0	2	122
		R4	9,099	2	0	2	115	9,708	2	0	2	123	9,879	2	0	2	125

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-50°C (32-122°F).

* Shaded cells include active dynamic temperature sensing.

Ambient	Lumen Multiplier		
	P1	P2	P3
0°C	1.05	1.05	1.05
10°C	1.03	1.03	1.03
20°C	1.01	1.01	1.01
25°C	1	1	1
30°C	0.99	0.99	0.99
40°C	0.97	0.97	0.93
45°C	0.96	0.96	0.84
50°C	0.95	0.95	0.74

Electrical Load

Package		120V	208V	240V	277V	347V	480V
P1	Current (A)	0.24A	0.14A	0.13A	0.11A		
	System Watts	29W	29W	29W	29W		
P2	Current (A)	0.41A	0.24A	0.21A	0.18A	0.14A	0.11A
	System Watts	49W	48W	48W	48W	47W	47W
P3	Current (A)	0.66A	0.38A	0.33A	0.29A	0.23A	0.17A
	System Watts	79W	78W	78W	78W	77W	76W

Projected LED Lumen Maintenance

Operating Hours	25,000	50,000	100,000
Lumen Maintenance Factor	>0.94	>0.89	>0.80

Values calculated according to IESNA TM-21-11 methodology and valid up to 40°C.

Control	PER Table				
	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)	
		Wire 4/Wire5	Wire 4/Wire5	Wire 6/Wire7	Wire 6/Wire7
Photocontrol Only (On/Off)	✓	⚠	⚠	⚠	⚠
ROAM	⊘	✓	⚠	⚠	⚠
ROAM with Motion (ROAM on/off only)	⊘	⚠	⚠	⚠	⚠
Future-proof*	⊘	⚠	✓	✓	⚠
Future-proof* with Motion	⊘	⚠	✓	✓	⚠


✓ Recommended
⊘ Will not work
⚠ Alternate

*Future-proof means: Ability to change controls in the future.


Isofootcandle plots for the KAXW LED P3 40K. Distances are in units of mounting height (20').

LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc
- 2.0 fc
- 5.0 fc




Test No. L03160690P8 tested in accordance with IESNA LM-79-08.



Test No. L03160690P8 tested in accordance with IESNA LM-79-08.



Test No. L03160690P8 tested in accordance with IESNA LM-79-08.



Test No. L03160690P8 tested in accordance with IESNA LM-79-08.

FEATURES & SPECIFICATIONS

INTENDED USE

This feature-rich luminaire embodies the highest level of functionality with extraordinary efficacy which maximizes your application efficiency providing high levels of light for minimal cost specifically for building-mounted doorway and pathway illumination on nearly any type of facility.

CONSTRUCTION

The die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. This modular design allows for ease of maintenance and future light engine upgrades. The LED driver is installed in a separate compartment to thermally isolate it from the light engines for low operating temperature and long life. The housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed. Light engines are available in 3000 K, 4000 K or 5000 K (minimum 70 CRI) configurations. The KAXW has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to >L80/100,000 hours). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours.

INSTALLATION

Included wall mount plate facilitates a quick and easy installation. Mounting bolts feature a 1000-hour salt fog finish. Optional bi-level motion sensor and NEMA 3, 5 or 7 pin twist lock photocontrol receptacle are also available.

LISTINGS

CSA Listed for wet locations. Light engines and electrical compartment are IP66 rated. Rated for temperatures as low as -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.