

ANCHORING DEVICES

MACHINE SCREW LEAD ANCHOR

ONE SETTING TOOL FURNISHED IN EACH JAR OF ANCHORS




We only recomend these anchors for cement floors,
not to be used overhead in ceilings or walls.

STOCK NO.	UPC NO.	SIZE	HOLE SIZE	ANCHOR LENGTH	WT. PER PKG.	STD. PKG.	SUGGESTED TRADE LIST PRICE PER
J1401	83155	6-32	5/16	17/32	0.87	100	44.75/c NEW
J1402	80846	8-32	5/16	17/32	0.91	100	45.03/c
J1403	80847	10-24	3/8	11/16	1.78	100	45.63/c
J1404	80848	10-32	3/8	1/2	1.88	100	45.63/c
J1406	80850	1/4-20	1/2	7/8	3.75	100	51.38/c
J1407	80851	5/16-18	5/8	1 1/16	6.69	100	129.38/c
J1408	80852	3/8-16	3/4	1 5/16	5.25	50	130.50/c
J1409	80853	1/2-13	7/8	1 9/16	8.97	50	158.90/c

NOT RECOMMENDED FOR CEMENT CEILING APPLICATIONS

PLEASE NOTE THAT MACHINE SCREW ANCHORS HAVE A LEAD OUTER GRIPPING SHELL. IN APPLICATIONS WHERE LEAD IS CONSIDERED DANGEROUS, WE DO NOT RECOMMEND THEIR USE. UNTIL U.S. GOVT. SAFETY REGULATIONS TAKE A FIRM STAND ON THEIR USE, METALLICS WILL CONTINUE TO OFFER THIS PRODUCT-AS DO MANY OTHER FASTENER COMPETITORS.

E

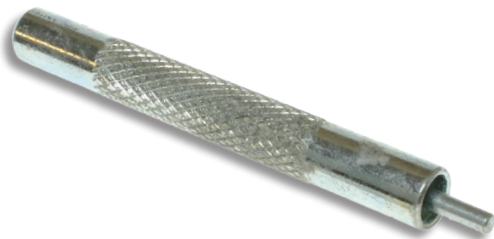

MACHINE SCREW ANCHOR SETTING TOOL

Safety glasses should be worn for any driving applications.
See Safety Glasses Pg. 220-222

STOCK NO.	UPC NO.	SIZE	WT. PER PKG.	STD. PKG.	SUGGESTED TRADE LIST PRICE PER
1401ST	17900	6-32	.04	1	4.93/ea NEW
1402ST	17905	8-32	.07	1	4.20/ea
1403ST	17910	10-24	.08	1	5.03/ea
1404ST	17915	10-32	.14	1	5.03/ea
1406ST	17925	1/4-20	.17	1	5.58/ea
1407ST	17930	5/16-18	.27	1	5.95/ea
1408ST	17935	3/8-16	.38	1	6.28/ea
1409ST	17940	1/2-13	.58	1	12.13/ea

STEEL SELF-DRILLING ANCHOR

STEEL ZINC CHROMATE/SNAP-OFF STYLE

Can be used in conjunction with
Machine Screws, Bolts, or Threaded Rod
Eliminates use of carbide masonry drill bits.
For use in structural fastening to concrete floors.



Safety glasses should be worn for any driving applications. Safety Glasses see Pages 220-222

STOCK NO.	UPC NO.	BOLT SIZE	WT. PER PKG.	STD. PKG.	SUGGESTED TRADE LIST PRICE PER
J14SOT	82600	1/4-20	4.81	100	170.00/c
J38SOT	82610	3/8-16	5.22	50	247.70/c
J12SOT	82615	1/2-13	4.88	25	380.52/c