
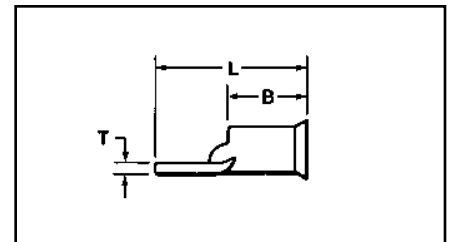


ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL BELLED END

TYPE YA-LB

COPPER COMPRESSION
TERMINAL

UL Listed 90° C,
600 Volts to 35 kV ◆

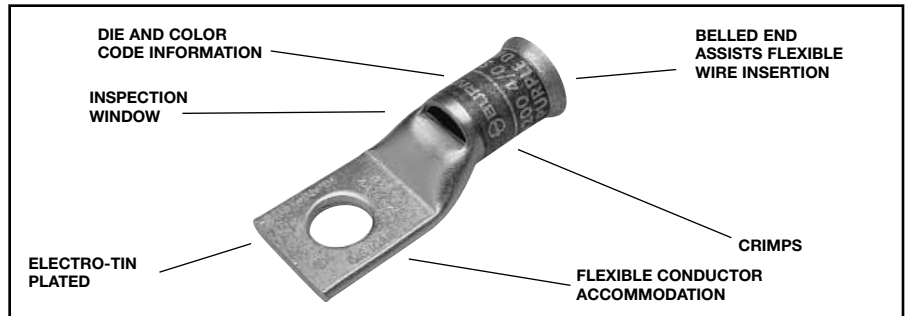

Catalog Number	Flexible Conductor Size AWG/kcmil	Stranding Class (Size of Strand)					Locomotive Cable	Bolt Size	Wire Strip Length	Installation Tooling	▲ Die Index	Dimensions					
		G	H	I (#24 Str.)	Battery Cable K (#30 Str.)	Welding Cable M (#34 Str.)								Dieless (# of crimps)			
										Number of Strands							
YA8C-LB	8	49	133	41	168	420	37/24	10	7/16"	Y81KFT (1) Y81KFTMBH (1) PAT81KFT-18 (1)	1013	.41"	1.12"				
YA5C-LB	6			63	266	665	61/24	1/4"	7/8"		1014	.44"	1.73"				
YA4C-LB	5			84	336	836	91/24				1015	.50"	1.92"				
YA3C-LB	4			105	420	1064	105/24	5/16"	5/16"		1016	.55"	1.94"				
YA2C-LB	3			133	532	1323	125/24				1017	.61"	1.97"				
YA1C-LB	2			161	665	1666	150/24				1018	.68"	2.02"				
YA25-LB	1	210	836	2107	225/24	1019	.75"				2.26"						
YA26-LB	1/0	133	259	266	1064	2646	275/24	3/8"	1"		1020	.83"	2.61"				
YA27-LB	2/0			342	1323	3325	325/24	1/2"	1-1/16"		1021	.91"	2.67"				
YA28-LB	3/0			418	1666	4256	450/24				1022	1.02"	2.77"				
YA29-LB	4/0			—	—	—	—				1023	1.11"	2.82"				
YA30-LB	4/0	—	—	532	2107	5320	550/24				1-1/8"	1024	1.20"	2.93"			
YA31-LB	250	259	427	—	—	—	—	1-3/16"	1025			1.29"	3.31"				
	250	—	—	—	—	—	—	1-1/4"	1026			1.40"	3.56"				
	262.2	—	—	637	2499	6384	650/24										
YA32-LB	300	259	427	735	2989	7851	—				1-7/16"			1027	1.52"	3.83"	
YA34-LB	313.1	—	—	—	—	—	775/24										
	350	—	—	—	3458	8806	—	1-3/4"	1028			1.69"	4.31"				
	373.7	—	—	—	—	—	925/24										
400	259	427	980	—	—	—	5/8"				1-15/16"			Y81KFT (2) Y81KFTMBH (2) PAT81KFT-18 (2)	1032	2.17"	4.5"
YA36-LB	444.4	—	—	—	—	—											
YA38-LB	450	—	—	1127	4522	11396		—	1029			1.81"	4.27"				
	500	—	—	—	—	12691		—									
	535.3	—	—	—	—	—	1325/24										
YA39-LB	600	427	703	1372	5054	—	—	1030			1.89"			4.27"			
YA40-LB	—	—	—	—	—	13664	—		1031			1.95"	4.27"				
		427	—	—	—	—	—										
		—	—	703	1470	—	14945								1600/24		
YA44-LB	—	—	—	—	5985	—	—	1032			2.17"			4.5"			
	650	—	—	1596	—	—	—										
	750	427	703	—	—	—	—										
	777.7	—	—	—	—	—	1925/24										

Note: All dimensions shown are for reference only.

Blue highlighted items are industry standard and most frequently ordered.