

2011 / 2012 CATALOG

ELECTRICAL WIRING DEVICES & ACCESSORIES

legrand®


Pass & Seymour

designed to be better.

legrand®
Pass & Seymour

How this new catalog works for *you*.

Before we wrote a word or snapped a photo — we did the same thing we always do when designing new products: We **listened** to the folks who use them. The result is a document that works for you, whether you're a purchasing agent, distributor salesperson, electrician, or specifying engineer.

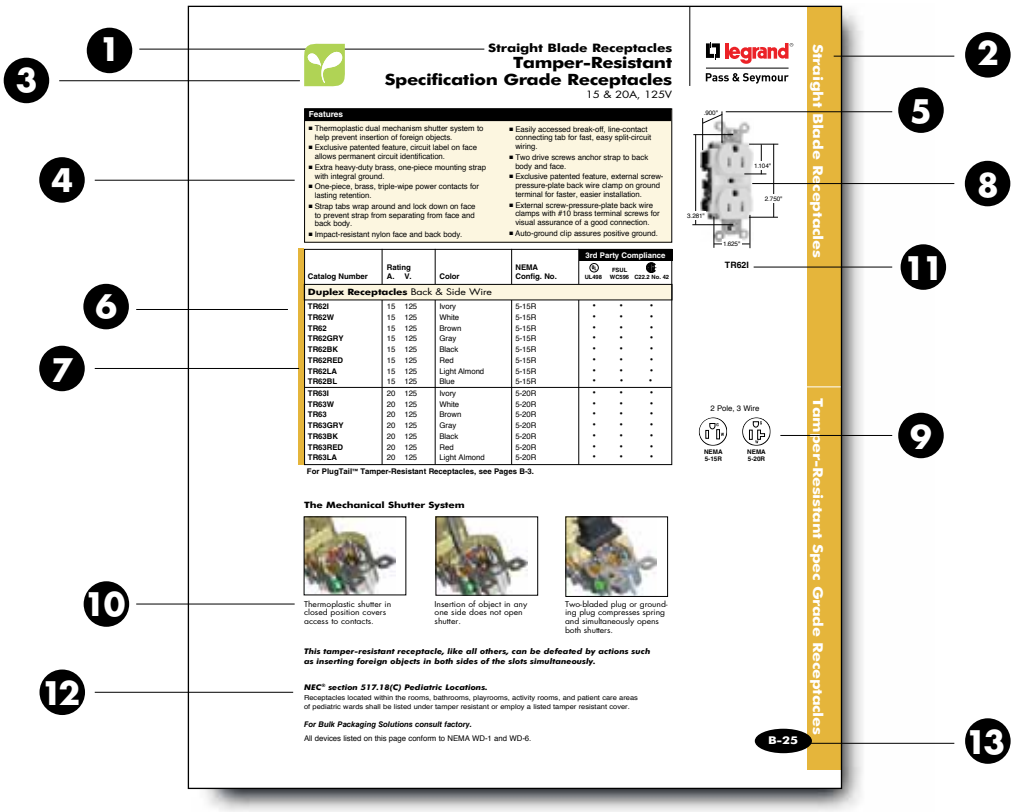

1. **Clear, sans-serif typefaces** remain legible after faxing and photocopying.
2. **Color-coded section pages** help you find products fast. Plus, product and section headings on every page.
3. **Energy-saving products** that reduce environmental impact and help control energy costs.
4. **Product Features** tell how our products work for you — fast!
5. **Dimensions overlay photos and line art.** No need to look in three different spots to get a "full picture" of the product.
6. **Key information at a glance:**
   - Features/Specs.
   - Canadian models
   - NEMA ratings/configurations
   - Dimensions
   - Catalog numbers
   - 3rd Party listings
   - Amperage/Voltage
   - Application notes
7. **Chart borders and dimension lines** are clear and easy to read, even after several duplications.
8. **Black & white, silhouetted product photos** for ready faxing and photocopying.
9. **NEMA configurations in 3 locations!** At beginning of catalog, in appropriate sections, and on pages with NEMA-applicable products.
10. **Additional information or accessory listing** for added convenience.
11. **Catalog numbers below product photos and line drawings** let you identify what you want by sight.
12. **NEC® requirements** called out near products help you keep current.
13. **Extra-large page numbers** for faster reference, especially during over-the-phone catalog searches.

Portions of this document are reprinted with permission from NFPA 70-1999, the National Electrical Code®, Copyright© 2010, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety. National Electrical Code® and NEC® are registered trademarks of the National Fire Protection Association, Inc., Quincy, MA 02269.

To make your job easier, Legrand/Pass & Seymour has gone to great lengths to ensure the accuracy of this catalog's data and graphics. Should you discover errors, please report them to us; we will gladly correct future editions.

The data and dimensions listed in the following pages are accurate as of the publishing date. Legrand/Pass & Seymour reserves the right to change the design, dimensions, materials, and manufacturing techniques of the products listed without notice. Therefore, you are encouraged to verify these characteristics before specifying, ordering, or installing these products.

© 2010, Legrand/Pass & Seymour

Printed in USA

Table of Contents

legrand®
Pass & Seymour

Switches ..... A

Straight Blade Receptacles ..... B

GFCIs C

Decorator Devices ..... D

Hospital Grade Devices ..... E

Surge Protective & Isolated Ground Devices ..... F

Straight Blade Plugs & Connectors ..... G

Industrial Spec Grade *Turnlok*® Locking Devices ..... H

Cam-Type Devices I

IEC 309 Industrial Products ..... J

***Flexcor*® Wire Mesh Grips** ..... K

Occupancy & Vacancy Sensors & Timers L

Dimmers & Fan Speed Controls ..... M

***Slater*® Plastic Boxes** ..... N

***Reiker* Ceiling Fan & Fixture Support Products** ..... O

Weatherproof Boxes & Covers ..... P

Wall Plates & Specialties ..... Q

Electrical Accessories ..... R

Technical Specifications ..... S

Glossary of Terms ..... T

Index ..... U

Devices & Wall Plates Color Selection Chart available on Pages A-29, B-78 and Q-61.

Innovative solutions that **offer you more.**

RESIDENTIAL SOLUTIONS

Today's homeowners demand more — and our complete residential line delivers. With new style that has any room or area looking good. Energy-saving solutions to help counter high utility rates. And fresh ideas to enhance safety. Check out our pace-setting residential solutions and you'll find everything you're looking for!

- Decorator-Style Wiring Devices and Wall Plates
- Screwless Wall Plates
- P&S Harmony™ Dimmers and Decorator Rotary Dimmers
- Digital Timers
- Vacancy and Occupancy Sensors
- Nightlight and Switch Combination Devices
- Tamper-Resistant Receptacles
- GFCIs with SafeLock™ Protection
- Home Locator Switches
- Weatherproof Receptacles and While-In-Use Covers
- Recessed Television Wall Boxes
- Surge Protective Receptacles



Recessed Television Wall Boxes

See Section N.

The most complete line of GFCIs

See Section C.





P&S Tamper-Resistant Receptacles feature an automatic shutter system to prevent kids from inserting objects. Our complete line covers all applications.

See Section B.

MEETS *NATIONAL ELECTRICAL CODE®* REQUIREMENTS









P&S Tamper-Resistant Nightlight Combinations include either a standard or GFCI receptacle. Add both safety and convenience!

See Sections B, C, D.



P&S Occupancy and Vacancy Sensors add safety, convenience and energy savings.

See Section L.

LIGHTING CONTROLS

When you're looking for quality energy-saving solutions, you'll find them in the broad line of P&S Lighting Controls. That includes many stylish dimmer and fan-speed control choices, vacancy and occupancy sensors, and timers.

See Sections L, M.





Learn more at www.legrand.us/passandseymour



COMMERCIAL PRODUCTS




The full range of P&S Commercial devices is built with a quality look and feel. Built to be easy to install. And built to stand up to constant use. We engineer them to satisfy virtually every need. And every user.

- Specification Grade Receptacles
- P&S PlugTail™ Devices
- Specification Grade Switches
- GFCIs with SafeLock™ Protection
- Occupancy and Vacancy Sensors
- Surge Protecting and Isolated Ground Devices
- Hospital Grade Devices
- Straight Blade Plugs & Connectors
- Clamp-Lock™ Plugs & Connectors
- P&S Titan® Dimmers
- Fan Speed Controls
- Wall Plates



Subtract waste and add productivity with P&S bulk packaging solutions.

Consult factory.

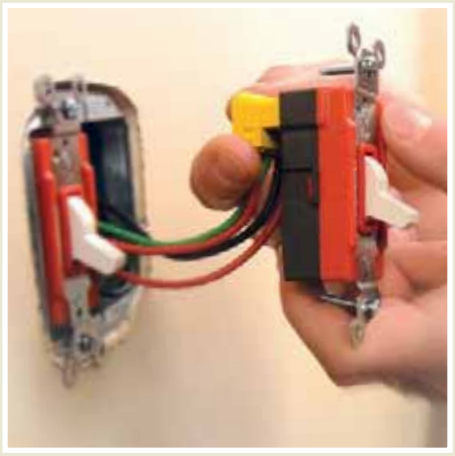

P&S PlugTail Wiring Devices — the fastest, most reliable wiring device installation for any commercial job.

See Sections A, B.

Learn more at www.legrand.us/passandseymour

Working for you — to **increase productivity, reduce risk**, and **increase customer profitability** and **satisfaction**.



Ground Continuity Monitoring Plugs and Connectors add job site safety.

See Sections G, H.



When we offered the first fusible mechanical interlock with visible blown-fuse indication, we helped plants avoid downtime. That's typical of the feature-rich P&S Industrial line. These rugged, reliable workhorses can take all the wear and tear industrial facilities can dish out.

- Straight Blade Plugs, Connectors and Receptacles
- Turnlok® Plugs, Connectors, Receptacles, Flanged Inlets and Outlets
- Flexcor® Wire Mesh Grips
- IEC Pin and Sleeve Devices
- Surge Protecting and Isolated Ground Devices
- Industrial Grade Switches
- Manual Controllers
- Mechanical Interlocks
- Safety Switches
- Ground Continuity Monitoring (GCM) Plugs and Connectors



IEC 309 Industrial Products for maximum durability and minimum downtime.

See Section J.

legrand®

Pass & Seymour

Together, let's try our best for

1+1+1+1+1+1...=

LESS

... less environmental impact, less wasted energy.
Every day, in your professional life, installation after installation, you will have the power to contribute to energy saving while installing our solutions marked with this symbol.
Hence, you are able to help your customer save energy and reduce their environmental impact. Energy saving is the matter of everyone. Together, let's make our best for 1+1+1...=less.

legrand®
Pass & Seymour



HARMONY™ DIMMERS & FAN SPEED CONTROLS

Cut energy use in bathrooms and bedrooms by 40 to 50%

Comfort benefit:
P&S Harmony™ Dimmers combine P&S Decorator style and easy, ergonomic operation. They also offer the added convenience of separate ON/OFF control and a sliding lighting-level control — so you can turn lights on directly to any selected dimming level.



COMMERCIAL CEILING OCCUPANCY SENSOR

Reduce light usage 20 to 40%

Comfort benefit:
P&S commercial Ceiling Mount Occupancy Sensors monitor room occupancy and control the lights, saving energy and extending the lamp life. All models offer manually selected time intervals so it's easy to optimize operation to minimize electrical consumption.



7-BUTTON DIGITAL TIMER

Make energy savings automatic

Comfort benefit:
The P&S RT1 Timer provides maximum control, ease and convenience with push button time-to-OFF selection and a time-to-OFF interval of up to 60 minutes.




SWITCHES

legrand®

Pass & Seymour

PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each device. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

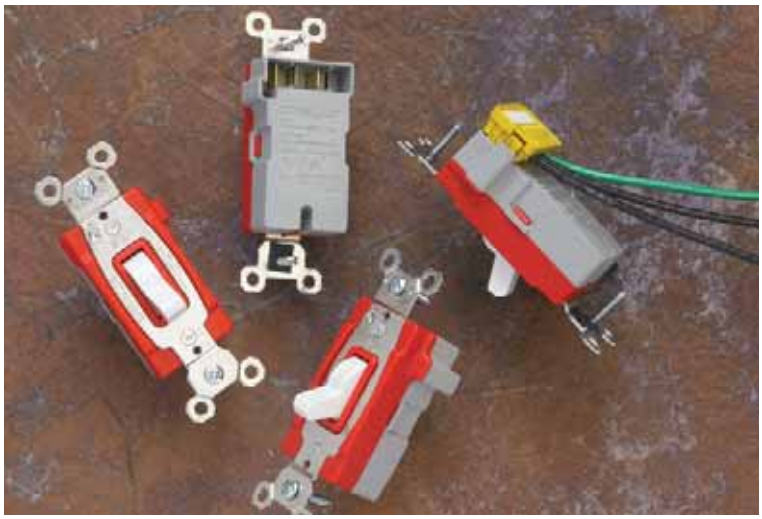

Readily installed in the plant or at the office — you can rely on all of our switches for years of quiet, trouble-free operation.

HP Conversion Table – Switches

15 Amp	1/2 Horsepower at 120VAC; 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC; 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC; 2 Horsepower at 240VAC

Index

Device	Rating	Page Number
Horsepower Rating Chart		A-1
PlugTail™ Spec Grade Switches	15 & 20A, 120/277VAC	A-2, A-3
Industrial Extra Heavy-Duty Spec Grade Switches	15, 20 & 30A, 120, 277 & 120/277VAC	A-4, A-5
Lock Switch Replacement Keys		A-5
Extra Heavy-Duty Spec Grade & Security Switches	15 & 20A, 347VAC; 20A, 120/277VAC	A-6
Hard Use & Commercial Spec Grade Switches	15 & 20A, 120/277VAC	A-7
Manual Controllers	30 & 40A, 1ø & 3ø; 15, 20 & 30A, 120/277VAC; 60A NEMA 3R; 20 & 30A, 1ø	A-8 – A-12
PlugTail™ Spec Grade Decorator Switches	15 & 20A, 120/277VAC	A-13, A-14
TradeMaster® Grounding Toggle Switches	15A, 120VAC	A-15, A-16
Combination Switches	15 & 20A, 120/277VAC; 15A, 120/125VAC; 20A, 120VAC	A-17, A-18
Specification Grade Decorator Switches	15 & 20A, 120/277 & 347VAC; 20A, 120VAC	A-19
TradeMaster® Decorator Switches	15A, 120 & 120/277VAC	A-20, A-21
Momentary & Maintained Contact Switches	15A, 120 & 120/277VAC	A-22
Spec Grade Decorator Combination Switches	20A, 277VAC	A-23
Shim-Lock		A-23
TradeMaster® Decorator Combination Switches	15A, 120 & 120/125VAC	A-24 – A-26
Decorator Combination Tamper-Resistant Switch/GFCI	15A, 125VAC	A-27
Canopy Switches & Locator Switches	15A, 120 & 250VAC; 15A, 120VAC	A-28

Devices & Wall Plates Color Selection Chart available on Page A-29, B-78 and Q-61.

legrand®
Pass & Seymour

Switches
PlugTail™ Specification Grade Switches

Auto-ground clip assures positive ground.

One-piece nickel-plated mounting strap for superior corrosion resistance.

Shallow design for easier installation.

Heavy-duty bumpers for quiet, smooth operation.




No exposed terminals create a finger-safe application before, during, and after installation.

EC&M Product of the year 10 Category Winner

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.



Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

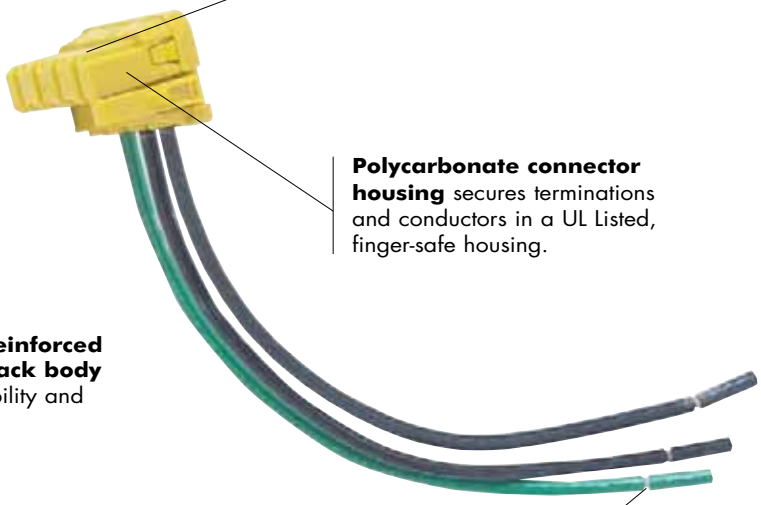

Polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.

Glass-reinforced nylon back body for durability and strength.


PT20AC1W

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

Switches
PlugTail™ Specification Grade Switches
15 & 20A, 120/277VAC

legrand®
Pass & Seymour

Catalog Number		Rating			3rd Party Compliance		
Single Pole	Three-Way	A.	VAC	Color	cULus	FSUL WS896	C22.2 111
NEW Toggle Switches							
PT15AC1I	PT15AC3I	15	120/277	Ivory	•	•	•
PT15AC1W	PT15AC3W	15	120/277	White	•	•	•
PT15AC1	PT15AC3	15	120/277	Brown	•	•	•
PT15AC1GRY	PT15AC3GRY	15	120/277	Gray	•	•	•
PT15AC1RED	PT15AC3RED	15	120/277	Red	•	•	•
PT15AC1LA	PT15AC3LA	15	120/277	Light Almond	•	•	•
PT20AC1I	PT20AC3I	20	120/277	Ivory	•	•	•
PT20AC1W	PT20AC3W	20	120/277	White	•	•	•
PT20AC1	PT20AC3	20	120/277	Brown	•	•	•
PT20AC1GRY	PT20AC3GRY	20	120/277	Gray	•	•	•
PT20AC1RED	PT20AC3RED	20	120/277	Red	•	•	•
PT20AC1LA	PT20AC3LA	20	120/277	Light Almond	•	•	•
NEW Illuminated Toggle Switches							
PT15AC1CSL	PT15AC3CSL	15	120/277	Clear	•	•	•
PT15AC1ISL	PT15AC3ISL	15	120/277	Ivory	•	•	•
PT15AC1WSL	PT15AC3WSL	15	120/277	White	•	•	•
PT20AC1CSL	PT20AC3CSL	20	120/277	Clear	•	•	•
PT20AC1ISL	PT20AC3ISL	20	120/277	Ivory	•	•	•
PT20AC1WSL	PT20AC3WSL	20	120/277	White	•	•	•

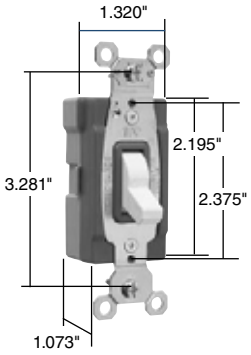


PT20AC1W



Available in 347VAC Canadian Catalog Numbers, add 347 to the end of the Catalog Number.
Example: PT15AC1W347. All Canadian Products have Combination Slotted/Robertson Head Brass Screws.

Catalog Number	Wire Type	Wire Length	Wire Colors
NEW PlugTail Connectors for Single Pole Switches 120/277VAC			
PTS6STR3	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	3 Wire Solid	6"	Green, Brown, Brown
NEW PlugTail Connectors for Three-Way Switches 120/277VAC			
PTS6STR4	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow



PTS6STR3 PTS6STR4

All PTS connectors are also available with WAGO connectors – add BP to the end of the catalog number.
Example: PTS6STR3BP. See Page A-14.

Catalog Number	Description
NEW PlugTail Jumper	
PTJ	PlugTail Cover for Rough In
PTJ5	PlugTail Cover for Rough In, 5-pack




PTJ

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Industrial Extra Heavy-Duty Specification Grade Switches



Auto-ground clip assures positive ground.

One-piece nickel-plated steel strap with integral ground.

Heavy-duty bumpers for quiet, smooth operation.

Oversized silver alloy contacts for long life and better heat dissipation.

Heavy-duty, brass alloy, one-piece contact arm virtually eliminates contact bounce.

Shallow design for easier installation.

Glass-reinforced nylon back body for superior durability and strength.

Locking support provides resistance to face and back body separation.

Side and external screw-pressure-plate back wire with #14 – #10 AWG copper or copper-clad wire.

Grounding terminal is standard with screw-pressure-plate back wire.

PS20AC1LA

Cam control and spring actuator for positive "makes and breaks."

Switches

Industrial Extra Heavy-Duty Specification Grade Switches

15, 20 & 30A, 120, 277 & 120/277VAC


legrand®
Pass & Seymour

Features


- Heavy-gauge one-piece copper alloy contact arm virtually eliminates contact bounce.
- Cam controls fast "make" and positive "break" to minimize arcing.
- Heavy-duty bumper pads for quiet operation.
- High strength thermoplastic polycarbonate toggle.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Oversized silver alloy contacts for long life and better heat dissipation.
- Grounding terminal is standard.
- Shallow design for ease of installation.
- Strap nickel-plated steel with integral ground.
- Auto-ground clip assures positive ground.

Catalog Number				Rating	Color	3rd Party Compliance		
Single Pole	Double Pole	Three-Way	Four-Way	A. VAC		UL20	FSUL WS896	C22.2 111
Toggle Switches Back & Side Wire								
PS15AC1I	PS15AC2I	PS15AC3I	PS15AC4I	15 120/277	Ivory	•	•	•
PS15AC1W	PS15AC2W	PS15AC3W	PS15AC4W	15 120/277	White	•	•	•
PS15AC1	PS15AC2	PS15AC3	PS15AC4	15 120/277	Brown	•	•	•
PS15AC1GRY	PS15AC2GRY	PS15AC3GRY	PS15AC4GRY	15 120/277	Gray	•	•	•
PS15AC1LA	PS15AC2LA	PS15AC3LA	PS15AC4LA	15 120/277	Light Almond	•	•	•
PS20AC1I	PS20AC2I	PS20AC3I	PS20AC4I	20 120/277	Ivory	•	•	•
PS20AC1W	PS20AC2W	PS20AC3W	PS20AC4W	20 120/277	White	•	•	•
PS20AC1	PS20AC2	PS20AC3	PS20AC4	20 120/277	Brown	•	•	•
PS20AC1GRY	PS20AC2GRY	PS20AC3GRY	PS20AC4GRY	20 120/277	Gray	•	•	•
PS20AC1BK	PS20AC2BK	PS20AC3BK	PS20AC4BK	20 120/277	Black	•	•	•
PS20AC1RED	PS20AC2RED	PS20AC3RED	PS20AC4RED	20 120/277	Red	•	•	•
PS20AC1LA	PS20AC2LA	PS20AC3LA	PS20AC4LA	20 120/277	Light Almond	•	•	•
PS30AC1I	PS30AC2I	PS30AC3I		30 120/277	Ivory	•	•	•
PS30AC1W	PS30AC2W			30 120/277	White	•	•	•
PS30AC1	PS30AC2	PS30AC3		30 120/277	Brown	•	•	•
Lighted Toggle Switches (Lighted when OFF) Back & Side Wire								
PS15AC1CSL		PS15AC3CSL		15 120/277	Clear	•	•	•
PS15AC1ISL		PS15AC3ISL		15 120/277	Ivory	•	•	•
PS15AC1WSL		PS15AC3WSL		15 120/277	White	•	•	•
PS20AC1CSL		PS20AC3CSL		20 120/277	Clear	•	•	•
PS20AC1ISL		PS20AC3ISL		20 120/277	Ivory	•	•	•
PS20AC1WSL		PS20AC3WSL		20 120/277	White	•	•	•
PS20AC1LASL		PS20AC3LASL		20 120/277	Light Almond	•	•	•
Pilot Lighted Switches (Lighted when ON) Back & Side Wire								
PS15AC1CPL		PS15AC3CPL		15 120	Clear	•	•	•
PS15AC1RPL		PS15AC3RPL		15 120	Red	•	•	•
PS20AC1CPL		PS20AC3CPL		20 120	Clear	•	•	•
PS20AC1CPL7				20 277	Clear	•	•	•
PS20AC1RPL		PS20AC3RPL		20 120	Red	•	•	•
PS20AC1RPL7		PS20AC3RPL7		20 277	Red	•	•	•
	PS20AC2CPL			20 120/277	Clear	•	•	•
	PS20AC2RPL			20 120/277	Red	•	•	•
PS30AC1RPL		PS30AC3RPL		30 120	Red	•	•	•
	PS30AC2RPL			30 120/277	Red	•	•	•
Lock Switches (Key can be removed in both positions) Back & Side Wire								
PS15AC1L		PS15AC3L		15 120/277	Gray	•	•	•
PS20AC1IL	PS20AC2IL	PS20AC3IL	PS20AC4IL	20 120/277	Ivory	•	•	•
PS20AC1WL	PS20AC2WL	PS20AC3WL	PS20AC4WL	20 120/277	White	•	•	•
PS20AC1L	PS20AC2L	PS20AC3L		20 120/277	Gray	•	•	•
PS20AC1REDL		PS20AC3REDL	PS20AC4REDL	20 120/277	Red	•	•	•
PS20AC1LAL	PS20AC2LAL	PS20AC3LAL	PS20AC4LAL	20 120/277	Light Almond	•	•	•


For Bulk Packaging Solutions consult factory.



15 & 20 Amp*



15 & 20 Amp Lighted & Pilot Lighted*



Locking*

*30AC series is 1.437" wide

Lock Switch Replacement Keys

(One key furnished with each switch)



500K
Fits new Switches



1498
Fits Switches manufactured before 1976




1498-NT
Fits Switches manufactured 1976-present

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Extra Heavy-Duty Specification Grade & Security Switches
15 & 20A, 347VAC; 20A, 120/277VAC




15 & 20 Amp
Canadian 347VAC

Features
- External screw-pressure-plate back and side wired. Accepts #14 – #10 AWG copper or copper-clad conductors.
- Heavy-gauge one-piece copper alloy contact arm virtually eliminates contact bounce.
- Cam controls fast "make" and positive "break" to minimize arcing.
- Heavy-duty bumper pads for quiet operation.
- High strength thermoplastic polycarbonate toggle.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Oversized silver alloy contacts for long life and better heat dissipation.
- Grounding terminal is standard.
- Shallow design for ease of installation.
- Strap nickel-plated steel with integral ground.
- Auto-ground clip assures positive ground.

Catalog Number		Rating			3rd Party Compliance
Single Pole	Three-Way	A.	VAC	Color	C22.2 111
347VAC Toggle Switches Back & Side Wire					
PS371510I	PS371530I	15	347	Ivory	•
PS371510W	PS371530W	15	347	White	•
PS371510	PS371530	15	347	Brown	•
PS371510GRY	PS371530GRY	15	347	Gray	•
PS371510BK	PS371530BK	15	347	Black	•
PS371510RED	PS371530RED	15	347	Red	•
PS372010I	PS372030I	20	347	Ivory	•
PS372010W	PS372030W	20	347	White	•
PS372010	PS372030	20	347	Brown	•
PS372010GRY	PS372030GRY	20	347	Gray	•
PS372010BK	PS372030BK	20	347	Black	•
PS372010RED	PS372030RED	20	347	Red	•
PS372010LA	PS372030LA	20	347	Light Almond	•
PS372010L	PS372030L	20	347	Gray, Locking	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.



Security Switch

Features
- Back and side wired. Accepts #14 – #10 AWG.
- Operated by cam lock for maximum security in critical areas.
- Recommended for tamper-proof installation in schools, public housing, trailer parks, freight yards, etc.
- Uses same key as Cat.# 4600 cast enclosure.
- Key can be removed in both positions.

Catalog Number				Rating		3rd Party Compliance		
Single Pole	Double Pole	Three-Way	Four-Way	A.	VAC	UL20	FSUL WS896	C22.2 55
Security Switches Back & Side Wire								
PS20AC1KL	PS20AC2KL	PS20AC3KL	PS20AC4KL	20	120/277	•	•	•
PS372010KL				20	347	•		•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

Stainless Steel Plate for PS20ACKL Switches Single Gang – SS717, Double Gang – SS727.
For custom combinations specify opening Style No. 302.
Catalog Number 4609 Security Switch Replacement Keys for PS20ACKL Switches (2 keys furnished with each switch).


All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches
Hard Use & Commercial Specification Grade Switches
15 & 20A, 120/277VAC

legrand®
Pass & Seymour

Features

- One-piece brass alloy contact arm for reliable electrical performance.
- One-piece steel strap with integral ground is plated for corrosion resistance.
- High strength thermoplastic polycarbonate toggle resists breaking and chipping under heavy abuse.
- Heavy-duty toggle bumpers for smooth and quiet operation.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Available with side wire or external screw-pressure-plate back and side wire models capable of accepting #14 – #10 AWG copper or copper-clad wire.
- Cam designed for fast make with positive break action to minimize arcing and prolong switch life.
- Oversized silver alloy contacts for longer dependable switch life.
- Tri-drive terminal and mounting screws.



15 & 20 Amp

Catalog Number				Rating	Color	3rd Party Compliance		
Single Pole	Double Pole	Three-Way	Four-Way	A. VAC		UL20	FSUL WS896	C22.2 111
Hard Use Specification Grade Back & Side Wire								
CSB15AC1I	CSB15AC2I	CSB15AC3I	CSB15AC4I	15 120/277	Ivory	•	•	•
CSB15AC1W	CSB15AC2W	CSB15AC3W	CSB15AC4W	15 120/277	White	•	•	•
CSB15AC1	CSB15AC2	CSB15AC3	CSB15AC4	15 120/277	Brown	•	•	•
CSB15AC1GRY	CSB15AC2GRY	CSB15AC3GRY	CSB15AC4GRY	15 120/277	Gray	•	•	•
CSB15AC1LA	CSB15AC2LA	CSB15AC3LA	CSB15AC4LA	15 120/277	Light Almond	•	•	•
CSB20AC1I	CSB20AC2I	CSB20AC3I	CSB20AC4I	20 120/277	Ivory	•	•	•
CSB20AC1W	CSB20AC2W	CSB20AC3W	CSB20AC4W	20 120/277	White	•	•	•
CSB20AC1	CSB20AC2	CSB20AC3	CSB20AC4	20 120/277	Brown	•	•	•
CSB20AC1BK		CSB20AC3BK		20 120/277	Black	•	•	•
CSB20AC1GRY	CSB20AC2GRY	CSB20AC3GRY	CSB20AC4GRY	20 120/277	Gray	•	•	•
CSB20AC1LA	CSB20AC2LA	CSB20AC3LA	CSB20AC4LA	20 120/277	Light Almond	•	•	•

Catalog Number		Rating	Color	3rd Party Compliance		
Single Pole	Three-Way	A. VAC		UL20	FSUL WS896	C22.2 111
Commercial Specification Grade Side Wire						
CS15AC1I	CS15AC3I	15 120/277	Ivory	•	•	•
CS15AC1W	CS15AC3W	15 120/277	White	•	•	•
CS15AC1	CS15AC3	15 120/277	Brown	•	•	•
CS15AC1GRY	CS15AC3GRY	15 120/277	Gray	•	•	•
CS15AC1BK	CS15AC3BK	15 120/277	Black	•	•	•
CS15AC1LA	CS15AC3LA	15 120/277	Light Almond	•	•	•
CS20AC1I	CS20AC3I	20 120/277	Ivory	•	•	•
CS20AC1W	CS20AC3W	20 120/277	White	•	•	•
CS20AC1	CS20AC3	20 120/277	Brown	•	•	•
CS20AC1GRY	CS20AC3GRY	20 120/277	Gray	•	•	•
CS20AC1LA	CS20AC3LA	20 120/277	Light Almond	•	•	•

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Manual Controllers



Thermoplastic housing resists tracking; withstands impacts.

Two oversized silver alloy contacts withstand years of use; improve heat dissipation by distributing arc energy.

One-piece contact carrier constructed of glass-reinforced thermoplastic ensures long-lasting "make and break" performance.

Two-point contact arm design reduces overall unit size; provides more enclosure space.

Exclusive, ready-to-wire external screw-pressure-plate back and side wire capability for easy installation with solid or stranded wire.

Heavy-duty, zinc-plated strap resists corrosion; two rolled-brass rivets secure the strap to the housing to avoid field tampering.

Oversized #10 terminal screws increase contact with wire and increase torque limit. Angled screw heads for easier access.

7803

NEMA Type Enclosures

NEMA Type 1 Enclosures – Intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt in locations where unusual service conditions do not exist.

NEMA Type 7 Enclosures – Intended for indoor use in locations classified as Class 1, Group A, B, C, or D, as defined in the National Electrical Code. They shall be capable of withstanding the pressures resulting from an internal explosion of specified gases, and contain such an explosion sufficient that an explosive gas-air mixture existing in the atmosphere surrounding the enclosure will not be ignited. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting explosive gas-air mixtures in the surrounding atmosphere. Enclosures shall meet explosion, hydrostatic, and temperature design tests.

NEMA Type 3R Enclosures – Intended for outdoor use primarily to provide a degree of protection against rain and sleet; and to be undamaged by the formation of ice on the enclosure. They are not intended to provide protection against conditions such as internal condensation, or internal icing.


NEMA Type 9 Enclosures – Intended for indoor use in locations classified as Class II, Groups E, F, or G, as defined in the National Electrical Code. They shall be capable of preventing the entrance of dust. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting or discoloring dust on the enclosure or igniting dust-air mixtures in the surrounding atmosphere. Enclosures shall meet dust penetration and temperature design tests, and aging of gaskets (if used).

legrand®
Pass & Seymour

Features — 7802 & 7803

- High horsepower rating of 20HP.
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- UL508 and cULus Listing of individual device and assembled device within enclosure.
- Heavy-duty zinc-plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- 2-3/4" hubs (7812EX and 7813EX).
- 2-1/2" knockouts on back and 2-1/2"–3/4" knockouts on top and bottom (7812P, 7813P, 7806P).
- 2-1/2" knockouts on bottom and back (7832 and 7833).


Catalog Number	Description	Rating A.	Rating VAC	Rating HP	Rating VAC
Double Pole, Single Phase					
7802	Double Pole, Single Phase AC Manual Motor Controller (No overload protection)	General Use 30	600 max.	2 3 7.5 10	120 240 480 600
7802MD	7802, See Footnote 1	Same as 7802			
7812P	7802 in a NEMA 1 Enclosure	Same as 7802			
7812PMD	7812P, See Footnote 1	Same as 7802			
7812EX	7802 in a NEMA 7 and 9 Enclosure for Hazardous Locations Class I – Groups C, D; Class II – Groups E, F, G	Same as 7802			
7832	7802 in a NEMA 3R Enclosure	Same as 7802			
7832MD	7832, See Footnote 1	Same as 7802			
Three Pole, Three Phase					
7803	Three Pole, Three Phase AC Manual Motor Controller (No overload protection)	General Use 30	600 max.	3 7.5 10 20	120 240 480 600
7803MD	7803, See Footnote 1	Same as 7803			
7813P	7803 in a NEMA 1 Enclosure	Same as 7803			
7813PMD	7813-P, See Footnote 1	Same as 7803			
7813EX	7803 in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I – Groups C, D; Class II – Groups E, F, G	Same as 7803			
7833	7803 in a NEMA 3R Enclosure	Same as 7803			
7833MD	7833, See Footnote 1	Same as 7803			




7802
7803



7812P
7813P



7812EX
7813EX



7832
7833

7806P NEMA 1 Black Nylon Enclosure with 1/2" and 3/4" knockouts at each end.
7801P Handle Locking Guard has opening for padlock to secure control in either ON or OFF position.
7830 NEMA 3R Aluminum Enclosure.


All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote:
1. Suitable as Motor Disconnect – 10KA @ 600VAC, 30A max. Class J Fuse.

UL Listed. CSA Certified. All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Manual Controllers
40A, 1ø & 3ø



7842
7843

Features — 7842 & 7843

- High horsepower rating of 20HP.
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- Heavy-duty yellow chromate plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- UL508 and cULus Listing of individual device and assembled device within enclosure.


Catalog Number	Description	Rating A.	Rating VAC	Rating HP	Rating VAC
Double Pole, Single Phase					
7842	Double Pole, Single Phase AC Manual Motor Controller (No overload protection)	40	600 max.	2 5 10 15	120 240 480 600
7842MD	7842, See Footnote 2	same as 7842			
Three Pole, Three Phase					
7843	Three Pole, Three Phase AC Manual Motor Controller (No overload protection)	40	600 max.	3 7.5 15 20	120 240 480 600
7843MD	7843, See Footnote 2	same as 7843			

All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote:

2. Suitable as Motor Disconnect – 10KA @ 600VAC, 60A max. Class J Fuse or 100A max. Ferraz Shawmut HSJ Fuse.

CATALOG NO.	PHASE	POLE
7802 or 7842	1	2
7803 or 7843	3	3

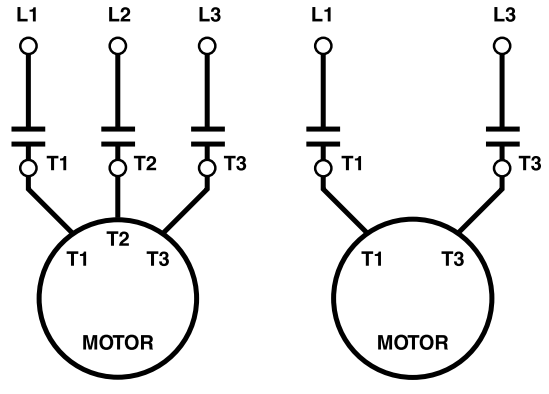

RATINGS


RESISTANCE		
7802 / 7803	30 AMP	600 VAC MAX.
7842 / 7843	40 AMP	600 VAC MAX.

MANUAL MOTOR CONTROLLER				
VAC	30A		40A	
	1 PHASE HP	3 PHASE HP	1 PHASE HP	3 PHASE HP
120	2	3	2	3
240	3	7.5	5	7.5
480	7.5	10	10	15
600	10	20	15	20

USE 60 / 75°C WIRING
TORQUE TERMINAL SCREWS TO 16 IN. LBS.



NO ALUMINUM



DO NOT REMOVE SCREWS FROM 30A DEVICES

UL Listed. CSA Certified. All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches
Manual Controllers

60A NEMA 3R Manual Controller
20 & 30A 1ø

legrand®
Pass & Seymour


Features

- High horsepower rating, up to 3 HP for heavy duty applications.
- Compact design provides ease of installation.
- Box lug terminals.
- Single piece moveable and stationary contact arms with oversized silver cadmium buttons provides excellent continuity and long life.
- Made in USA.
- Wire pockets and thick wall arc barriers.
- Cold-rolled steel NEMA 3R enclosure with polyester urethane finish conforms to OSHA lockout requirements.
- Type 3R enclosure has 2-1/2", 3/4" and 1" concentric knockouts on bottom.
- Accepts #4 AWG.
- cULus listed.




7863R

Catalog Number	Description	Rating A.	Rating VAC	Rating HP	Rating VAC
Double Pole Manual Motor Controller					
7862R	Double Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	3 5 15 15	120 240 480 600
7862	Double Pole AC Manual Motor Controller	60	600 max.	Same as 7862R	
Three Pole Manual Motor Controller					
7863R	Three Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	5 10 20 30	120 240 480 600
7863	Three Pole AC Manual Motor Controller	60	600 max.	Same as 7863R	
NEMA 3R Enclosure					
7860	NEMA 3R Enclosure for 7862 & 7863				

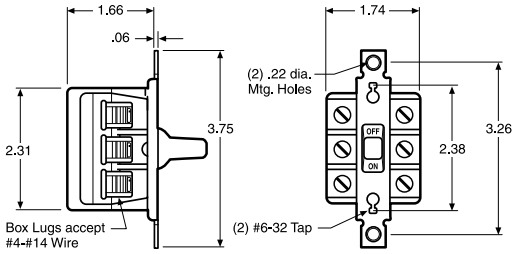

Features

- Oversize silver contacts for long life and better heat dissipation.
- Single phase switches are side wired with #14 – #10 AWG copper or copper-clad conductors.
- Shallow design for ease of installation.
- 2-3/4" hubs (HP30EX).




PS20AC2HP
PS30AC2HP

Catalog Number	Description	Rating A.	Rating VAC	Rating HP	Rating VAC
Double Pole, Single Phase					
PS20AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	20	120/277	1 2	120 240
PS30AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	30	120/277	1 2	120 240
HP30EX	PS30AC2HP in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I – Groups C, D; Class II – Groups E, F, G	Same as PS30AC2HP			


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Manual Controllers
15, 20 & 30A, 120/277VAC – Maintained Contact
15, 20 & 30A, 120/277VAC – Momentary Contact

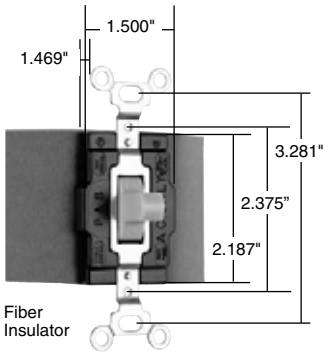

Maintained and Momentary Contact

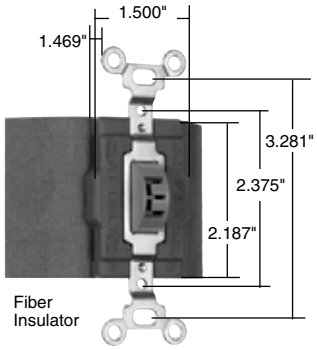

Locking

Applications

For ON-OFF control of motors on small machine tools, pumps, fans and air conditioning equipment that require heavy-duty AC Double Throw Center OFF controls.

Features

- Oversized silver alloy contacts for long life and better heat dissipation.
- Side wired terminals accept #14 – #10 AWG copper or copper-clad conductors.
- Fiber terminal insulation barriers standard.
- Can be mounted in standard device boxes or in NEMA 1 sheet steel enclosures.
- Bodies, covers and toggles molded of durable nylon.
- Single Pole-Double Throw and Double Pole-Double Throw.
- Locking Switches supplied with one 1498 NT key.
- Normally open.

Catalog Number		Rating		
S.P.D.T.	D.P.D.T.	A.	VAC	Color
Maintained Contact Three Position – Two Circuit, Center Off				
1221I	**1222I**	15	120/277	Ivory
1221W	**1222W**	15	120/277	White
1221	**1222**	15	120/277	Brown
1221LA		15	120/277	Light Almond
1221L	**1222L**	15	120/277	Locking
1225I	**1226I**	20	120/277	Ivory
1225W	**1226W**	20	120/277	White
1225	**1226**	20	120/277	Brown
1225GRY		20	120/277	Gray
1225LA		20	120/277	Light Almond
1225L	**1226L**	20	120/277	Locking
1227I	**1228I**	30	120/277	Ivory
1227	**1228**	30	120/277	Brown
Maintained Contact Either Direction Two Position, No Center Off				
1275	**1276**	30	120/277	Brown
Momentary Contact Either Direction Three Position, Center Off				
1250I		15	120/277	Ivory
1250W		15	120/277	White
1250		15	120/277	Brown
1250GRY		15	120/277	Gray
1250RED		15	120/277	Red
1250L		15	120/277	Locking
1251I		20	120/277	Ivory
1251W		20	120/277	White
1251		20	120/277	Brown
1251GRY		20	120/277	Gray
1251LA		20	120/277	Light Almond
1251L		20	120/277	Locking
	1256I	30	120/277	Ivory
	1256W	30	120/277	White
1255	**1256**	30	120/277	Brown
1255L	**1256L**	30	120/277	Locking

Catalog Number	Description
Lock Switch Replacement Keys	
1498	Fits switches manufactured before 1976.
1498NT	Fits switches manufactured between 1976-present.

HP Conversion Table

1221 Series		1250 Series	
15 Amp	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC	15 Amp	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC 2 Horsepower at 240VAC	20 Amp	1 Horsepower at 120VAC 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC 2 Horsepower at 240VAC	30 Amp	2 Horsepower at 120VAC 2 Horsepower at 240VAC

UL Listed.
CSA Certified.
All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches
PlugTail™ Specification Grade Decorator Switches

legrand®
Pass & Seymour

Auto-ground clip assures positive ground.

Shallow design for easier installation.



Heavy-gauge steel strap for superior strength.

No exposed terminals create a finger-safe application before, during, and after installation.

EC&M Product of the Year 10 Category Winner


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.



PT2626W

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.


Polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.

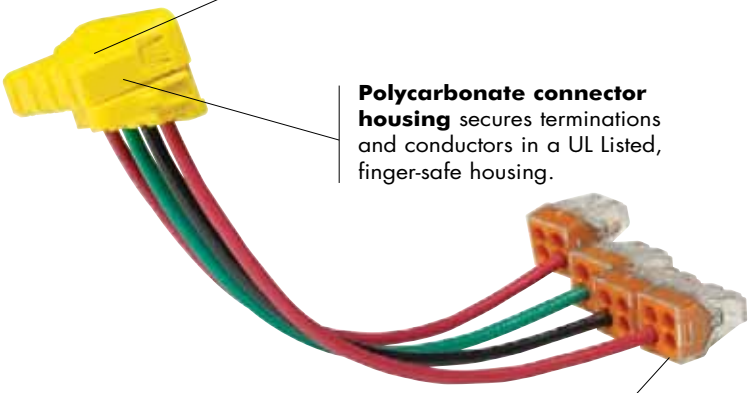


WAGO push-in connectors are available to further speed up installation.

legrand®
Pass & Seymour


Switches
PlugTail™ Specification Grade Decorator Switches
15 & 20A, 120/277VAC

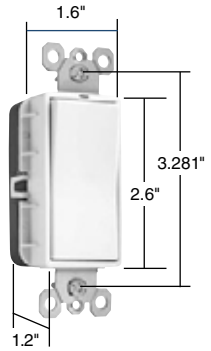

PT2626W



PTS6STR3 PTS6STR4



PTS6STR3BP PTS6STR4BP



Catalog Number		Rating			3rd Party Compliance		
Single Pole	Three-Way	A.	VAC	Color	UL20	FSUL WS896	C22.2 111
NEW Decorator Switches							
PT2601I	PT2603I	15	120/277	Ivory	•	•	•
PT2601W	PT2603W	15	120/277	White	•	•	•
PT2601	PT2603	15	120/277	Brown	•	•	•
PT2601GRY	PT2603GRY	15	120/277	Gray	•	•	•
PT2601RED	PT2603RED	15	120/277	Red	•	•	•
PT2601BK	PT2603BK	15	120/277	Black	•	•	•
PT2601LA	PT2603LA	15	120/277	Light Almond	•	•	•
PT2621I	PT2623I	20	120/277	Ivory	•	•	•
PT2621W	PT2623W	20	120/277	White	•	•	•
PT2621	PT2623	20	120/277	Brown	•	•	•
PT2621GRY	PT2623GRY	20	120/277	Gray	•	•	•
PT2621RED	PT2623RED	20	120/277	Red	•	•	•
PT2621BK	PT2623BK	20	120/277	Black	•	•	•
PT2621LA	PT2623LA	20	120/277	Light Almond	•	•	•
NEW Illuminated Decorator Switches							
PT2625I	PT2626I	20	120/277	Ivory	•	•	•
PT2625W	PT2626W	20	120/277	White	•	•	•
PT2625BK	PT2626BK	20	120/277	Black	•	•	•
PT2625LA	PT2626LA	20	120/277	Light Almond	•	•	•

Available in 347VAC Canadian Catalog Numbers, add 347 to the end of the Catalog Number.
Example: PT2601W347. All Canadian Products have Combination Slotted/Robertson Head Brass Screws.

Catalog Number	Wire Type	Wire Length	Wire Colors
NEW PlugTail Connectors for Single Pole Switches			
PTS6STR3	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	3 Wire Solid	6"	Green, Brown, Brown
NEW PlugTail Connectors for Three-Way Switches			
PTS6STR4	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow
NEW PlugTail Connectors for Single Pole Switches With WAGO Connectors			
PTS6STR3BP	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3BP	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277BP	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277BP	3 Wire Solid	6"	Green, Brown, Brown
NEW PlugTail Connectors for Three-Way Switches With WAGO Connectors			
PTS6STR4BP	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4BP	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277BP	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277BP	4 Wire Solid	6"	Green, Brown, Yellow, Yellow

All PTS Connectors are 120/277VAC

Catalog Number	Description
NEW PlugTail Jumper	
PTJ	PlugTail Cover for Rough In
PTJ5	PlugTail Cover for Rough In, 5-pack



PTJ


All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches
TradeMaster® Grounding Toggle Switches
15A, 120VAC

legrand®
Pass & Seymour

Features

- Thermoplastic toggle and frame.
- Extra-long strap.
- High-impact resistant construction.
- Side wire #12 and #14 AWG; push wire #14 AWG.
- Tri-drive ground, terminal and mounting screws.
- Easy-access green hex head ground screw.
- Smooth, quiet toggle action.

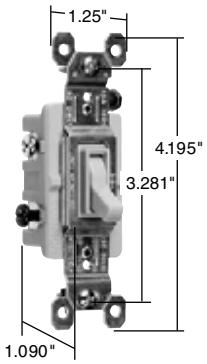

663IG

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Toggle Switches Grounding					
660IG*	15	120	Ivory	•	•
660WG*	15	120	White	•	•
660G*	15	120	Brown	•	•
660BKG	15	120	Black	•	•
660LAG*	15	120	Light Almond	•	•
Single Pole Toggle Switches Grounding (Without Ears)					
660IGMH	15	120	Ivory	•	•
660WGMH	15	120	White	•	•
660GMH	15	120	Brown	•	•
NEW **NAFTA-Compliant Single Pole Toggle Switches** Grounding					
660NAIG	15	120	Ivory		•
660NAWG	15	120	White		•
660NAG	15	120	Brown		•
660NABKG	15	120	Black		•
660NALAG	15	120	Light Almond		•
Three-Way Toggle Switches Grounding					
663IG**	15	120	Ivory	•	•
663WG**	15	120	White	•	•
663G**	15	120	Brown	•	•
663BKG	15	120	Black	•	•
663LAG**	15	120	Light Almond	•	•
NEW **NAFTA-Compliant Three-Way Toggle Switches** Grounding					
663IG	15	120	Ivory		•
663WG	15	120	White		•
663G	15	120	Brown		•
663BKG	15	120	Black		•
663LAG	15	120	Light Almond		•
Four-Way Toggle Switches Grounding					
664IG	15	120	Ivory	•	•
664WG	15	120	White	•	•
664G	15	120	Brown	•	•
664BKG	15	120	Black	•	•
664LAG	15	120	Light Almond	•	•
664ICN	15	120	Ivory	•	•
664WCN	15	120	White	•	•
Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.					
NEW **NAFTA-Compliant Four-Way Toggle Switches** Grounding					
664IG	15	120	Ivory		•
664WG	15	120	White		•
664G	15	120	Brown		•
664BKG	15	120	Black		•
664LAG	15	120	Light Almond		•


*Available in bulk packs of 120. Add "U" to end of Catalog Number. Example: 660WGU.
**Available in bulk packs of 90. Add "U" to end of Catalog Number. Example: 663WGU.

NAFTA-Compliant Switches are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
TradeMaster® Grounding Illuminated & Self-Grounding Toggle Switches
15A, 120VAC

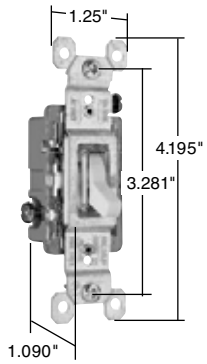

660ISLG

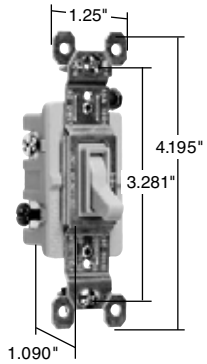

663SIG

Features

- Thermoplastic toggle and frame.
- Extra-long strap.
- High-impact resistant construction.
- Side wire #12 and #14 AWG.
- Push wire #14 AWG.
- Tri-drive ground, terminal and mounting screws.
- Easy-access green hex head ground screw.
- Smooth, quiet toggle action.
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Illuminated Toggle Switches Grounding (Lighted when OFF)					
660ISLG	15	120	Ivory	•	•
660WSLG	15	120	White	•	•
660LASLG	15	120	Light Almond	•	•
Self-Grounding Single Pole Toggle Switches					
660SIG	15	120	Ivory	•	•
660SWG	15	120	White	•	•
660SG	15	120	Brown	•	•
660SLAG	15	120	Light Almond	•	•
Three-Way Illuminated Toggle Switches Grounding (Lighted when OFF)					
663ISLG	15	120	Ivory	•	•
663WSLG	15	120	White	•	•
663LASLG	15	120	Light Almond	•	•
Self-Grounding Three-Way Toggle Switches					
663SIG	15	120	Ivory	•	•
663SWG	15	120	White	•	•
663SG	15	120	Brown	•	•
663SLAG	15	120	Light Almond	•	•
Self-Grounding Four-Way Toggle Switches					
664SIG	15	120	Ivory	•	•
664SWG	15	120	White	•	•
664SG	15	120	Brown	•	•
664SLAG	15	120	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches
Combination Switches
15 & 20A, 120/277VAC; 15 & 20A, 120/125VAC; 15A, 120VAC


legrand®
Pass & Seymour

Features


- Easily accessible break-off for separate or common feed.
- Long-life red neon lamp in pilot light rated 1/25 Watt, 125V.
- Side wire #12 and #14 AWG.
- Two devices fit into the space of one.
- Grounding combination devices meet NEC Requirements.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL20	UL498
Single Pole Switch & Tamper-Resistant Single Receptacle Side Wire, Grounding						
691TRI	15	120/125	Ivory	5-15R	•	•
691TRW	15	120/125	White	5-15R	•	•
691TR	15	120/125	Brown	5-15R	•	•
691TRLA	15	120/125	Light Almond	5-15R	•	•
671TRI	20	120/125	Ivory	5-20R	•	•
671TRW	20	120/125	White	5-20R	•	•
671TR	20	120/125	Brown	5-20R	•	•
671TRLA	20	120/125	Light Almond	5-20R	•	•
Two Single Pole Switches Side Wire, Grounding						
690IG	15	120/277	Ivory		•	
690WG	15	120/277	White		•	
690G	15	120/277	Brown		•	
690LAG	15	120/277	Light Almond		•	
670IG	20	120/277	Ivory		•	
670WG	20	120/277	White		•	
670G	20	120/277	Brown		•	
670LAG	20	120/277	Light Almond		•	
Single Pole & Three-Way Switch Side Wire, Grounding						
696IG	15	120/277	Ivory		•	
696WG	15	120/277	White		•	
696G	15	120/277	Brown		•	
696LAG	15	120/277	Light Almond		•	
Two Three-Way Switches Side Wire, Grounding						
693IG	15	120/277	Ivory		•	
693WG	15	120/277	White		•	
693G	15	120/277	Brown		•	
693LAG	15	120/277	Light Almond		•	
Single Pole Switch & Single Receptacle Side Wire, Grounding						
691I	15	120/125	Ivory	5-15R	•	•
691W	15	120/125	White	5-15R	•	•
691	15	120/125	Brown	5-15R	•	•
691LA	15	120/125	Light Almond	5-15R	•	•
671I	20	120/125	Ivory	5-20R	•	•
671W	20	120/125	White	5-20R	•	•
671	20	120/125	Brown	5-20R	•	•
671LA	20	120/125	Light Almond	5-20R	•	•
Single Pole Switch & Pilot Light Side Wire, Grounding						
692IG	15	120	Ivory		•	
692WG	15	120	White		•	
692G	15	120	Brown		•	
692LAG	15	120	Light Almond		•	
Three-Way Switch & Pilot Light Side Wire, Grounding						
695IG	15	120	Ivory		•	
695WG	15	120	White		•	
695G	15	120	Brown		•	
695LAG	15	120	Light Almond		•	


All devices listed on this page conform to NEMA WD-1 and WD-6.




Combination Switch & Tamper-Resistant Receptacle

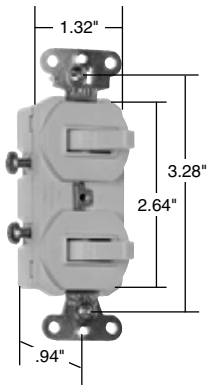

Combination Switches




Combination Switch & Pilot Light



NEMA 5-15R **NEMA 5-20R**

legrand®
Pass & Seymour


Switches
Combination Switches
15 & 20A, 120/277VAC; 15A, 120/125VAC; 15A, 120VAC



Decorator Combination

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL20	UL498
Decorator Two Single Pole Switches Side Wire, Grounding						
680IG	15	120/277	Ivory		•	
680WG	15	120/277	White		•	
680LAG	15	120/277	Light Almond		•	
Decorator Single Pole Switch & Single Receptacle Side Wire, Grounding						
681I	15	120/125	Ivory	5-15R	•	•
681W	15	120/125	White	5-15R	•	•
681LA	15	120/125	Light Almond	5-15R	•	•

Non-Grounding

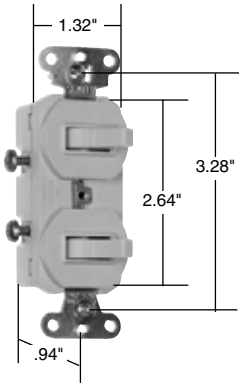

Combination Switches

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	UL498
Two Single Pole Switches Side Wire, Non-Grounding					
690I	15	120/277	Ivory	•	
690W	15	120/277	White	•	
690	15	120/277	Brown	•	
670I	20	120/277	Ivory	•	
670W	20	120/277	White	•	
670	20	120/277	Brown	•	
Single Pole & Three-Way Switch Side Wire, Non-Grounding					
696I	15	120/277	Ivory	•	
696W	15	120/277	White	•	
696	15	120/277	Brown	•	
696LA	15	120/277	Light Almond	•	
Two Three-Way Switches Side Wire, Non-Grounding					
693I	15	120/277	Ivory	•	
693W	15	120/277	White	•	
693	15	120/277	Brown	•	
693LA	15	120/277	Light Almond	•	
Single Pole Switch & Pilot Light Side Wire, Non-Grounding					
692I	15	120	Ivory	•	•
692W	15	120	White	•	•
692	15	120	Brown	•	•
692LA	15	120	Light Almond	•	•
Three-Way Switch & Pilot Light Side Wire, Non-Grounding					
695I	15	120	Ivory	•	
695W	15	120	White	•	
695	15	120	Brown	•	
695LA	15	120	Light Almond	•	
Decorator Two Single Pole Switches Side Wire, Non-Grounding					
680I	15	120/277	Ivory	•	
680W	15	120/277	White	•	
680LA	15	120/277	Light Almond	•	



NEMA 5-15R

See our full range of Decorator Combination Devices on Pages D-9 – D-12, D-20, D-24, D-33, and D-39.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Specification Grade Decorator Switches

15 & 20A, 120/277 & 347VAC; 20A, 120VAC

legrand® Pass & Seymour


Features

- Impact-resistant polycarb back body and frame.
- Cushioned thermoplastic paddle assures smooth, quiet, long term operation.
- Unique single rocking butterfly contact provides long term consistent performance with significantly fewer moving parts.
- Internal screw-pressure-plate back and side wire capability for easy installation with #14 – #10 stranded or solid copper/copper clad wire. Terminals made of high conductivity brass and serrated for maximum wire gripping.
- Silver alloy contacts integrally formed to the butterfly actuator assures reliable performance.
- Integral auto-ground clip for positive ground to metal boxes.
- Tri-drive ground, terminal and mounting screws. All terminal screws backed out, ready-to-install.

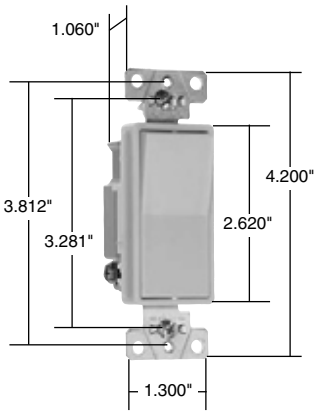

2601

Catalog Number				Rating			3rd Party Compliance	
Single Pole	Double Pole	Three-Way	Four-Way	A.	VAC	Color	UL20	C22.2 111
Specification Grade Decorator Switches Back & Side Wire								
2601I		2603I	2604I	15	120/277	Ivory	•	•
2601W		2603W	2604W	15	120/277	White	•	•
2601GRY		2603GRY		15	120/277	Gray	•	•
2601BK		2603BK		15	120/277	Black	•	•
2601LA		2603LA	2604LA	15	120/277	Light Almond	•	•
2621I	2622I	2623I	2624I	20	120/277	Ivory	•	•
2621W	2622W	2623W	2624W	20	120/277	White	•	•
2621	2622	2623	2624	20	120/277	Brown	•	•
2621GRY	2622GRY	2623GRY	2624GRY	20	120/277	Gray	•	•
2621BK	2622BK	2623BK	2624BK	20	120/277	Black	•	•
2621RED		2623RED	2624RED	20	120/277	Red	•	•
2621LA	2622LA	2623LA	2624LA	20	120/277	Light Almond	•	•
Illuminated Decorator Switches (Lighted when OFF) Back & Side Wire								
2625I		2626I	2628I	20	120	Ivory	•	•
2625W		2626W	2628W	20	120	White	•	•
2625				20	120	Brown	•	•
2625RED				20	120	Red	•	•
2625LA		2626LA	2628LA	20	120	Light Almond	•	•
Pilot Lighted Decorator Switches (Lighted when ON) Back & Side Wire								
2629I				20	120	Ivory	•	•
2629W				20	120	White	•	•
2629LA				20	120	Light Almond	•	•

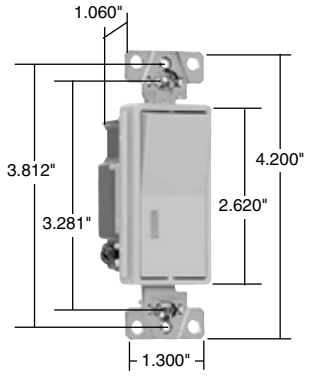


2625, 2626, 2629

For Bulk Packaging Solutions consult factory.

Catalog Number			Rating			3rd Party Compliance	
Single Pole	Three-Way	Four-Way	A.	VAC	Color	UL20	C22.2 111
Specification Grade Decorator Switches Back & Side Wire							
2601347I	2603347I		15	347	Ivory	•	•
2601347W	2603347W		15	347	White	•	•
2601347GRY			15	347	Gray	•	•
2601347LA			15	347	Light Almond	•	•
2621347I	2623347I	2624347I	20	347	Ivory	•	•
2621347W	2623347W	2624347W	20	347	White	•	•
2621347GRY	2623347GRY		20	347	Gray	•	•
2621347BK	2623347BK		20	347	Black	•	•
2621347RED	2623347RED		20	347	Red	•	•
2621347LA	2623347LA	2624347LA	20	347	Light Almond	•	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

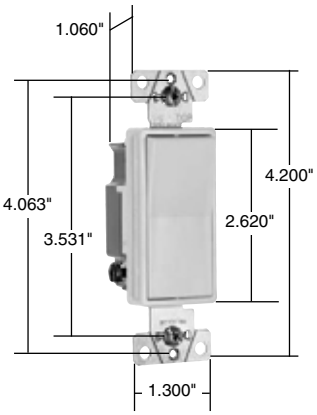


2601347


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Switches
TradeMaster® Decorator Switches
15A, 120/277VAC



TM870LA



TM873LA



TM874LA

Features

- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- ON-OFF switches conform to NEC 430-104 requirements for kitchen disposal units.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Decorator Switches Grounding					
TM870I	15	120/277	Ivory	•	•
TM870W	15	120/277	White	•	•
TM870	15	120/277	Brown	•	•
TM870GRY	15	120/277	Gray	•	•
TM870BK	15	120/277	Black	•	•
TM870LA	15	120/277	Light Almond	•	•
TM870BNCC10	15	120/277	Brushed Nickel	•	•
TM870TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Single Pole Decorator Switches** Grounding					
TM870NAI	15	120	Ivory	•	
TM870NAW	15	120	White	•	
TM870NA	15	120	Brown	•	
TM870NAGRY	15	120	Gray	•	
TM870NABK	15	120	Black	•	
TM870NALA	15	120	Light Almond	•	
Three-Way Decorator Switches Grounding					
TM873I	15	120/277	Ivory	•	•
TM873W	15	120/277	White	•	•
TM873	15	120/277	Brown	•	•
TM873GRY	15	120/277	Gray	•	•
TM873BK	15	120/277	Black	•	•
TM873LA	15	120/277	Light Almond	•	•
TM873BNCC10	15	120/277	Brushed Nickel	•	•
TM873TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Three-Way Decorator Switches** Grounding					
TM873NAI	15	120	Ivory	•	
TM873NAW	15	120	White	•	
TM873NA	15	120	Brown	•	
TM873NAGRY	15	120	Gray	•	
TM873NABK	15	120	Black	•	
TM873NALA	15	120	Light Almond	•	
Four-Way Decorator Switches Grounding					
TM874I	15	120/277	Ivory	•	•
TM874W	15	120/277	White	•	•
TM874	15	120/277	Brown	•	•
TM874BK	15	120/277	Black	•	•
TM874LA	15	120/277	Light Almond	•	•
TM874BNCC6	15	120/277	Brushed Nickel	•	•
TM874TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Four-Way Decorator Switches** Grounding					
TM874I	15	120	Ivory	•	
TM874W	15	120	White	•	
TM874	15	120	Brown	•	
TM874GRY	15	120	Gray	•	
TM874BK	15	120	Black	•	
TM874LA	15	120	Light Almond	•	

NAFTA-Compliant Switches are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.


TradeMaster® Decorator Illuminated & Self-Grounding Switches

15A, 120 & 120/277VAC


legrand®
Pass & Seymour

Features

- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- Self-grounding models provide automatic ground clip.



TM870LASL




TM870SLA

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM870ISL	15	120	Ivory	•	•
TM870WSL	15	120	White	•	•
TM870LASL	15	120	Light Almond	•	•
Self-Grounding Single Pole Decorator Switches					
TM870SI	15	120/277	Ivory	•	•
TM870SW	15	120/277	White	•	•
TM870S	15	120/277	Brown	•	•
TM870SBK	15	120/277	Black	•	•
TM870SLA	15	120/277	Light Almond	•	•
Three-Way Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM873ISL	15	120	Ivory	•	•
TM873WSL	15	120	White	•	•
TM873LASL	15	120	Light Almond	•	•
Self-Grounding Three-Way Decorator Switches					
TM873SI	15	120/277	Ivory	•	•
TM873SW	15	120/277	White	•	•
TM873S	15	120/277	Brown	•	•
TM873SBK	15	120/277	Black	•	•
TM873SLA	15	120/277	Light Almond	•	•
Four-Way Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM874ISL	15	120	Ivory	•	•
TM874WSL	15	120	White	•	•
TM874LASL	15	120	Light Almond	•	•
Self-Grounding Four-Way Decorator Switches					
TM874SI	15	120/277	Ivory	•	•
TM874SW	15	120/277	White	•	•
TM874S	15	120/277	Brown	•	•
TM874SBK	15	120/277	Black	•	•
TM874SLA	15	120/277	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
Decorator & Specification Grade Momentary & Maintained Contact Switches
15A, 120 & 120/277VAC




TM870STMLACC10

Features


- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Decorator Momentary Contact Switches					
TM870STMWCC10	15	120/277	White	•	•
TM870STMBKCC10	15	120/277	Black	•	•
TM870STMLACC10	15	120/277	Light Almond	•	•

EXCLUSIVE! P&S EXCLUSIVE!



Momentary Contact



Maintained Contact

Features

- Unique “Up/Down” switches match the look and feel of standard decorator switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance cULus	UL20	UL508
Specification Grade Double Throw Momentary Contact Switches						
TM811DTMOI	15	120	Ivory	•		•
TM811DTMOW	15	120	White	•		•
NEW **TM811DTMOBK**	15	120	Black	•		•
TM811DTMOLA	15	120	Light Almond	•		•
Specification Grade Double Throw Maintained Contact Switches						
TM811DTMAI	15	120	Ivory	•	•	
TM811DTMAW	15	120	White	•	•	
NEW **TM811DTMABK**	15	120	Black	•	•	
TM811DTMALA	15	120	Light Almond	•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches

Specification Grade Decorator Combination Switches & Shim-Lock

20A, 277VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features

- Unique "Up/Down" switches match the look and feel of standard decorator switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.
- Patent-pending snap-in light module (sold separately) transforms a combination switch into an illuminated switch.
- Identification modules (sold separately) identifies each switch — light, fan, heat lamp. See Page A-24 for details.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance cULus	UL20
Two Single Pole Switches					
PS81120I	20	277	Ivory	•	•
PS81120W	20	277	White	•	•
PS81120LA	20	277	Light Almond	•	•
Three Single Pole Switches					
PS811120I	20	277	Ivory	•	•
PS811120W	20	277	White	•	•
PS811120LA	20	277	Light Almond	•	•
Snap-In Light Module*					
PS8LM	—	—	Clear		


*For use with PS81120 and PS811120 only.



15 & 20 Amp


Features

- One Shim-Lock provides a device adjustment depth range between 1/8" and 3/4".
- An inexpensive and quick fix for floating installations.
- Provides a perfect flush mount every time, regardless of the wallboard, tile or panel condition.
- Made of steel and finished with clear zinc chromate plating.



Shim-Lock

Catalog Number	Dimensions	Qty. Per Package
Shim-Lock		
SHL20	Length: .310", Screw Opening: #6	20
SHL100	Length: .310", Screw Opening: #6	100



All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
TradeMaster® Decorator Combination Switches

EXCLUSIVE! P&S EXCLUSIVE!

Unique "Up/Down" switches match the look and feel of standard Decorator switches.

Easy-to-use oversized main switch for primary load.

Patented Snap-In Light Module (sold separately) transforms a combination switch into an illuminated switch in seconds.

Identification modules (sold separately) identifies each switch — light, fan, heat lamp.



TM8113WCC
Shown with Snap-In Light Module TM8LMCC.

Ground screw position under the end of the strap minimizes the risk of contact.

Impact-resistant face and body.

Fully rounded back body protects wires from being damaged by sharp edges.




Full wraparound metal strap, commercial grade with lock-in tabs.

All screws are tri-drive.

Patented split circuit tab – easily accessible, and can be reinstalled without a tool.

External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.

Adding a Snap-In Light Module

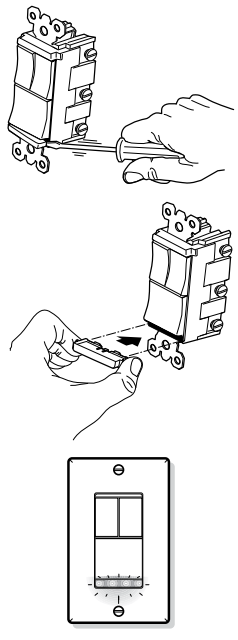

Features

- Module simply snaps-in for easy installation.
- Can be installed with the following devices: TM811, TM813, TM833, TM818, TM838, TM8111, TM8113, TM81111, TM8118 and the LS Series of Dimmers & Fan Speed Controls (see Pages M-13 through M-15).

Snap-In Light Module:

- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.



TM8LMCC



TM8IDWCC

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance c UL us cULus
Snap-In Light Module				
TM8LMCC	15	120/125	Clear	•
Identification Modules				
TM8IDICC	—	—	Ivory	
TM8IDWCC	—	—	White	
TM8IDCC	—	—	Brown	
TM8IDBKCC	—	—	Black	
TM8IDLACC	—	—	Light Almond	

For Decorator Hallway Lights and Combination Devices, see Page D-24.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Switches

TradeMaster® Decorator Combination Switches

15A, 120VAC


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!


Features

- Impact-resistant face and body.
- Fully rounded back body protects wires from being damaged by sharp edges.
- Clear identification of circuits.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Full wraparound metal strap with lock-in tabs.
- Patented split circuit tab – easily accessible, and can be reinstalled without a tool.
- Unique "Up/Down" switches match the look and feel of standard Decorator switches.
- Largest breadth of 15 amp offering.
- All screws are tri-drive.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects (see Page A-26).


Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	cULus
Two Single Pole Switches					
TM811ICC	15	120	Ivory	•	•
TM811WCC	15	120	White	•	•
TM811CC	15	120	Brown	•	•
TM811BKCC	15	120	Black	•	•
TM811LACC	15	120	Light Almond	•	•
Single Pole Switch & Three-Way Switch					
TM813ICC	15	120	Ivory	•	•
TM813WCC	15	120	White	•	•
TM813CC	15	120	Brown	•	•
TM813BKCC	15	120	Black	•	•
TM813LACC	15	120	Light Almond	•	•
Two Three-Way Switches					
TM833ICC	15	120	Ivory	•	•
TM833WCC	15	120	White	•	•
TM833CC	15	120	Brown	•	•
TM833BKCC	15	120	Black	•	•
TM833LACC	15	120	Light Almond	•	•
Three Single Pole Switches					
TM8111ICC	15	120	Ivory	•	•
TM8111WCC	15	120	White	•	•
TM8111CC	15	120	Brown	•	•
TM8111BKCC	15	120	Black	•	•
TM8111LACC	15	120	Light Almond	•	•
Two Single Pole Switches & Three-Way Switch					
TM8113ICC	15	120	Ivory	•	•
TM8113WCC	15	120	White	•	•
TM8113CC	15	120	Brown	•	•
TM8113BKCC	15	120	Black	•	•
TM8113LACC	15	120	Light Almond	•	•
Four Single Pole Switches					
TM81111ICC	15	120	Ivory	•	•
TM81111WCC	15	120	White	•	•
TM81111CC	15	120	Brown	•	•
TM81111BKCC	15	120	Black	•	•
TM81111LACC	15	120	Light Almond	•	•



TM811WCC



TM8111WCC




TM81111WCC


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Switches
TradeMaster® Tamper-Resistant Decorator Combination Switches
15A, 120/125VAC



TM818TRWCC



TM838TRLACC


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL20	UL498	cULus
Tamper-Resistant Single Pole Switch & Single Receptacle							
TM818TRICC	15	120/125	Ivory	5-15R	•	•	•
TM818TRWCC	15	120/125	White	5-15R	•	•	•
TM818TRCC	15	120/125	Brown	5-15R	•	•	•
TM818TRBKCC	15	120/125	Black	5-15R	•	•	•
TM818TRLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Single Pole Switch & Single Receptacle with Pilot Light							
TM818TRPLICC	15	120/125	Ivory	5-15R	•	•	•
TM818TRPLWCC	15	120/125	White	5-15R	•	•	•
TM818TRPLBKCC	15	120/125	Black	5-15R	•	•	•
TM818TRPLLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Three-Way Switch & Single Receptacle							
TM838TRICC	15	120/125	Ivory	5-15R	•	•	•
TM838TRWCC	15	120/125	White	5-15R	•	•	•
TM838TRCC	15	120/125	Brown	5-15R	•	•	•
TM838TRBKCC	15	120/125	Black	5-15R	•	•	•
TM838TRLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Two Single Pole Switches & Single Receptacle							
TM8118TRICC	15	120/125	Ivory	5-15R	•	•	•
TM8118TRWCC	15	120/125	White	5-15R	•	•	•
TM8118TRCC	15	120/125	Brown	5-15R	•	•	•
TM8118TRBKCC	15	120/125	Black	5-15R	•	•	•
TM8118TRLACC	15	120/125	Light Almond	5-15R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC

legrand®
Pass & Seymour

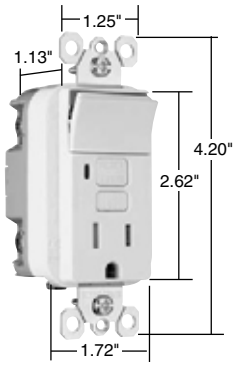

1595SWTTRWCC4

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Switch Rating A.	VAC	Receptacle Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL20 C22.2 No. 111
Combination Tamper-Resistant Single Pole Switch/GFCI									
1595SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1595SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1595SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Switches
Canopy Switches & Locator Switches
15A, 120 & 250VAC; 15A, 120VAC

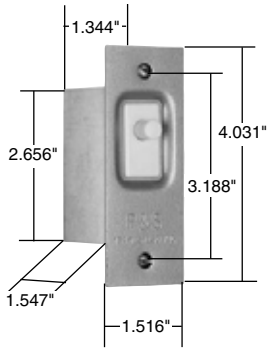

1200
1201

Features
- Equipped with wire leads.
- 1200 and 1201 complete with metal box and plate.
- Only 14 oz. pressure actuates switch.
- Back box cold rolled steel.
- Plate is steel with a bronze coating.

Catalog Number		Rating AC	
Light On Door Open	Light On Door Closed	120VAC	250VAC
Pressure Sensitive Door & Canopy Switches			
1200	1201	15A	15A
Interiors Only, with Leads & Plunger			
1205	1206	15A	15A
Interiors Only, with Leads, Plunger & Face Plate			
1205A	1206A	15A	15A



TM8LOCATORLA


Application
In an emergency, seconds can make all the difference. Easily make a home instantly identifiable with a P&S Decorator Home Locator Switch. Just a single touch on its lower push button flashes the front outside lights continuously. The switch's LED flashes red to indicate the locator is in operation. When the locator flasher isn't in use, the switch's LED glows green for easy location in the dark.

Features
- ON/OFF switch with normal paddle operation.
- Locator function flashes the outdoor light ON and OFF signaling SOS in Morse Code.
- Green LED illuminates and differentiates switch for easy location in emergency.
- Red LED indicates the emergency function is enabled.
- Wires the same as a single pole switch.
- cULus Listed.

Catalog Number	Description	Rating	Color
Decorator Home Locator Switches			
TM8LOCATORI TM8LOCATORW TM8LOCATORLA	Emergency Decorator Home Locator	500 Watts, 15A, 120VAC	Ivory White Light Almond

Application
The 911 Locator should be used in place of a standard single-pole switch to turn outdoor house or porch lights ON and OFF. In the 911 "flashing" position, the light becomes a house locator for police, medical personnel, emergency utility service, foul weather deliveries, etc.
- Illuminated toggle when switch is off.
- Toggle and attached load flashes when toggle in center position (in 911 mode).

Helps Emergency Personnel Locate Address
Used in conjunction with your call for assistance, the 911 Locator solves the problem of night time house identification for emergency personnel. After you have placed your call for help, simply flick the switch toggle to the "911" position and your outdoor light will flash on and off continuously, cutting response time to insure effective action.



911LOCATOR

Features
- Functions as a standard ON/OFF switch.
- Installs in minutes. Replaces any standard single-pole switch.
- 5" pre-stripped wire leads.
- All wire nuts and mounting hardware included.
- Transparent wall plate sticker included.
- UL20 Listed.


Catalog Number	Description	Rating
Single Pole, Double Throw		
911LOCATOR	Emergency Flasher Switch	600 Watts, 120VAC

All devices listed on this page conform to NEMA WD-1 and WD-6.


Devices & Wall Plates
Color Selection Chart

legrand®
Pass & Seymour

Devices & Plastic Wall Plate Colors

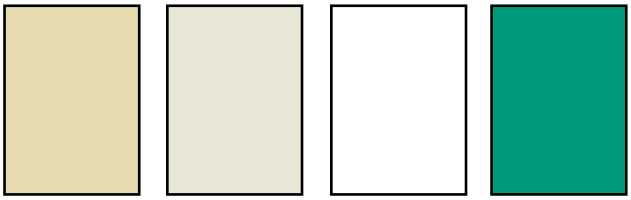


Ivory | Light Almond | White | Green

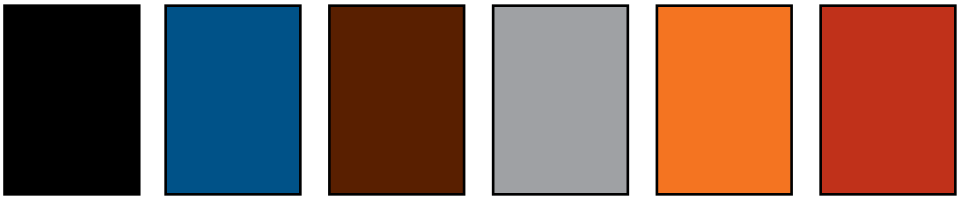

Black | Blue | Brown | Gray | Orange | Red


See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

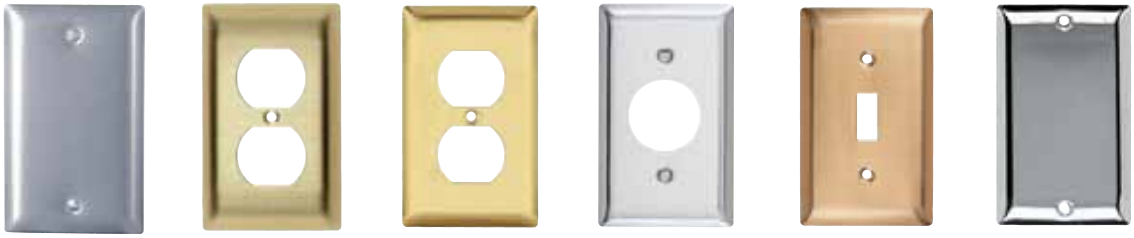


Metal Finish Aluminum | Brass (Brushed) | Polished Brass | Stainless Steel | Brushed Bronze | Chrome

Custom Metal Wall Plates Paint Finish Colors

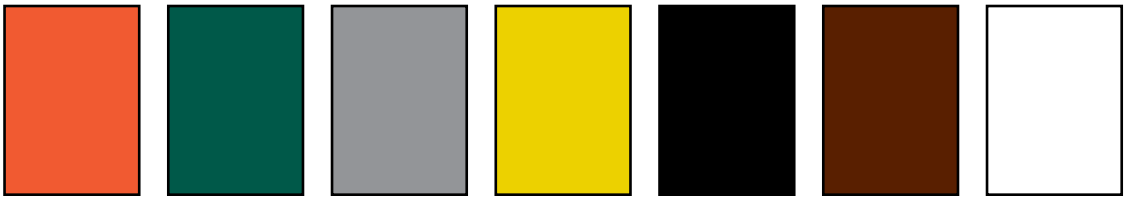


Paint Color Orange | Green | Gray | Yellow | Glossy Black | Brown | White

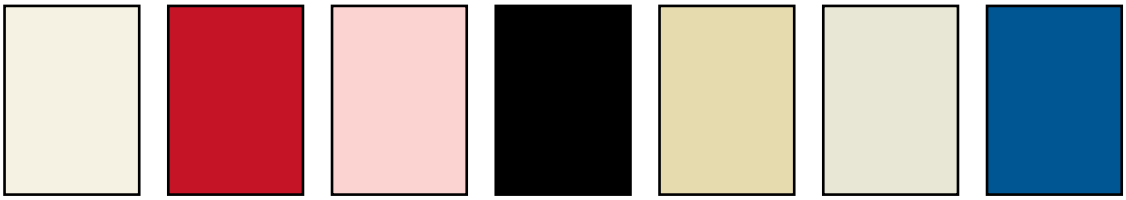

Paint Color Primer | Red | Pink | Flat Black | Ivory | Light Almond | Blue

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

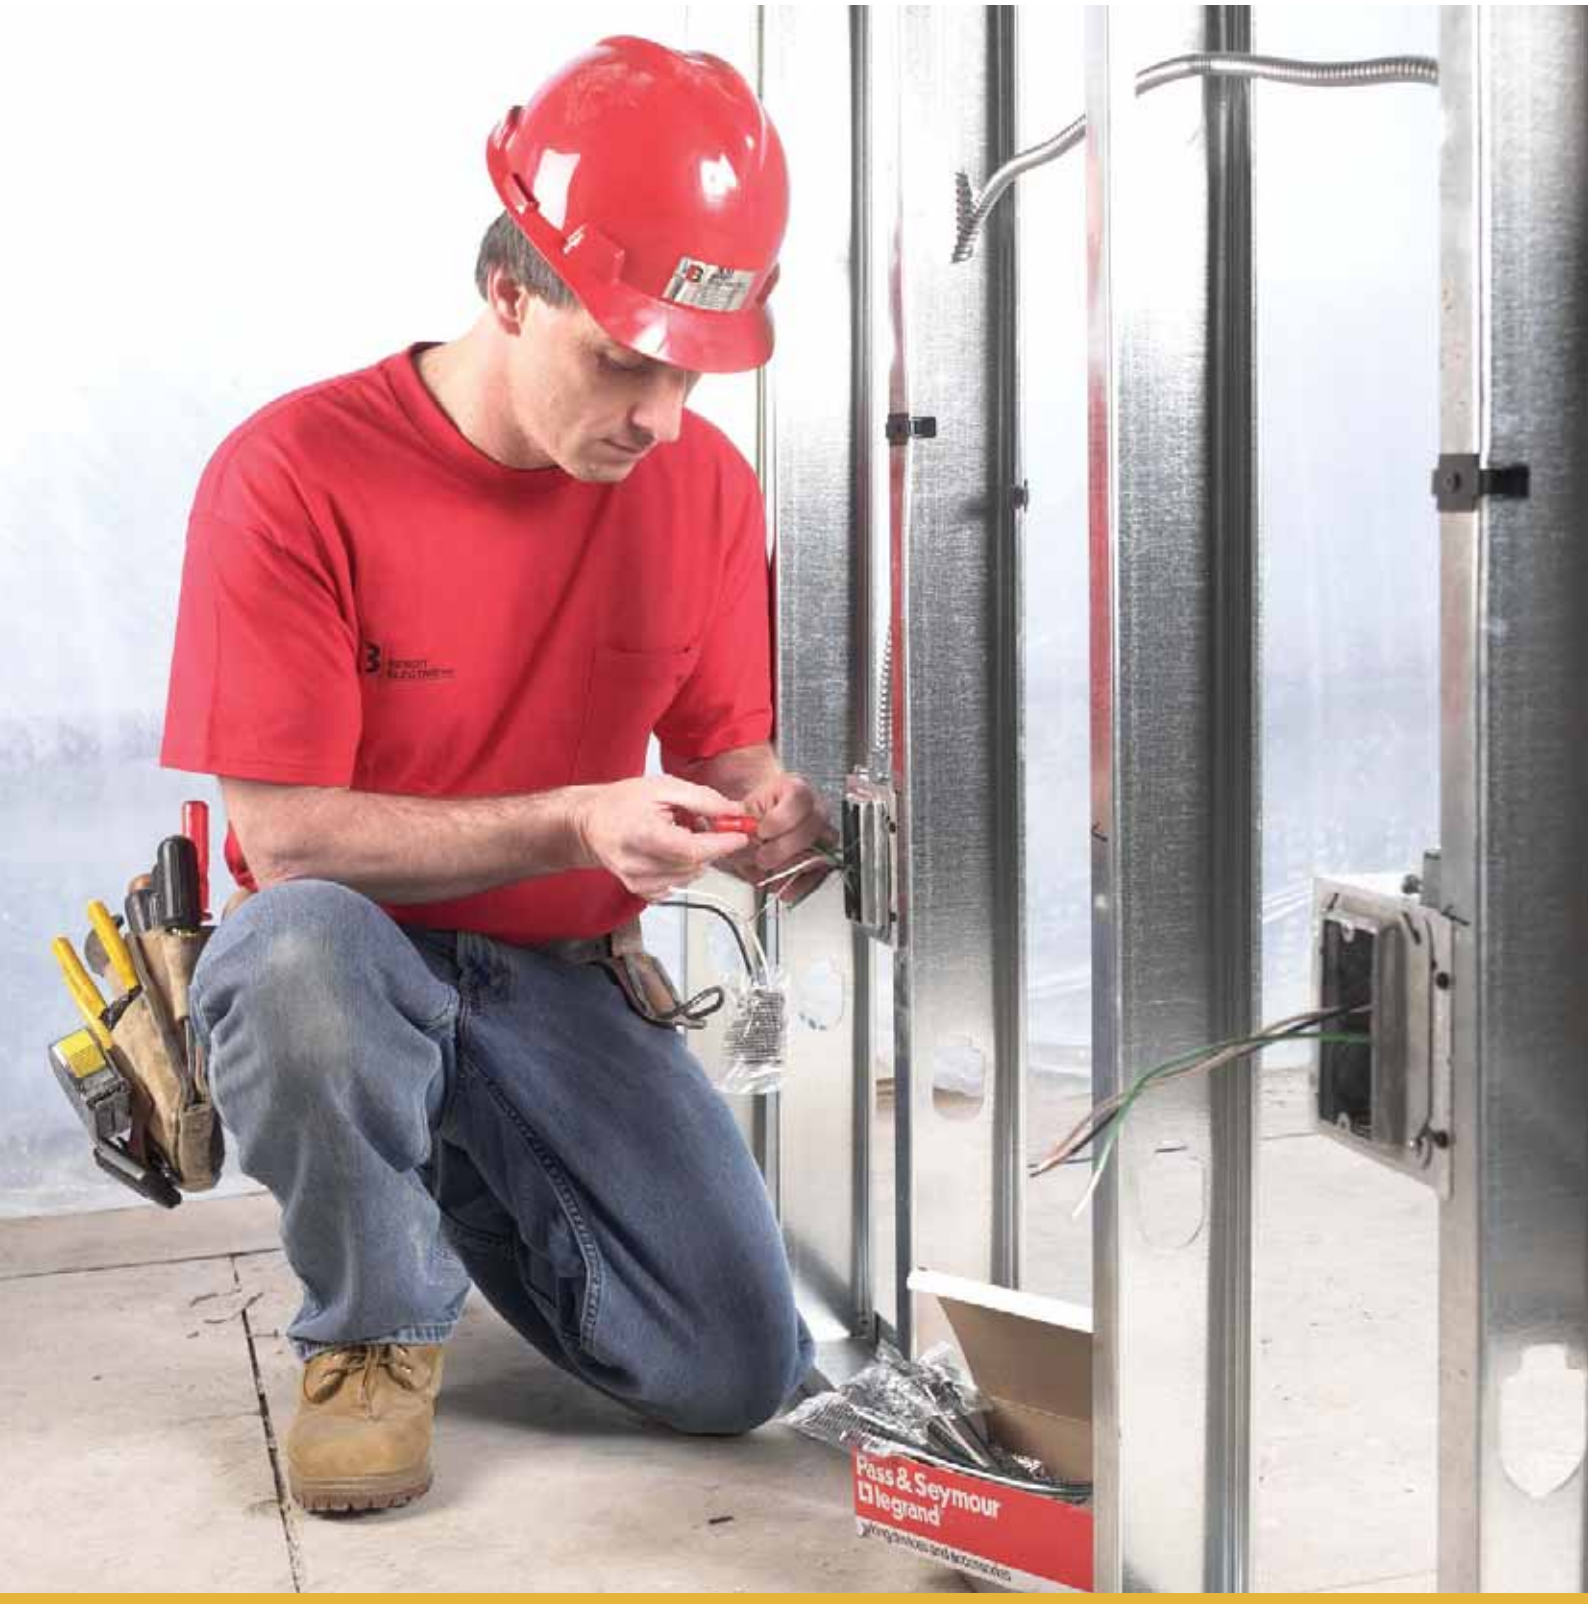

STRAIGHT BLADE RECEPTACLES


legrand®

Pass & Seymour

Straight Blade Receptacles

legrand®
Pass & Seymour

PlugTail™. The fastest, most consistent and reliable wiring devices – ever! *Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device — no preparing, stripping or looping conductors, no exposed terminals to tighten or tape, and no mistakes mean no costly callbacks! Now device installation is a snap!*

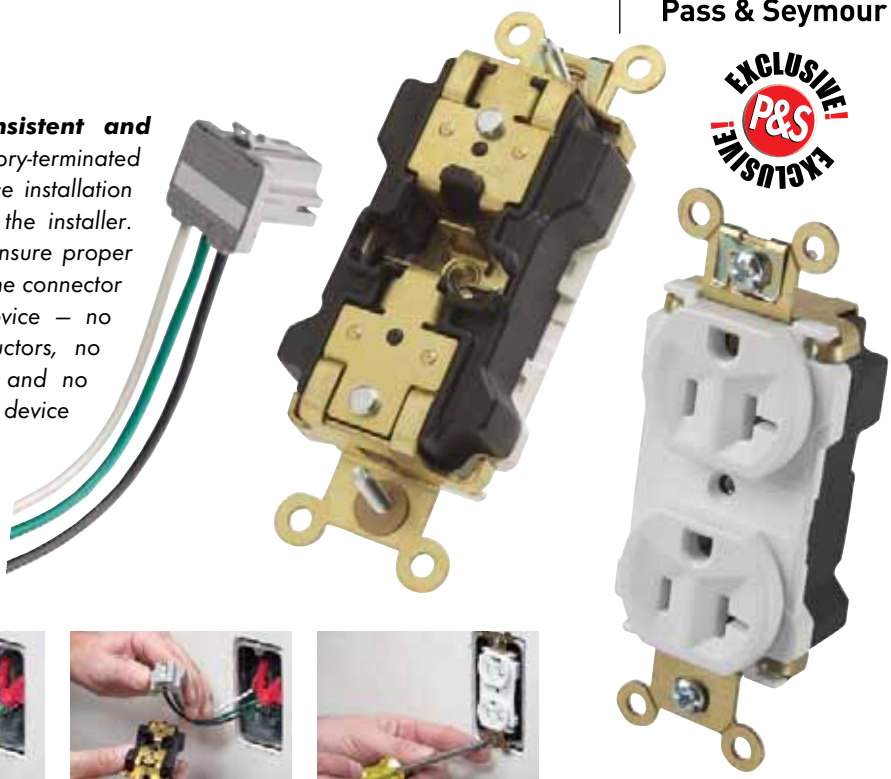




Device	Rating	Page Number
PlugTail™ Extra Heavy-Duty Specification Grade Receptacles	15 & 20A, 125V	B-2 – B-5
Extra Heavy-Duty Hospital Grade Receptacles	15 & 20A, 125V; 20A, 250V	B-6, B-7
Industrial Extra Heavy-Duty Specification Grade Receptacles	15 & 20A, 125 & 250V	B-8, B-9
Heavy-Duty Specification Grade Receptacles	15 & 20A, 125 & 250V	B-10
Heavy-Duty Hospital Grade Receptacles	15 & 20A, 125V; 20A, 250V	B-11, B-12
PlugTail™ Specification Grade Receptacles	15 & 20A, 125V	B-13 – B-16
PlugTail™ Power Pre-Fab Wiring Systems & Metal Box Kits		B-17, B-18
Hard Use Specification Grade Receptacles	15 & 20A, 125, 125/250V	B-19
Construction Specification Grade Receptacles	15 & 20A, 125V	B-20
Commercial Specification Grade Receptacles	15A, 125V; 20A, 125 & 250V	B-21
Hospital & Specification Grade Single Receptacles	15 & 20A, 125 & 250V	B-22 – B-24
Tamper-Resistant Receptacles	15 & 20A, 125V	B-25 – B-28
Weather-Resistant Receptacles	15 & 20A, 125 & 250V	B-29
Isolated Ground Receptacles	15 & 20A, 125V; 20A, 250V	B-30, B-31
PlugTail™ Decorator Receptacles	15 & 20A, 125V	B-32
Hospital & Specification Grade Decorator Receptacles	15 & 20A, 120/125, 125 & 250V	B-33 – B-37
TradeMaster® Tamper-Resistant Receptacles	15A, 125V	B-38, B-39
Weather-Resistant Receptacles	15A, 125V	B-40
TradeMaster® Receptacles, Hallway Lights & Combinations	15A, 125V & 15A, 120/125VAC	B-41 – B-43
Recessed TV Boxes		B-44
Specification & Hospital Grade GFCI Receptacles	15 & 20A, 125VAC	B-45 – B-51
Weather-Resistant & DuraShield™ GFCI Receptacles	15 & 20A, 125VAC	B-52, B-53
PlugTail™ GFCI Receptacles	15 & 20A, 125VAC	B-54 – B-57
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles	15 & 20A, 125VAC	B-58 – B-61
Surge Protective Spec Grade Hospital Receptacles & PlugTail	15 & 20A, 125VAC	B-62, B-68
Quad Receptacles & Specifications & Accessories	15 & 20A, 125V	B-69, B-70
Dust & Moisture Resistant & Clock Hanger Receptacles	15 & 20A, 125V	B-71
Power Outlet Receptacles & Plugs	20, 30, 50 & 60A	B-72 – B-74
Miscellaneous Configurations		B-75
Power & Surge Protection Strips & Specifications		B-76, B-77

Devices & Wall Plates Color Selection Chart available on Pages A-29, B-78 and Q-61.

legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Extra Heavy-Duty Specification Grade Receptacles

EXCLUSIVE! P&S EXCLUSIVE!

Auto-ground clip assures positive ground.

Two drive screws anchor strap to back body and face.

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.




Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.


No exposed terminals create a finger-safe application before, during, and after installation.

Large crimped and welded brass contacts snugly terminate on device blade terminals.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing. Audible snapping latch assures connection, allows release.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

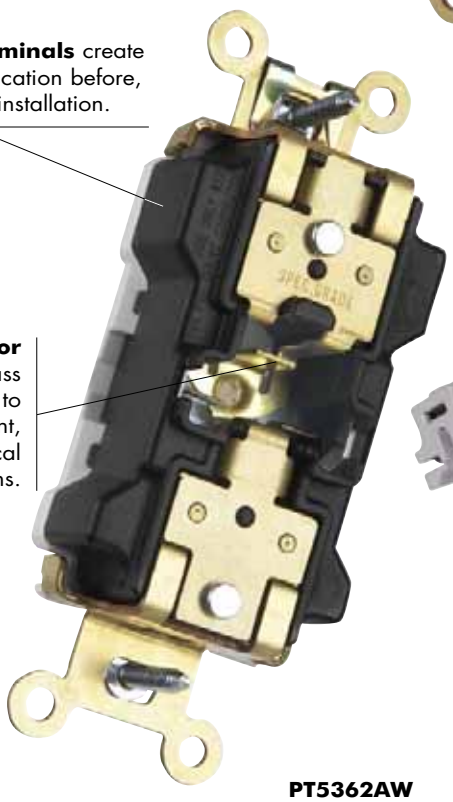

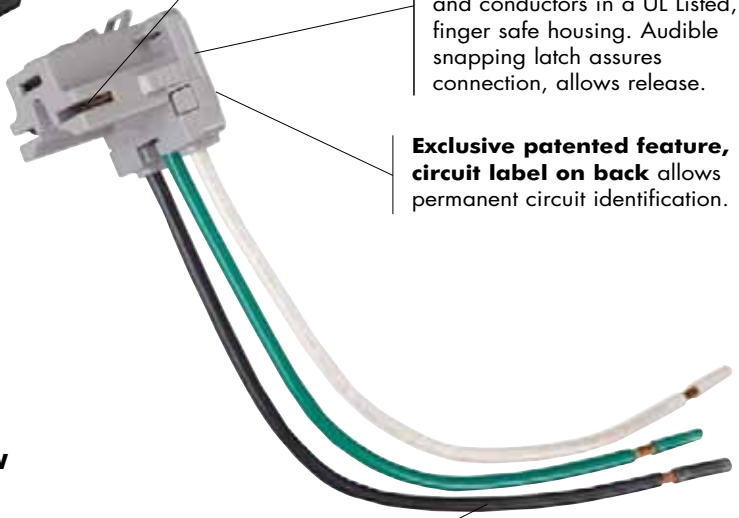

Exclusive patented feature, circuit label on back allows permanent circuit identification.

PT5362AW

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

Straight Blade Receptacles


PlugTail™ Extra Heavy-Duty Specification Grade Receptacles

15 & 20A, 125V

legrand®
Pass & Seymour


Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: c UL us UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT5262AI	15	125	Ivory	5-15R	•	•
PT5262AW	15	125	White	5-15R	•	•
PT5262A	15	125	Brown	5-15R	•	•
PT5262AGRY	15	125	Gray	5-15R	•	•
PT5262ABK	15	125	Black	5-15R	•	•
PT5262ARED	15	125	Red	5-15R	•	•
PT5262ALA	15	125	Light Almond	5-15R	•	•
PT5262ABL	15	125	Blue	5-15R	•	•
PT5362AI	20	125	Ivory	5-20R	•	•
PT5362AW	20	125	White	5-20R	•	•
PT5362A	20	125	Brown	5-20R	•	•
PT5362AGRY	20	125	Gray	5-20R	•	•
PT5362ABK	20	125	Black	5-20R	•	•
PT5362ARED	20	125	Red	5-20R	•	•
PT5362ALA	20	125	Light Almond	5-20R	•	•
PT5362ABL	20	125	Blue	5-20R	•	•
Tamper-Resistant Duplex Receptacles						
PTTR62I	15	125	Ivory	5-15R	•	•
PTTR62W	15	125	White	5-15R	•	•
PTTR62	15	125	Brown	5-15R	•	•
PTTR62GRY	15	125	Gray	5-15R	•	•
PTTR62BK	15	125	Black	5-15R	•	•
PTTR62RED	15	125	Red	5-15R	•	•
PTTR62LA	15	125	Light Almond	5-15R	•	•
PTTR62BL	15	125	Blue	5-15R	•	•
PTTR63I	20	125	Ivory	5-20R	•	•
PTTR63W	20	125	White	5-20R	•	•
PTTR63	20	125	Brown	5-20R	•	•
PTTR63GRY	20	125	Gray	5-20R	•	•
PTTR63BK	20	125	Black	5-20R	•	•
PTTR63RED	20	125	Red	5-20R	•	•
PTTR63LA	20	125	Light Almond	5-20R	•	•
PTTR63BL	20	125	Blue	5-20R	•	•

EXCLUSIVE! P&S EXCLUSIVE!



PT5362AW




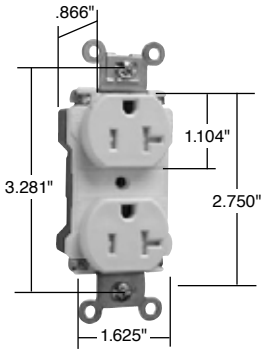


PTTR63W

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
NEW **NAFTA-Compliant PlugTail Connectors – Right Angle**		
PTRA6SOLNA	Solid	6"
PTRA6STRNA	Stranded	6"
PlugTail Connectors – Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PlugTail Connectors – Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

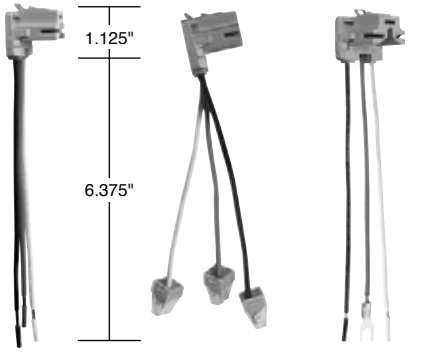

PTRA6STR PTRA6STRBP PTRA6STRG

For Bulk Packaging Solutions consult factory.

NAFTA-Compliant PlugTail Connectors are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
PlugTail™ Extra Heavy-Duty Hospital Grade Receptacles
15 & 20A, 125V

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

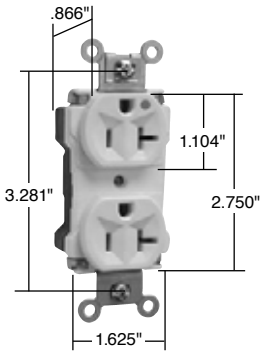


PT8300W

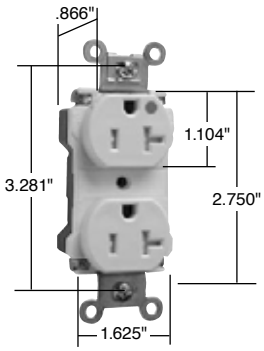

PTTR63HW



2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT8200I	15	125	Ivory	5-15R	•	•
PT8200W	15	125	White	5-15R	•	•
PT8200	15	125	Brown	5-15R	•	•
PT8200GRY	15	125	Gray	5-15R	•	•
PT8200BK	15	125	Black	5-15R	•	•
PT8200RED	15	125	Red	5-15R	•	•
PT8200LA	15	125	Light Almond	5-15R	•	•
PT8200BL	15	125	Blue	5-15R	•	•
PT8300I	20	125	Ivory	5-20R	•	•
PT8300W	20	125	White	5-20R	•	•
PT8300	20	125	Brown	5-20R	•	•
PT8300GRY	20	125	Gray	5-20R	•	•
PT8300BK	20	125	Black	5-20R	•	•
PT8300RED	20	125	Red	5-20R	•	•
PT8300LA	20	125	Light Almond	5-20R	•	•
PT8300BL	20	125	Blue	5-20R	•	•
Tamper-Resistant Duplex Receptacles						
PTTR62HI	15	125	Ivory	5-15R	•	•
PTTR62HW	15	125	White	5-15R	•	•
PTTR62H	15	125	Brown	5-15R	•	•
PTTR62HGRY	15	125	Gray	5-15R	•	•
PTTR62HBK	15	125	Black	5-15R	•	•
PTTR62HRED	15	125	Red	5-15R	•	•
PTTR62HLA	15	125	Light Almond	5-15R	•	•
PTTR62HBL	15	125	Blue	5-15R	•	•
PTTR63HI	20	125	Ivory	5-20R	•	•
PTTR63HW	20	125	White	5-20R	•	•
PTTR63H	20	125	Brown	5-20R	•	•
PTTR63HGRY	20	125	Gray	5-20R	•	•
PTTR63HBK	20	125	Black	5-20R	•	•
PTTR63HRED	20	125	Red	5-20R	•	•
PTTR63HLA	20	125	Light Almond	5-20R	•	•
PTTR63HBL	20	125	Blue	5-20R	•	•

For PlugTail Connectors, see Page B-3.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

PlugTail™ Extra Heavy-Duty Hospital Grade Illuminated Receptacles


15 & 20A, 125V

legrand®
Pass & Seymour

Features

- Molded-in "IL" markings on face of product.
- Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

EXCLUSIVE! P&S EXCLUSIVE!

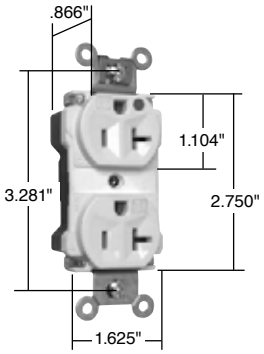


PT8300ILLA

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Illuminated Duplex Receptacles						
PT8200ILI	15	125	Ivory	5-15R	•	•
PT8200ILW	15	125	White	5-15R	•	•
NEW **PT8200IL**	15	125	Brown	5-15R	•	•
PT8200ILGRY	15	125	Gray	5-15R	•	•
PT8200ILBK	15	125	Black	5-15R	•	•
PT8200ILRED	15	125	Red	5-15R	•	•
PT8200ILLA	15	125	Light Almond	5-15R	•	•
PT8300ILI	20	125	Ivory	5-20R	•	•
PT8300ILW	20	125	White	5-20R	•	•
PT8300IL	20	125	Brown	5-20R	•	•
PT8300ILGRY	20	125	Gray	5-20R	•	•
PT8300ILBK	20	125	Black	5-20R	•	•
PT8300ILRED	20	125	Red	5-20R	•	•
PT8300ILLA	20	125	Light Almond	5-20R	•	•



Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For PlugTail Connectors, see Page B-3.

For Bulk Packaging Solutions consult factory.

Features

- Ensures proper connections and power presence at both rough-in and device-out stages during P&S PlugTail Device installation.
- Fast, easy identification of circuit connections.
- Easy-to-see indicator lights.
- Sturdy construction for long-term dependability.
- Helps prevent call backs.
- Ensures proper wiring.

Catalog Number	Description
P&S PlugTail™ Tester	
PTTESTER	Red PlugTail Tester for Receptacles and Tails




PTTESTER


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Extra Heavy-Duty Hospital Grade Receptacles
15 & 20A, 125V; 20A, 250V

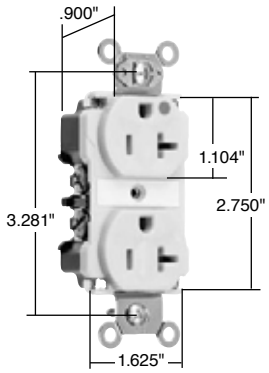

8300I

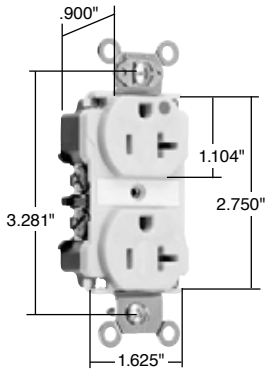

8300ILI

Features
- One-piece nickel-plated brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Illuminated version features exclusive LED lamp with solder connection for long durable life (10-12 years).

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
8200I	15	125	Ivory	5-15R	•	•	•
8200W	15	125	White	5-15R	•	•	•
8200	15	125	Brown	5-15R	•	•	•
8200GRY	15	125	Gray	5-15R	•	•	•
8200BK	15	125	Black	5-15R	•	•	•
8200RED	15	125	Red	5-15R	•	•	•
8200LA	15	125	Light Almond	5-15R	•	•	•
8300I	20	125	Ivory	5-20R	•	•	•
8300W	20	125	White	5-20R	•	•	•
8300	20	125	Brown	5-20R	•	•	•
8300GRY	20	125	Gray	5-20R	•	•	•
8300BK	20	125	Black	5-20R	•	•	•
8300RED	20	125	Red	5-20R	•	•	•
8300LA	20	125	Light Almond	5-20R	•	•	•
8800I	20	250	Ivory	6-20R	•	•	•
8800W	20	250	White	6-20R	•	•	•
8800	20	250	Brown	6-20R	•	•	•
8800GRY	20	250	Gray	6-20R	•	•	•
8800BK	20	250	Black	6-20R	•	•	•
8800LA	20	250	Light Almond	6-20R	•	•	•
8800RED	20	250	Red	6-20R	•	•	•
LED Illuminated Face Duplex Receptacles Back & Side Wire							
8200ILI	15	125	Ivory	5-15R	•	•	•
8200ILW	15	125	White	5-15R	•	•	•
8200ILRED	15	125	Red	5-15R	•	•	•
8300ILI	20	125	Ivory	5-20R	•	•	•
NEW **8300ILW**	20	125	White	5-20R	•	•	•
8300ILGRY	20	125	Gray	5-20R	•	•	•
8300ILRED	20	125	Red	5-20R	•	•	•
8300ILLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R | NEMA 5-20R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

Extra Heavy-Duty Hospital Grade MRI Receptacles

15 & 20A, 125V


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Receptacles designed expressly for MRI applications – *We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.*

Features


- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty, one-piece nickel-plated brass mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.



8200LAMRI

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Hospital Grade Duplex Receptacles Back & Side Wire							
8200IMRI	15	125	Ivory	5-15R	•	•	•
8200WMRI	15	125	White	5-15R	•	•	•
8200MRI	15	125	Brown	5-15R	•	•	•
8200GRYMRI	15	125	Gray	5-15R	•	•	•
8200BKMRI	15	125	Black	5-15R	•	•	•
8200REDMRI	15	125	Red	5-15R	•	•	•
8200LAMRI	15	125	Light Almond	5-15R	•	•	•
8300IMRI	20	125	Ivory	5-20R	•	•	•
8300WMRI	20	125	White	5-20R	•	•	•
8300GRYMRI	20	125	Gray	5-20R	•	•	•
8300BKMRI	20	125	Black	5-20R	•	•	•
8300REDMRI	20	125	Red	5-20R	•	•	•
8300LAMRI	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
Industrial Extra Heavy-Duty Specification Grade Receptacles

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Exclusive, patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

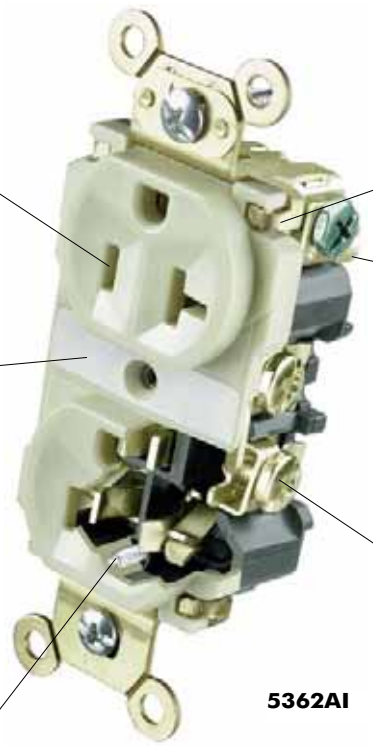

External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.

5362AI

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.



Auto-ground clip assures positive ground.

Heavy-duty, one-piece brass strap and integral ground for added strength and safety.

Straight Blade Receptacles


Industrial Extra Heavy-Duty Specification Grade Receptacles

15 & 20A, 125 & 250V

legrand®
Pass & Seymour

Features

- One-piece brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Corrosion-resistant models have nickel-plated straps and contacts.

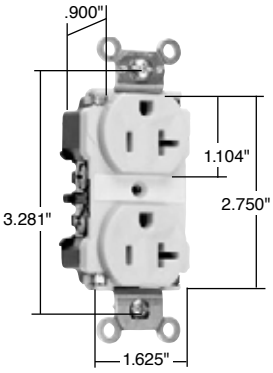


5362AI


Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
5262AI	15	125	Ivory	5-15R	•	•	•
5262AW	15	125	White	5-15R	•	•	•
5262A	15	125	Brown	5-15R	•	•	•
5262AGRY	15	125	Gray	5-15R	•	•	•
5262ABK	15	125	Black	5-15R	•	•	•
5262ARED	15	125	Red	5-15R	•	•	•
5262ALA	15	125	Light Almond	5-15R	•	•	•
CR6200*	15	125	Yellow	5-15R	•	•	•
NEW **CR6200GRY***	15	125	Gray	5-15R	•	•	•
5362AI	20	125	Ivory	5-20R	•	•	•
5362AW	20	125	White	5-20R	•	•	•
5362A	20	125	Brown	5-20R	•	•	•
5362AGRY	20	125	Gray	5-20R	•	•	•
5362ABK	20	125	Black	5-20R	•	•	•
5362ARED	20	125	Red	5-20R	•	•	•
5362ALA	20	125	Light Almond	5-20R	•	•	•
5362ABL	20	125	Blue	5-20R	•	•	•
CR6300BR*	20	125	Brown	5-20R	•	•	•
CR6300*	20	125	Yellow	5-20R	•	•	•
5662AI	15	250	Ivory	6-15R	•	•	•
5662AW	15	250	White	6-15R	•	•	•
5662A	15	250	Brown	6-15R	•	•	•
5662AGRY	15	250	Gray	6-15R	•	•	•
5662ABK	15	250	Black	6-15R	•	•	•
5662ARED	15	250	Red	6-15R	•	•	•
5862AI	20	250	Ivory	6-20R	•	•	•
5862AW	20	250	White	6-20R	•	•	•
5862A	20	250	Brown	6-20R	•	•	•
5862AGRY	20	250	Gray	6-20R	•	•	•
5862ABK	20	250	Black	6-20R	•	•	•
5862ARED	20	250	Red	6-20R	•	•	•
5862ALA	20	250	Light Almond	6-20R	•	•	•

*Corrosion-Resistant.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**




NEMA 6-15R **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Heavy-Duty Specification Grade Receptacles
15 & 20A, 125 & 250V

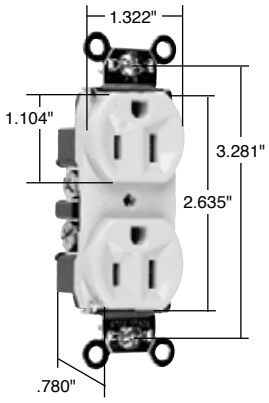


PS5262I

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- High strength nylon face.
- Internal screw-pressure-plate back and side wired to accept #14 and #10 AWG stranded or solid copper or copper-clad conductors. Eight back wire holes.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
PS5262I	15	125	Ivory	5-15R	•	•	•
PS5262W	15	125	White	5-15R	•	•	•
PS5262	15	125	Brown	5-15R	•	•	•
PS5262GRY	15	125	Gray	5-15R	•	•	•
PS5262BK	15	125	Black	5-15R	•	•	•
PS5262RED	15	125	Red	5-15R	•	•	•
PS5262LA	15	125	Light Almond	5-15R	•	•	•
PS5262BL	15	125	Blue	5-15R	•	•	•
PS5362I	20	125	Ivory	5-20R	•	•	•
PS5362W	20	125	White	5-20R	•	•	•
PS5362	20	125	Brown	5-20R	•	•	•
PS5362GRY	20	125	Gray	5-20R	•	•	•
PS5362BK	20	125	Black	5-20R	•	•	•
PS5362RED	20	125	Red	5-20R	•	•	•
PS5362LA	20	125	Light Almond	5-20R	•	•	•
PS5362BL	20	125	Blue	5-20R	•	•	•
5662I	15	250	Ivory	6-15R	•	•	•
5662W	15	250	White	6-15R	•	•	•
5662	15	250	Brown	6-15R	•	•	•
5862I	20	250	Ivory	6-20R	•	•	•
5862W	20	250	White	6-20R	•	•	•
5862	20	250	Brown	6-20R	•	•	•
5862GRY	20	250	Gray	6-20R	•	•	•
5862BK	20	250	Black	6-20R	•	•	•
5862RED	20	250	Red	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Heavy-Duty Hospital Grade Receptacles
15 & 20A, 125V


legrand®
Pass & Seymour

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.
- Smooth face version features an impact-resistant nylon face for ease of cleaning and less dirt build-up.

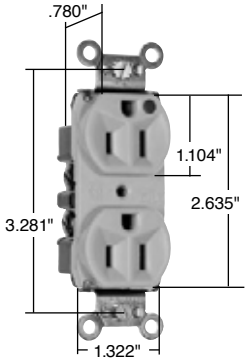


PS8200HI

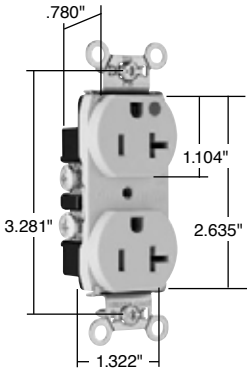

PS8300HSLA

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
PS8200HI	15	125	Ivory	5-15R	•	•	•
PS8200HW	15	125	White	5-15R	•	•	•
PS8200H	15	125	Brown	5-15R	•	•	•
PS8200HGRY	15	125	Gray	5-15R	•	•	•
PS8200HRED	15	125	Red	5-15R	•	•	•
PS8200HLA	15	125	Light Almond	5-15R	•	•	•
PS8300HI	20	125	Ivory	5-20R	•	•	•
PS8300HW	20	125	White	5-20R	•	•	•
PS8300H	20	125	Brown	5-20R	•	•	•
PS8300HGRY	20	125	Gray	5-20R	•	•	•
PS8300HRED	20	125	Red	5-20R	•	•	•
PS8300HLA	20	125	Light Almond	5-20R	•	•	•
Duplex Receptacles – Smooth Face Back & Side Wire							
PS8200HSI	15	125	Ivory	5-15R	•	•	•
PS8200HSW	15	125	White	5-15R	•	•	•
PS8200HS	15	125	Brown	5-15R	•	•	•
PS8200HSGRY	15	125	Gray	5-15R	•	•	•
PS8200HSRED	15	125	Red	5-15R	•	•	•
PS8200HSLA	15	125	Light Almond	5-15R	•	•	•
PS8300HSI	20	125	Ivory	5-20R	•	•	•
PS8300HSW	20	125	White	5-20R	•	•	•
PS8300HS	20	125	Brown	5-20R	•	•	•
PS8300HSGRY	20	125	Gray	5-20R	•	•	•
PS8300HSRED	20	125	Red	5-20R	•	•	•
PS8300HSLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Heavy-Duty Hospital Grade Compact Design Receptacles
15 & 20A, 125V; 20A, 250V

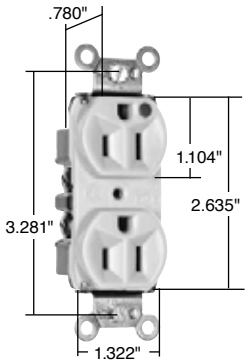

8200HI

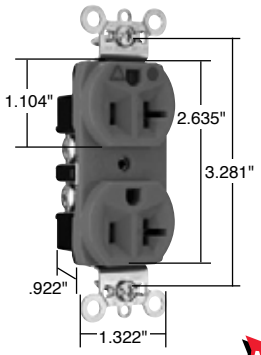

IG8300

Features
- Impact-resistant nylon face.
- One-piece heat-treated triple-wipe brass power contacts.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Back wire holes allow entry of conductor insulation partially into body but not into wiring compartment.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles – Compact Design Back & Side Wire							
8200HI	15	125	Ivory	5-15R	•	•	•
8200HW	15	125	White	5-15R	•	•	•
8200H	15	125	Brown	5-15R	•	•	•
8200HGRY	15	125	Gray	5-15R	•	•	•
8200HRED	15	125	Red	5-15R	•	•	•
8200HLA	15	125	Light Almond	5-15R	•	•	•
8300HI	20	125	Ivory	5-20R	•	•	•
8300HW	20	125	White	5-20R	•	•	•
8300H	20	125	Brown	5-20R	•	•	•
8300HGRY	20	125	Gray	5-20R	•	•	•
8300HBK	20	125	Black	5-20R	•	•	•
8300HRED	20	125	Red	5-20R	•	•	•
8300HLA	20	125	Light Almond	5-20R	•	•	•
NEW **8300HBL**	20	125	Blue	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire							
IG8200I	15	125	Ivory	5-15R	•	•	•
IG8200	15	125	Orange	5-15R	•	•	•
IG8200RED	15	125	Red	5-15R	•	•	•
IG8300I	20	125	Ivory	5-20R	•	•	•
IG8300W	20	125	White	5-20R	•	•	•
IG8300	20	125	Orange	5-20R	•	•	•
IG8300RED	20	125	Red	5-20R	•	•	•
IG8300LA	20	125	Light Almond	5-20R	•	•	•
IG8800	20	250	Orange	6-20R	•	•	•
IG8800LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R | NEMA 5-20R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
PlugTail™ Specification Grade Receptacles

legrand®
Pass & Seymour

Auto-ground clip assures positive ground.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.


Dual mechanical shutter system to help prevent insertion of foreign objects.

Plated steel wrap strap design for maximum durability and corrosion resistance.



Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

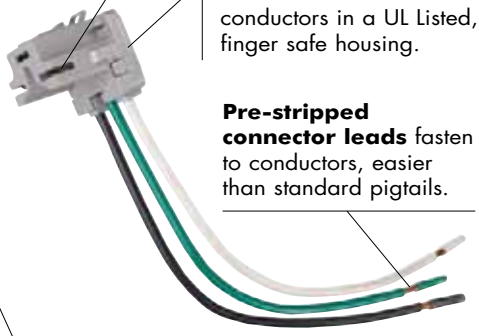

PTTR5362W

No exposed terminals create a finger safe application before,during, and after installation.


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Exclusive patented feature, circuit label on back allows permanent circuit identification

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

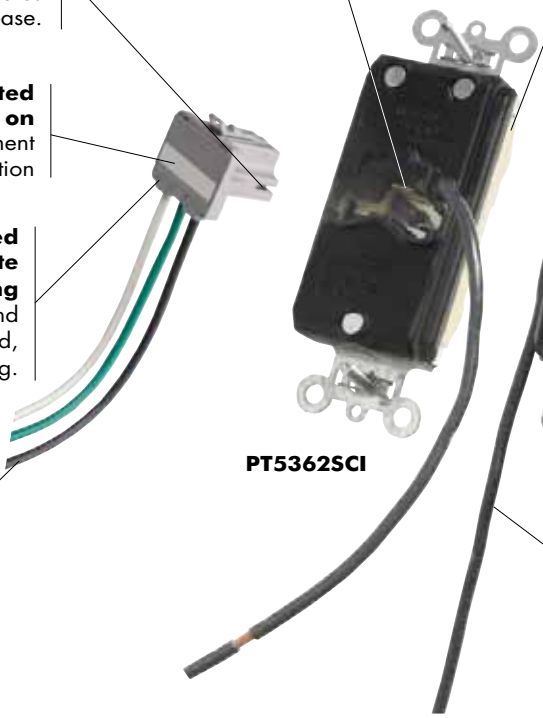

PT5362SCI

Auto-ground clip assures positive ground.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Three drive screws anchor strap to back body and face.


Plated steel wrap strap design for maximum durability and corrosion resistance.

Pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

legrand®
Pass & Seymour


Straight Blade Receptacles
PlugTail™ Specification Grade Receptacles
15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

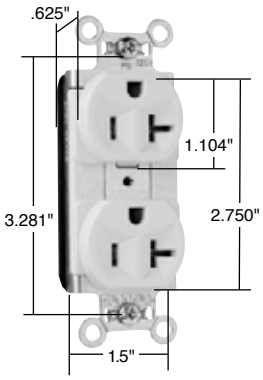


PT5362LA



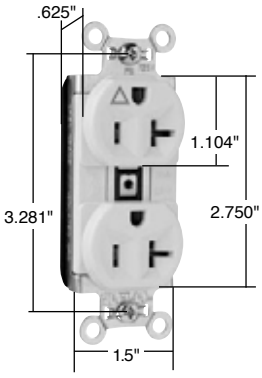

PTIG5362LA

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Crimped and welded contacts.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Isolated ground version features a plastic barrier that isolates grounding terminal from mounting strap and metal boxes.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT5262I	15	125	Ivory	5-15R	•	•
PT5262W	15	125	White	5-15R	•	•
PT5262	15	125	Brown	5-15R	•	•
PT5262GRY	15	125	Gray	5-15R	•	•
PT5262BK	15	125	Black	5-15R	•	•
PT5262RED	15	125	Red	5-15R	•	•
PT5262LA	15	125	Light Almond	5-15R	•	•
PT5262BL	15	125	Blue	5-15R	•	•
PT5362I	20	125	Ivory	5-20R	•	•
PT5362W	20	125	White	5-20R	•	•
PT5362	20	125	Brown	5-20R	•	•
PT5362GRY	20	125	Gray	5-20R	•	•
PT5362BK	20	125	Black	5-20R	•	•
PT5362RED	20	125	Red	5-20R	•	•
PT5362LA	20	125	Light Almond	5-20R	•	•
PT5362BL	20	125	Blue	5-20R	•	•

Catalog Number: Spec Grade	Catalog Number: Hospital Grade	Rating A.	Rating V.	NEMA Config. No.	Color	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Isolated Ground Duplex Receptacles							
PTIG5262I	**PTIG8200I**	15	125	5-15R	Ivory	•	•
PTIG5262W		15	125	5-15R	White	•	•
PTIG5262	**PTIG8200**	15	125	5-15R	Orange	•	•
PTIG5262GRY		15	125	5-15R	Gray	•	•
PTIG5262RED	**PTIG8200RED**	15	125	5-15R	Red	•	•
PTIG5262LA		15	125	5-15R	Light Almond	•	•
PTIG5362I	**PTIG8300I**	20	125	5-20R	Ivory	•	•
PTIG5362W		20	125	5-20R	White	•	•
PTIG5362	**PTIG8300**	20	125	5-20R	Orange	•	•
PTIG5362GRY		20	125	5-20R	Gray	•	•
PTIG5362RED	**PTIG8300RED**	20	125	5-20R	Red	•	•
PTIG5362LA	**PTIG8300LA** NEW	20	125	5-20R	Light Almond	•	•

For PlugTail Connectors, see Page B-3.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
PlugTail™ Tamper-Resistant Specification & Hospital Grade Receptacles
15 & 20A, 125V

legrand®
Pass & Seymour


Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

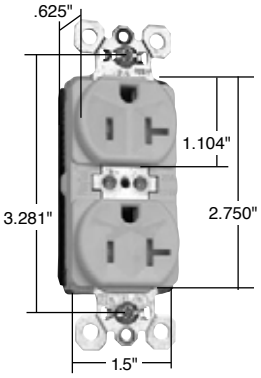

PTTR5362W



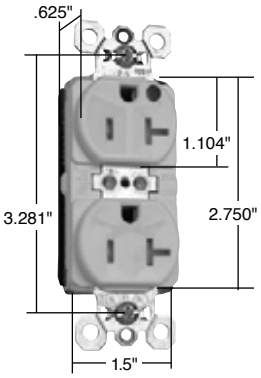


PTTR8300W

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance c UL us UL498	FSUL WC596
NEW Duplex Receptacles						
PTTR5262I	15	125	Ivory	5-15R	•	•
PTTR5262W	15	125	White	5-15R	•	•
PTTR5262	15	125	Brown	5-15R	•	•
PTTR5262BK	15	125	Black	5-15R	•	•
PTTR5262LA	15	125	Light Almond	5-15R	•	•
PTTR5362I	20	125	Ivory	5-20R	•	•
PTTR5362W	20	125	White	5-20R	•	•
PTTR5362	20	125	Brown	5-20R	•	•
PTTR5362BK	20	125	Black	5-20R	•	•
PTTR5362LA	20	125	Light Almond	5-20R	•	•

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance c UL us UL498	FSUL WC596
NEW Hospital Grade Duplex Receptacles						
PTTR8200I	15	125	Ivory	5-15R	•	•
PTTR8200W	15	125	White	5-15R	•	•
PTTR8200	15	125	Brown	5-15R	•	•
PTTR8200GRY	15	125	Gray	5-15R	•	•
PTTR8200BK	15	125	Black	5-15R	•	•
PTTR8200RED	15	125	Red	5-15R	•	•
PTTR8200LA	15	125	Light Almond	5-15R	•	•
PTTR8300I	20	125	Ivory	5-20R	•	•
PTTR8300W	20	125	White	5-20R	•	•
PTTR8300	20	125	Brown	5-20R	•	•
PTTR8300GRY	20	125	Gray	5-20R	•	•
PTTR8300BK	20	125	Black	5-20R	•	•
PTTR8300RED	20	125	Red	5-20R	•	•
PTTR8300LA	20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Specification Grade Receptacles
Split Circuit
15 & 20A, 125V

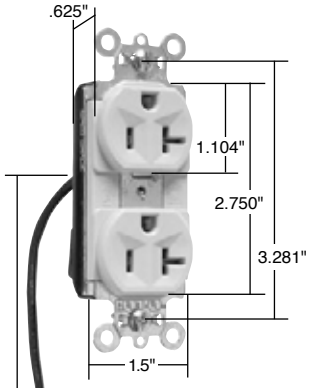

PT5362SCI



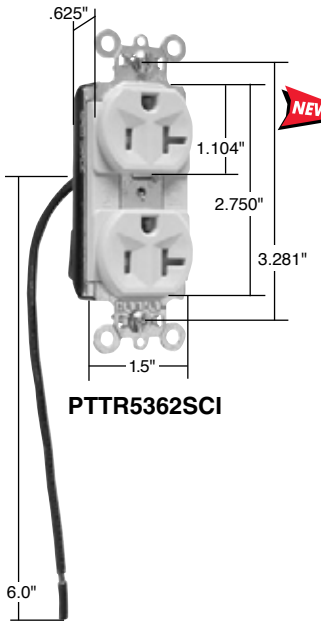

PTTR5362SCI

Features


- Pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
NEW Split Circuit Duplex Receptacles with 6" Lead						
PT5262SCI	15	125	Ivory	5-15R	•	•
PT5262SCW	15	125	White	5-15R	•	•
PT5262SC	15	125	Brown	5-15R	•	•
PT5262SCGRY	15	125	Gray	5-15R	•	•
PT5262SCBK	15	125	Black	5-15R	•	•
PT5262SCRED	15	125	Red	5-15R	•	•
PT5262SCLA	15	125	Light Almond	5-15R	•	•
PT5262SCBL	15	125	Blue	5-15R	•	•
PT5362SCI	20	125	Ivory	5-20R	•	•
PT5362SCW	20	125	White	5-20R	•	•
PT5362SC	20	125	Brown	5-20R	•	•
PT5362SCGRY	20	125	Gray	5-20R	•	•
PT5362SCBK	20	125	Black	5-20R	•	•
PT5362SCRED	20	125	Red	5-20R	•	•
PT5362SCLA	20	125	Light Almond	5-20R	•	•
PT5362SCBL	20	125	Blue	5-20R	•	•

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
NEW Tamper-Resistant Split Circuit Duplex Receptacles with 6" Lead						
PTTR5262SCI	15	125	Ivory	5-15R	•	•
PTTR5262SCW	15	125	White	5-15R	•	•
PTTR5262SC	15	125	Brown	5-15R	•	•
PTTR5262SCBK	15	125	Black	5-15R	•	•
PTTR5262SCLA	15	125	Light Almond	5-15R	•	•
PTTR5362SCI	20	125	Ivory	5-20R	•	•
PTTR5362SCW	20	125	White	5-20R	•	•
PTTR5362SC	20	125	Brown	5-20R	•	•
PTTR5362SCBK	20	125	Black	5-20R	•	•
PTTR5362SCLA	20	125	Light Almond	5-20R	•	•

For Bulk Packaging Solutions consult factory.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
PlugTail™ Power
Pre-Fabricated Wiring Systems


legrand®
Pass & Seymour











Constructing a condominium complex, office building or hotel and the wiring project is substantial or repetitive? Look to PlugTail Power Products from Legrand/Pass & Seymour. With PlugTail Power, much of the electrical assembly is completed in advance, dramatically cutting project completion times.

Rough-in is fast and easy. PlugTail Power floor brackets slide under the sill plate so no vertical measuring is necessary. Wall brackets that attach to the stud are also available. Everything is pre-wired for fast rough in – P&S PlugTail Connector is pre-wired to the ground screw.

And all PlugTail Power Products are pre-packaged and shipped to the requirements of the contractor for fast job starts.

Each PlugTail Power assembly includes:
- Floor or wall bracket with one or two gang openings
- Pre-installed boxes
- Pre-installed rings available in 5/8" or 3/4" rise
- Far side support arms
- PlugTail devices pre-wired to ground screw

PlugTail Power can benefit you in many ways:
- PlugTail Power assemblies are packaged per contractor
- Simple installation – no vertical measuring necessary for mounting boxes
- Pre-mounted and grounded boxes cut install times
- Available in 2-1/2" and 3-1/2" depth, depending on wall thickness
- Pre-wired PlugTail Connector allows you to make device choices at finish

Floor Bracket Wired Assemblies – One and Two Gang

The P&S Floor Bracket Assembly consists of a floor bracket, 4-inch ring, back side support arm, 4-11/16 x 2-1/8 inch metal boxes, and PlugTail Right Angle Connectors with push-in connectors. The PlugTail Connectors are sealed in plastic to keep them finish-ready. The boxes are mounted independent of the rings to allow full box access when wiring. Multiple wire openings in the push-in wire connectors allow connection of in-line, end-of-line, or multi-wire branch circuits. A large selection of PlugTail Receptacles and GFCIs is available to complete the installation.

Installation: The Floor Bracket is installed by kicking the lower flange under the wall base. Two holes are provided for attachment screws, if required.

Wall Bracket Wired Assemblies – One and Two Gang

The P&S Wall Bracket Wire Assembly consists of a 9-1/2 x 5 inch wall bracket, 4-inch mud rings, back side support arm, 4-11/16 x 2-1/8 inch metal boxes, and PlugTail Right Angle Connectors with push-in wire connectors. The PlugTail Connectors are sealed in plastic to keep them finish-ready. The boxes are mounted independent of the rings to allow full box access when wiring. Multiple wire openings in the push-in wire connectors allow connection of in-line, end-of-line, or multi-wire branch circuits.

Installation: The Wall Bracket Assembly is quickly installed with screws using the holes provided in the bracket.

A large selection of PlugTail Receptacles and GFCIs is available to complete the installation. For more information, see Section B and Section C.

legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Power Pre-Fabricated Wiring Systems & Metal-Box Kits



PSF1185825



PSW15825

Features

- Four-inch mud ring.
- Back side support arm.
- 18-inch box mounting height.
- 4-11/16" x 2-1/8" metal boxes.
- Push-in push wire connectors.
- PlugTail Right Angle Connectors with 12 AWG copper pigtails.
- Floor brackets are 16-gauge galvanized steel.
- Wall brackets are 18-gauge galvanized steel.

Catalog Number		
Single Gang Single PlugTail™	Double Gang Double PlugTail™	Description
Floor Bracket Wired Assemblies with Stranded Copper Pigtails		
PSF1185825	PSF2185825	5/8" ring rise, 2-1/2" wall depth
PSF1185835	PSF2185835	5/8" ring rise, 3-1/2" wall depth
PSF1187525	PSF2187525	3/4" ring rise, 2-1/2" wall depth
PSF1187535	PSF2187535	3/4" ring rise, 3-1/2" wall depth
Floor Bracket Wired Assemblies with Solid Copper Pigtails		
PSFS1185825	PSFS2185825	5/8" ring rise, 2-1/2" wall depth
PSFS1185835	PSFS2185835	5/8" ring rise, 3-1/2" wall depth
PSFS1187525	PSFS2187525	3/4" ring rise, 2-1/2" wall depth
PSFS1187535	PSFS2187535	3/4" ring rise, 3-1/2" wall depth
Wall Bracket Wired Assemblies with Stranded Copper Pigtails		
PSW15825	PSW25825	5/8" ring rise, 2-1/2" wall depth
PSW15835	PSW25835	5/8" ring rise, 3-1/2" wall depth
PSW17525	PSW27525	3/4" ring rise, 2-1/2" wall depth
PSW17535	PSW27535	3/4" ring rise, 3-1/2" wall depth
Wall Bracket Wired Assemblies with Solid Copper Pigtails		
PSWS15825	PSWS25825	5/8" ring rise, 2-1/2" wall depth
PSWS15835	PSWS25835	5/8" ring rise, 3-1/2" wall depth
PSWS17525	PSWS27525	3/4" ring rise, 2-1/2" wall depth
PSWS17535	PSWS27535	3/4" ring rise, 3-1/2" wall depth

PlugTail Receptacles and GFCIs sold separately.



MBD4S1PTSTR



MBD4S1SPTSTR

Features

- Ground wire pre-mounted to the box.
- Mud ring factory installed.
- 4" square x 1-1/2" or 2-1/8" metal boxes.
- Unit only ships in quantities of 24.
- PlugTail Right Angle Connectors with 12 AWG copper pigtails.
- All Double Gang Kits contain two right angle PlugTail connectors.

Catalog Number		
Single Gang	Double Gang	Description
Metal-Box Kits with Stranded Copper Pigtails		
MB4S1PTSTR	MB4S2PTSTR	4 Sq. 1-1/2" Metal Box, 5/8 MR, PTRA6STR
MBD4S1PTSTR	MBD4S2PTSTR	4 Sq. 2-1/8" Metal Box, 5/8 MR, PTRA6STR
MB4S1SPTSTR	MB4S2SPTSTR	4 Sq. 1-1/2" Metal Box, 3/4 MR, PTRA6STR
MBD4S1SPTSTR	MBD4S2SPTSTR	4 Sq. 2-1/8" Metal Box, 3/4 MR, PTRA6STR
Metal-Box Kits with Solid Copper Pigtails		
MB4S1PTSOL	MB4S2PTSOL	4 Sq. 1-1/2" Metal Box, 5/8 MR, PTRA6SOL
MBD4S1PTSOL	MBD4S2PTSOL	4 Sq. 2-1/8" Metal Box, 5/8 MR, PTRA6SOL
MB4S1SPTSOL	MB4S2SPTSOL	4 Sq. 1-1/2" Metal Box, 3/4 MR, PTRA6SOL
MBD4S1SPTSOL	MBD4S2SPTSOL	4 Sq. 2-1/8" Metal Box, 3/4 MR, PTRA6SOL



MRC2 & MRC1

Features

- Protects electrical box opening from dust, debris and other contaminants.
- Removes easily upon installation of the device.

Catalog Number	Description	Size
P&S Mud Ring Covers NEW		
MRC1	Mud Ring Cover	1-Gang
MRC2	Mud Ring Cover	2-Gang

Straight Blade Receptacles

Hard Use Specification Grade Receptacles


15A & 20A, 125 & 125/250V

legrand®
Pass & Seymour


Features

- Corrosion-resistant, plated and tabbed steel strap is locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
5262I	15	125	Ivory	5-15R	•	•	•
5262W	15	125	White	5-15R	•	•	•
5262	15	125	Brown	5-15R	•	•	•
5262GRY	15	125	Gray	5-15R	•	•	•
5262BK	15	125	Black	5-15R	•	•	•
5262RED	15	125	Red	5-15R	•	•	•
5262LA	15	125	Light Almond	5-15R	•	•	•
5262BL	15	125	Blue	5-15R	•	•	•
5362I	20	125	Ivory	5-20R	•	•	•
5362W	20	125	White	5-20R	•	•	•
5362	20	125	Brown	5-20R	•	•	•
5362GRY	20	125	Gray	5-20R	•	•	•
5362BK	20	125	Black	5-20R	•	•	•
5362RED	20	125	Red	5-20R	•	•	•
5362LA	20	125	Light Almond	5-20R	•	•	•
5362BL	20	125	Blue	5-20R	•	•	•
NEW **5362GN**	20	125	Green	5-20R	•	•	•
Combination Duplex Receptacles Side Wire							
5290I	15	125/250	Ivory	5/6-15R	•	•	•
5290	15	125/250	Brown	5/6-15R	•	•	•
5890I	20	125/250	Ivory	5/6-20R	•	•	
5890W	20	125/250	White	5/6-20R	•	•	
5890	20	125/250	Brown	5/6-20R	•	•	

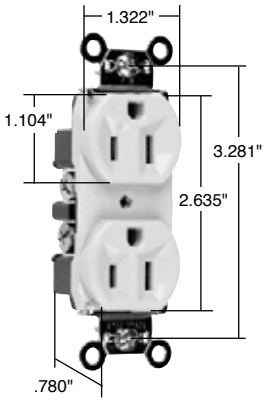


5262I

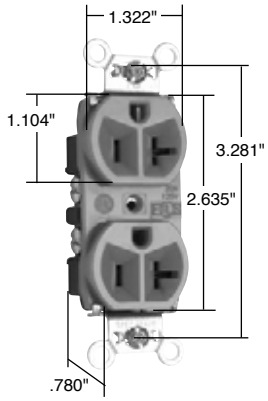

5362GN

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-15R** **NEMA 6-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
Construction Specification Grade Receptacles

15 & 20A, 125V

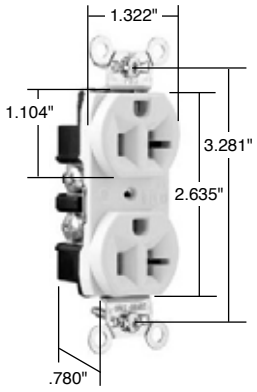

CRB5362I

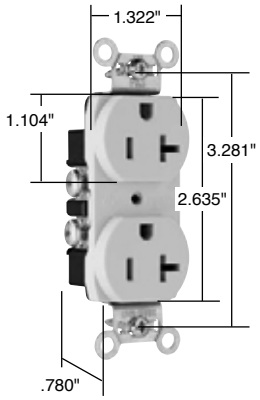


CRB5362SLA

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.
- Smooth face version features an impact-resistant nylon face for ease of cleaning and less dirt build-up.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
CRB5262I	15	125	Ivory	5-15R	•	•	•
CRB5262W	15	125	White	5-15R	•	•	•
CRB5262	15	125	Brown	5-15R	•	•	•
CRB5262GRY	15	125	Gray	5-15R	•	•	•
CRB5262BK	15	125	Black	5-15R	•	•	•
CRB5262RED	15	125	Red	5-15R	•	•	•
CRB5262LA	15	125	Light Almond	5-15R	•	•	•
CRB5362I	20	125	Ivory	5-20R	•	•	•
CRB5362W	20	125	White	5-20R	•	•	•
CRB5362	20	125	Brown	5-20R	•	•	•
CRB5362GRY	20	125	Gray	5-20R	•	•	•
CRB5362BK	20	125	Black	5-20R	•	•	•
CRB5362RED	20	125	Red	5-20R	•	•	•
CRB5362LA	20	125	Light Almond	5-20R	•	•	•
Duplex Receptacles – Smooth Face Back & Side Wire							
CRB5262SI	15	125	Ivory	5-15R	•	•	•
CRB5262SW	15	125	White	5-15R	•	•	•
CRB5262S	15	125	Brown	5-15R	•	•	•
CRB5262SGRY	15	125	Gray	5-15R	•	•	•
CRB5262SRED	15	125	Red	5-15R	•	•	•
CRB5262SLA	15	125	Light Almond	5-15R	•	•	•
CRB5362SI	20	125	Ivory	5-20R	•	•	•
CRB5362SW	20	125	White	5-20R	•	•	•
CRB5362S	20	125	Brown	5-20R	•	•	•
CRB5362SGRY	20	125	Gray	5-20R	•	•	•
CRB5362SRED	20	125	Red	5-20R	•	•	•
CRB5362SLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Commercial Specification Grade Receptacles

15A, 125V; 20A, 125 & 250V

legrand®
Pass & Seymour

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Accepts #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

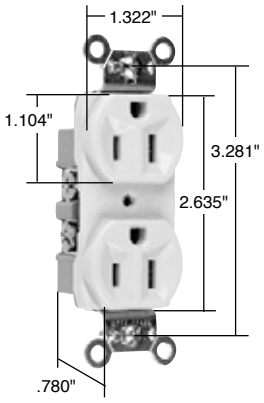

CR15I

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42
Duplex Receptacles Side Wire						
CR15I	15	125	Ivory	5-15R	•	•
CR15W	15	125	White	5-15R	•	•
CR15	15	125	Brown	5-15R	•	•
CR15GRY	15	125	Gray	5-15R	•	•
CR15LA	15	125	Light Almond	5-15R	•	•
CR20I	20	125	Ivory	5-20R	•	•
CR20W	20	125	White	5-20R	•	•
CR20	20	125	Brown	5-20R	•	•
CR20GRY	20	125	Gray	5-20R	•	•
CR20BK	20	125	Black	5-20R	•	•
CR20RED	20	125	Red	5-20R	•	•
CR20LA	20	125	Light Almond	5-20R	•	•
Duplex Receptacles Side Wire						
5850I	20	250	Ivory	6-20R	•	•
5850W	20	250	White	6-20R	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R** **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Hospital Grade Single Receptacles
15 & 20A, 125V; 20A, 250V



8201I



8284I

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Single Receptacles Back & Side Wire							
8201I	15	125	Ivory	5-15R	•	•	•
8201W	15	125	White	5-15R	•	•	•
8201	15	125	Brown	5-15R	•	•	•
8201GRY	15	125	Gray	5-15R	•	•	•
8201BK	15	125	Black	5-15R	•	•	•
8201RED	15	125	Red	5-15R	•	•	•
8201LA	15	125	Light Almond	5-15R	•	•	•
8301I	20	125	Ivory	5-20R	•	•	•
8301W	20	125	White	5-20R	•	•	•
8301	20	125	Brown	5-20R	•	•	•
8301GRY	20	125	Gray	5-20R	•	•	•
8301RED	20	125	Red	5-20R	•	•	•
8801I	20	250	Ivory	6-20R	•	•	•
8801W	20	250	White	6-20R	•	•	•
8801	20	250	Brown	6-20R	•	•	•
8801GRY	20	250	Gray	6-20R	•	•	•
8801RED	20	250	Red	6-20R	•	•	•
Short Strap Single Receptacles 1.937" Screw Spacing, Back & Side Wire							
8284I	15	125	Ivory	5-15R	•	•	•
8284	15	125	Brown	5-15R	•	•	•
8384I	20	125	Ivory	5-20R	•	•	
8384	20	125	Brown	5-20R	•	•	

For Hospital Use Power Interrupting Device consult Turnlok® Section H.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Heavy-Duty Specification Grade Single Receptacles

15 & 20A, 125 & 250V

legrand®
Pass & Seymour

Features


- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- One-piece brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

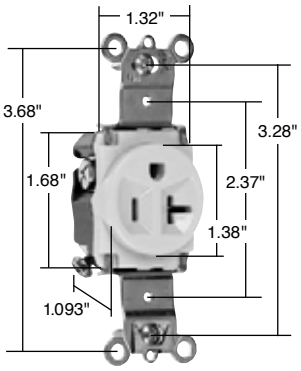

5361I

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Single Receptacles Back & Side Wire							
5261I	15	125	Ivory	5-15R	•	•	•
5261W	15	125	White	5-15R	•	•	•
5261	15	125	Brown	5-15R	•	•	•
5261GRY	15	125	Gray	5-15R	•	•	•
5261BK	15	125	Black	5-15R	•	•	•
5261RED	15	125	Red	5-15R	•	•	•
5261LA	15	125	Light Almond	5-15R	•	•	•
5361I	20	125	Ivory	5-20R	•	•	•
5361W	20	125	White	5-20R	•	•	•
5361	20	125	Brown	5-20R	•	•	•
5361GRY	20	125	Gray	5-20R	•	•	•
5361BK	20	125	Black	5-20R	•	•	•
5361RED	20	125	Red	5-20R	•	•	•
5361LA	20	125	Light Almond	5-20R	•	•	•
5671I	15	250	Ivory	6-15R	•	•	•
5671	15	250	Brown	6-15R	•	•	•
5671LA	15	250	Light Almond	6-15R	•	•	•
5871I	20	250	Ivory	6-20R	•	•	•
5871W	20	250	White	6-20R	•	•	•
5871	20	250	Brown	6-20R	•	•	•
5871GRY	20	250	Gray	6-20R	•	•	•
5871BK	20	250	Black	6-20R	•	•	•
5871RED	20	250	Red	6-20R	•	•	•
5871LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R** **NEMA 6-15R** **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
Specification Grade Single Receptacles
15 & 20A, 125 & 250V



5251I

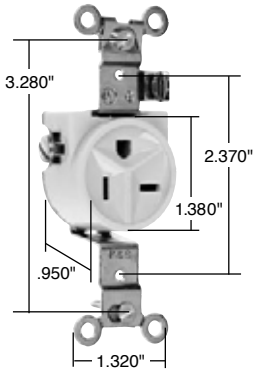


5371I



5258I

2 Pole, 3 Wire


NEMA 5-15R

NEMA 5-20R


NEMA 6-15R


NEMA 6-20R

Features

- Auto-ground clip assures positive ground.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- Heavy-duty, corrosion-resistant zinc-plated steel strap for added strength.
- Backed-out tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for increased wiring flexibility.
- One-piece brass triple-wipe power contacts for lasting retention.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 No. 42
Single Receptacles Back & Side Wire						
5251I	15	125	Ivory	5-15R	•	•
5251W	15	125	White	5-15R	•	•
5251	15	125	Brown	5-15R	•	•
5251LA	15	125	Light Almond	5-15R	•	•
5351I	20	125	Ivory	5-20R	•	•
5351W	20	125	White	5-20R	•	•
5351	20	125	Brown	5-20R	•	•
5351LA	20	125	Light Almond	5-20R	•	•
5651I	15	250	Ivory	6-15R	•	•
5651W	15	250	White	6-15R	•	•
5651	15	250	Brown	6-15R	•	•
5651LA	15	250	Light Almond	6-15R	•	•
5851I	20	250	Ivory	6-20R	•	•
5851W	20	250	White	6-20R	•	•
5851	20	250	Brown	6-20R	•	•
5851LA	20	250	Light Almond	6-20R	•	•
NEW **Short Strap Single Receptacles** Screw Spacing 2.370"						
5251SSBKI	15	125	Ivory	5-15R	•	•
5251SSBKW	15	125	White	5-15R	•	•
5251SSBKBK	15	125	Black	5-15R	•	•
5251SSBKLA	15	125	Light Almond	5-15R	•	•
Single Receptacles Side Wire Right Angle Slots						
5371I	20	125	Ivory	Non-NEMA	•	•
5371W	20	125	White	Non-NEMA	•	•
5371	20	125	Brown	Non-NEMA	•	•
Short Strap Single Receptacles Screw Spacing 1.750"						
5258I	15	125	Ivory	5-15R	•	•
5258W	15	125	White	5-15R	•	•
5258	15	125	Brown	5-15R	•	•
5358I	20	125	Ivory	5-20R	•	•
5358W	20	125	White	5-20R	•	•
5358	20	125	Brown	5-20R	•	•
5358BK	20	125	Black	5-20R	•	•
5658I	15	250	Ivory	6-15R	•	•
5658	15	250	Brown	6-15R	•	•
5858I	20	250	Ivory	6-20R	•	•
5858W	20	250	White	6-20R	•	•
5858	20	250	Brown	6-20R	•	•
Supplied with mounting screws.						

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Straight Blade Receptacles
Tamper-Resistant Specification Grade Receptacles

15 & 20A, 125V

legrand®
Pass & Seymour

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

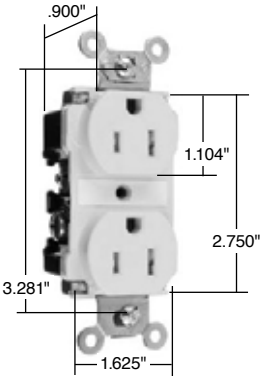


TR62I

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
TR62I	15	125	Ivory	5-15R	•	•	•
TR62W	15	125	White	5-15R	•	•	•
TR62	15	125	Brown	5-15R	•	•	•
TR62GRY	15	125	Gray	5-15R	•	•	•
TR62BK	15	125	Black	5-15R	•	•	•
TR62RED	15	125	Red	5-15R	•	•	•
TR62LA	15	125	Light Almond	5-15R	•	•	•
TR62BL	15	125	Blue	5-15R	•	•	•
TR63I	20	125	Ivory	5-20R	•	•	•
TR63W	20	125	White	5-20R	•	•	•
TR63	20	125	Brown	5-20R	•	•	•
TR63GRY	20	125	Gray	5-20R	•	•	•
TR63BK	20	125	Black	5-20R	•	•	•
TR63RED	20	125	Red	5-20R	•	•	•
TR63LA	20	125	Light Almond	5-20R	•	•	•


For PlugTail™ Tamper-Resistant Receptacles, see Pages B-3.

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**


The Mechanical Shutter System



Thermoplastic shutter in closed position covers access to contacts.



Insertion of object in any one side does not open shutter.



Two-bladed plug or grounding plug compresses spring and simultaneously opens both shutters.

This tamper-resistant receptacle, like all others, can be defeated by actions such as inserting foreign objects in both sides of the slots simultaneously.

NEC® section 517.18(C) Pediatric Locations.


Receptacles located within the rooms, bathrooms, playrooms, activity rooms, and patient care areas of pediatric wards shall be listed under tamper resistant or employ a listed tamper resistant cover.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Tamper-Resistant Hospital Grade Receptacles
15 & 20A, 125V

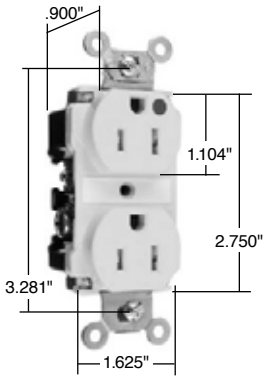


TR62HI

Features
- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Hospital Grade Duplex Receptacles Back & Side Wire							
TR62HI	15	125	Ivory	5-15R	•	•	•
TR62HW	15	125	White	5-15R	•	•	•
TR62H	15	125	Brown	5-15R	•	•	•
TR62HGRY	15	125	Gray	5-15R	•	•	•
TR62HRED	15	125	Red	5-15R	•	•	•
TR62HLA	15	125	Light Almond	5-15R	•	•	•
TR63HI	20	125	Ivory	5-20R	•	•	•
TR63HW	20	125	White	5-20R	•	•	•
TR63H	20	125	Brown	5-20R	•	•	•
TR63HGRY	20	125	Gray	5-20R	•	•	•
TR63HRED	20	125	Red	5-20R	•	•	•
TR63HLA	20	125	Light Almond	5-20R	•	•	•
TR63HBL	20	125	Blue	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For PlugTail™ Tamper-Resistant Receptacles, see Pages B-4 and B-5.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Tamper-Resistant Hard Use & Commercial Grade Receptacles

15 & 20A, 125V

legrand®
Pass & Seymour

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Corrosion-resistant plated steel strap is locked in to face and back body to resist pulling away from the face/body assembly.
- .032 inch thick brass triple-wipe power contacts.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.

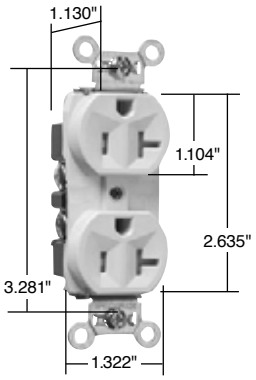


TR5362LA

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Tamper-Resistant Duplex Receptacles Back & Side Wire							
TR5262I	15	125	Ivory	5-15R	•	•	•
TR5262W	15	125	White	5-15R	•	•	•
TR5262	15	125	Brown	5-15R	•	•	•
TR5262GRY	15	125	Gray	5-15R	•	•	•
TR5262BK	15	125	Black	5-15R	•	•	•
TR5262RED	15	125	Red	5-15R	•	•	•
TR5262LA	15	125	Light Almond	5-15R	•	•	•
TR5362I	20	125	Ivory	5-20R	•	•	•
TR5362W	20	125	White	5-20R	•	•	•
TR5362	20	125	Brown	5-20R	•	•	•
TR5362GRY	20	125	Gray	5-20R	•	•	•
TR5362BK	20	125	Black	5-20R	•	•	•
TR5362RED	20	125	Red	5-20R	•	•	•
TR5362LA	20	125	Light Almond	5-20R	•	•	•

Features


- Dual mechanical shutter system to help prevent insertions of foreign objects.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- .032 inch thick brass triple-wipe power contacts for lasting retention.
- Corrosion-resistant plated steel strap is locked in to the face and back body to resist pulling away from the face/body assembly.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive steel terminal screws. Side wire capability.

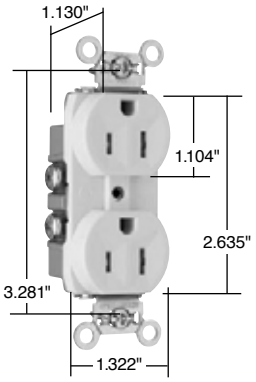

TR15LA

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	cULus	C22.2 No. 42
Tamper-Resistant Duplex Receptacles Side Wire							
TR15I	15	125	Ivory	5-15R	•	•	•
TR15W	15	125	White	5-15R	•	•	•
TR15	15	125	Brown	5-15R	•	•	•
TR15GRY	15	125	Gray	5-15R	•	•	•
TR15LA	15	125	Light Almond	5-15R	•	•	•
TR20I	20	125	Ivory	5-20R	•	•	•
TR20W	20	125	White	5-20R	•	•	•
TR20	20	125	Brown	5-20R	•	•	•
TR20GRY	20	125	Gray	5-20R	•	•	•
TR20BK	20	125	Black	5-20R	•	•	•
TR20LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles


Tamper-Resistant Construction Grade Receptacles & Shim-Lock

15 & 20A, 125V

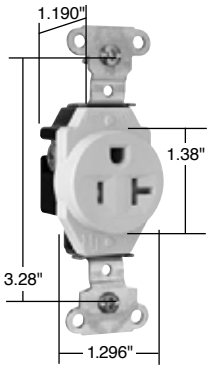

TR5351LA

2 Pole, 3 Wire




NEMA 5-15R NEMA 5-20R


Features

- Dual mechanical shutter system to help prevent insertions of foreign objects.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- Heavy-duty, corrosion-resistant zinc-plated steel strap for added strength.
- Backed-out tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for increased wiring flexibility.
- One-piece brass triple-wipe power contacts for lasting retention.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	FSUL WC596	C22.2 No. 42
Tamper-Resistant Single Receptacles Back & Side Wire							
TR5251I	15	125	Ivory	5-15R	•	•	•
TR5251W	15	125	White	5-15R	•	•	•
TR5251	15	125	Brown	5-15R	•	•	•
TR5251LA	15	125	Light Almond	5-15R	•	•	•
TR5351I	20	125	Ivory	5-20R	•	•	•
TR5351W	20	125	White	5-20R	•	•	•
TR5351	20	125	Brown	5-20R	•	•	•
TR5351LA	20	125	Light Almond	5-20R	•	•	•



Shim-Lock



Features

- One Shim-Lock provides a device adjustment depth range between 1/8" and 3/4".
- An inexpensive and quick fix for floating installations.
- Provides a perfect flush mount every time, regardless of the wallboard, tile or panel condition.
- Made of steel and finished with clear zinc chromate plating.

Catalog Number	Dimensions	Qty. Per Package
Shim-Lock		
SHL20	Length: .310", Screw Opening: #6	20
SHL100	Length: .310", Screw Opening: #6	100

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Weather-Resistant Heavy-Duty & Commercial Grade Receptacles

15 & 20A, 125 & 250V

legrand®
Pass & Seymour


Features

- Auto-ground clip assures positive ground.
- WR marking on face as required by UL Standard.
- Zinc-plated steel mounting screws for greater ease of installation and removal in wet or damp locations.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Heavy-duty, brass strap for added strength and ground conductivity.
- UV-resistant nylon face for longer life under adverse environmental conditions.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- .032 inch thick brass triple-wipe power contacts for lasting retention.

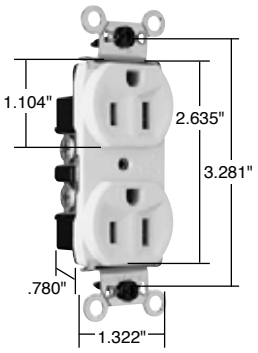

WR5262W

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Weather-Resistant Duplex Receptacles Back & Side Wire							
WR5262I	15	125	Ivory	5-15R	•	•	•
WR5262W	15	125	White	5-15R	•	•	•
WR5262GRY	15	125	Gray	5-15R	•	•	•
WR5362I	20	125	Ivory	5-20R	•	•	•
WR5362W	20	125	White	5-20R	•	•	•
WR5362GRY	20	125	Gray	5-20R	•	•	•
WR5662I	15	250	Ivory	6-15R	•	•	•
WR5662W	15	250	White	6-15R	•	•	•
WR5662GRY	15	250	Gray	6-15R	•	•	•
WR5862I	20	250	Ivory	6-20R	•	•	•
WR5862W	20	250	White	6-20R	•	•	•
WR5862GRY	20	250	Gray	6-20R	•	•	•

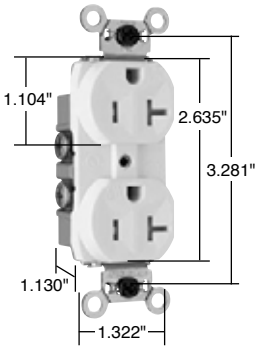


WR20TRW

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42
Weather-Resistant Duplex Receptacles Side Wire						
WR20TRI	20	125	Ivory	5-20R	•	•
WR20TRW	20	125	White	5-20R	•	•
WR20TR	20	125	Brown	5-20R	•	•
WR20TRGRY	20	125	Gray	5-20R	•	•
WR20TRLA	20	125	Light Almond	5-20R	•	•

WR20TR models are Tamper-Resistant.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.


Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
Isolated Ground Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V & 250V

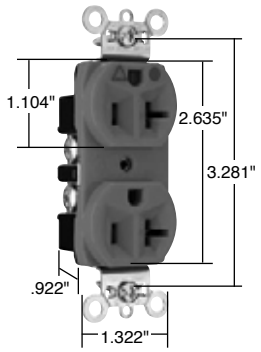

IG8300



IG26262GRY




IG5261

Catalog Number		Rating		NEMA Config.		3rd Party Compliance		
Spec Grade	Hospital Grade	A.	V.	No.	Color	UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire								
IG5262I	IG8200I	15	125	5-15R	Ivory	•	•	•
IG5262W		15	125	5-15R	White	•	•	•
IG5262	IG8200	15	125	5-15R	Orange	•	•	•
IG5262GRY		15	125	5-15R	Gray	•	•	•
IG5262RED	IG8200RED	15	125	5-15R	Red	•	•	•
IG5262LA		15	125	5-15R	Light Almond	•	•	•
IG5362I	IG8300I	20	125	5-20R	Ivory	•	•	•
IG5362W	IG8300W	20	125	5-20R	White	•	•	•
IG5362	IG8300	20	125	5-20R	Orange	•	•	•
IG5362GRY		20	125	5-20R	Gray	•	•	•
IG5362BK		20	125	5-20R	Black	•	•	•
IG5362RED	IG8300RED	20	125	5-20R	Red	•		•
IG5362LA	IG8300LA	20	125	5-20R	Light Almond	•	•	•
IG5362BL		20	125	5-20R	Blue	•	•	•
IG5662		15	250	6-15R	Orange	•	•	•
IG5862	IG8800	20	250	6-20R	Orange	•	•	•
	IG8800LA	20	250	6-20R	Light Almond	•	•	•
Decorator Duplex Receptacles Back & Side Wire								
IG26262I		15	125	5-15R	Ivory	•	•	•
IG26262W	IG26262HGW	15	125	5-15R	White	•	•	•
IG26262	IG26262HG	15	125	5-15R	Orange	•	•	•
IG26262GRY		15	125	5-15R	Gray	•	•	•
IG26262BK		15	125	5-15R	Black	•	•	•
IG26262RED	IG26262HGRED	15	125	5-15R	Red	•	•	•
IG26262LA		15	125	5-15R	Light Almond	•	•	•
IG26362I		20	125	5-20R	Ivory	•	•	•
IG26362W	IG26362HGW	20	125	5-20R	White	•	•	•
IG26362	IG26362HG	20	125	5-20R	Orange	•	•	•
IG26362GRY		20	125	5-20R	Gray	•	•	•
IG26362BK	IG26362HGBK	20	125	5-20R	Black	•	•	•
IG26362RED	IG26362HGRED	20	125	5-20R	Red	•	•	•
IG26362LA		20	125	5-20R	Light Almond	•	•	•
Single Receptacles Back & Side Wire								
IG5261		15	125	5-15R	Orange	•	•	•
IG5361	IG8301	20	125	5-20R	Orange	•	•	•

For Wall Plates for Isolated Ground Systems, consult Wall Plates Section Q.


For Bulk Packaging Solutions consult factory.


NEMA 5-15R

NEMA 6-15R


NEMA 5-20R


NEMA 6-20R

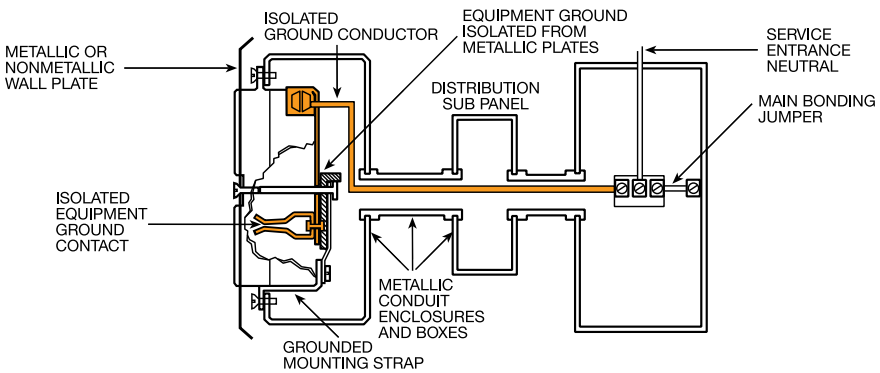

All devices listed on this page conform to NEMA WD-1 and WD-6.


Straight Blade Receptacles

Tamper-Resistant Isolated Ground Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V


legrand®
Pass & Seymour

Catalog Number		Rating		NEMA Config. No.	Color	3rd Party Compliance	
Spec Grade	Hospital Grade	A.	V.			c UL us UL498	FSUL WC596
Tamper-Resistant Duplex Receptacles Back & Side Wire							
TRIG5262I	TRIG8200I	15	125	5-15R	Ivory	•	•
TRIG5262W	TRIG8200W	15	125	5-15R	White	•	•
TRIG5262	TRIG8200	15	125	5-15R	Orange	•	•
TRIG5262BK	TRIG8200BK	15	125	5-15R	Black	•	•
TRIG5262GRY	TRIG8200GRY	15	125	5-15R	Gray	•	•
TRIG5262RED	TRIG8200RED	15	125	5-15R	Red	•	•
TRIG5262LA	TRIG8200LA	15	125	5-15R	Light Almond	•	•
TRIG5362I	TRIG8300I	20	125	5-20R	Ivory	•	•
TRIG5362W	TRIG8300W	20	125	5-20R	White	•	•
TRIG5362	TRIG8300	20	125	5-20R	Orange	•	•
TRIG5362BK	TRIG8300BK	20	125	5-20R	Black	•	•
TRIG5362GRY	TRIG8300GRY	20	125	5-20R	Gray	•	•
TRIG5362RED	TRIG8300RED	20	125	5-20R	Red	•	•
TRIG5362LA	TRIG8300LA	20	125	5-20R	Light Almond	•	•
Tamper-Resistant Decorator Receptacles Back & Side Wire							
TRIG26262I	TRIG26262HGI	15	125	5-15R	Ivory	•	•
TRIG26262W	TRIG26262HGW	15	125	5-15R	White	•	•
TRIG26262	TRIG26262HG	15	125	5-15R	Orange	•	•
TRIG26262BK	TRIG26262HGBK	15	125	5-15R	Black	•	•
TRIG26262GRY	TRIG26262HGGRY	15	125	5-15R	Gray	•	•
TRIG26262RED	TRIG26262HGRED	15	125	5-15R	Red	•	•
TRIG26262LA	TRIG26262HGLA	15	125	5-15R	Light Almond	•	•
TRIG26362I	TRIG26362HGI	20	125	5-20R	Ivory	•	•
TRIG26362W	TRIG26362HGW	20	125	5-20R	White	•	•
TRIG26362	TRIG26362HG	20	125	5-20R	Orange	•	•
TRIG26362BK	TRIG26362HGBK	20	125	5-20R	Black	•	•
TRIG26362GRY	TRIG26362HGGRY	20	125	5-20R	Gray	•	•
TRIG26362RED	TRIG26362HGRED	20	125	5-20R	Red	•	•
TRIG26362LA	TRIG26362HGLA	20	125	5-20R	Light Almond	•	•




NEMA 5-15R NEMA 5-20R


For Bulk Packaging Solutions consult factory.

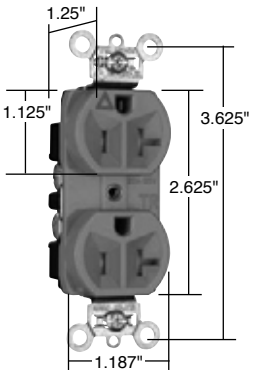

TRIG5362

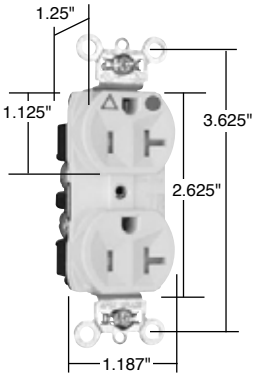

TRIG8300W

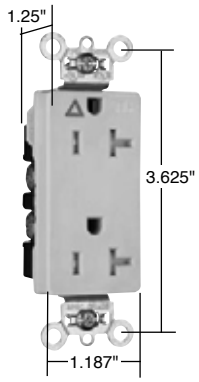


TRIG26362

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Decorator Receptacles
15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

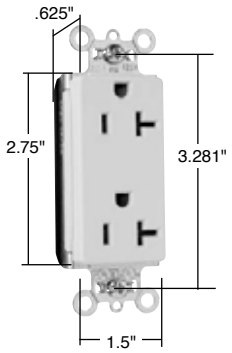


PT26352LA

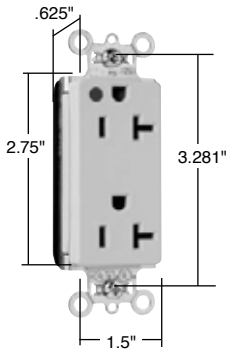

PT26362HGI



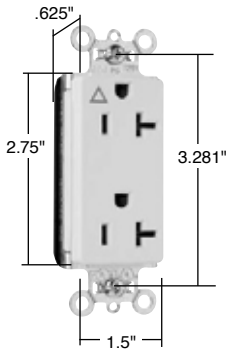


PTIG26362LA

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Isolated ground version features nylon isolator plate for isolating ground from strap and box system.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT26252I	15	125	Ivory	5-15R	•	•
PT26252W	15	125	White	5-15R	•	•
PT26252	15	125	Brown	5-15R	•	•
PT26252GRY	15	125	Gray	5-15R	•	•
PT26252BK	15	125	Black	5-15R	•	•
PT26252RED	15	125	Red	5-15R	•	•
PT26252LA	15	125	Light Almond	5-15R	•	•
PT26352I	20	125	Ivory	5-20R	•	•
PT26352W	20	125	White	5-20R	•	•
PT26352	20	125	Brown	5-20R	•	•
PT26352GRY	20	125	Gray	5-20R	•	•
PT26352BK	20	125	Black	5-20R	•	•
PT26352RED	20	125	Red	5-20R	•	•
PT26352LA	20	125	Light Almond	5-20R	•	•
Hospital Grade Duplex Receptacles						
PT26262HGI	15	125	Ivory	5-15R	•	•
PT26262HGW	15	125	White	5-15R	•	•
PT26262HGGRY	15	125	Gray	5-15R	•	•
PT26262HGRED	15	125	Red	5-15R	•	•
PT26362HGI	20	125	Ivory	5-20R	•	•
PT26362HGW	20	125	White	5-20R	•	•
PT26362HGGRY	20	125	Gray	5-20R	•	•
PT26362HGRED	20	125	Red	5-20R	•	•
PT26362HGLA	20	125	Light Almond	5-20R	•	•
Isolated Ground Duplex Receptacles						
PTIG26262I	15	125	Ivory	5-15R	•	•
PTIG26262W	15	125	White	5-15R	•	•
PTIG26262	15	125	Orange	5-15R	•	•
PTIG26262GRY	15	125	Gray	5-15R	•	•
PTIG26262RED	15	125	Red	5-15R	•	•
PTIG26262LA	15	125	Light Almond	5-15R	•	•
PTIG26362I	20	125	Ivory	5-20R	•	•
PTIG26362W	20	125	White	5-20R	•	•
PTIG26362	20	125	Orange	5-20R	•	•
PTIG26362GRY	20	125	Gray	5-20R	•	•
PTIG26362RED	20	125	Red	5-20R	•	•
PTIG26362LA	20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

For PlugTail Connectors, see Page B-3.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

Heavy-Duty Hospital Grade Decorator Receptacles


15 & 20A, 125V

legrand®
Pass & Seymour


Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Hospital Grade Duplex Receptacles Back & Side Wire							
26262HGI	15	125	Ivory	5-15R	•	•	•
26262HGW	15	125	White	5-15R	•	•	•
26262HGGRY	15	125	Gray	5-15R	•	•	•
26262HGRED	15	125	Red	5-15R	•	•	•
26362HGI	20	125	Ivory	5-20R	•	•	•
26362HGW	20	125	White	5-20R	•	•	•
26362HG	20	125	Brown	5-20R	•	•	•
26362HGGRY	20	125	Gray	5-20R	•	•	•
26362HGRED	20	125	Red	5-20R	•	•	•
26362HGLA	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Isolated Ground Duplex Receptacles Back & Side Wire							
IG26262HGW	15	125	White	5-15R	•		•
IG26262HG	15	125	Orange	5-15R	•		•
IG26262HGRED	15	125	Red	5-15R	•		•
IG26362HGW	20	125	White	5-20R	•		•
IG26362HG	20	125	Orange	5-20R	•		•
IG26362HGBK	20	125	Black	5-20R	•		•
IG26362HGRED	20	125	Red	5-20R	•		•
Hospital Grade Illuminated Duplex Receptacles Back & Side Wire							
26222HGI	15	125	Ivory	5-15R	•		•
26322HGI	20	125	Ivory	5-20R	•		•
26322HGW	20	125	White	5-20R	•		•
26322HGRED	20	125	Red	5-20R	•		•

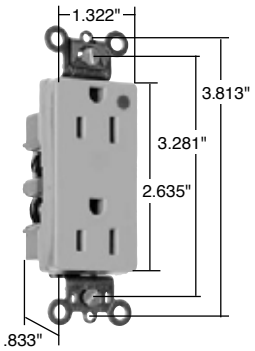


26262HGI



IG26262HG

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
Specification Grade Decorator Receptacles

15 & 20A, 125 & 250V

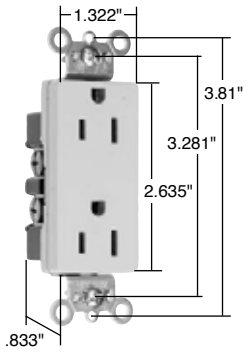

26252I



26852I


Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Specification Grade Duplex Receptacles Back & Side Wire							
26252I	15	125	Ivory	5-15R	•	•	•
26252W	15	125	White	5-15R	•	•	•
26252	15	125	Brown	5-15R	•	•	•
26252GRY	15	125	Gray	5-15R	•	•	•
26252BK	15	125	Black	5-15R	•	•	•
26252RED	15	125	Red	5-15R	•	•	•
26252LA	15	125	Light Almond	5-15R	•	•	•
26352I	20	125	Ivory	5-20R	•	•	•
26352W	20	125	White	5-20R	•	•	•
26352	20	125	Brown	5-20R	•	•	•
26352GRY	20	125	Gray	5-20R	•	•	•
26352BK	20	125	Black	5-20R	•	•	•
26352RED	20	125	Red	5-20R	•	•	•
26352LA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire							
26652I	15	250	Ivory	6-15R	•	•	•
26652W	15	250	White	6-15R	•	•	•
26652	15	250	Brown	6-15R	•	•	•
26652GRY	15	250	Gray	6-15R	•	•	•
26652BK	15	250	Black	6-15R	•	•	•
26652RED	15	250	Red	6-15R	•	•	•
26852I	20	250	Ivory	6-20R	•	•	•
26852W	20	250	White	6-20R	•	•	•
26852	20	250	Brown	6-20R	•	•	•
26852GRY	20	250	Gray	6-20R	•	•	•
26852BK	20	250	Black	6-20R	•	•	•
26852RED	20	250	Red	6-20R	•	•	•
26852LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-15R** **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Heavy-Duty Tamper-Resistant Decorator Receptacles

15 & 20A, 125V


legrand®
Pass & Seymour

Features

- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

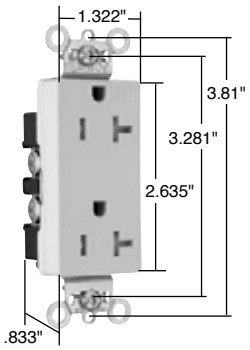


TR26362I



TR26362HGI

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Decorator Duplex Receptacles Back & Side Wire							
TR26262I	15	125	Ivory	5-15R	•	•	•
TR26262W	15	125	White	5-15R	•	•	•
TR26262	15	125	Brown	5-15R	•	•	•
TR26262GRY	15	125	Gray	5-15R	•	•	•
TR26262BK	15	125	Black	5-15R	•	•	•
TR26262RED	15	125	Red	5-15R	•	•	•
TR26262LA	15	125	Light Almond	5-15R	•	•	•
TR26362I	20	125	Ivory	5-20R	•	•	•
TR26362W	20	125	White	5-20R	•	•	•
TR26362	20	125	Brown	5-20R	•	•	•
TR26362GRY	20	125	Gray	5-20R	•	•	•
TR26362BK	20	125	Black	5-20R	•	•	•
TR26362RED	20	125	Red	5-20R	•	•	•
TR26362LA	20	125	Light Almond	5-20R	•	•	•
Tamper-Resistant Hospital Grade Duplex Receptacles Back & Side Wire							
TR26262HGI	15	125	Ivory	5-15R	•	•	•
TR26262HGW	15	125	White	5-15R	•	•	•
TR26262HGGRY	15	125	Gray	5-15R	•	•	•
TR26262HGRED	15	125	Red	5-15R	•	•	•
TR26262HGLA	15	125	Light Almond	5-15R	•	•	•
TR26362HGI	20	125	Ivory	5-20R	•	•	•
TR26362HGW	20	125	White	5-20R	•	•	•
TR26362HGGRY	20	125	Gray	5-20R	•	•	•
TR26362HGBK	20	125	Black	5-20R	•	•	•
TR26362HGRED	20	125	Red	5-20R	•	•	•
TR26362HGLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles

Heavy-Duty Tamper-Resistant Decorator Single Receptacles

15 & 20A, 125V

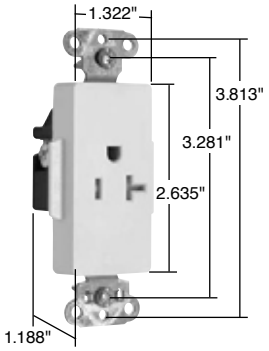

TR26361LA

Features

- Auto-ground clip assures positive ground.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Heavy-duty corrosion-resistant zinc-plated strap for added strength.
- One-piece brass triple-wipe power contact for lasting retention.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.
- Dual mechanical shutter system to help prevent insertion of foreign objects.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	22.2 No. 42
Heavy-Duty Tamper-Resistant Decorator Single Receptacles Back & Side Wire							
TR26261I	15	125	Ivory	5-15R	•	•	•
TR26261W	15	125	White	5-15R	•	•	•
TR26261	15	125	Brown	5-15R	•	•	•
TR26261GRY	15	125	Gray	5-15R	•	•	•
TR26261BK	15	125	Black	5-15R	•	•	•
TR26261LA	15	125	Light Almond	5-15R	•	•	•
TR26361I	20	125	Ivory	5-20R	•	•	•
TR26361W	20	125	White	5-20R	•	•	•
TR26361	20	125	Brown	5-20R	•	•	•
TR26361GRY	20	125	Gray	5-20R	•	•	•
TR26361BK	20	125	Black	5-20R	•	•	•
TR26361LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Specification Grade Decorator & Combination Receptacles

15 & 20A, 125 & 250V; 20A, 120/125VAC

legrand®
Pass & Seymour

Features

- Corrosion-resistant, plated wraparound steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.




26861LA

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Heavy-Duty Specification Grade Single Receptacles Back & Side Wire							
26661I	15	250	Ivory	6-15R	•	•	•
26661W	15	250	White	6-15R	•	•	•
26661GRY	15	250	Gray	6-15R	•	•	•
26661BK	15	250	Black	6-15R	•	•	•
26861I	20	250	Ivory	6-20R	•	•	
26861W	20	250	White	6-20R	•	•	
26861	20	250	Brown	6-20R	•	•	
26861GRY	20	250	Gray	6-20R	•	•	
26861BK	20	250	Black	6-20R	•	•	
26861LA	20	250	Light Almond	6-20R	•	•	

For Bulk Packaging Solutions consult factory.

Features

- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.




PS8HWLLA

Catalog Number	Rating A.	Rating VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance c UL us UL498
Specification Grade Decorator Hallway Light & Single Receptacle						
PS8HWLI	20	120/125	0.2561	Ivory	5-20R	•
PS8HWLW	20	120/125	0.2561	White	5-20R	•
PS8HWLLA	20	120/125	0.2561	Light Almond	5-20R	•

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See Page S-56 for more information.

2 Pole, 3 Wire




NEMA 5-20R **NEMA 6-15R** **NEMA 6-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
TradeMaster® Tamper-Resistant Receptacles

Meets National Electrical Code® Tamper-Resistant requirements.

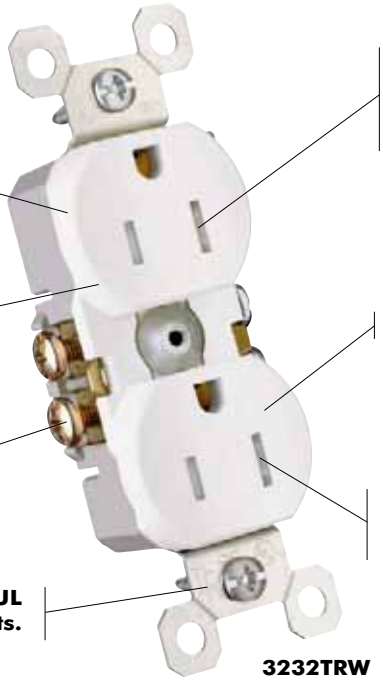

Patented internal shutter system lets plugs in, but keeps keys and other objects out with automatic shutters that block access.

High-impact resistant thermoplastic construction.

Low profile face.

Traditional contoured face.

Side wire accepts #12 – #14 AWG solid wire. Push wire accepts #14 AWG solid only.

Safer and more effective than traditional plastic outlet caps or protection plates.


"TR" markings on strap per UL Tamper-Resistant requirements.

3232TRW

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.
In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

Features

- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

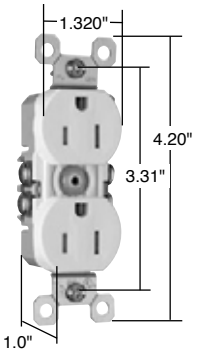

3232TRW

2 Pole, 3 Wire



NEMA 5-15R

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42	cULus
Tamper-Resistant Duplex Receptacles – Grounding							
3232TRI	15	125	Ivory	5-15R	•	•	•
3232TRW	15	125	White	5-15R	•	•	•
3232TR	15	125	Brown	5-15R	•	•	•
3232TRBK	15	125	Black	5-15R	•	•	•
3232TRLA	15	125	Light Almond	5-15R	•	•	•
Self-Grounding Tamper-Resistant Duplex Receptacles							
3232TRSI	15	125	Ivory	5-15R	•	•	•
3232TRSW	15	125	White	5-15R	•	•	•
3232TRS	15	125	Brown	5-15R	•	•	•
3232TRSLA	15	125	Light Almond	5-15R	•	•	•
NEW **NAFTA-Compliant TradeMaster® Tamper-Resistant 15 Amp Duplex Receptacles**							
3232TRNAI	15	125	Ivory	5-15R	•	•	•
3232TRNAW	15	125	White	5-15R	•	•	•
3232TRNA	15	125	Brown	5-15R	•	•	•
3232TRNABK	15	125	Black	5-15R	•	•	•
3232TRNALA	15	125	Light Almond	5-15R	•	•	•

NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
TradeMaster® Tamper-Resistant Receptacles
15A, 125V

legrand®
Pass & Seymour

Features

- Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet "caps" or "protection plates."
- Low profile face.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42	cULus
Decorator Tamper-Resistant Receptacles							
885TRI	15	125	Ivory	5-15R	•	•	•
885TRW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRLA	15	125	Light Almond	5-15R	•	•	•
NEW **885TRTI**	15	125	Titanium	5-15R	•	•	•
NEW **885TRBNCC12**	15	125	Brushed Nickel	5-15R	•	•	•
Self-Grounding Decorator Tamper-Resistant Receptacles							
885TRSI	15	125	Ivory	5-15R	•	•	•
885TRSW	15	125	White	5-15R	•	•	•
885TRSLA	15	125	Light Almond	5-15R	•	•	•
NEW **NAFTA-Compliant TradeMaster® Tamper-Resistant 15 Amp Decorator Receptacle**							
885TRNAI	15	125	Ivory	5-15R	•	•	•
885TRNAW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRNAGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRNALA	15	125	Light Almond	5-15R	•	•	•

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42
Tamper-Resistant 8 Hole Push Wire Without Terminal Screws						
880TRI	15	125	Ivory	5-15R	•	•
880TRW	15	125	White	5-15R	•	•
880TRWMH*	15	125	White	5-15R	•	•
880TR	15	125	Brown	5-15R	•	•


*Without ears.

2 Pole, 3 Wire




NEMA 5-15R


NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

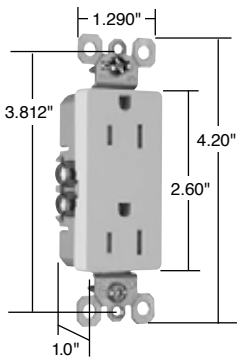

885TRSLA

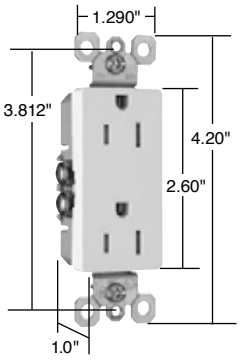

885TRNAW

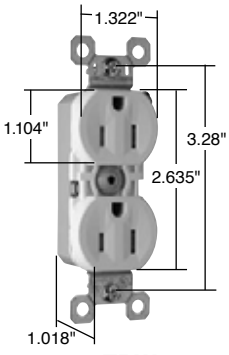

880TRW

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
Weather-Resistant Receptacles

Residential Weather-Resistant Receptacles are Tamper-Resistant as required by National Electrical Code®

Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:

- Ultraviolet light exposure test
- Cold impact test
- Accelerated aging test
- Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.

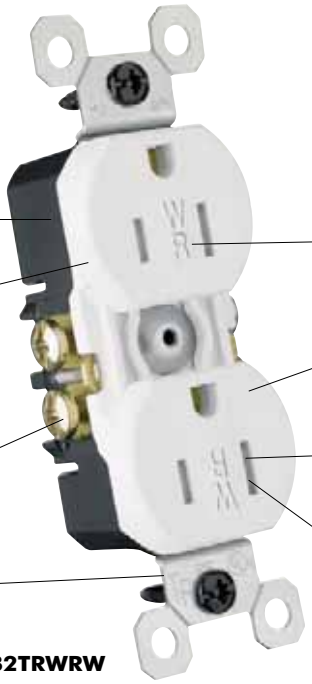

High-impact resistant thermoplastic construction.

Low profile face.

Side wire accepts #12 – #14 AWG solid wire. Push wire accepts #14 AWG solid only.

"TR" markings identify devices as Tamper-Resistant.


"WR" markings on face per UL Weather-Resistant requirements.

Traditional contoured face.


Patented internal shutter system lets plugs in, but keeps keys and other objects out with automatic shutters that block access.

Safer and more effective than plastic outlet caps.

3232TRWRW

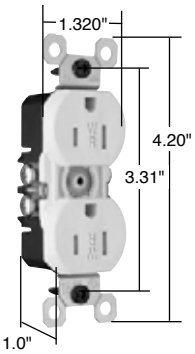

3232TRWRW

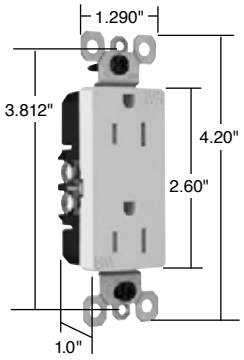

885TRWRW

Features

- Specifically designed for increased protection of children in the home.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	C22.2 No. 42	cULus
Weather-Resistant Duplex Receptacles							
3232TRWRI	15	125	Ivory	5-15R	•	•	•
3232TRWRW	15	125	White	5-15R	•	•	•
3232TRWR	15	125	Brown	5-15R	•	•	•
NEW 3232TRWRGRY	15	125	Gray	5-15R	•	•	•
3232TRWRLA	15	125	Light Almond	5-15R	•	•	•
Decorator Weather-Resistant Duplex Receptacles							
885TRWRI	15	125	Ivory	5-15R	•	•	•
885TRWRW	15	125	White	5-15R	•	•	•
885TRWR	15	125	Brown	5-15R	•	•	•
885TRWRLA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.


Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
TradeMaster® Decorator Receptacles
15A, 125V

legrand®
Pass & Seymour

Features
- High impact-resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Tri-drive screws.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Self-grounding models provide automatic ground clip.

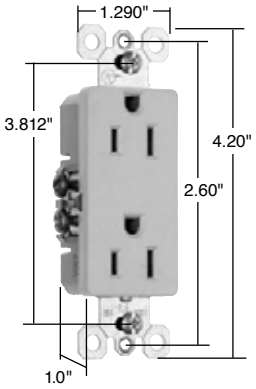


885I

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 42
Decorator Duplex Receptacles						
885I	15	125	Ivory	5-15R	•	•
885W	15	125	White	5-15R	•	•
885	15	125	Brown	5-15R	•	•
885BK	15	125	Black	5-15R	•	•
885LA	15	125	Light Almond	5-15R	•	•
Self-Grounding Decorator Duplex Receptacles						
885SI	15	125	Ivory	5-15R	•	•
885SW	15	125	White	5-15R	•	•
885SLA	15	125	Light Almond	5-15R	•	•

For Bulk Packaging Solutions consult factory.

Features
- Longer steel straps than competitive devices, still fits under a standard wall plate.
- High-impact thermoplastic face and back body eliminate cracks, breaks and callbacks.
- Ultrasonic welding of face to back body.
- Patented design provides better plug retention.
- External screw-pressure-plate back wire on all four terminal screws and ground screw eliminates wrapping.
- Accepts #12 and #14 stranded and solid wire.
- Break-off tabs that are big enough to grab hold of – even if the contact screws are backed-out. Scored deeper, for fast, clean breaks every time.
- All four contact screws and the ground screw are backed-out.
- All screws are tri-drive.

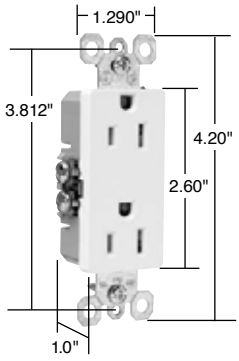

TM885W

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498
Decorator Duplex Receptacles with Pressure Plates					
TM885I	15	125	Ivory	5-15R	•
TM885W	15	125	White	5-15R	•
TM885	15	125	Brown	5-15R	•
TM885GRY	15	125	Gray	5-15R	•
TM885BK	15	125	Black	5-15R	•
TM885LA	15	125	Light Almond	5-15R	•
Decorator Duplex Receptacles with Pressure Plates Self-Grounding					
TM885SI	15	125	Ivory	5-15R	•
TM885SW	15	125	White	5-15R	•
TM885SLA	15	125	Light Almond	5-15R	•
Decorator Duplex Receptacles with Pressure Plates Bulk Pack of 150					
TM885I150	15	125	Ivory	5-15R	•
TM885W150	15	125	White	5-15R	•
TM885LA150	15	125	Light Almond	5-15R	•

2 Pole, 3 Wire




NEMA 5-15R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
TradeMaster® Receptacles
15A, 125V

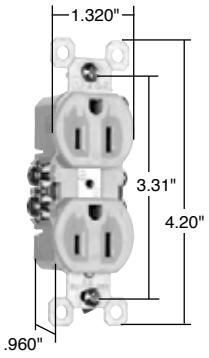


3232I

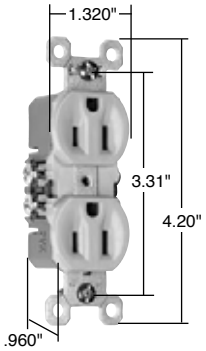

3232SI



3232IMH

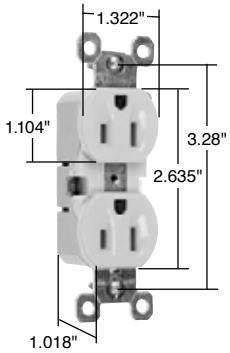

880I

Features


- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Traditional contoured face. (3232 models.)
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42	cULus
Duplex Receptacles – Grounding							
3232I*	15	125	Ivory	5-15R	•	•	
3232W*	15	125	White	5-15R	•	•	
3232*	15	125	Brown	5-15R	•	•	
3232BK	15	125	Black	5-15R	•	•	
3232LA*	15	125	Light Almond	5-15R	•	•	
Self-Grounding Duplex Receptacles							
3232SI	15	125	Ivory	5-15R	•	•	
3232SW	15	125	White	5-15R	•	•	
3232S	15	125	Brown	5-15R	•	•	
3232SLA	15	125	Light Almond	5-15R	•	•	
4 Terminal, Screws In							
3232I4	15	125	Ivory	5-15R	•	•	
3232W4	15	125	White	5-15R	•	•	
32324	15	125	Brown	5-15R	•	•	
Duplex Receptacles – Without Ears							
3232IMH	15	125	Ivory	5-15R	•	•	
3232WMH	15	125	White	5-15R	•	•	
3232MH	15	125	Brown	5-15R	•	•	

*Available in bulk packs of 150. Add "U" to end of Catalog Number. Example: 3232LAU.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42
8 Hole Push Wire Without Terminal Screws						
880I	15	125	Ivory	5-15R	•	•
880W	15	125	White	5-15R	•	•
880	15	125	Brown	5-15R	•	•
8 Hole Push Wire – Without Ears Without Terminal Screws						
880IMH	15	125	Ivory	5-15R	•	•
880WMH	15	125	White	5-15R	•	•
880MH	15	125	Brown	5-15R	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

TradeMaster® Decorator Hallway Lights & Combination Devices

legrand®
Pass & Seymour

Features

- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.

Tamper-Resistant Combination Version:

- UL tested shutter mechanism for protection against improper object insertion per UL478.
- Specially designed for increased protection of children in their homes.
- Superior protection than traditional outlet "caps" or "protection plates."

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	3rd Party Compliance UL1598
TradeMaster® Decorator Full Hallway Light with Light Sensor				
TMHWLCC	— 120	0.1328	Clear	•
Enhanced Decorator Full Hallway Light with Light Sensor				
TMHWLECC	— 120	1.079	Clear	•
Enhanced Decorator Full Hallway Light without Light Sensor				
TMHWLENSCC	— 120	1.113	Clear	•
Full Hallway Decorator Light for use with P&S Metal Louver Plates**				
TMHWLLOUVCC	— 120	0.0843	Clear	•


*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See page S-56 for more information.
**For Louver Plates, see Page Q-21.

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance UL498
TradeMaster® Decorator Hallway Light & Single Receptacle					
TM8HWLICC	15 120/125	0.1442	Ivory	5-15R	•
TM8HWLWCC	15 120/125	0.1442	White	5-15R	•
TM8HWLCC	15 120/125	0.1442	Brown	5-15R	•
TM8HWLBKCC	15 120/125	0.1442	Black	5-15R	•
TM8HWLLACC	15 120/125	0.1442	Light Almond	5-15R	•
Decorator Hallway Light with High Output Light & Tamper-Resistant Single Receptacle					
TM8HWLTRICC	15 125	0.2561	Ivory	5-15R	•
TM8HWLTRWCC	15 125	0.2561	White	5-15R	•
TM8HWLTRCC	15 125	0.2561	Brown	5-15R	•
TM8HWLTRBKCC	15 125	0.2561	Black	5-15R	•
TM8HWLTRLACC	15 125	0.2561	Light Almond	5-15R	•


*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See page S-56 for more information.

For complete line of Decorator Combination Devices, see Pages D-9 – D-12, D-20, D-24, D-33 and D-39.


EXCLUSIVE! P&S EXCLUSIVE!




TMHWLCC



TMHWLECC



TM8HWLWCC



TM8HWLTRLACC

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Recessed TV Boxes

Ideal for flat-screen TVs, home office, kitchen counter tops, and behind furniture to allow snug-to-wall placement.

Today's homeowners have more multimedia choices than ever — including flat panel, wall-mounted televisions. P&S Recessed TV Boxes offer a clean installation with the versatility to handle up to 12 multimedia connections, while providing surge protected power.

Their recessed design saves space and simplifies connections to cable or satellite boxes, DVRs, DVD players, surround-sound systems and more.

And they're available with or without surge protective receptacles to protect costly electronics from potentially damaging surges.



TV3WTVSSLA



TV1WW



TV1WTVSSBK

Features

- Clean, flush-mount appearance — snap-on end caps hide mounting screws.
- Flexible — position either line voltage or low-voltage in all three openings.
- Low-voltage connectors offer both terminated and pull-through capability.
- Plugs and multimedia connections stay recessed behind the wall surface.
- Molded-in template and rectangular cut-out.
- Accepts standard TP wall plates.
- Metal swing brackets ensure a solid mounting.
- Uses old-work-style boxes for line voltage.
- Accepts all P&S keystone low-voltage connectors, including Cat 5e and F-connectors (both supplied with Surge Protective kit), as well as RCA and audio binding posts.

Catalog Number	Description	Color
Recessed TV Boxes		
TV1WW **TV1WBK** **TV1WLA**	Single Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV1WTVSSW **TV1WTVSSBK** **TV1WTVSSLA**	Single Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond
TV3WW **TV3WBK** **TV3WLA**	Three Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV3WTVSSW **TV3WTVSSBK** **TV3WTVSSLA**	Three Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond

Single gang dimensions: 7.25" L x 4.875" W x 2.25" D
Three gang dimensions: 8.5" L x 4.875" W x 2.25" D

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Tamper-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

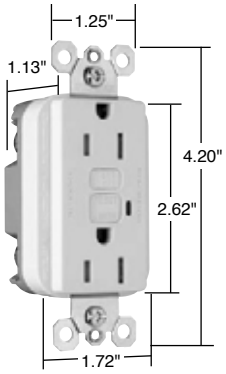


1595TRW

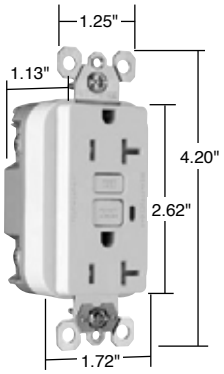

2095TRSW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
1595TRBNCC4	15	125	Brushed Nickel	5-15R	•	•	•
1595TRTI	15	125	Titanium	5-15R	•	•	•
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI with Auto-Ground							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI with Auto-Ground							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R NEMA 5-20R

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.


In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Receptacles
Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

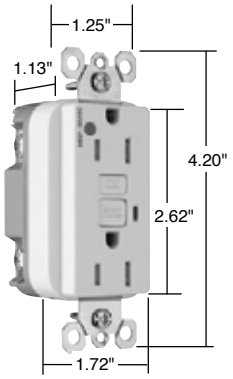

1595HGTRW

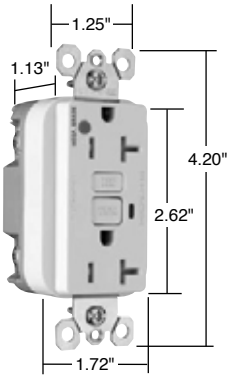

2095HGTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

TradeMaster® & Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- GFCIs with Auto-Ground assure a positive ground to metal box.


Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
Specification Grade 20 Amp Duplex GFCI with Auto-Ground							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

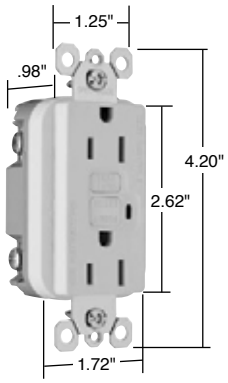

1595W

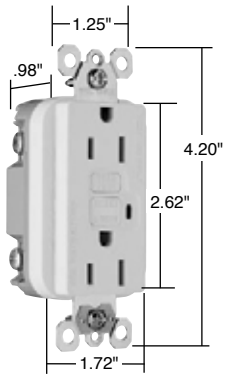

1595SW

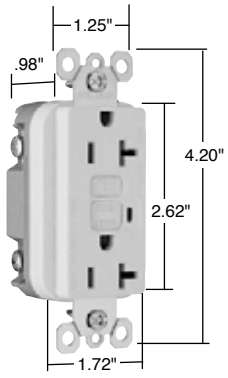

2095W



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

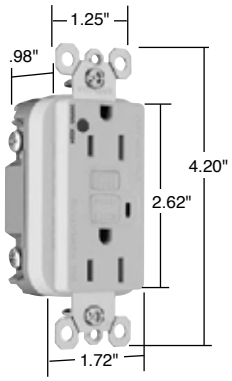

1595HGW

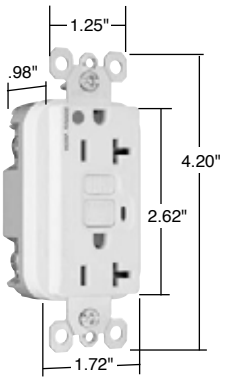

2095HGW

Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
1595HGI	15	125	Ivory	5-15R	•	•	•
1595HGW	15	125	White	5-15R	•	•	•
1595HG	15	125	Brown	5-15R	•	•	•
1595HGGRY	15	125	Gray	5-15R	•	•	•
1595HGRED	15	125	Red	5-15R	•	•	•
1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
2095HGI	20	125	Ivory	5-20R	•	•	•
2095HGW	20	125	White	5-20R	•	•	•
2095HG	20	125	Brown	5-20R	•	•	•
2095HGGRY	20	125	Gray	5-20R	•	•	•
2095HGRED	20	125	Red	5-20R	•	•	•
2095HGLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC


legrand®
Pass & Seymour

Features

- Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

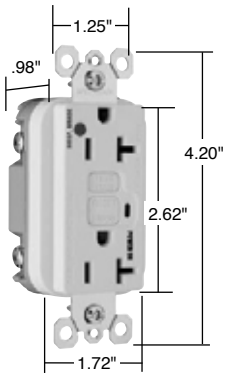

2095HGWL


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Illuminated 20 Amp Duplex GFCI							
2095IL	20	125	Ivory	5-20R	•	•	•
2095WL	20	125	White	5-20R	•	•	•
2095LAL	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

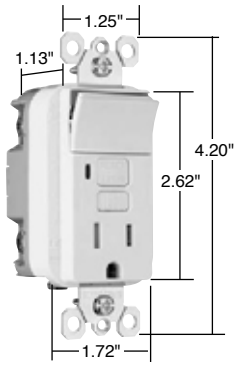

1595SWTTRWCC4

Straight Blade Receptacles

Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Switch Rating A.	VAC	Receptacle Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL20 C22.2 No. 111
Combination Tamper-Resistant Single Pole Switch/GFCI									
1595SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1595SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1595SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•



NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding15 & 20A, 125VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

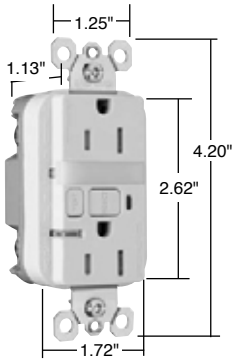

1595NTLTRWCC4

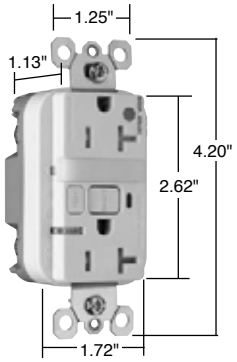

2095HGNTLTRW

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595NTLTRICC4	15	125	0.180	Ivory	5-15R	•	•	•
1595NTLTRWCC4	15	125	0.180	White	5-15R	•	•	•
1595NTLTRBKCC4	15	125	0.180	Black	5-15R	•	•	•
1595NTLTRLACC4	15	125	0.180	Light Almond	5-15R	•	•	•
1595NTLTRBNCC4	15	125	0.180	Brushed Nickel	5-15R	•	•	•
1595NTLTRTICC4	15	125	0.180	Titanium	5-15R	•	•	•
Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095NTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095NTLTRW	20	125	0.180	White	5-20R	•	•	•
2095NTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095NTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•
Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page S-56 for more information.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Weather-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

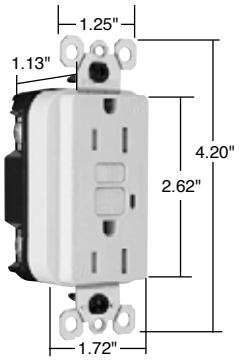

1595TRWRW

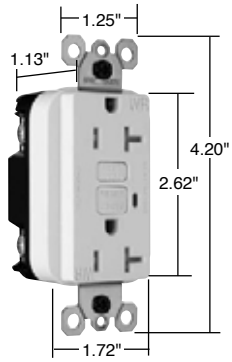

2095TRWRW

Features

- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Tamper-Resistant: Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRWRW	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Weather-Resistant 20 Amp Duplex GFCI							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRWRW	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Weather-Resistant DuraShield™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Features

- Designed for extra durability and a long service life when installed in harsh environments: outdoor, garages, workshops, wash down areas, commercial kitchens, and labs.
- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Dust- and insect-resistant.
- Rubber curtains let plug blades in; keep dust, water and insects out.
- Integral gasket seals receptacle, protecting critical electronic components.
- Exceeds UL corrosion requirements – survives 4X the required corrosion test cycles.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity



1595DSWRBKCC4



Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	3rd Party Compliance UL498 C22.2 No. 42
Specification Grade Weather-Resistant DuraShield™ 15 Amp Duplex GFCI						
1595DSWRBKCC4	15	125	Black	5-15R	•	•
Specification Grade Weather-Resistant DuraShield™ 20 Amp Duplex GFCI						
2095DSWRBK	20	125	Black	5-20R	•	•



NEMA 5-15R




NEMA 5-20R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Specification Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

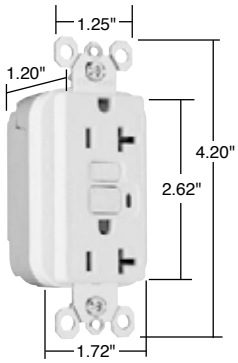


PT2095W



Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade 15 Amp Duplex GFCI							
PT1595I	15	125	Ivory	5-15R	•	•	•
PT1595W	15	125	White	5-15R	•	•	•
PT1595	15	125	Brown	5-15R	•	•	•
PT1595GRY	15	125	Gray	5-15R	•	•	•
PT1595BK	15	125	Black	5-15R	•	•	•
PT1595RED	15	125	Red	5-15R	•	•	•
PT1595LA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
PT2095I	20	125	Ivory	5-20R	•	•	•
PT2095W	20	125	White	5-20R	•	•	•
PT2095	20	125	Brown	5-20R	•	•	•
PT2095GRY	20	125	Gray	5-20R	•	•	•
PT2095BK	20	125	Black	5-20R	•	•	•
PT2095RED	20	125	Red	5-20R	•	•	•
PT2095LA	20	125	Light Almond	5-20R	•	•	•



PTRA6STR

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"



NEMA 5-15R



NEMA 5-20R

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
PlugTail™ Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

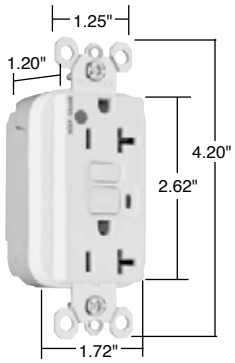

PT2095HGW




Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
PT1595HGI	15	125	Ivory	5-15R	•	•	•
PT1595HGW	15	125	White	5-15R	•	•	•
PT1595HG	15	125	Brown	5-15R	•	•	•
PT1595HGGRY	15	125	Gray	5-15R	•	•	•
PT1595HGRED	15	125	Red	5-15R	•	•	•
PT1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
PT2095HGI	20	125	Ivory	5-20R	•	•	•
PT2095HGW	20	125	White	5-20R	•	•	•
PT2095HG	20	125	Brown	5-20R	•	•	•
PT2095HGGRY	20	125	Gray	5-20R	•	•	•
PT2095HGRED	20	125	Red	5-20R	•	•	•
PT2095HGLA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



PTRA6STR



NEMA 5-15R



NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles

PlugTail™ Specification & Hospital Grade Tamper-Resistant GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

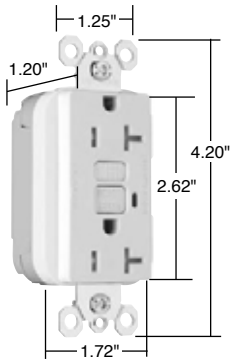


PT2095TRW

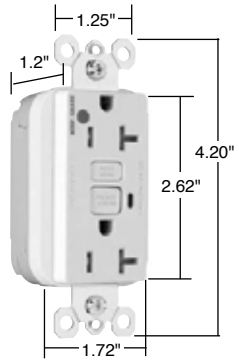

PT2095HGTRW



PTRA6STR



NEMA 5-15R NEMA 5-20R

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595TRI	15	125	Ivory	5-15R	•	•	•
PT1595TRW	15	125	White	5-15R	•	•	•
PT1595TR	15	125	Brown	5-15R	•	•	•
PT1595TRGRY	15	125	Gray	5-15R	•	•	•
PT1595TRBK	15	125	Black	5-15R	•	•	•
PT1595TRRED	15	125	Red	5-15R	•	•	•
PT1595TRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRI	20	125	Ivory	5-20R	•	•	•
PT2095TRW	20	125	White	5-20R	•	•	•
PT2095TR	20	125	Brown	5-20R	•	•	•
PT2095TRGRY	20	125	Gray	5-20R	•	•	•
PT2095TRBK	20	125	Black	5-20R	•	•	•
PT2095TRRED	20	125	Red	5-20R	•	•	•
PT2095TRLA	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connector catalog numbers, see Page B-54 or B-55.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles

PlugTail™ Specification & Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRI	15	125	Ivory	5-15R	•	•	•
NEW Specification Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRW	20	125	White	5-20R	•	•	•
NEW Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRRED	15	125	Red	5-15R	•	•	•
NEW Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRLA	20	125	Light Almond	5-20R	•	•	•




NEMA 5-15R NEMA 5-20R


For PlugTail Connector catalog numbers, see Page B-54 or B-55.

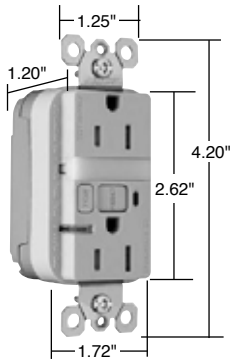

PT1595NTLTRI

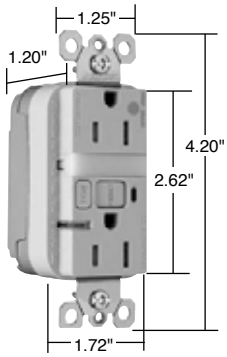

PT1595HGNTLTRI




PTRA6STR


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

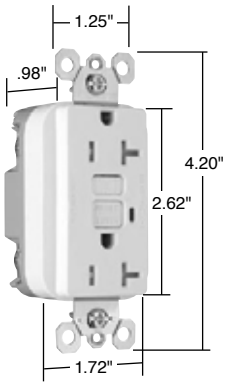

2095TRNAW

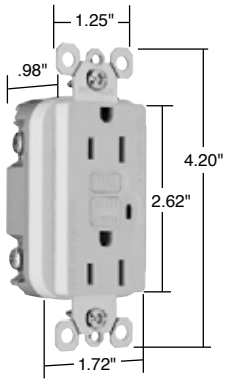

1595NAW

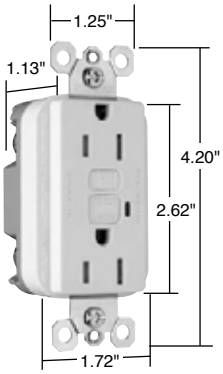

1595RW



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRNAI	15	125	Ivory	5-15R	•	•	•
1595TRNAW	15	125	White	5-15R	•	•	•
1595TRNA	15	125	Brown	5-15R	•	•	•
1595TRNAGRY	15	125	Gray	5-15R	•	•	•
1595TRNABK	15	125	Black	5-15R	•	•	•
1595TRNALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRNAI	20	125	Ivory	5-20R	•	•	•
2095TRNAW	20	125	White	5-20R	•	•	•
2095TRNA	20	125	Brown	5-20R	•	•	•
2095TRNAGRY	20	125	Gray	5-20R	•	•	•
2095TRNABK	20	125	Black	5-20R	•	•	•
2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595NAI	15	125	Ivory	5-15R	•	•	•
1595NAW	15	125	White	5-15R	•	•	•
1595NA	15	125	Brown	5-15R	•	•	•
1595NAGRY	15	125	Gray	5-15R	•	•	•
1595NABK	15	125	Black	5-15R	•	•	•
1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI							
2095NAI	20	125	Ivory	5-20R	•	•	•
2095NAW	20	125	White	5-20R	•	•	•
2095NA	20	125	Brown	5-20R	•	•	•
2095NAGRY	20	125	Gray	5-20R	•	•	•
2095NABK	20	125	Black	5-20R	•	•	•
2095NALA	20	125	Light Almond	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW RoHS-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595RI	15	125	Ivory	5-15R	•	•	•
1595RW	15	125	White	5-15R	•	•	•
1595RLA	15	125	Light Almond	5-15R	•	•	•

RoHS-Compliant GFCI Receptacles meet the requirements of Restriction of Hazardous Substances directives and regulations.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
NAFTA-Compliant Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand® Pass & Seymour


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
2095HGTRNAW	20	125	White	5-20R	•	•	•
2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
2095HGTRNARED	20	125	Red	5-20R	•	•	•
2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade 15 Amp Duplex GFCI							
1595HGNAI	15	125	Ivory	5-15R	•	•	•
1595HGNAW	15	125	White	5-15R	•	•	•
1595HGNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
2095HGNAI	20	125	Ivory	5-20R	•	•	•
2095HGNAW	20	125	White	5-20R	•	•	•
2095HGNA	20	125	Brown	5-20R	•	•	•
2095HGNAGRY	20	125	Gray	5-20R	•	•	•
2095HGNARED	20	125	Red	5-20R	•	•	•
2095HGNALA	20	125	Light Almond	5-20R	•	•	•




NEMA 5-15R

NEMA 5-20R

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

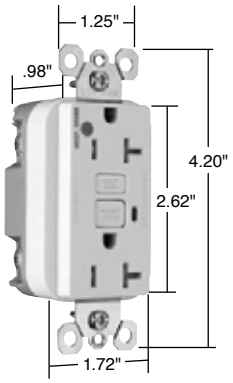

2095HGTRNAW

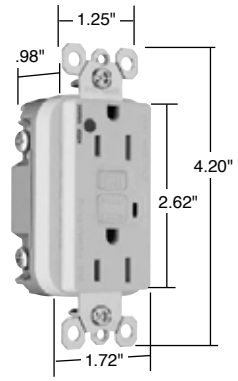


1595HGNAW


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
NAFTA-Compliant PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

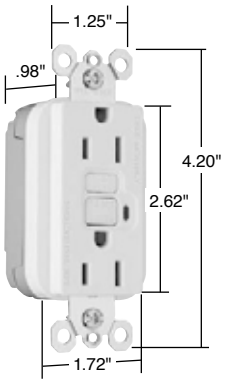

PT1595NAW

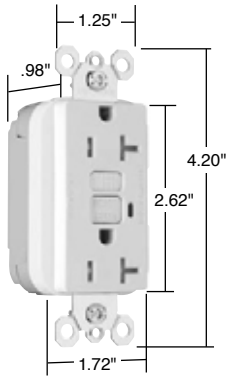

PT2095TRNAW

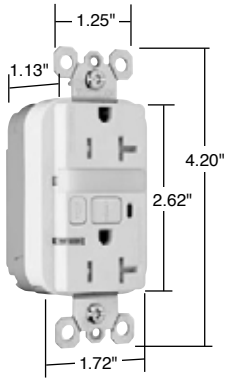

PT2095NTLTRNAW



NEMA 5-15R



NEMA 5-20R

Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW **NAFTA-Compliant Spec Grade 15 Amp Duplex GFCI**							
PT1595NAI	15	125	Ivory	5-15R	•	•	•
PT1595NAW	15	125	White	5-15R	•	•	•
PT1595NAGRY	15	125	Gray	5-15R	•	•	•
PT1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW **NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI**							
PT2095NAI	20	125	Ivory	5-20R	•	•	•
PT2095NAW	20	125	White	5-20R	•	•	•
PT2095NAGRY	20	125	Gray	5-20R	•	•	•
PT2095NABK	20	125	Black	5-20R	•	•	•
PT2095NALA	20	125	Light Almond	5-20R	•	•	•
NEW **NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Duplex GFCI**							
PT2095TRNAI	20	125	Ivory	5-20R	•	•	•
PT2095TRNAW	20	125	White	5-20R	•	•	•
PT2095TRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW **NAFTA-Compliant Spec Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI**							
PT1595NTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595NTLTRNAW	15	125	White	5-15R	•	•	•
NEW **NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI**							
PT2095NTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRNAW	20	125	White	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

For PlugTail Connector catalog numbers, see Page B-61.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
NAFTA-Compliant PlugTail™ Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand® Pass & Seymour

Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
PT2095HGNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNAW	20	125	White	5-20R	•	•	•
PT2095HGNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNARED	20	125	Red	5-20R	•	•	•
PT2095HGNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRNAW	20	125	White	5-20R	•	•	•
PT2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRNARED	20	125	Red	5-20R	•	•	•
PT2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRNAW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRNAW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRNARED	20	125	Red	5-20R	•	•	•


NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"


For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.


All devices listed on this page conform to NEMA WD-1 and WD-6.

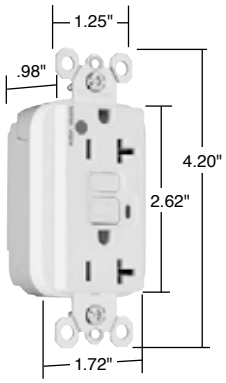


PT2095HGNAW

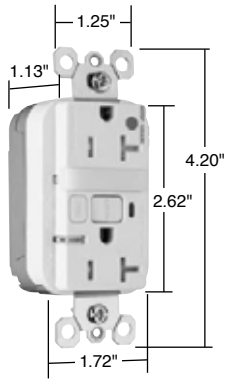

PT2095HGNTLTRNAW




PTRA6STR




NEMA 5-15R NEMA 5-20R

legrand®
Pass & Seymour

Straight Blade Receptacles
Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

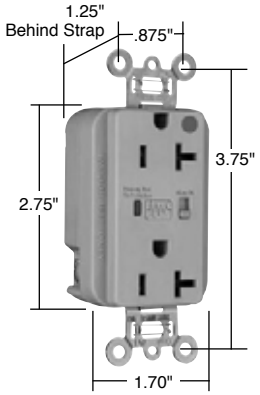

8300GRYSP

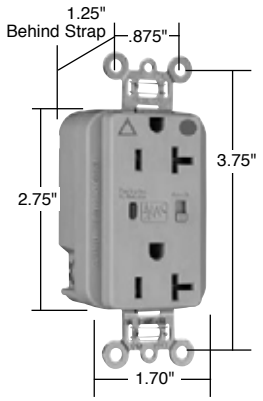

IG8300GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50μs 6000V, 8 x 20μs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance)
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)

5262/5362, IG5262/5362, 8200/8300, IG8200/8300, TR5262/5362, TRIG5262/5362, TR8200/8300, TRIG8200/8300

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20μS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.


5252/5352, TR5252/5352, All PlugTail™

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20μS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.
- PlugTail versions – factory-terminated devices and connectors.

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200REDSP	15	125	5-15R	Red	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300SP	20	125	5-20R	Brown	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300REDSP	20	125	5-20R	Red	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.




NEMA 5-15R **NEMA 5-20R**

Straight Blade Receptacles
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
5262ISP	15	125	5-15R	Ivory	•	•	•	•
5262WSP	15	125	5-15R	White	•	•	•	•
5262SP	15	125	5-15R	Brown	•	•	•	•
5262GRYSP	15	125	5-15R	Gray	•	•	•	•
5262BKSP	15	125	5-15R	Black	•	•	•	•
5262REDSP	15	125	5-15R	Red	•	•	•	•
5262LASP	15	125	5-15R	Light Almond	•	•	•	•
5262BLSP	15	125	5-15R	Blue	•	•	•	•
5362ISP	20	125	5-20R	Ivory	•	•	•	•
5362WSP	20	125	5-20R	White	•	•	•	•
5362SP	20	125	5-20R	Brown	•	•	•	•
5362GRYSP	20	125	5-20R	Gray	•	•	•	•
5362BKSP	20	125	5-20R	Black	•	•	•	•
5362REDSP	20	125	5-20R	Red	•	•	•	•
5362LASP	20	125	5-20R	Light Almond	•	•	•	•
5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
IG5262ISP	15	125	5-15R	Ivory	•	•	•	•
IG5262WSP	15	125	5-15R	White	•	•	•	•
IG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
IG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
IG5262BLSP	15	125	5-15R	Blue	•	•	•	•
IG5262OSP	15	125	5-15R	Orange	•	•	•	•
IG5362ISP	20	125	5-20R	Ivory	•	•	•	•
IG5362WSP	20	125	5-20R	White	•	•	•	•
IG5362SP	20	125	5-20R	Brown	•	•	•	•
IG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
IG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
IG5362BLSP	20	125	5-20R	Blue	•	•	•	•
IG5362OSP	20	125	5-20R	Orange	•	•	•	•




NEMA 5-15R

NEMA 5-20R

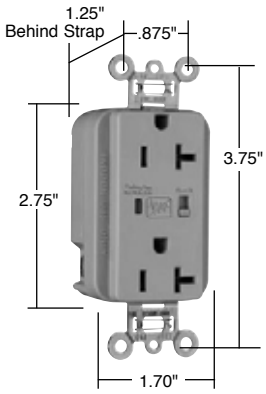

5362GRYSP

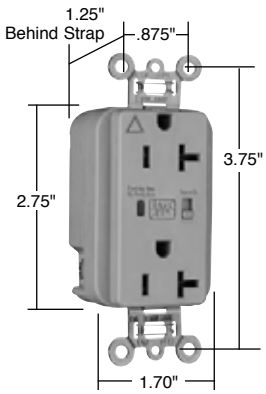


IG5362GRYSP

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

legrand®
Pass & Seymour


Straight Blade Receptacles
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

LED Indicator Only

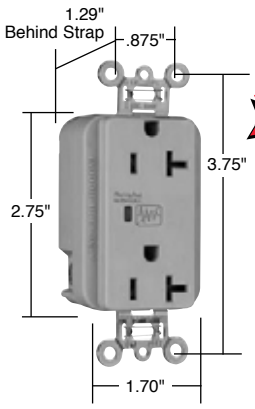

5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252BKSP	15	125	5-15R	Black	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352BKSP	20	125	5-20R	Black	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•

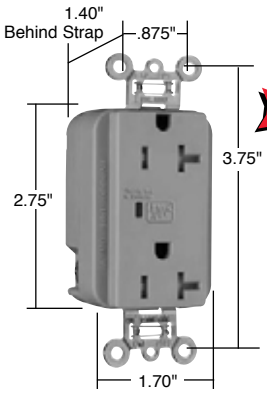

TR5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Duplex Receptacles Back & Side Wire*								
TR5252ISP	15	125	5-15R	Ivory	•	•	•	•
TR5252WSP	15	125	5-15R	White	•	•	•	•
TR5252GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5252BKSP	15	125	5-15R	Black	•	•	•	•
TR5252LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5252BLSP	15	125	5-15R	Blue	•	•	•	•
TR5352ISP	20	125	5-20R	Ivory	•	•	•	•
TR5352WSP	20	125	5-20R	White	•	•	•	•
TR5352GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5352BKSP	20	125	5-20R	Black	•	•	•	•
TR5352LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5352BLSP	20	125	5-20R	Blue	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Straight Blade Receptacles
PlugTail™ Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

legrand®
Pass & Seymour


Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT5262ISP	15	125	5-15R	Ivory	•	•	•	•
PT5262WSP	15	125	5-15R	White	•	•	•	•
PT5262SP	15	125	5-15R	Brown	•	•	•	•
PT5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PT5262BKSP	15	125	5-15R	Black	•	•	•	•
PT5262REDSP	15	125	5-15R	Red	•	•	•	•
PT5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PT5262BLSP	15	125	5-15R	Blue	•	•	•	•
PT5362ISP	20	125	5-20R	Ivory	•	•	•	•
PT5362WSP	20	125	5-20R	White	•	•	•	•
PT5362SP	20	125	5-20R	Brown	•	•	•	•
PT5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PT5362BKSP	20	125	5-20R	Black	•	•	•	•
PT5362REDSP	20	125	5-20R	Red	•	•	•	•
PT5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PT5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG5262WSP	15	125	5-15R	White	•	•	•	•
PTIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG5262BKSP	15	125	5-15R	Black	•	•	•	•
PTIG5262REDSP	15	125	5-15R	Red	•	•	•	•
PTIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG5262OSP	15	125	5-15R	Orange	•	•	•	•
PTIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG5362WSP	20	125	5-20R	White	•	•	•	•
PTIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG5362BKSP	20	125	5-20R	Black	•	•	•	•
PTIG5362REDSP	20	125	5-20R	Red	•	•	•	•
PTIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG5362OSP	20	125	5-20R	Orange	•	•	•	•
PTIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR5262WSP	15	125	5-15R	White	•	•	•	•
PTTR5262SP	15	125	5-15R	Brown	•	•	•	•
PTTR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR5262BKSP	15	125	5-15R	Black	•	•	•	•
PTTR5262REDSP	15	125	5-15R	Red	•	•	•	•
PTTR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR5362WSP	20	125	5-20R	White	•	•	•	•
PTTR5362SP	20	125	5-20R	Brown	•	•	•	•
PTTR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR5362BKSP	20	125	5-20R	Black	•	•	•	•
PTTR5362REDSP	20	125	5-20R	Red	•	•	•	•
PTTR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR5362BLSP	20	125	5-20R	Blue	•	•	•	•

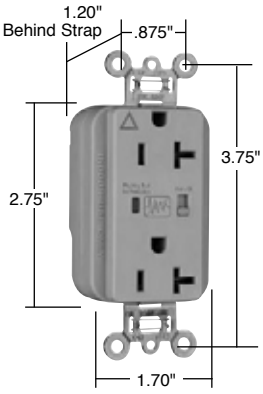


PTIG5362GRYSP



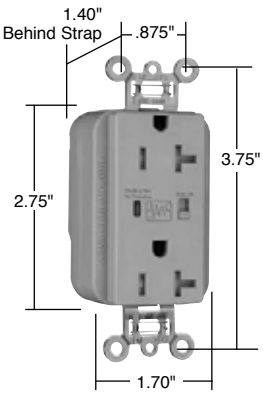

PTTR5362GRYSP

For PlugTail Connectors, see Page B-3.



NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1, WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Available Spring 2011


legrand®
Pass & Seymour

Straight Blade Receptacles
PlugTail™ Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


Audible Alarm with LED Indicator

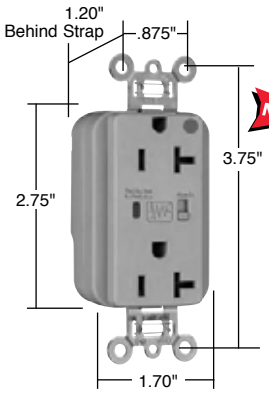

PT8300GRYSP

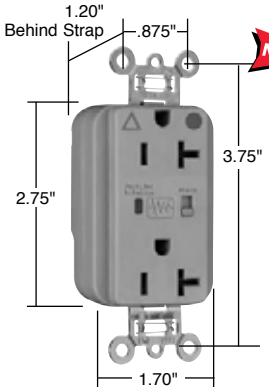

PTIG8300GRYSP

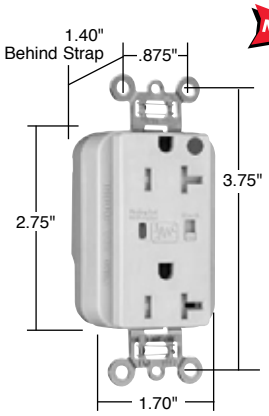

PTTR8300ISP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance: UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT8200ISP	15	125	5-15R	Ivory	•	•	•	•
PT8200WSP	15	125	5-15R	White	•	•	•	•
PT8200SP	15	125	5-15R	Brown	•	•	•	•
PT8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PT8200REDSP	15	125	5-15R	Red	•	•	•	•
PT8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PT8200BLSP	15	125	5-15R	Blue	•	•	•	•
PT8300ISP	20	125	5-20R	Ivory	•	•	•	•
PT8300WSP	20	125	5-20R	White	•	•	•	•
PT8300SP	20	125	5-20R	Brown	•	•	•	•
PT8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PT8300REDSP	20	125	5-20R	Red	•	•	•	•
PT8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PT8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG8200WSP	15	125	5-15R	White	•	•	•	•
PTIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG8200REDSP	15	125	5-15R	Red	•	•	•	•
PTIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG8200OSP	15	125	5-15R	Orange	•	•	•	•
PTIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG8300WSP	20	125	5-20R	White	•	•	•	•
PTIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG8300REDSP	20	125	5-20R	Red	•	•	•	•
PTIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
PTIG8300OSP	20	125	5-20R	Orange	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR8200WSP	15	125	5-15R	White	•	•	•	•
PTTR8200SP	15	125	5-15R	Brown	•	•	•	•
PTTR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR8200REDSP	15	125	5-15R	Red	•	•	•	•
PTTR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR8300WSP	20	125	5-20R	White	•	•	•	•
PTTR8300SP	20	125	5-20R	Brown	•	•	•	•
PTTR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR8300REDSP	20	125	5-20R	Red	•	•	•	•
PTTR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR8300BLSP	20	125	5-20R	Blue	•	•	•	•

For PlugTail Connectors, see Page B-3.



NEMA 5-15R



NEMA 5-20R

Available Spring 2011


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Straight Blade Receptacles
Tamper-Resistant Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand® Pass & Seymour

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
TR5262ISP	15	125	5-15R	Ivory	•	•	•	•
TR5262WSP	15	125	5-15R	White	•	•	•	•
TR5262SP	15	125	5-15R	Brown	•	•	•	•
TR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5262BKSP	15	125	5-15R	Black	•	•	•	•
TR5262REDSP	15	125	5-15R	Red	•	•	•	•
TR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5262BLSP	15	125	5-15R	Blue	•	•	•	•
TR5362ISP	20	125	5-20R	Ivory	•	•	•	•
TR5362WSP	20	125	5-20R	White	•	•	•	•
TR5362SP	20	125	5-20R	Brown	•	•	•	•
TR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5362BKSP	20	125	5-20R	Black	•	•	•	•
TR5362REDSP	20	125	5-20R	Red	•	•	•	•
TR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
TRIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG5262WSP	15	125	5-15R	White	•	•	•	•
TRIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG5262BKSP	15	125	5-15R	Black	•	•	•	•
TRIG5262REDSP	15	125	5-15R	Red	•	•	•	•
TRIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG5262OSP	15	125	5-15R	Orange	•	•	•	•
TRIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG5362WSP	20	125	5-20R	White	•	•	•	•
TRIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG5362BKSP	20	125	5-20R	Black	•	•	•	•
TRIG5362REDSP	20	125	5-20R	Red	•	•	•	•
TRIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG5362OSP	20	125	5-20R	Orange	•	•	•	•

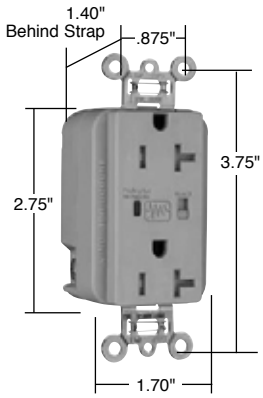

TR5362GRYSP

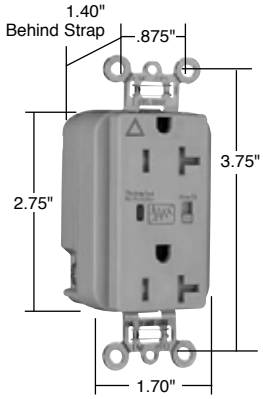

TRIG5362GRYSP



NEMA 5-15R



NEMA 5-20R


Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Straight Blade Receptacles
Tamper-Resistant Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

Audible Alarm with LED Indicator

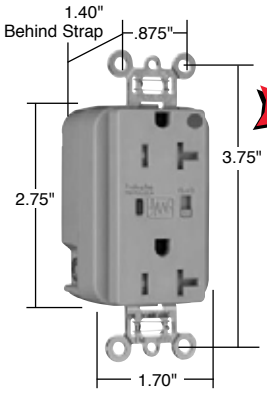

TR8300GRYSP

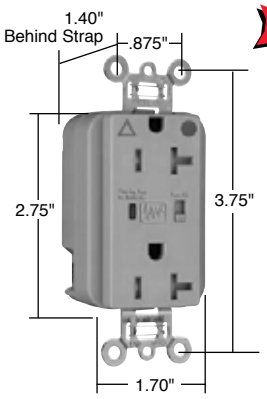

TRIG8300GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Extra Heavy-Duty Duplex Receptacles Back & Side Wire								
TR8200ISP	15	125	5-15R	Ivory	•	•	•	•
TR8200WSP	15	125	5-15R	White	•	•	•	•
TR8200SP	15	125	5-15R	Brown	•	•	•	•
TR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TR8200REDSP	15	125	5-15R	Red	•	•	•	•
TR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TR8200BLSP	15	125	5-15R	Blue	•	•	•	•
TR8300ISP	20	125	5-20R	Ivory	•	•	•	•
TR8300WSP	20	125	5-20R	White	•	•	•	•
TR8300SP	20	125	5-20R	Brown	•	•	•	•
TR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TR8300REDSP	20	125	5-20R	Red	•	•	•	•
TR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TR8300BLSP	20	125	5-20R	Blue	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire								
TRIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG8200WSP	15	125	5-15R	White	•	•	•	•
TRIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG8200REDSP	15	125	5-15R	Red	•	•	•	•
TRIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG8200OSP	15	125	5-15R	Orange	•	•	•	•
TRIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG8300WSP	20	125	5-20R	White	•	•	•	•
TRIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG8300REDSP	20	125	5-20R	Red	•	•	•	•
TRIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG8300OSP	20	125	5-20R	Orange	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Straight Blade Receptacles
Quad Receptacles & Accessories
15 & 20A, 125V


legrand®
Pass & Seymour

Application

Legrand/Pass & Seymour's quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

Features


- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

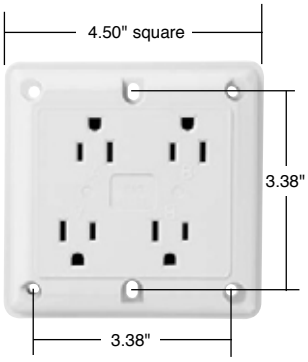

Quad Receptacle

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	UL1449	CSA
Hospital Grade Isolated Ground Surge Protective Quads							
IG420HISP	20	125	Ivory	5-20R	•	•	
IG420HGRYSP	20	125	Gray	5-20R	•	•	
IG420HBLSP	20	125	Blue	5-20R	•	•	
Hospital Grade Quads							
420HI	20	125	Ivory	5-20R	•		•
420HW	20	125	White	5-20R	•		•
420H	20	125	Brown	5-20R	•		•
420HGRY	20	125	Gray	5-20R	•		•
420HRED	20	125	Red	5-20R	•		•
Specification Grade Surge Protective Quads							
420ISP	20	125	Ivory	5-20R	•	•	
420BLSP	20	125	Blue	5-20R	•	•	
Specification Isolated Grade Quads							
IG415	15	125	Orange	5-15R	•		•
IG420	20	125	Orange	5-20R	•		•
Specification Grade Quads							
415I	15	125	Ivory	5-15R	•		•
415W	15	125	White	5-15R	•		•
415GRY	15	125	Gray	5-15R	•		•
420I	20	125	Ivory	5-20R	•		•
420W	20	125	White	5-20R	•		•
420GRY	20	125	Gray	5-20R	•		•
Quad Adapter Plates							
4APIV			Ivory		•	•	
4APW			White		•	•	
4AP			Brown		•	•	
4APGRY			Gray		•	•	
4APRED			Red		•	•	
4APBL			Blue		•	•	
4APORG			Orange		•	•	

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Quad Receptacles Specifications

Hard Use Spec Grade & Hard Use Surge Protective Spec Grade Quads


- Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4
- Conforms to NEMA WD-1, WD-6.

Electrical	
Frequency	60Hz
Voltage	125V
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 –12 AWG copper and copper-clad
Product Identification	Ratings are permanent part of device
Weight	10.75 oz.
Environmental	
Flammability	UL94 V2
Operating Temperature	-40°C to 65°C (-40°F to 150°F) continuous without impact
Materials	
Face	Nylon
Body	Nylon
Line Terminals	.035" T-type Triple-Wipe Phosphor Bronze
Terminal Screws	Brass #8-32
Hex Head Grounding Screw	Steel (Green)
Mounting Screws	Zinc-plated steel


Additional Specifications for Hard Use Surge Protective Spec Grade Quads

- ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45
- Installation Categories “A” (ring wave) and “B” (unidirectional impulse)

Electrical	
MOV Rating	18mm
UL1449 Suppressed Voltage Rating	500V (L-N, L-G, N-G)
Noise Attenuation	-35db Noise Filtering at 5kHz-50MHz
Thermal Protection	Fused
Green LED Indicator	ON when protection is active, OFF when protection is inactive

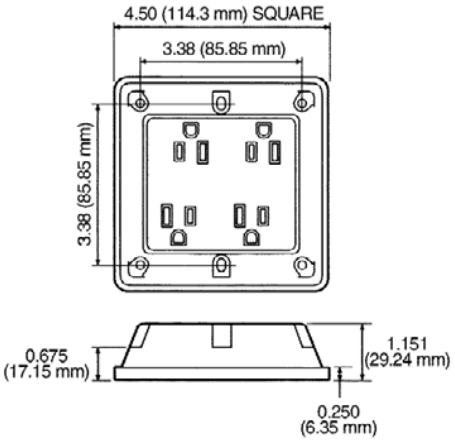

Quad Receptacle

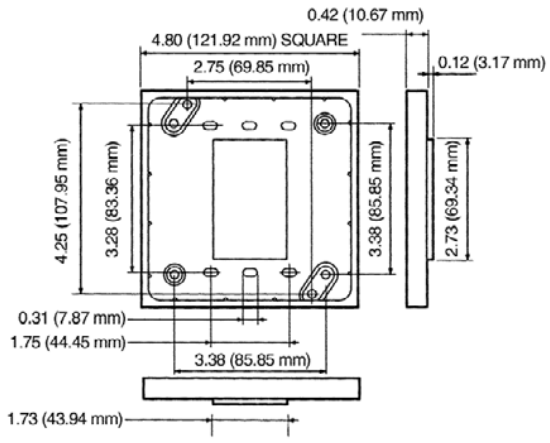

Adapter Plate

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles


Dust & Moisture Resistant & Clock Hanger Receptacles

15 & 20A, 125V

legrand®
Pass & Seymour


Features – Dust & Moisture Resistant

- Duplex receptacle has face backed by neoprene gasket which is slit to provide wiping action on plug blades and to provide positive closure when not in use.
- Cellular neoprene sealing mat fits under wall plate.




6207
shown with neoprene sealing mat

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Dust & Moisture Resistant							
6207	15	125	Duplex, Dust and Moisture Resistant, Gray	5-15R	•	•	•
CR6207	15	125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-15R	•	•	•
6307	20	125	Duplex, Dust and Moisture Resistant, Gray	5-20R	•	•	
6307RED	20	125	Duplex, Dust and Moisture Resistant, Red	5-20R	•	•	
CR6307	20	125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-20R	•	•	

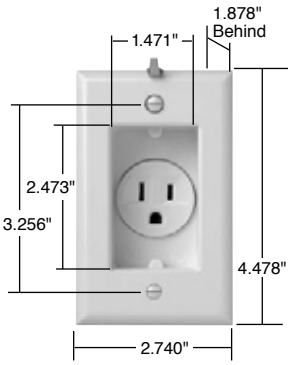


S3713I

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Clock Hangers							
S3713I	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713W	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713BK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713LA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•
S3733SS	15	125	Recessed Receptacle with Stainless Steel Wall Plate	5-15R	•	•	•
S3733	15	125	Recessed Receptacle with Brass Wall Plate	5-15R	•	•	•
NEW **Tamper-Resistant Clock Hangers** Back & Side Wire							
S3713TRI	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713TRW	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713TRGRY	15	125	Recessed Receptacle with Gray Smooth Wall Plate	5-15R	•	•	•
S3713TRBK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713TRLA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•

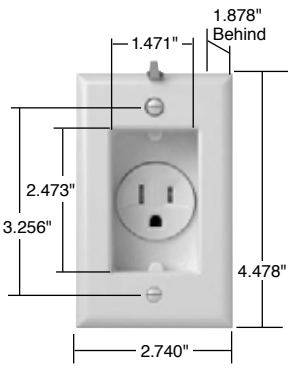

S3713TRI

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
Power Outlet Receptacles & Plugs
20, 30, 50, & 60A

Rating A.	V.	Receptacle/Plug Configuration & NEMA No.	Flush Receptacle	Wall Plate *For 2 screw mounting **For 4 screw mounting	Surface Receptacle	Plug	Angle Plug	Connector
			Catalog Nos.					
2 Pole, 3 Wire Grounding								
30	125	5-30	**3802**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****		**D0531** .57"-1.26"		**D0533** .57"-1.26"
30	125 For recreational vehicles.	NEMA TT30	**3830** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****				
30	250	6-30	**3801** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****		**D0631** .57"-1.26"	**3869**	**D0633** .57"-1.26"
50	125	5-50				**D0551** .57"-1.26"		**D0553** .57"-1.26"
50	250	6-50	**3804**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**3852**# AL/CU	**D0651** .57"-1.26"	**3869**	**D0653** .57"-1.26"
3 Pole, 3 Wire Non-Grounding								
30	125/250 **Dryer**	10-30	**3860** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**388** AL/CU	**1031**	**3861**	
50	125/250 **Range**	10-50	**3890**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**385** AL/CU	**1051** .57"-1.26"	**3861**	**1053** .32"-.91"
3 Pole, 4 Wire Grounding								
20	125/250	14-20	**3820**	1-Gang: **SS7***				
30	125/250 **Dryer**	14-30	**3864** AL/CU **3864NA†**	2-Gang: **SS702*** 2-Gang: **TP703****	**3884**#/**388440**‡ AL/CU **3884NA†**	**1431** .57"-1.26"	**5746AN** **3867**	
30	3ø, 250	15-30	**5740** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****			**5741AN**	
50	125/250 **Range**	14-50	**3894**§ AL/CU **3894NA†**	2-Gang: **SS702*** 2-Gang: **TP703****	**3854**#/**385440**‡ AL/CU **3854NA†**	**1451** .57"-1.26"	**5745AN** **3867**	
50	3ø, 250	15-50	**5750** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****			**5751AN**	
60	3ø, 250	15-60	**5760** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****			**5761AN**	
4 Pole, 4 Wire Non-Grounding								
20	3øY, 120/208	18-20	**3822**	1-Gang: **SS7***		**7251DF** .35"-1.05"		
60	3øY, 120/208	18-60	**3870**§ AL/CU	2-Gang: **SS701****		**D1861** .57"-1.26"	**8302AN**	


‡**In bulk pack of 40 with plastic snap-in wire clamp.** §Up to #3 AWG aluminum conductors. #Up to #4 AWG aluminum conductors.
For further information consult Wall Plate Section Q (for Stainless Steel versions of TP724 and TP703, refer to Pages Q-13 and Q-14).
†NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.
All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Power Outlet Receptacles & Plugs
20, 30, 50, & 60A

legrand®
Pass & Seymour

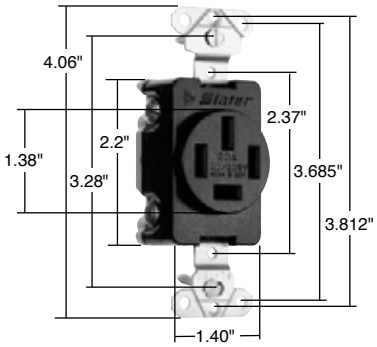


3822




3820




385 3854
388 3884
3852

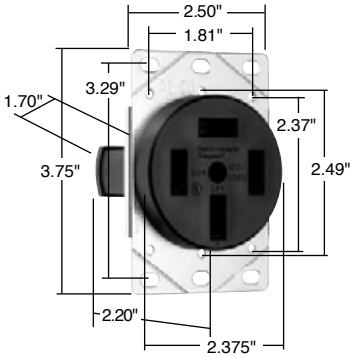

3870

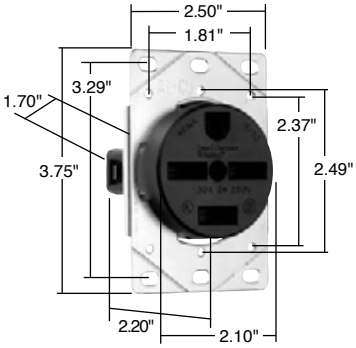


3801 3802
3804 3864
3894 5740
5750 5760

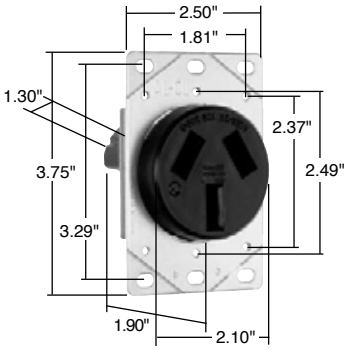


3830
3860
3890




3861




3867



3869



5741AN 5751AN
5745AN 5761AN
5746AN 8302AN



7251DF

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles
Power Outlet Receptacles & Plugs
20, 30, 50 & 60A




Flush Receptacle




Surface Receptacle



Angle Plug



Plug



Wall Plate

Application


Power devices are for use in industrial, institutional, commercial, and certain residential applications to provide higher amperage power to equipment such as air conditioners, copiers, small welders, ranges, and dryers.

Features

- Flush receptacle bodies are molded of arc-resistant plastic.
- All devices are of dead front design.
- Receptacles have double-wipe contacts of high performance copper-based alloy.
- Recommended stainless steel wall plates are listed with each flush receptacle.
- UL Listed for use with aluminum wiring.

Receptacle Amp. Rating	AWG Size	Material
Conductor Size & Material for Power Outlet Receptacles		
20A	#14 – #10	Copper/Copper-clad
30A	#10 – #6	Copper/Copper-clad/Aluminum
50A	#10 – #6	Copper/Copper-clad/Aluminum
60A	#8 – #4	Copper/Copper-clad/Aluminum

Ampere Rating	With Non-Metallic Sheathed Cable	With Conduit
Recommended Box Sizes for Flush Receptacles		
30A	4" sq. x 2-1/8" deep	4-11/16" sq. x 2-1/8" deep
50A	4-11/16" sq. x 2-1/8" deep	2-g deep box (4" sq. x 2-1/2" deep)
60A	4-11/16" sq. x 2-1/8" deep with 1/2" raised ring	2-g deep box (4" sq. x 2-1/2" deep)

Description	Color	Nylon TradeMaster®	Metal Material	Wall Plates Recommended for the Following Flush Receptacles
Accessories – Flush Receptacle Wall Plates				
 • 2.156" hole for 2.125" dia. device • 2 mtg. holes	Ivory White Brown Gray Black Light Almond	**TP724I** **TP724W** **TP724** **TP724GRY** **TP724BK** **TP724LA**	Chrome **S384C** **302S/S SS724**	2 Pole, 3 Wire Grounded **3801 3804** **3802 3830**
 • 2-5/32" hole for 2-1/8" dia. device • 2 mtg. holes			**302S/S SS702**	3 Pole, 3 Wire Ungrounded **3860** **3860**
 • 2.1563" hole for 2.125" dia. device • 4 mtg. holes	Ivory White Brown Gray Black Light Almond	**TP703I** **TP703W** **TP703** **TP703GRY** **TP703BK** **TP703LA**	Chrome **S3862C** **302S/S SS703**	3 Pole, 4 Wire Ungrounded **3864 5740** **3894 5750** **5760**


New Installations require 4 wire range and dryer outlets. Ref: 2002 NEC 250-134, 250-138
Existing Installations permitted to use 3 wire range and dryer outlets. Ref: 2002 NEC 250-140


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Receptacles, 3 Wire, Specification Grade

Catalog Number	Rating A.	V.	Description	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
2 Pole, 3 Wire Grounding							
5762	15	277	Duplex Receptacle, Self-Grounding	7-15R	•		
PS5766X	15	277	Plug, Yellow	7-15P	•		•
7621	20	277	Single Receptacle	7-20R	•		
PS5866X	20	277	Plug, Yellow	7-20P			
3 Pole, 3 Wire Non-Grounding							
6810I	20	125/250	Receptacle, Ivory	10-20R	•		
6810	20	125/250	Receptacle, Black	10-20R	•		
9977	20	125/250	Plug, Nylon	10-20P			
7088	20	125/250	Connector, Armored	10-20R			

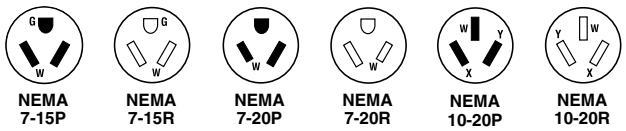


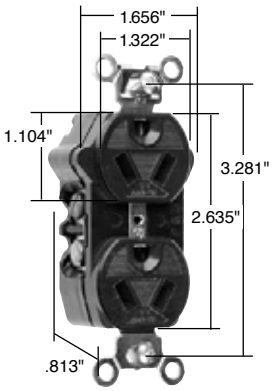


5762




6810I



9977



7088

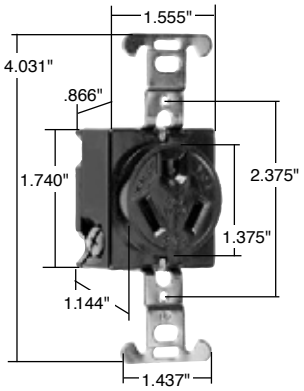

7621

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Receptacles
Power & Surge Protection Strips

Features

- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Circuit breaker switch.

Catalog Number	Rating A.	Rating V.	Type of Housing	# of Outlets	Cord Length	Color
Power Strips without Surge Protection						
PNS6	15	125	Strip	6	3'	Black
PNS7L	15	125	Strip	7	8'	Black
PNS10	15	125	Block	10	15'	Black

Application

There are an average of over 250 power disturbances per year in each home or office in the United States. Over 8% data loss is a direct result from lightning and the value of equipment and data is sometimes much greater than that of equipment.

Surges and spikes can come through power lines as well as phone and coax lines. So choose a protector which includes phone and/or coax protection.


Features

- 400V clamping voltage.
- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Multiple function protection available for power, phone, fax, modem, coax or data.
- Extremely long life with dependable protection.
- Surge protection indicator on surge devices.
- Circuit breaker switch.
- Heavy-duty high-energy MOVs.
- Ground continuity indicator.


Protection Specifications

- Line protection modes: L-N, L-G, N-G.
- Spike protection for sudden, dramatic surges, over 400V.
- Surge protection lasts for 1/120 of a second, for moderate short term overvoltage.
- EMI/RFI noise attenuation.


Catalog Number	Rating A.	Rating V.	Type of Housing	# of Outlets	Cord Length	Joule Rating Range	Max. Spike Current (Amps)	Type of Protection		Color
								Phone/Fax	Coax	
Power Strips with Surge Protection										
PS1	15	125	Tap	1		740J	48K			PC Gray
PS1P	15	125	Tap	1		740J	48K	X		PC Gray
PS6	15	125	Strip	6	3'	555J	36K			PC Gray
PS7	15	125	Strip	7	6'	740J	48K			PC Gray
PS7P	15	125	Strip	7	6'	740J	48K	X		PC Gray
PS7L	15	125	Strip	7	15'	740J	48K			PC Gray
PS8C	15	125	Block	8	8'	1100J	72K		X	PC Gray
PS8P	15	125	Block	8	8'	1100J	72K	X		PC Gray
PS10PC	15	125	Block	10	8'	1100J	72K	X	X	PC Gray



TAP – PS1

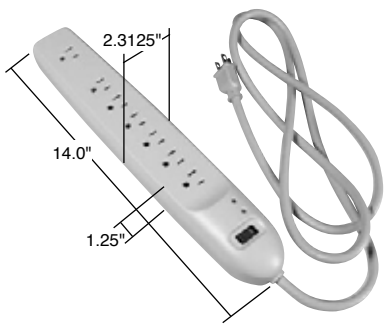

STRIP – PNS7L

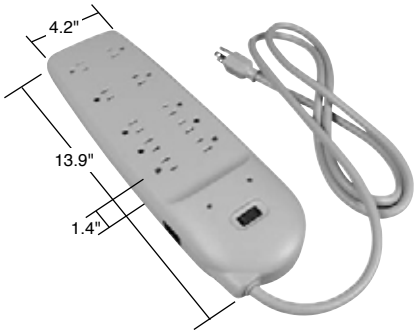

BLOCK – PS10PC

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Receptacles
Power & Surge Protection Strips Specifications

legrand®
Pass & Seymour

Power Devices – Ratings			
Catalog Number	**PNS6**	**PNS7L**	**PNS10**
Type of Housing	Strip	Strip	Strip
Total Outlets	6	7	10
Standard Grounded Outlets	6	6	6
Transformer Ready Outlets	0	1	4
Power Indicator			X
Circuit Breaker Switch	Unlighted	Lighted	Lighted
Cord Length (exposed) ft.	3'	8'	15'
Plug	Straight	Straight	Straight
Molded Add-On Safety Covers	0	0	5
Molded Housing Color	Black	Black	Black


Power & Surge Protection Devices – Ratings									
Catalog Number	**PS1**	**PS1P**	**PS6**	**PS7**	**PS7P**	**PS7L**	**PS8C**	**PS8P**	**PS10PC**
Type of Housing	Tap	Tap	Strip	Strip	Strip	Strip	Block	Block	Block
Number of Outlets	1	1	6	7	7	7	8	8	10
Standard Grounded Outlets	1	1	6	6	6	6	0	0	6
Transformer Ready Outlets	1	1	0	1	1	1	8	8	4
Joule Rating Range	740J	740J	555J	740J	740J	740J	1100J	1100J	1100J
MOV Configuration	4-20mm	4-20mm	3-20mm	4-20mm	4-20mm	4-20mm	6-20mm	6-20mm	6-20mm
Clamping Voltage	400V	400V	400V	400V	400V	400V	400V	400V	400V
Max. Spike Current (Amps)	48K	48K	36K	48K	48K	48K	72K	72K	72K
EMI Filter Capacitors	X	X		X	X	X	X	X	X
Protection (L-N, L-G, N-G)	X	X	X	X	X	X	X	X	X
Surge Protection Indicator	X	X	X	X	X	X	X	X	X
Ground/Wiring Indicator				X	X	X	X	X	X
Circuit Breaker Switch			Unlighted	Lighted	Lighted	Lighted	Lighted	Lighted	Lighted
Cord Length (exposed) ft.			3'	6'	6'	15'	8'	8'	8'
Plug			Straight	Straight	Straight	Straight	Rt. Angle	Rt. Angle	Rt. Angle
Phone/Fax Protection		X			X			X	X
Phone Line(s) Configuration					1 in/1 out			1 in/2 out	1 in/1 out
Phone Jack Spec		RJ-11			RJ-11			RJ-45	RJ-45
Nickel-Coaxial Jack Protection							X		X
6' Phone Cable (6P2C)		X			X			X	X
6' Coax Cable (Nickel Plated)							X		X
Molded Add-On Safety Covers	0	0	0	2	2	2	4	4	5
Molded Housing Color	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray
UL1449 2nd Edition	X	X	X	X	X	X	X	X	X

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Devices & Wall Plates
Color Selection Chart

Devices & Plastic Wall Plate Colors

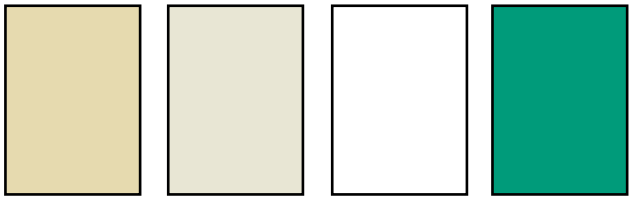


Ivory | Light Almond | White | Green

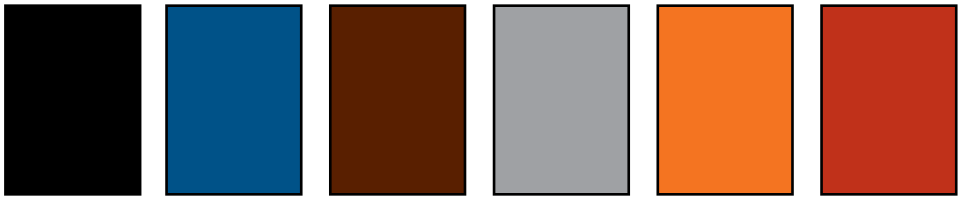

Black | Blue | Brown | Gray | Orange | Red


See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

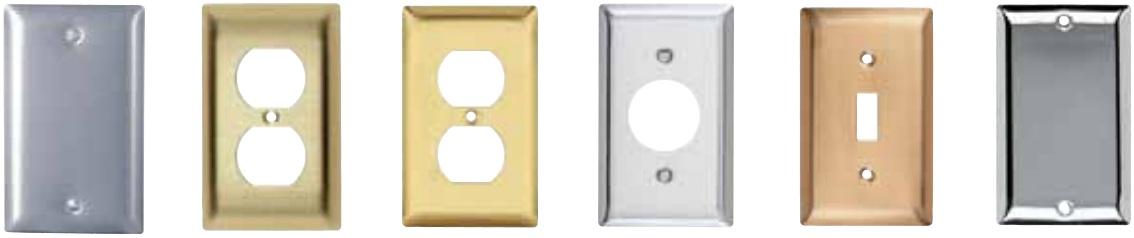

Metal Finish | Aluminum | Brass (Brushed) | Polished Brass | Stainless Steel | Brushed Bronze | Chrome

Custom Metal Wall Plates Paint Finish Colors

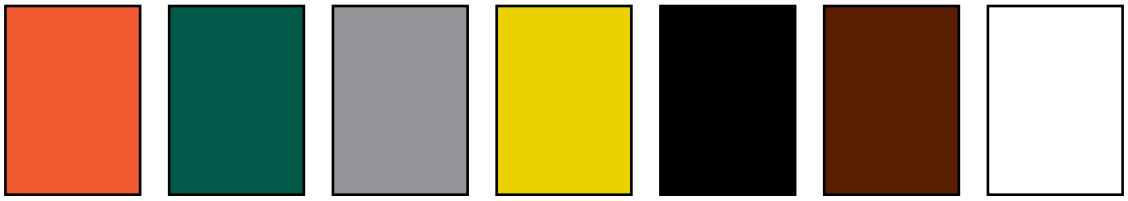

Paint Color | Orange | Green | Gray | Yellow | Glossy Black | Brown | White



Paint Color | Primer | Red | Pink | Flat Black | Ivory | Light Almond | Blue

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.

Notes

legrand®
Pass & Seymour



GFCIs

legrand®

Pass & Seymour

P&S innovations – from the first GFCI receptacle to SafeLock™ Protection.



In 1971, we introduced the first GFCI receptacle. Soon, our invention was preventing injuries and saving lives throughout North America.

That spirit of innovation and commitment to safety continues. P&S GFCI receptacles now have SafeLock™ Protection – and made it standard in all our GFCI receptacles. It goes beyond UL® standards to provide our best GFCI safety ever. With SafeLock Protection, if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

Today, you'll find P&S innovation and safety throughout a broad range of GFCI products – products that offer new versatility, save installation time, and solve problems. And products that continue a proud safety tradition that we began more than 30 years ago.

A full range of intelligently engineered, highly durable, and reliable GFCIs — whether you require receptacle, combination, portable, or in-line ground fault protection.

Index

Device	Rating	Page Number
TradeMaster® & Specification Grade GFCI Receptacles	15 & 20A, 125VAC	C-2, C-5
Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-3
Hospital Grade Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-4
Hospital Grade GFCI Receptacles	15 & 20A, 125VAC	C-6
Illuminated GFCI Receptacles	20A, 125VAC	C-7
Specification Grade Dead Front GFCIs	20A, 125VAC	C-8
Decorator Combination Tamper-Resistant Switch/GFCI Receptacles	15A, 125VAC	C-9
Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles	15 & 20A, 125VAC	C-10
Weather-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-11
Weather-Resistant DuraShield™ GFCI Receptacles	15 & 20A, 125VAC	C-12
PlugTail™ Specification Grade GFCI Receptacles	15 & 20A, 125VAC	C-13
PlugTail™ Hospital Grade GFCI Receptacles	15 & 20A, 125VAC	C-14
PlugTail™ Tamper-Resistant GFCI Receptacles	15 & 20A, 125VAC	C-15
PlugTail™ Tamper-Resistant Nightlight/GFCI Receptacles	15 & 20A, 125VAC	C-16
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles	15 & 20A, 125VAC	C-17, C-18
NAFTA-Compliant PlugTail™ GFCI Receptacles	15 & 20A, 125VAC	C-19, C-20
GFCI Portables		C-21 – C-23

legrand®
Pass & Seymour

GFCIs
TradeMaster® & Specification Grade GFCI Receptacles

GFCIs with patented SafeLock™ Protection
If critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.

High-impact-resistant, thermoplastic construction for superior strength and durability.

Back wire clamp allows for fast installation of ground wires.



Trip indicator light (LED) makes it easy to identify tripped condition.

Captive screws make for easier installation.

Two back wire holes per termination add wiring flexibility, eliminate pigtailing, and save box space.

Extra-long strap for better sheet rock contact eliminates "floaters" yet takes standard wall plate.

1595LA



Side or internal screw-pressure-plate back wire termination takes #10–#14 AWG stranded or solid, copper or copper-clad conductors.

1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.

The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

FSUL Listed (Federal Specification WC596).

Prevents line-load reversal miswire: No power to the face or downstream receptacles if wired incorrectly.

GFCIs

Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

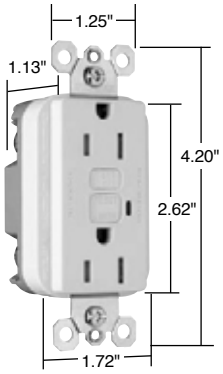


1595TRW

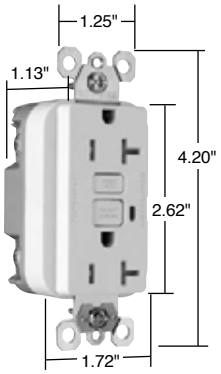

2095TRSW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
1595TRBNCC4	15	125	Brushed Nickel	5-15R	•	•	•
1595TRTI	15	125	Titanium	5-15R	•	•	•
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI with Auto-Ground							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI with Auto-Ground							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R NEMA 5-20R

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.


In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

GFCIs
Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

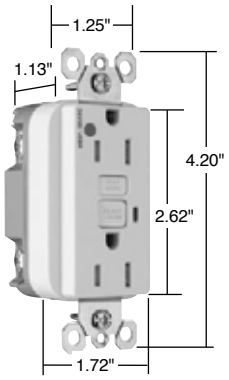

1595HGTRW

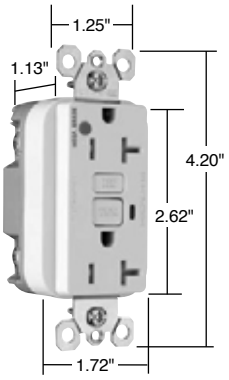

2095HGTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs
TradeMaster® & Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- GFCIs with Auto-Ground assure a positive ground to metal box.


Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
Specification Grade 20 Amp Duplex GFCI with Auto-Ground							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

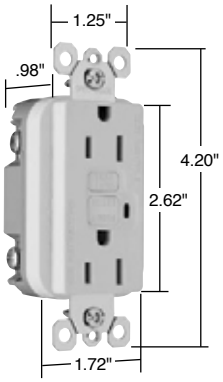

1595W

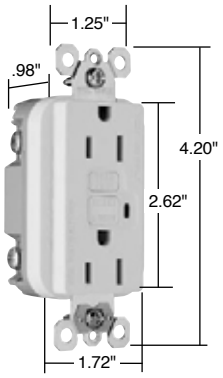

1595SW

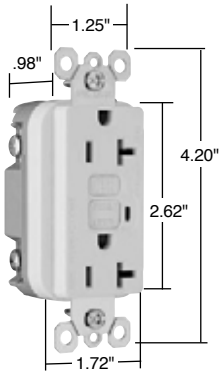

2095W



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

GFCIs
Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

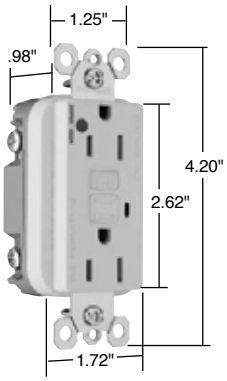

1595HGW

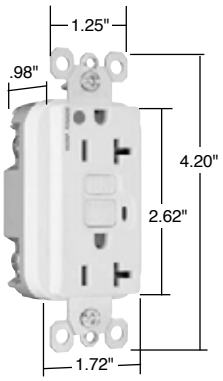

2095HGW

Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
1595HGI	15	125	Ivory	5-15R	•	•	•
1595HGW	15	125	White	5-15R	•	•	•
1595HG	15	125	Brown	5-15R	•	•	•
1595HGGRY	15	125	Gray	5-15R	•	•	•
1595HGRED	15	125	Red	5-15R	•	•	•
1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
2095HGI	20	125	Ivory	5-20R	•	•	•
2095HGW	20	125	White	5-20R	•	•	•
2095HG	20	125	Brown	5-20R	•	•	•
2095HGGRY	20	125	Gray	5-20R	•	•	•
2095HGRED	20	125	Red	5-20R	•	•	•
2095HGLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs
Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC


legrand®
Pass & Seymour

Features

- Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

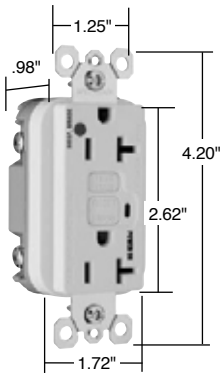

2095HGWL

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Illuminated 20 Amp Duplex GFCI							
2095IL	20	125	Ivory	5-20R	•	•	•
2095WL	20	125	White	5-20R	•	•	•
2095LAL	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

GFCIs
Specification Grade Dead Front GFCI
20A, 125VAC

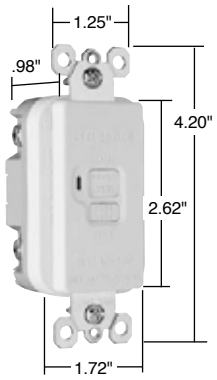

2085W

Features
- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to the load is disconnected.
- Prevents line-load reversal miswire: no power to the load or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz.
- Supply Voltage Range: 102-132 VAC.
- Trip Threshold: 5± 1mA.
- Trip Time: 0.025 sec., nominal per UL Standard.
- 20 Amp feed-thru capacity.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance: UL943 C22.2 No. 144	3rd Party Compliance: UL508 C22.2 No. 14
Specification Grade Dead Front GFCI – 1½ HP Motor Control Rating					
2085I	20	125	Ivory	•	•
2085W	20	125	White	•	•
2085BK	20	125	Black	•	•
2085LA	20	125	Light Almond	•	•

Catalog Number	Description
Accessories – GFCIs	
1594TPAI	7.0 cu. in. Extension Ring, Ivory
1594TPAW	7.0 cu. in. Extension Ring, White
1594TPA	7.0 cu. in. Extension Ring, Brown
1594TPALA	7.0 cu. in. Extension Ring, Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC


legrand®
Pass & Seymour

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

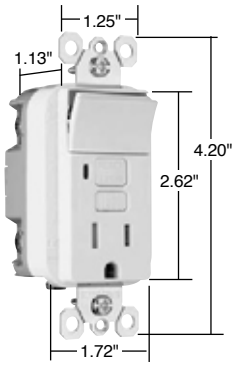

1595SWTTRWCC4

Catalog Number	Switch Rating A.	VAC	Receptacle Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL20 C22.2 No. 111
Combination Tamper-Resistant Single Pole Switch/GFCI									
1595SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1595SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1595SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•



NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

GFCIs


Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

EXCLUSIVE! P&S EXCLUSIVE!

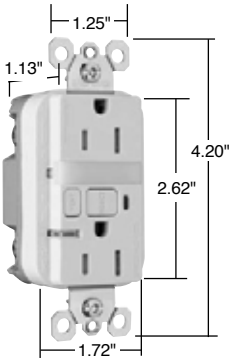

1595NTLTRWCC4

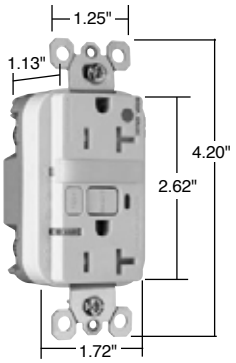

2095HGNTLTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595NTLTRICC4	15	125	0.180	Ivory	5-15R	•	•	•
1595NTLTRWCC4	15	125	0.180	White	5-15R	•	•	•
1595NTLTRBKCC4	15	125	0.180	Black	5-15R	•	•	•
1595NTLTRLACC4	15	125	0.180	Light Almond	5-15R	•	•	•
1595NTLTRBNCC4	15	125	0.180	Brushed Nickel	5-15R	•	•	•
1595NTLTRTICC4	15	125	0.180	Titanium	5-15R	•	•	•
Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095NTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095NTLTRW	20	125	0.180	White	5-20R	•	•	•
2095NTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095NTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•
Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page S-56 for more information.



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs
Weather-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features


- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Tamper-Resistant: Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

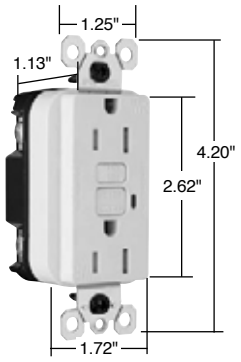


1595TRWRW

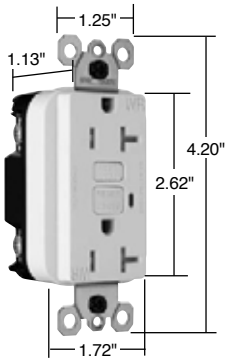

2095TRWRW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRWRW	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Weather-Resistant 20 Amp Duplex GFCI							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRWRW	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R NEMA 5-20R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

GFCIs
Weather-Resistant DuraShield™ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1595DSWRBKCC4



Features

- Designed for extra durability and a long service life when installed in harsh environments: outdoor, garages, workshops, wash down areas, commercial kitchens, and labs.
- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Dust- and insect-resistant.
- Rubber curtains let plug blades in; keep dust, water and insects out.
- Integral gasket seals receptacle, protecting critical electronic components.
- Exceeds UL corrosion requirements – survives 4X the required corrosion test cycles.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A. VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	3rd Party Compliance UL498 C22.2 No. 42
Specification Grade Weather-Resistant DuraShield™ 15 Amp Duplex GFCI					
1595DSWRBKCC4	15 125	Black	5-15R	•	•
Specification Grade Weather-Resistant DuraShield™ 20 Amp Duplex GFCI					
2095DSWRBK	20 125	Black	5-20R	•	•



NEMA 5-15R



NEMA 5-20R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

PlugTail™ Specification Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

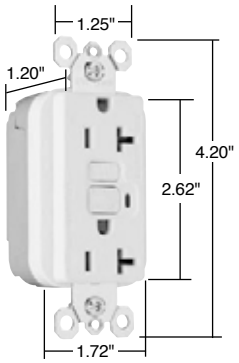

PT2095W




Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade 15 Amp Duplex GFCI							
PT1595I	15	125	Ivory	5-15R	•	•	•
PT1595W	15	125	White	5-15R	•	•	•
PT1595	15	125	Brown	5-15R	•	•	•
PT1595GRY	15	125	Gray	5-15R	•	•	•
PT1595BK	15	125	Black	5-15R	•	•	•
PT1595RED	15	125	Red	5-15R	•	•	•
PT1595LA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
PT2095I	20	125	Ivory	5-20R	•	•	•
PT2095W	20	125	White	5-20R	•	•	•
PT2095	20	125	Brown	5-20R	•	•	•
PT2095GRY	20	125	Gray	5-20R	•	•	•
PT2095BK	20	125	Black	5-20R	•	•	•
PT2095RED	20	125	Red	5-20R	•	•	•
PT2095LA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



PTRA6STR



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

GFCIs
PlugTail™ Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

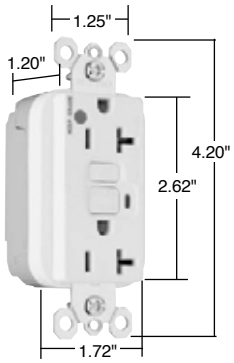

PT2095HGW




Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
PT1595HGI	15	125	Ivory	5-15R	•	•	•
PT1595HGW	15	125	White	5-15R	•	•	•
PT1595HG	15	125	Brown	5-15R	•	•	•
PT1595HGGRY	15	125	Gray	5-15R	•	•	•
PT1595HGRED	15	125	Red	5-15R	•	•	•
PT1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
PT2095HGI	20	125	Ivory	5-20R	•	•	•
PT2095HGW	20	125	White	5-20R	•	•	•
PT2095HG	20	125	Brown	5-20R	•	•	•
PT2095HGGRY	20	125	Gray	5-20R	•	•	•
PT2095HGRED	20	125	Red	5-20R	•	•	•
PT2095HGLA	20	125	Light Almond	5-20R	•	•	•



PTRA6STR

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs


PlugTail™ Specification & Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand® Pass & Seymour

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

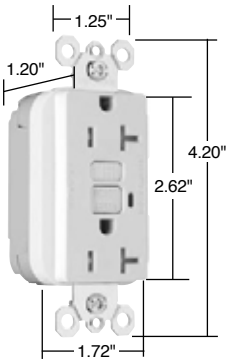

PT2095TRW

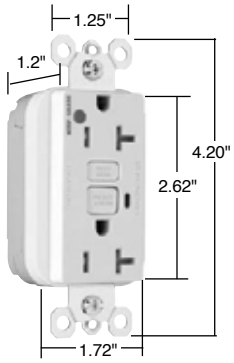

PT2095HGTRW



PTRA6STR

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595TRI	15	125	Ivory	5-15R	•	•	•
PT1595TRW	15	125	White	5-15R	•	•	•
PT1595TR	15	125	Brown	5-15R	•	•	•
PT1595TRGRY	15	125	Gray	5-15R	•	•	•
PT1595TRBK	15	125	Black	5-15R	•	•	•
PT1595TRRED	15	125	Red	5-15R	•	•	•
PT1595TRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRI	20	125	Ivory	5-20R	•	•	•
PT2095TRW	20	125	White	5-20R	•	•	•
PT2095TR	20	125	Brown	5-20R	•	•	•
PT2095TRGRY	20	125	Gray	5-20R	•	•	•
PT2095TRBK	20	125	Black	5-20R	•	•	•
PT2095TRRED	20	125	Red	5-20R	•	•	•
PT2095TRLA	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R


For PlugTail Connector catalog numbers, see Page C-13 or C-14.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

GFCIs
PlugTail™ Specification & Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

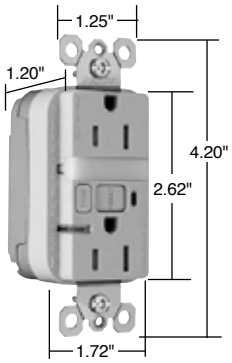

PT1595NTLTRI

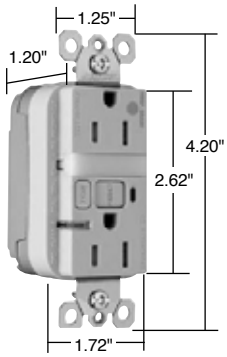

PT1595HGNTLTRI



PTRA6STR

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRI	15	125	Ivory	5-15R	•	•	•
NEW Specification Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRW	20	125	White	5-20R	•	•	•
NEW Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRRED	15	125	Red	5-15R	•	•	•
NEW Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For PlugTail Connector catalog numbers, see Page C-13 or C-14.

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRNAI	15	125	Ivory	5-15R	•	•	•
1595TRNAW	15	125	White	5-15R	•	•	•
1595TRNA	15	125	Brown	5-15R	•	•	•
1595TRNAGRY	15	125	Gray	5-15R	•	•	•
1595TRNABK	15	125	Black	5-15R	•	•	•
1595TRNALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRNAI	20	125	Ivory	5-20R	•	•	•
2095TRNAW	20	125	White	5-20R	•	•	•
2095TRNA	20	125	Brown	5-20R	•	•	•
2095TRNAGRY	20	125	Gray	5-20R	•	•	•
2095TRNABK	20	125	Black	5-20R	•	•	•
2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595NAI	15	125	Ivory	5-15R	•	•	•
1595NAW	15	125	White	5-15R	•	•	•
1595NA	15	125	Brown	5-15R	•	•	•
1595NAGRY	15	125	Gray	5-15R	•	•	•
1595NABK	15	125	Black	5-15R	•	•	•
1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI							
2095NAI	20	125	Ivory	5-20R	•	•	•
2095NAW	20	125	White	5-20R	•	•	•
2095NA	20	125	Brown	5-20R	•	•	•
2095NAGRY	20	125	Gray	5-20R	•	•	•
2095NABK	20	125	Black	5-20R	•	•	•
2095NALA	20	125	Light Almond	5-20R	•	•	•


NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW RoHS-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595RI	15	125	Ivory	5-15R	•	•	•
1595RW	15	125	White	5-15R	•	•	•
1595RLA	15	125	Light Almond	5-15R	•	•	•


RoHS-Compliant GFCI Receptacles meet the requirements of Restriction of Hazardous Substances directives and regulations.

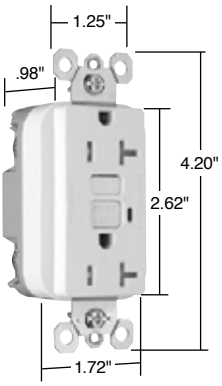

2095TRNAW

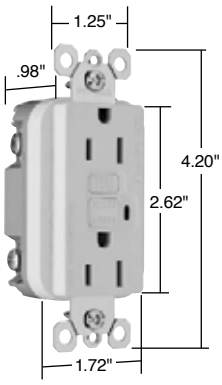

1595NAW

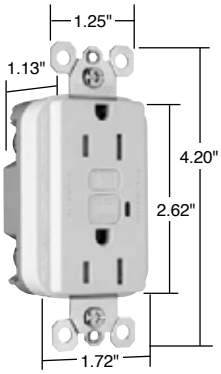

1595RW



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

GFCIs
NAFTA-Compliant Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

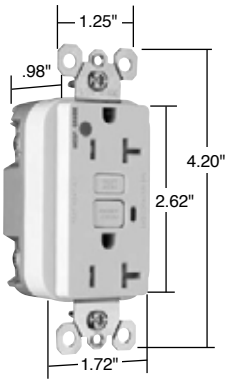

2095HGTRNAW

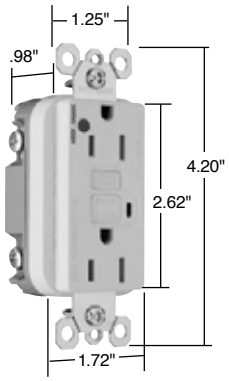

1595HGNAW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
2095HGTRNAW	20	125	White	5-20R	•	•	•
2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
2095HGTRNARED	20	125	Red	5-20R	•	•	•
2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade 15 Amp Duplex GFCI							
1595HGNAI	15	125	Ivory	5-15R	•	•	•
1595HGNAW	15	125	White	5-15R	•	•	•
1595HGNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
2095HGNAI	20	125	Ivory	5-20R	•	•	•
2095HGNAW	20	125	White	5-20R	•	•	•
2095HGNA	20	125	Brown	5-20R	•	•	•
2095HGNAGRY	20	125	Gray	5-20R	•	•	•
2095HGNARED	20	125	Red	5-20R	•	•	•
2095HGNALA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs
NAFTA-Compliant PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.


Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Spec Grade 15 Amp Duplex GFCI							
PT1595NAI	15	125	Ivory	5-15R	•	•	•
PT1595NAW	15	125	White	5-15R	•	•	•
PT1595NAGRY	15	125	Gray	5-15R	•	•	•
PT1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI							
PT2095NAI	20	125	Ivory	5-20R	•	•	•
PT2095NAW	20	125	White	5-20R	•	•	•
PT2095NAGRY	20	125	Gray	5-20R	•	•	•
PT2095NABK	20	125	Black	5-20R	•	•	•
PT2095NALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRNAI	20	125	Ivory	5-20R	•	•	•
PT2095TRNAW	20	125	White	5-20R	•	•	•
PT2095TRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595NTLTRNAW	15	125	White	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRNAW	20	125	White	5-20R	•	•	•

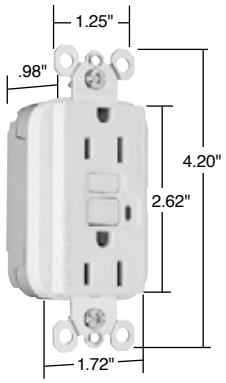


PT1595NAW

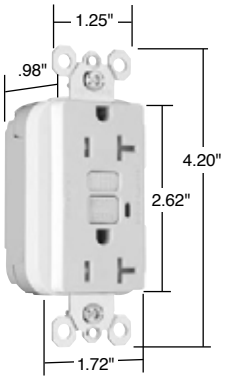

PT2095TRNAW

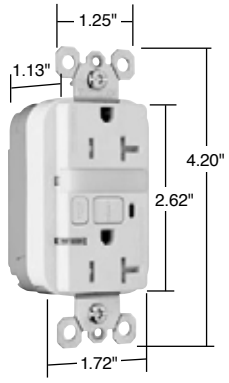

PT2095NTLTRNAW



NEMA 5-15R NEMA 5-20R

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.


For PlugTail Connector catalog numbers, see Page C-20.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

GFCIs
NAFTA-Compliant PlugTail™ Hospital Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

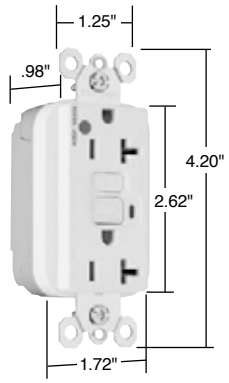

PT2095HGNAW

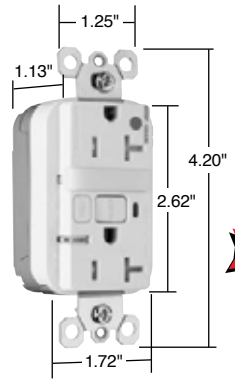

PT2095HGNTLTRNAW



PTRA6STR

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
PT2095HGNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNAW	20	125	White	5-20R	•	•	•
PT2095HGNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNARED	20	125	Red	5-20R	•	•	•
PT2095HGNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRNAW	20	125	White	5-20R	•	•	•
PT2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRNARED	20	125	Red	5-20R	•	•	•
PT2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRNAW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRNAW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRNARED	20	125	Red	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R



NEMA 5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Applications

All Legrand/Pass & Seymour Portable GFCIs meet OSHA and NEC requirements to provide ground fault protection for personnel utilizing temporary power during construction, remodeling, maintenance, repair and demolition. Can be used with power tools, high-pressure power washers, wet vacuums, and grounds keeping equipment. Also used on spas, hot tubs, vending machines, and portable signs to provide ground fault protection.

Open Neutral Protection

All Legrand/Pass & Seymour portable GFCIs have an open neutral relay that automatically cuts off power to the line (hot) conductor of the device in the event that the neutral wire preceding the GFCI becomes severed. For example, if your portable GFCI were plugged into an extension cord that was supplying the power and the neutral conductor on that extension cord was accidentally cut (as can happen on a job site), the open neutral relay would shut off power to the hot conductor. This provides an additional level of safety from possible ground faults.

Manual Reset GFCI


Requires the GFCI to be manually set for use by pressing the reset button upon plug in and after loss of primary power (power failure or unplugging the device). Must be manually reset after a ground fault condition. Ideal for applications where operator injury might occur if equipment were to restart after a power failure. Typical equipment includes power drills, saws, lathes, and grinders.

Automatic Reset GFCI

Automatically energizes or sets the GFCI for use upon plug in and after the loss of primary power (power failure or unplugging the device). After a ground fault condition, must be reset by pushing the reset button. This feature eliminates the need for unit to be reset each time it is plugged in or powered up. Ideal for equipment intended for continuous use where a temporary power failure is likely and undesirable. Examples are pumps, pressure washers, portable signs, or lighting and engine heaters.

Features & Specifications

- Durable polycarbonate case withstands hard use.
- Open neutral protection.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Operating Temperature: -35°C (-30°F) to +66°C (150°F)
- Trip Time: .025 sec., nominal per UL Standard
- Trip Threshold: 5±1mA
- Cord Grip Range: .30"-.46"
- RoHS-Compliant.

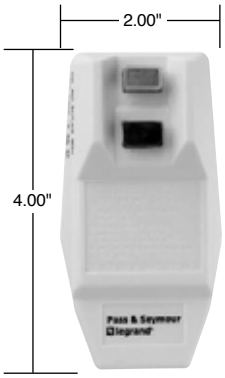

1594CMM


Catalog Number	Reset	Rating A. VAC	NEMA Config. No.	GFCI	Right Angle Plug	3rd Party Compliance UL943	UL498	C22.2 No. 144
Right Angle Plug – Portable GFCI								
1594CMM	Manual	15 125	5-15P		User attachable	•	•	•
1594CMA	Automatic	15 125	5-15P		User attachable	•	•	•

RoHS-Compliant Portable GFCIs meet the requirements of Restriction of Hazardous Substances directives and regulations.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


GFCIs
Portables




1594PC2A



1594TC2A



2094TL2M




2094PC2A

Features & Specifications

- Durable polycarbonate case withstands hard use.
- In-line has power indicator light that is on when power is available.
- Open neutral protection.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Optional tri-cord connector handles up to three loads.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Operating Temperature: -35°C (-30°F) to +66°C (150°F)
- Trip Time: .025 sec., nominal per UL Standard
- Trip Threshold: 5±1mA
- RoHS-Compliant.

Catalog Number	Description	Reset	Rating A. VAC	NEMA Config. No.	Plug	Conn.	3rd Party Compliance UL943	UL498	C22.2 No. 144
15 Amp In-Line – Portable GFCI									
1594PC6M	6' cord, straight blade	Manual	15 125	5-15P/R			•	•	•
1594PC2M	2' cord, straight blade	Manual	15 125	5-15P/R			•	•	•
1594PC2A	2' cord, straight blade	Auto.	15 125	5-15P/R			•	•	•
1594TC2M	2' cord with tri-cord connector	Manual	15 125	5-15P/R			•	•	•
1594TC2A	2' cord with tri-cord connector	Auto.	15 125	5-15P/R			•	•	•
20 Amp In-Line Portable GFCI									
2094PC2A	2' cord, straight blade	Auto.	20 125	5-20P/R			•	•	•
2094PC2M	2' cord, straight blade	Manual	20 125	5-20P/R			•	•	•
2094TL2A	2' cord, Turnlok®	Auto.	20 125	L5-20P/R			•	•	•
2094TL2M	2' cord, Turnlok®	Manual	20 125	L5-20P/R			•	•	•

Catalog Number	Description	Reset	Rating A. VAC	NEMA Config. No.	Plug Conn.	3rd Party Compliance UL943	UL498	C22.2 No. 144
Cord Set – Portable GFCI								
1594CS1M	1' cord with connector	Manual	15 125	5-15P/R		•	•	•
1594CS1A	1' cord with connector	Automatic	15 125	5-15P/R		•	•	•



1594CS1M
1594CS1A


RoHS-Compliant Portable GFCIs meet the requirements of Restriction of Hazardous Substances directives and regulations.

All devices listed on this page conform to NEMA WD-1 and WD-6.




legrand®
Pass & Seymour

Features & Specifications

- Handles up to four loads.
- Open neutral protection.
- High-impact-resistant thermoplastic housing.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5±1mA
- Trip Time: .025 sec., nominal per UL Standard
- Case Material: Yellow Thermoplastic



PS154S

Catalog Number	Description	Rating A.	Rating VAC	NEMA Config. No.	Plug	Receptacle	3rd Party Compliance UL943	3rd Party Compliance UL498
Auto Reset Boxes – Portable GFCI								
PS154S	Four 15A, 125V straight blade outlets. Cord has 15A, 125V plug	15	125	5-15P 5-15R			•	•
PS204S	Four 20A, 125V straight blade outlets. Cord has 20A, 125V plug	20	125	5-20P 5-20R			•	•
PL204L	Two 20A, 125V straight blade outlets and one 20A 125V locking outlet has 20A, 125V locking plug	20	125	L5-20P L5-20R 5-20R			•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.



DECORATOR DEVICES

legrand®

Pass & Seymour

Decorator Devices

legrand®
Pass & Seymour



Chromate-plated steel strap ensures structural integrity. A high-strength, nylon face withstands impacts.

Auto-ground clip assures positive ground.

Triple-wipe contacts interface with plug blades at three points for better contact, lasting blade retention.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Totally isolated terminal compartments for positive conductor containment.

Side and internal screw-pressure-plate back wire capability. Accepts #14 – #10 AWG solid or stranded wire.

26252W

Our complete line of Decorator devices combine today's design aesthetics — with ease of installation, reliability, and performance that never goes out of style.

Device	Page Number
PlugTail™ Specification Grade Decorator Switches	D-2, D-3
Specification Grade Decorator & Combination & Contact Switches	D-4, D-8, D-9, D-20
TradeMaster® Decorator & Combinations	D-5 – D-8, D-10 – D-12
Home Locator Switches	D-13
PlugTail™ Decorator Receptacles	D-14
Hospital & Specification Grade & Isolated Ground Decorator Receptacles	D-15 – D-17
Heavy-Duty Tamper-Resistant Decorator Receptacles & Single Receptacles	D-18 – D-20
TradeMaster® Decorator Receptacles & Hallway Lights & Combinations	D-21, D-23, D-24
Weather-Resistant Receptacles	D-22
Recessed TV Boxes	D-25
TradeMaster®, Specification & Hospital Grade GFCI & Combination Receptacles	D-26 – D-35, D-40, D-41
PlugTail™ GFCI Receptacles	D-36 – D-39, D-42, D-43
Surge Protective Receptacles	D-44 – D-50
Vacancy & Occupancy Sensors & Timers	D-51 – D-61
RF Lighting Control System	D-62, D-63
Scene Director & Leandro®	D-64 – D-66
Harmony™ TradeMaster® Dimmers & Fan Speed Controls	D-67, D-68
LS TradeMaster® Series	D-69 – D-71
DR TradeMaster® Series	D-72
Wide Slide TradeMaster® Series	D-73
Titan™ Series	D-74 – D-81
Decorator Wall Plates	D-82 – D-86

legrand®
Pass & Seymour

Decorator Devices
PlugTail™ Specification Grade Decorator Switches

Auto-ground clip assures positive ground.

Shallow design for easier installation.



Heavy-gauge steel strap for superior strength.

No exposed terminals create a finger-safe application before, during, and after installation.

EC&M Product of the Year 10 Category Winner


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.



PT2626W

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.

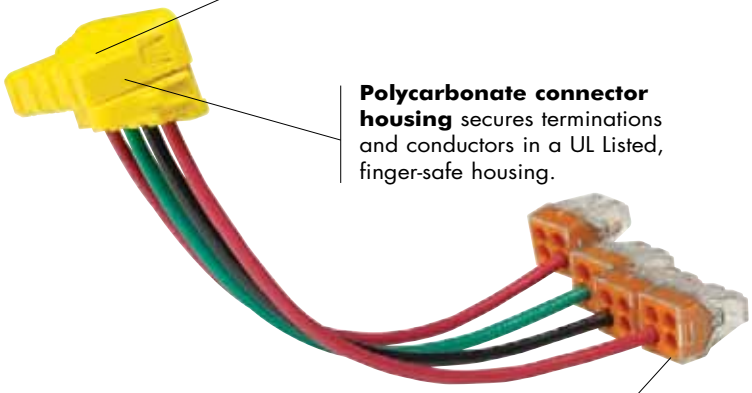

WAGO push-in connectors are available to further speed up installation.

Decorator Devices
PlugTail™ Specification Grade Decorator Switches
15 & 20A, 120/277VAC

legrand®
Pass & Seymour


Catalog Number		Rating			3rd Party Compliance		
Single Pole	Three-Way	A.	VAC	Color	UL20	FSUL WS896	C22.2 111
NEW Decorator Switches							
PT2601I	PT2603I	15	120/277	Ivory	•	•	•
PT2601W	PT2603W	15	120/277	White	•	•	•
PT2601	PT2603	15	120/277	Brown	•	•	•
PT2601GRY	PT2603GRY	15	120/277	Gray	•	•	•
PT2601RED	PT2603RED	15	120/277	Red	•	•	•
PT2601BK	PT2603BK	15	120/277	Black	•	•	•
PT2601LA	PT2603LA	15	120/277	Light Almond	•	•	•
PT2621I	PT2623I	20	120/277	Ivory	•	•	•
PT2621W	PT2623W	20	120/277	White	•	•	•
PT2621	PT2623	20	120/277	Brown	•	•	•
PT2621GRY	PT2623GRY	20	120/277	Gray	•	•	•
PT2621RED	PT2623RED	20	120/277	Red	•	•	•
PT2621BK	PT2623BK	20	120/277	Black	•	•	•
PT2621LA	PT2623LA	20	120/277	Light Almond	•	•	•
NEW Illuminated Decorator Switches							
PT2625I	PT2626I	20	120/277	Ivory	•	•	•
PT2625W	PT2626W	20	120/277	White	•	•	•
PT2625BK	PT2626BK	20	120/277	Black	•	•	•
PT2625LA	PT2626LA	20	120/277	Light Almond	•	•	•

Available in 347VAC Canadian Catalog Numbers, add 347 to the end of the Catalog Number.
Example: PT2601W347. All Canadian Products have Combination Slotted/Robertson Head Brass Screws.




PT2626W

Catalog Number	Wire Type	Wire Length	Wire Colors
NEW PlugTail Connectors for Single Pole Switches			
PTS6STR3	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	3 Wire Solid	6"	Green, Brown, Brown
NEW PlugTail Connectors for Three-Way Switches			
PTS6STR4	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow
NEW PlugTail Connectors for Single Pole Switches With WAGO Connectors			
PTS6STR3BP	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3BP	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277BP	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277BP	3 Wire Solid	6"	Green, Brown, Brown
NEW PlugTail Connectors for Three-Way Switches With WAGO Connectors			
PTS6STR4BP	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4BP	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277BP	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277BP	4 Wire Solid	6"	Green, Brown, Yellow, Yellow

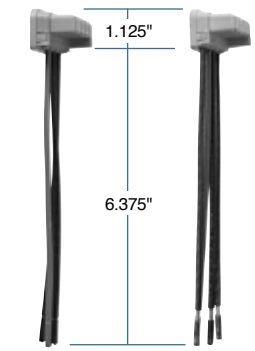

PTS6STR3 PTS6STR4

All PTS Connectors are 120/277VAC



PTS6STR3BP PTS6STR4BP

Catalog Number	Description
NEW PlugTail Jumper	
PTJ	PlugTail Cover for Rough In
PTJ5	PlugTail Cover for Rough In, 5-pack



PTJ




All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
Specification Grade Decorator Switches
15 & 20A, 120/277 & 347VAC; 20A, 120VAC

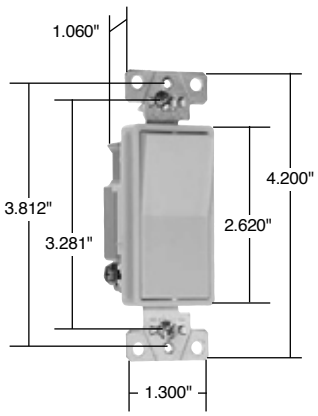

2601

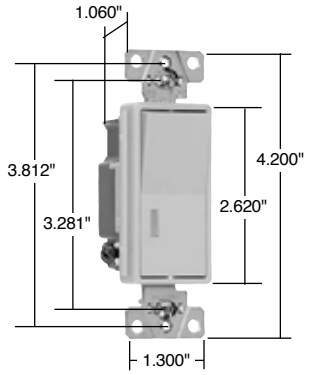

2625, 2626, 2629

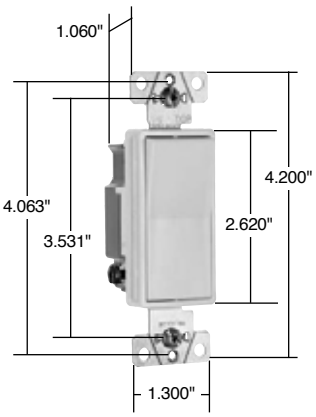

2601347

Features

- Impact-resistant polycarb back body and frame.
- Cushioned thermoplastic paddle assures smooth, quiet, long term operation.
- Unique single rocking butterfly contact provides long term consistent performance with significantly fewer moving parts.
- Internal screw-pressure-plate back and side wire capability for easy installation with #14 – #10 stranded or solid copper/copper clad wire. Terminals made of high conductivity brass and serrated for maximum wire gripping.
- Silver alloy contacts integrally formed to the butterfly actuator assures reliable performance.
- Integral auto-ground clip for positive ground to metal boxes.
- Tri-drive ground, terminal and mounting screws. All terminal screws backed out, ready-to-install.

Catalog Number				Rating			3rd Party Compliance	
Single Pole	Double Pole	Three-Way	Four-Way	A.	VAC	Color	UL20	C22.2 111
Specification Grade Decorator Switches Back & Side Wire								
2601I		2603I	2604I	15	120/277	Ivory	•	•
2601W		2603W	2604W	15	120/277	White	•	•
2601GRY		2603GRY		15	120/277	Gray	•	•
2601BK		2603BK		15	120/277	Black	•	•
2601LA		2603LA	2604LA	15	120/277	Light Almond	•	•
2621I	2622I	2623I	2624I	20	120/277	Ivory	•	•
2621W	2622W	2623W	2624W	20	120/277	White	•	•
2621	2622	2623	2624	20	120/277	Brown	•	•
2621GRY	2622GRY	2623GRY	2624GRY	20	120/277	Gray	•	•
2621BK	2622BK	2623BK	2624BK	20	120/277	Black	•	•
2621RED		2623RED	2624RED	20	120/277	Red	•	•
2621LA	2622LA	2623LA	2624LA	20	120/277	Light Almond	•	•
Illuminated Decorator Switches (Lighted when OFF) Back & Side Wire								
2625I		2626I	2628I	20	120	Ivory	•	•
2625W		2626W	2628W	20	120	White	•	•
2625				20	120	Brown	•	•
2625RED				20	120	Red	•	•
2625LA		2626LA	2628LA	20	120	Light Almond	•	•
Pilot Lighted Decorator Switches (Lighted when ON) Back & Side Wire								
2629I				20	120	Ivory	•	•
2629W				20	120	White	•	•
2629LA				20	120	Light Almond	•	•


For Bulk Packaging Solutions consult factory.

Catalog Number			Rating			3rd Party Compliance	
Single Pole	Three-Way	Four-Way	A.	VAC	Color	UL20	C22.2 111
Specification Grade Decorator Switches Back & Side Wire							
2601347I	2603347I		15	347	Ivory	•	•
2601347W	2603347W		15	347	White	•	•
2601347GRY			15	347	Gray	•	•
2601347LA			15	347	Light Almond	•	•
2621347I	2623347I	2624347I	20	347	Ivory	•	•
2621347W	2623347W	2624347W	20	347	White	•	•
2621347GRY	2623347GRY		20	347	Gray	•	•
2621347BK	2623347BK		20	347	Black	•	•
2621347RED	2623347RED		20	347	Red	•	•
2621347LA	2623347LA	2624347LA	20	347	Light Almond	•	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

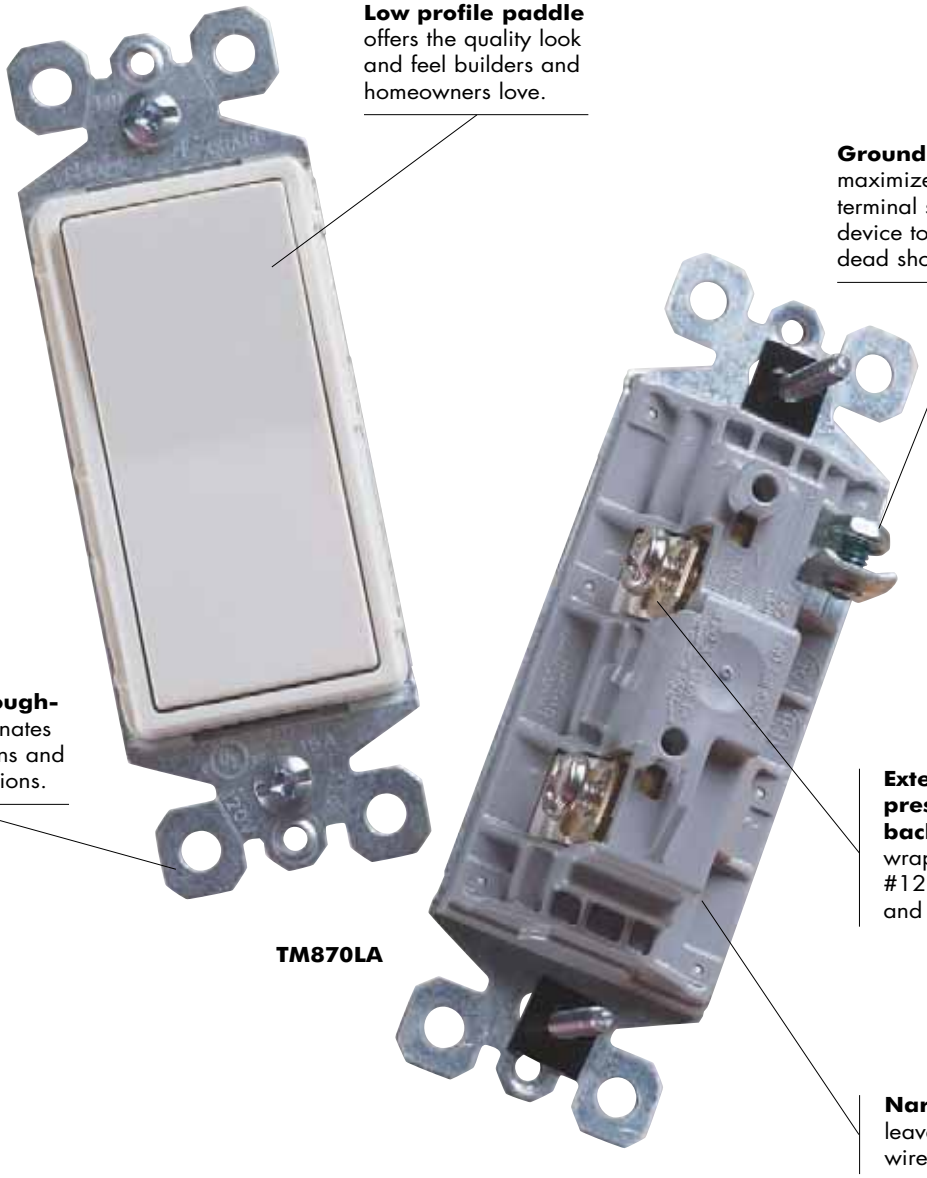

Low profile paddle offers the quality look and feel builders and homeowners love.

Ground screw location maximizes distance from terminal screw on adjacent device to eliminate risk of dead shorts.

Extra-long, through-body strap eliminates floating installations and imperfect applications.


External screw-pressure-plate back wire eliminates wrapping. Accepts #12 and #14 stranded and solid wire.

TM870LA


Narrow back body leaves more room for wires in the box.

legrand®
Pass & Seymour


Decorator Devices
TradeMaster® Decorator Switches
15A, 120/277VAC



TM870LA



TM873LA



TM874LA

Features

- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- ON-OFF switches conform to NEC 430-104 requirements for kitchen disposal units.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Decorator Switches Grounding					
TM870I	15	120/277	Ivory	•	•
TM870W	15	120/277	White	•	•
TM870	15	120/277	Brown	•	•
TM870GRY	15	120/277	Gray	•	•
TM870BK	15	120/277	Black	•	•
TM870LA	15	120/277	Light Almond	•	•
TM870BNCC10	15	120/277	Brushed Nickel	•	•
TM870TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Single Pole Decorator Switches** Grounding					
TM870NAI	15	120	Ivory	•	
TM870NAW	15	120	White	•	
TM870NA	15	120	Brown	•	
TM870NAGRY	15	120	Gray	•	
TM870NABK	15	120	Black	•	
TM870NALA	15	120	Light Almond	•	
Three-Way Decorator Switches Grounding					
TM873I	15	120/277	Ivory	•	•
TM873W	15	120/277	White	•	•
TM873	15	120/277	Brown	•	•
TM873GRY	15	120/277	Gray	•	•
TM873BK	15	120/277	Black	•	•
TM873LA	15	120/277	Light Almond	•	•
TM873BNCC10	15	120/277	Brushed Nickel	•	•
TM873TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Three-Way Decorator Switches** Grounding					
TM873NAI	15	120	Ivory	•	
TM873NAW	15	120	White	•	
TM873NA	15	120	Brown	•	
TM873NAGRY	15	120	Gray	•	
TM873NABK	15	120	Black	•	
TM873NALA	15	120	Light Almond	•	
Four-Way Decorator Switches Grounding					
TM874I	15	120/277	Ivory	•	•
TM874W	15	120/277	White	•	•
TM874	15	120/277	Brown	•	•
TM874BK	15	120/277	Black	•	•
TM874LA	15	120/277	Light Almond	•	•
TM874BNCC6	15	120/277	Brushed Nickel	•	•
TM874TI	15	120/277	Titanium	•	•
NEW **NAFTA-Compliant Four-Way Decorator Switches** Grounding					
TM874I	15	120	Ivory	•	
TM874W	15	120	White	•	
TM874	15	120	Brown	•	
TM874GRY	15	120	Gray	•	
TM874BK	15	120	Black	•	
TM874LA	15	120	Light Almond	•	

NAFTA-Compliant Switches are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices


TradeMaster® Decorator Illuminated & Self-Grounding Switches

15A, 120 & 120/277VAC


legrand®
Pass & Seymour

Features

- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- Self-grounding models provide automatic ground clip.



TM870LASL



TM870SLA

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM870ISL	15	120	Ivory	•	•
TM870WSL	15	120	White	•	•
TM870LASL	15	120	Light Almond	•	•
Self-Grounding Single Pole Decorator Switches					
TM870SI	15	120/277	Ivory	•	•
TM870SW	15	120/277	White	•	•
TM870S	15	120/277	Brown	•	•
TM870SBK	15	120/277	Black	•	•
TM870SLA	15	120/277	Light Almond	•	•
Three-Way Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM873ISL	15	120	Ivory	•	•
TM873WSL	15	120	White	•	•
TM873LASL	15	120	Light Almond	•	•
Self-Grounding Three-Way Decorator Switches					
TM873SI	15	120/277	Ivory	•	•
TM873SW	15	120/277	White	•	•
TM873S	15	120/277	Brown	•	•
TM873SBK	15	120/277	Black	•	•
TM873SLA	15	120/277	Light Almond	•	•
Four-Way Illuminated Decorator Switches Grounding (Lighted when OFF)					
TM874ISL	15	120	Ivory	•	•
TM874WSL	15	120	White	•	•
TM874LASL	15	120	Light Almond	•	•
Self-Grounding Four-Way Decorator Switches					
TM874SI	15	120/277	Ivory	•	•
TM874SW	15	120/277	White	•	•
TM874S	15	120/277	Brown	•	•
TM874SBK	15	120/277	Black	•	•
TM874SLA	15	120/277	Light Almond	•	•


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices

Decorator & Specification Grade Momentary & Maintained Contact Switches

15A, 120 & 120/277VAC



TM870STMLACC10

Features


- Designer-style satin-finish rocker.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	C22.2 111
Single Pole Decorator Momentary Contact Switches					
TM870STMWCC10	15	120/277	White	•	•
TM870STMBKCC10	15	120/277	Black	•	•
TM870STMLACC10	15	120/277	Light Almond	•	•


EXCLUSIVE! P&S EXCLUSIVE!

Features

- Unique “Up/Down” switches match the look and feel of standard decorator switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.



Momentary Contact



Maintained Contact

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance cULus	UL20	UL508
Specification Grade Double Throw Momentary Contact Switches						
TM811DTMOI	15	120	Ivory	•		•
TM811DTMOW	15	120	White	•		•
NEW **TM811DTMOBK**	15	120	Black	•		•
TM811DTMOLA	15	120	Light Almond	•		•
Specification Grade Double Throw Maintained Contact Switches						
TM811DTMAI	15	120	Ivory	•	•	
TM811DTMAW	15	120	White	•	•	
NEW **TM811DTMABK**	15	120	Black	•	•	
TM811DTMALA	15	120	Light Almond	•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

Specification Grade Decorator Combination Switches


20A, 277VAC

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Features

- Unique “Up/Down” switches match the look and feel of standard decorator switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.
- Patent-pending snap-in light module (sold separately) transforms a combination switch into an illuminated switch.
- Identification modules (sold separately) identifies each switch — light, fan, heat lamp. See Page A-24 for details.



15 & 20 Amp

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance cULus	UL20
Two Single Pole Switches					
PS81120I	20	277	Ivory	•	•
PS81120W	20	277	White	•	•
PS81120LA	20	277	Light Almond	•	•
Three Single Pole Switches					
PS811120I	20	277	Ivory	•	•
PS811120W	20	277	White	•	•
PS811120LA	20	277	Light Almond	•	•
Snap-In Light Module*					
PS8LM	—	—	Clear		

*For use with PS81120 and PS811120 only.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
TradeMaster® Decorator Combination Switches

EXCLUSIVE! P&S EXCLUSIVE!

Unique "Up/Down" switches match the look and feel of standard Decorator switches.

Easy-to-use oversized main switch for primary load.

Patented Snap-In Light Module (sold separately) transforms a combination switch into an illuminated switch in seconds.

Identification modules (sold separately) identifies each switch — light, fan, heat lamp.



TM8113WCC
Shown with Snap-In Light Module TM8LMCC.

Ground screw position under the end of the strap minimizes the risk of contact.

Impact-resistant face and body.



Full wraparound metal strap, commercial grade with lock-in tabs.


All screws are tri-drive.

Patented split circuit tab – easily accessible, and can be reinstalled without a tool.

External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.

Fully rounded back body protects wires from being damaged by sharp edges.

Adding a Snap-In Light Module

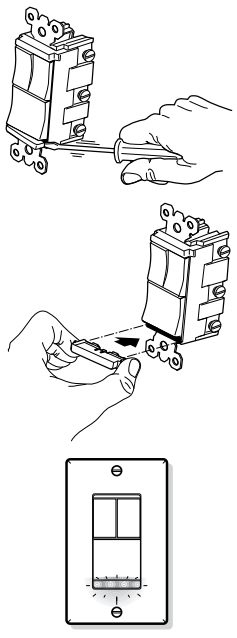

Features

- Module simply snaps-in for easy installation.
- Can be installed with the following devices: TM811, TM813, TM833, TM818, TM838, TM8111, TM8113, TM81111, TM8118 and the LS Series of Dimmers & Fan Speed Controls (see Pages M-13 through M-15).

Snap-In Light Module:

- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.



TM8LMCC



TM8IDWCC

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance c UL us cULus
Snap-In Light Module				
TM8LMCC	15	120/125	Clear	•
Identification Modules				
TM8IDICC	—	—	Ivory	
TM8IDWCC	—	—	White	
TM8IDCC	—	—	Brown	
TM8IDBKCC	—	—	Black	
TM8IDLACC	—	—	Light Almond	

For Decorator Hallway Lights and Combination Devices, see Pages D-24.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Decorator Devices
TradeMaster® Decorator Combination Switches
15A, 120VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features
- Impact-resistant face and body.
- Fully rounded back body protects wires from being damaged by sharp edges.
- Clear identification of circuits.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Full wraparound metal strap with lock-in tabs.
- Patented split circuit tab – easily accessible, and can be reinstalled without a tool.
- Unique "Up/Down" switches match the look and feel of standard Decorator switches.
- Largest breadth of 15 amp offering.
- All screws are tri-drive.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects (see Page D-12).


Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL20	cULus
Two Single Pole Switches					
TM811ICC	15	120	Ivory	•	•
TM811WCC	15	120	White	•	•
TM811CC	15	120	Brown	•	•
TM811BKCC	15	120	Black	•	•
TM811LACC	15	120	Light Almond	•	•
Single Pole Switch & Three-Way Switch					
TM813ICC	15	120	Ivory	•	•
TM813WCC	15	120	White	•	•
TM813CC	15	120	Brown	•	•
TM813BKCC	15	120	Black	•	•
TM813LACC	15	120	Light Almond	•	•
Two Three-Way Switches					
TM833ICC	15	120	Ivory	•	•
TM833WCC	15	120	White	•	•
TM833CC	15	120	Brown	•	•
TM833BKCC	15	120	Black	•	•
TM833LACC	15	120	Light Almond	•	•
Three Single Pole Switches					
TM8111ICC	15	120	Ivory	•	•
TM8111WCC	15	120	White	•	•
TM8111CC	15	120	Brown	•	•
TM8111BKCC	15	120	Black	•	•
TM8111LACC	15	120	Light Almond	•	•
Two Single Pole Switches & Three-Way Switch					
TM8113ICC	15	120	Ivory	•	•
TM8113WCC	15	120	White	•	•
TM8113CC	15	120	Brown	•	•
TM8113BKCC	15	120	Black	•	•
TM8113LACC	15	120	Light Almond	•	•
Four Single Pole Switches					
TM81111ICC	15	120	Ivory	•	•
TM81111WCC	15	120	White	•	•
TM81111CC	15	120	Brown	•	•
TM81111BKCC	15	120	Black	•	•
TM81111LACC	15	120	Light Almond	•	•



TM811WCC



TM8111WCC




TM81111WCC

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Decorator Devices
TradeMaster® Tamper-Resistant Decorator Combination Switches
15A, 120/125VAC

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL20	UL498	cULus
Tamper-Resistant Single Pole Switch & Single Receptacle							
TM818TRICC	15	120/125	Ivory	5-15R	•	•	•
TM818TRWCC	15	120/125	White	5-15R	•	•	•
TM818TRCC	15	120/125	Brown	5-15R	•	•	•
TM818TRBKCC	15	120/125	Black	5-15R	•	•	•
TM818TRLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Single Pole Switch & Single Receptacle with Pilot Light							
TM818TRPLICC	15	120/125	Ivory	5-15R	•	•	•
TM818TRPLWCC	15	120/125	White	5-15R	•	•	•
TM818TRPLBKCC	15	120/125	Black	5-15R	•	•	•
TM818TRPLLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Three-Way Switch & Single Receptacle							
TM838TRICC	15	120/125	Ivory	5-15R	•	•	•
TM838TRWCC	15	120/125	White	5-15R	•	•	•
TM838TRCC	15	120/125	Brown	5-15R	•	•	•
TM838TRBKCC	15	120/125	Black	5-15R	•	•	•
TM838TRLACC	15	120/125	Light Almond	5-15R	•	•	•
Tamper-Resistant Two Single Pole Switches & Single Receptacle							
TM8118TRICC	15	120/125	Ivory	5-15R	•	•	•
TM8118TRWCC	15	120/125	White	5-15R	•	•	•
TM8118TRCC	15	120/125	Brown	5-15R	•	•	•
TM8118TRBKCC	15	120/125	Black	5-15R	•	•	•
TM8118TRLACC	15	120/125	Light Almond	5-15R	•	•	•



TM818TRWCC



TM838TRLACC

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Application

In an emergency, seconds can make all the difference. Easily make a home instantly identifiable with a P&S Decorator Home Locator Switch. Just a single touch on its lower push button flashes the front outside lights continuously. The switch's LED flashes red to indicate the locator is in operation. When the locator flasher isn't in use, the switch's LED glows green for easy location in the dark.

Features

- ON/OFF switch with normal paddle operation.
- Locator function flashes the outdoor light ON and OFF signaling SOS in Morse Code.
- Green LED illuminates and differentiates switch for easy location in emergency.
- Red LED indicates the emergency function is enabled.
- Wires the same as a single pole switch.
- cULus Listed.



TM8LOCATORLA


Catalog Number	Description	Rating	Color
Decorator Home Locator Switches			
TM8LOCATORI **TM8LOCATORW** **TM8LOCATORLA**	Emergency Decorator Home Locator	500 Watts, 15A, 120VAC	Ivory White Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Decorator Devices
PlugTail™ Decorator Receptacles
15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

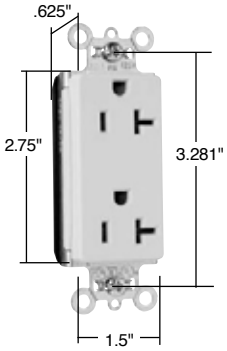


PT26352LA

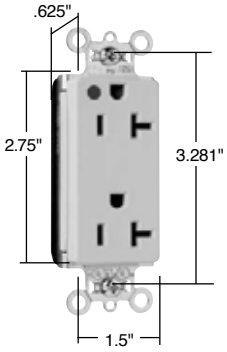

PT26362HGI



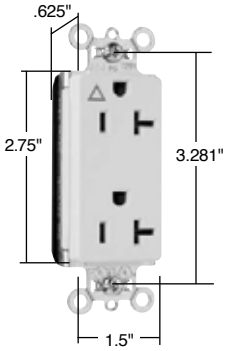


PTIG26362LA

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Isolated ground version features nylon isolator plate for isolating ground from strap and box system.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT26252I	15	125	Ivory	5-15R	•	•
PT26252W	15	125	White	5-15R	•	•
PT26252	15	125	Brown	5-15R	•	•
PT26252GRY	15	125	Gray	5-15R	•	•
PT26252BK	15	125	Black	5-15R	•	•
PT26252RED	15	125	Red	5-15R	•	•
PT26252LA	15	125	Light Almond	5-15R	•	•
PT26352I	20	125	Ivory	5-20R	•	•
PT26352W	20	125	White	5-20R	•	•
PT26352	20	125	Brown	5-20R	•	•
PT26352GRY	20	125	Gray	5-20R	•	•
PT26352BK	20	125	Black	5-20R	•	•
PT26352RED	20	125	Red	5-20R	•	•
PT26352LA	20	125	Light Almond	5-20R	•	•
Hospital Grade Duplex Receptacles						
PT26262HGI	15	125	Ivory	5-15R	•	•
PT26262HGW	15	125	White	5-15R	•	•
PT26262HGGRY	15	125	Gray	5-15R	•	•
PT26262HGRED	15	125	Red	5-15R	•	•
PT26362HGI	20	125	Ivory	5-20R	•	•
PT26362HGW	20	125	White	5-20R	•	•
PT26362HGGRY	20	125	Gray	5-20R	•	•
PT26362HGRED	20	125	Red	5-20R	•	•
PT26362HGLA	20	125	Light Almond	5-20R	•	•
Isolated Ground Duplex Receptacles						
PTIG26262I	15	125	Ivory	5-15R	•	•
PTIG26262W	15	125	White	5-15R	•	•
PTIG26262	15	125	Orange	5-15R	•	•
PTIG26262GRY	15	125	Gray	5-15R	•	•
PTIG26262RED	15	125	Red	5-15R	•	•
PTIG26262LA	15	125	Light Almond	5-15R	•	•
PTIG26362I	20	125	Ivory	5-20R	•	•
PTIG26362W	20	125	White	5-20R	•	•
PTIG26362	20	125	Orange	5-20R	•	•
PTIG26362GRY	20	125	Gray	5-20R	•	•
PTIG26362RED	20	125	Red	5-20R	•	•
PTIG26362LA	20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

For PlugTail Connectors, see Page D-36.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

Decorator Isolated Ground & Hospital Grade Receptacles


15 & 20A, 125V

legrand®
Pass & Seymour


Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Hospital Grade Duplex Receptacles Back & Side Wire							
26262HGI	15	125	Ivory	5-15R	•	•	•
26262HGW	15	125	White	5-15R	•	•	•
26262HGGRY	15	125	Gray	5-15R	•	•	•
26262HGRED	15	125	Red	5-15R	•	•	•
26362HGI	20	125	Ivory	5-20R	•	•	•
26362HGW	20	125	White	5-20R	•	•	•
26362HG	20	125	Brown	5-20R	•	•	•
26362HGGRY	20	125	Gray	5-20R	•	•	•
26362HGRED	20	125	Red	5-20R	•	•	•
26362HGLA	20	125	Light Almond	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire							
IG26262I	15	125	Ivory	5-15R	•	•	•
IG26262W	15	125	White	5-15R	•	•	•
IG26262	15	125	Orange	5-15R	•	•	•
IG26262GRY	15	125	Gray	5-15R	•	•	•
IG26262BK	15	125	Black	5-15R	•	•	•
IG26262RED	15	125	Red	5-15R	•	•	•
IG26262LA	15	125	Light Almond	5-15R	•	•	•
IG26362I	20	125	Ivory	5-20R	•	•	•
IG26362W	20	125	White	5-20R	•	•	•
IG26362	20	125	Orange	5-20R	•	•	•
IG26362GRY	20	125	Gray	5-20R	•	•	•
IG26362BK	20	125	Black	5-20R	•	•	•
IG26362RED	20	125	Red	5-20R	•	•	•
IG26362LA	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Isolated Ground Duplex Receptacles Back & Side Wire							
IG26262HGW	15	125	White	5-15R	•		•
IG26262HG	15	125	Orange	5-15R	•		•
IG26262HGRED	15	125	Red	5-15R	•		•
IG26362HGW	20	125	White	5-20R	•		•
IG26362HG	20	125	Orange	5-20R	•		•
IG26362HGBK	20	125	Black	5-20R	•		•
IG26362HGRED	20	125	Red	5-20R	•		•
Hospital Grade Illuminated Duplex Receptacles Back & Side Wire							
26222HGI	15	125	Ivory	5-15R	•		•
26322HGI	20	125	Ivory	5-20R	•		•
26322HGW	20	125	White	5-20R	•		•
26322HGRED	20	125	Red	5-20R	•		•

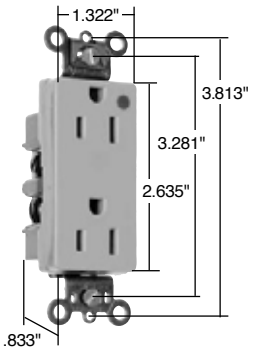


26262HGI



IG26262HG

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
Tamper-Resistant Decorator Isolated Ground Receptacles
15 & 20A, 125V

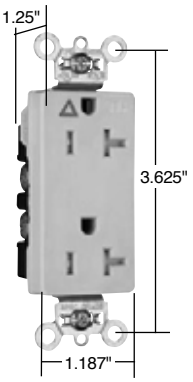

TRIG26362

Catalog Number		Rating		NEMA Config. No.	Color	3rd Party Compliance	
Spec Grade	Hospital Grade	A.	V.			cULus UL498	FSUL WC596
Tamper-Resistant Decorator Receptacles Back & Side Wire							
TRIG26262I	TRIG26262HGI	15	125	5-15R	Ivory	•	•
TRIG26262W	TRIG26262HGW	15	125	5-15R	White	•	•
TRIG26262	TRIG26262HG	15	125	5-15R	Orange	•	•
TRIG26262BK	TRIG26262HGBK	15	125	5-15R	Black	•	•
TRIG26262GRY	TRIG26262HGGRY	15	125	5-15R	Gray	•	•
TRIG26262RED	TRIG26262HGRED	15	125	5-15R	Red	•	•
TRIG26262LA	TRIG26262HGLA	15	125	5-15R	Light Almond	•	•
TRIG26362I	TRIG26362HGI	20	125	5-20R	Ivory	•	•
TRIG26362W	TRIG26362HGW	20	125	5-20R	White	•	•
TRIG26362	TRIG26362HG	20	125	5-20R	Orange	•	•
TRIG26362BK	TRIG26362HGBK	20	125	5-20R	Black	•	•
TRIG26362GRY	TRIG26362HGGRY	20	125	5-20R	Gray	•	•
TRIG26362RED	TRIG26362HGRED	20	125	5-20R	Red	•	•
TRIG26362LA	TRIG26362HGLA	20	125	5-20R	Light Almond	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Specification Grade Decorator Receptacles
15 & 20A, 125 & 250V


legrand®
Pass & Seymour

Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

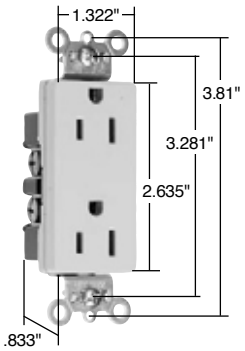

26252I




26852I

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Specification Grade Duplex Receptacles Back & Side Wire							
26252I	15	125	Ivory	5-15R	•	•	•
26252W	15	125	White	5-15R	•	•	•
26252	15	125	Brown	5-15R	•	•	•
26252GRY	15	125	Gray	5-15R	•	•	•
26252BK	15	125	Black	5-15R	•	•	•
26252RED	15	125	Red	5-15R	•	•	•
26252LA	15	125	Light Almond	5-15R	•	•	•
26352I	20	125	Ivory	5-20R	•	•	•
26352W	20	125	White	5-20R	•	•	•
26352	20	125	Brown	5-20R	•	•	•
26352GRY	20	125	Gray	5-20R	•	•	•
26352BK	20	125	Black	5-20R	•	•	•
26352RED	20	125	Red	5-20R	•	•	•
26352LA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire							
26652I	15	250	Ivory	6-15R	•	•	•
26652W	15	250	White	6-15R	•	•	•
26652	15	250	Brown	6-15R	•	•	•
26652GRY	15	250	Gray	6-15R	•	•	•
26652BK	15	250	Black	6-15R	•	•	•
26652RED	15	250	Red	6-15R	•	•	•
26852I	20	250	Ivory	6-20R	•	•	•
26852W	20	250	White	6-20R	•	•	•
26852	20	250	Brown	6-20R	•	•	•
26852GRY	20	250	Gray	6-20R	•	•	•
26852BK	20	250	Black	6-20R	•	•	•
26852RED	20	250	Red	6-20R	•	•	•
26852LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Heavy-Duty Tamper-Resistant Decorator Receptacles
15 & 20A, 125V

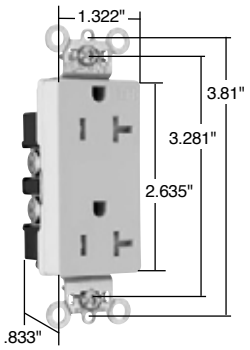

TR26362I




TR26362HGI

Features
- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Decorator Duplex Receptacles Back & Side Wire							
TR26262I	15	125	Ivory	5-15R	•	•	•
TR26262W	15	125	White	5-15R	•	•	•
TR26262	15	125	Brown	5-15R	•	•	•
TR26262GRY	15	125	Gray	5-15R	•	•	•
TR26262BK	15	125	Black	5-15R	•	•	•
TR26262RED	15	125	Red	5-15R	•	•	•
TR26262LA	15	125	Light Almond	5-15R	•	•	•
TR26362I	20	125	Ivory	5-20R	•	•	•
TR26362W	20	125	White	5-20R	•	•	•
TR26362	20	125	Brown	5-20R	•	•	•
TR26362GRY	20	125	Gray	5-20R	•	•	•
TR26362BK	20	125	Black	5-20R	•	•	•
TR26362RED	20	125	Red	5-20R	•	•	•
TR26362LA	20	125	Light Almond	5-20R	•	•	•
Tamper-Resistant Hospital Grade Duplex Receptacles Back & Side Wire							
TR26262HGI	15	125	Ivory	5-15R	•	•	•
TR26262HGW	15	125	White	5-15R	•	•	•
TR26262HGGRY	15	125	Gray	5-15R	•	•	•
TR26262HGRED	15	125	Red	5-15R	•	•	•
TR26262HGLA	15	125	Light Almond	5-15R	•	•	•
TR26362HGI	20	125	Ivory	5-20R	•	•	•
TR26362HGW	20	125	White	5-20R	•	•	•
TR26362HGGRY	20	125	Gray	5-20R	•	•	•
TR26362HGBK	20	125	Black	5-20R	•	•	•
TR26362HGRED	20	125	Red	5-20R	•	•	•
TR26362HGLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices


Heavy-Duty Tamper-Resistant Decorator Single Receptacles

15 & 20A, 125V

legrand®
Pass & Seymour

Features


- Auto-ground clip assures positive ground.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Heavy-duty corrosion-resistant zinc-plated strap for added strength.
- One-piece brass triple-wipe power contact for lasting retention.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.
- Dual mechanical shutter system to help prevent insertion of foreign objects.

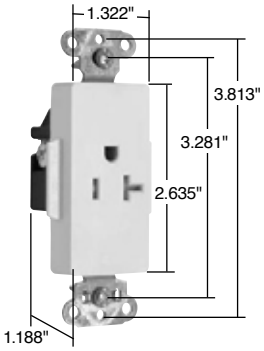

TR26361LA

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	22.2 No. 42
Heavy-Duty Tamper-Resistant Decorator Single Receptacles Back & Side Wire							
TR26261I	15	125	Ivory	5-15R	•	•	•
TR26261W	15	125	White	5-15R	•	•	•
TR26261	15	125	Brown	5-15R	•	•	•
TR26261GRY	15	125	Gray	5-15R	•	•	•
TR26261BK	15	125	Black	5-15R	•	•	•
TR26261LA	15	125	Light Almond	5-15R	•	•	•
TR26361I	20	125	Ivory	5-20R	•	•	•
TR26361W	20	125	White	5-20R	•	•	•
TR26361	20	125	Brown	5-20R	•	•	•
TR26361GRY	20	125	Gray	5-20R	•	•	•
TR26361BK	20	125	Black	5-20R	•	•	•
TR26361LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Specification Grade Decorator & Combination Receptacles
15 & 20A, 125 & 250V; 20A, 120/125VAC




26861LA

Features
- Corrosion-resistant, plated wraparound steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Heavy-Duty Specification Grade Single Receptacles Back & Side Wire							
26661I	15	250	Ivory	6-15R	•	•	•
26661W	15	250	White	6-15R	•	•	•
26661GRY	15	250	Gray	6-15R	•	•	•
26661BK	15	250	Black	6-15R	•	•	•
26861I	20	250	Ivory	6-20R	•	•	
26861W	20	250	White	6-20R	•	•	
26861	20	250	Brown	6-20R	•	•	
26861GRY	20	250	Gray	6-20R	•	•	
26861BK	20	250	Black	6-20R	•	•	
26861LA	20	250	Light Almond	6-20R	•	•	

For Bulk Packaging Solutions consult factory.




PS8HWLLA

Features
- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.

Catalog Number	Rating A.	VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance UL498
Specification Grade Decorator Hallway Light & Single Receptacle						
PS8HWLI	20	120/125	0.2561	Ivory	5-20R	•
PS8HWLW	20	120/125	0.2561	White	5-20R	•
PS8HWLLA	20	120/125	0.2561	Light Almond	5-20R	•

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See Page S-56 for more information.

2 Pole, 3 Wire



NEMA 5-20R **NEMA 6-15R** **NEMA 6-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
TradeMaster® Tamper-Resistant Receptacles
15A, 125V

legrand®
Pass & Seymour

Features


- Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet "caps" or "protection plates."
- Low profile face.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	C22.2 No. 42	cULus
Decorator Tamper-Resistant Receptacles							
885TRI	15	125	Ivory	5-15R	•	•	•
885TRW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRLA	15	125	Light Almond	5-15R	•	•	•
NEW **885TRTI**	15	125	Titanium	5-15R	•	•	•
NEW **885TRBNCC12**	15	125	Brushed Nickel	5-15R	•	•	•
Self-Grounding Decorator Tamper-Resistant Receptacles							
885TRSI	15	125	Ivory	5-15R	•	•	•
885TRSW	15	125	White	5-15R	•	•	•
885TRSLA	15	125	Light Almond	5-15R	•	•	•
NEW **NAFTA-Compliant TradeMaster® Tamper-Resistant 15 Amp Decorator Receptacle**							
885TRNAI	15	125	Ivory	5-15R	•	•	•
885TRNAW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRNAGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRNALA	15	125	Light Almond	5-15R	•	•	•


2 Pole, 3 Wire



NEMA 5-15R

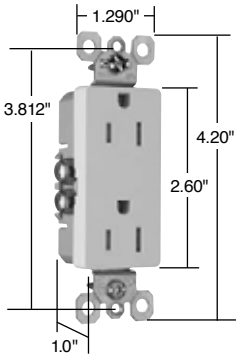

885TRSLA

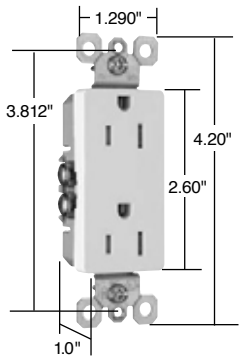

885TRNAW

NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Decorator Devices
Weather-Resistant Receptacles

Residential Weather-Resistant Receptacles are Tamper-Resistant as required by National Electrical Code®

Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:

- Ultraviolet light exposure test
- Cold impact test
- Accelerated aging test
- Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.

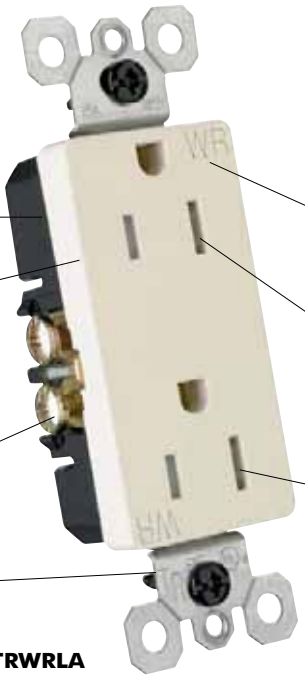

High-impact resistant thermoplastic construction.

Low profile face.

Side wire accepts #12 – #14 AWG solid wire. Push wire accepts #14 AWG solid only.


"TR" markings identify devices as Tamper-Resistant.

"WR" markings on face per UL Weather-Resistant requirements.

Safer and more effective than plastic outlet caps.

Patented internal shutter system lets plugs in, but keeps keys and other objects out with automatic shutters that block access.

885TRWRLA

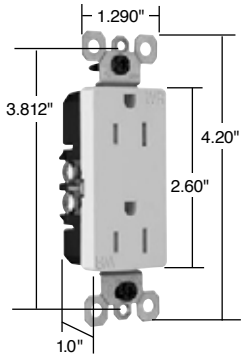

885TRWRW

Features

- Specifically designed for increased protection of children in the home.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 No. 42	cULus
Decorator Weather-Resistant Duplex Receptacles							
885TRWRI	15	125	Ivory	5-15R	•	•	•
885TRWRW	15	125	White	5-15R	•	•	•
885TRWR	15	125	Brown	5-15R	•	•	•
885TRWRLA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.


Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
TradeMaster® Decorator Receptacles
15A, 125V

legrand®
Pass & Seymour

Features
- High impact-resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Tri-drive screws.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Self-grounding models provide automatic ground clip.

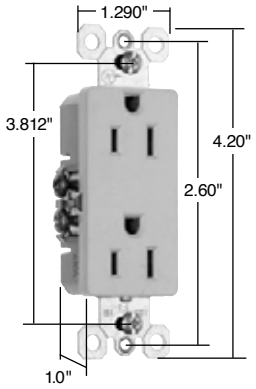


885I

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	C22.2 42
Decorator Duplex Receptacles						
885I	15	125	Ivory	5-15R	•	•
885W	15	125	White	5-15R	•	•
885	15	125	Brown	5-15R	•	•
885BK	15	125	Black	5-15R	•	•
885LA	15	125	Light Almond	5-15R	•	•
Self-Grounding Decorator Duplex Receptacles						
885SI	15	125	Ivory	5-15R	•	•
885SW	15	125	White	5-15R	•	•
885SLA	15	125	Light Almond	5-15R	•	•

For Bulk Packaging Solutions consult factory.

Features
- Longer steel straps than competitive devices, still fits under a standard wall plate.
- High-impact thermoplastic face and back body eliminate cracks, breaks and callbacks.
- Ultrasonic welding of face to back body.
- Patented design provides better plug retention.
- External screw-pressure-plate back wire on all four terminal screws and ground screw eliminates wrapping.
- Accepts #12 and #14 stranded and solid wire.
- Break-off tabs that are big enough to grab hold of – even if the contact screws are backed-out. Scored deeper, for fast, clean breaks every time.
- All four contact screws and the ground screw are backed-out.
- All screws are tri-drive.

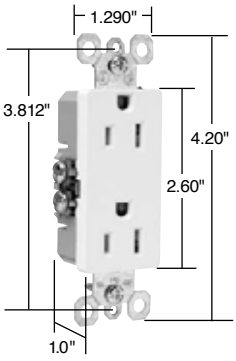

TM885W

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance c UL us UL498
Decorator Duplex Receptacles with Pressure Plates					
TM885I	15	125	Ivory	5-15R	•
TM885W	15	125	White	5-15R	•
TM885	15	125	Brown	5-15R	•
TM885GRY	15	125	Gray	5-15R	•
TM885BK	15	125	Black	5-15R	•
TM885LA	15	125	Light Almond	5-15R	•
Decorator Duplex Receptacles with Pressure Plates Self-Grounding					
TM885SI	15	125	Ivory	5-15R	•
TM885SW	15	125	White	5-15R	•
TM885SLA	15	125	Light Almond	5-15R	•
Decorator Duplex Receptacles with Pressure Plates Bulk Pack of 150					
TM885I150	15	125	Ivory	5-15R	•
TM885W150	15	125	White	5-15R	•
TM885LA150	15	125	Light Almond	5-15R	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Decorator Devices
TradeMaster® Decorator Hallway Lights & Combination Devices


EXCLUSIVE! P&S EXCLUSIVE!




TMHWLCC



TMHWLECC



TM8HWLWCC



TM8HWLTRLACC

Features

- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.

Tamper-Resistant Combination Version:

- UL tested shutter mechanism for protection against improper object insertion per UL478.
- Specially designed for increased protection of children in their homes.
- Superior protection than traditional outlet "caps" or "protection plates."

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	3rd Party Compliance UL1598
TradeMaster® Decorator Full Hallway Light with Light Sensor				
TMHWLCC	— 120	0.1328	Clear	•
Enhanced Decorator Full Hallway Light with Light Sensor				
TMHWLECC	— 120	1.079	Clear	•
Enhanced Decorator Full Hallway Light without Light Sensor				
TMHWLENSCC	— 120	1.113	Clear	•
Full Hallway Decorator Light for use with P&S Metal Louver Plates**				
TMHWLLOUVCC	— 120	0.0843	Clear	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See page S-56 for more information.
**For Louver Plates, see Page Q-21.

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance UL498
TradeMaster® Decorator Hallway Light & Single Receptacle					
TM8HWLICC	15 120/125	0.1442	Ivory	5-15R	•
TM8HWLWCC	15 120/125	0.1442	White	5-15R	•
TM8HWLCC	15 120/125	0.1442	Brown	5-15R	•
TM8HWLBKCC	15 120/125	0.1442	Black	5-15R	•
TM8HWLLACC	15 120/125	0.1442	Light Almond	5-15R	•
Decorator Hallway Light with High Output Light & Tamper-Resistant Single Receptacle					
TM8HWLTRICC	15 125	0.2561	Ivory	5-15R	•
TM8HWLTRWCC	15 125	0.2561	White	5-15R	•
TM8HWLTRCC	15 125	0.2561	Brown	5-15R	•
TM8HWLTRBKCC	15 125	0.2561	Black	5-15R	•
TM8HWLTRLACC	15 125	0.2561	Light Almond	5-15R	•

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See page S-56 for more information.

For complete line of Decorator Combination Devices, see Pages D-9 – D-12, D-20, D-24, D-33, and D-39.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Recessed TV Boxes

legrand®
Pass & Seymour

Ideal for flat-screen TVs, home office, kitchen counter tops, and behind furniture to allow snug-to-wall placement.

Today's homeowners have more multimedia choices than ever — including flat panel, wall-mounted televisions. P&S Recessed TV Boxes offer a clean installation with the versatility to handle up to 12 multimedia connections, while providing surge protected power.

Their recessed design saves space and simplifies connections to cable or satellite boxes, DVRs, DVD players, surround-sound systems and more.

And they're available with or without surge protective receptacles to protect costly electronics from potentially damaging surges.



TV3WTVSSLA



TV1WW



TV1WTVSSBK

Features

- Clean, flush-mount appearance — snap-on end caps hide mounting screws.
- Flexible — position either line voltage or low-voltage in all three openings.
- Low-voltage connectors offer both terminated and pull-through capability.
- Plugs and multimedia connections stay recessed behind the wall surface.
- Molded-in template and rectangular cut-out.
- Accepts standard TP wall plates.
- Metal swing brackets ensure a solid mounting.
- Uses old-work-style boxes for line voltage.
- Accepts all P&S keystone low-voltage connectors, including Cat 5e and F-connectors (both supplied with Surge Protective kit), as well as RCA and audio binding posts.


Catalog Number	Description	Color
Recessed TV Boxes		
TV1WW **TV1WBK** **TV1WLA**	Single Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV1WTVSSW **TV1WTVSSBK** **TV1WTVSSLA**	Single Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond
TV3WW **TV3WBK** **TV3WLA**	Three Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV3WTVSSW **TV3WTVSSBK** **TV3WTVSSLA**	Three Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond

Single gang dimensions: 7.25" L x 4.875" W x 2.25" D
Three gang dimensions: 8.5" L x 4.875" W x 2.25" D


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Tamper-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

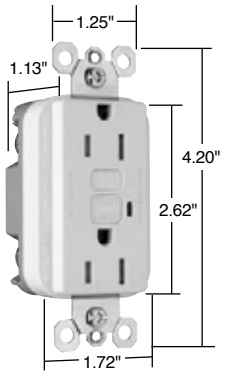

1595TRW

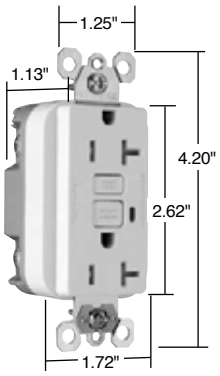

2095TRSW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
1595TRBNCC4	15	125	Brushed Nickel	5-15R	•	•	•
1595TRTI	15	125	Titanium	5-15R	•	•	•
TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI with Auto-Ground							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI with Auto-Ground							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

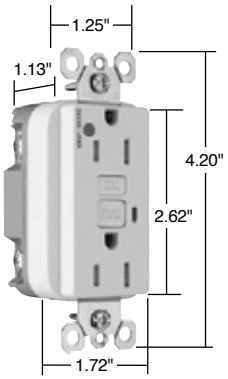

1595HGTRW

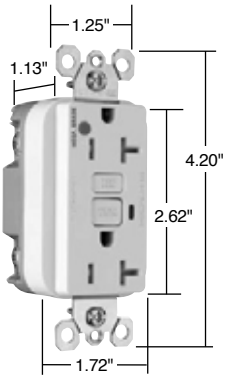

2095HGTRW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
TradeMaster® & Specification Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

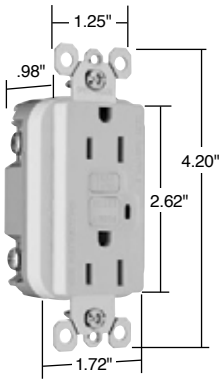

1595W

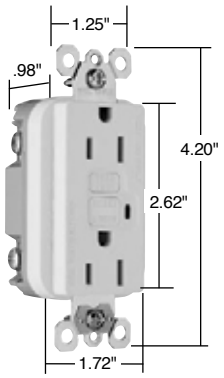

1595SW

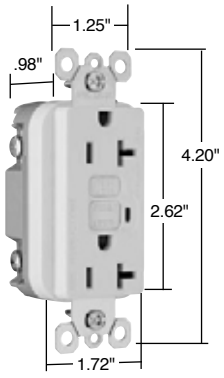

2095W



NEMA 5-15R



NEMA 5-20R

Features
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- GFCIs with Auto-Ground assure a positive ground to metal box.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
Specification Grade 20 Amp Duplex GFCI with Auto-Ground							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features


- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

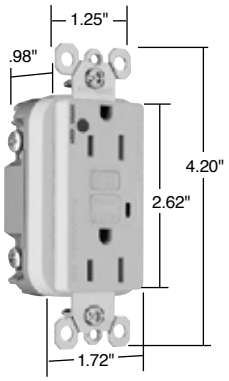

1595HGW

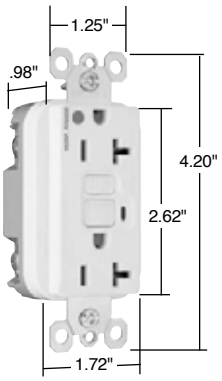

2095HGW

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
1595HGI	15	125	Ivory	5-15R	•	•	•
1595HGW	15	125	White	5-15R	•	•	•
1595HG	15	125	Brown	5-15R	•	•	•
1595HGGRY	15	125	Gray	5-15R	•	•	•
1595HGRED	15	125	Red	5-15R	•	•	•
1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
2095HGI	20	125	Ivory	5-20R	•	•	•
2095HGW	20	125	White	5-20R	•	•	•
2095HG	20	125	Brown	5-20R	•	•	•
2095HGGRY	20	125	Gray	5-20R	•	•	•
2095HGRED	20	125	Red	5-20R	•	•	•
2095HGLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC

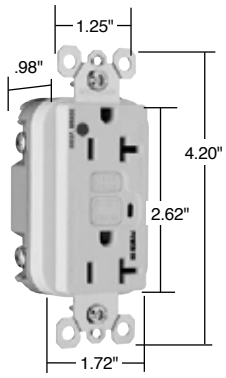

2095HGWL

Features

- Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Illuminated 20 Amp Duplex GFCI							
2095IL	20	125	Ivory	5-20R	•	•	•
2095WL	20	125	White	5-20R	•	•	•
2095LAL	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Specification Grade Dead Front GFCI


20A, 125VAC

Features

- Rated as a 1½ HP motor control switch.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to the load is disconnected.
- Prevents line-load reversal miswire: no power to the load or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz.
- Supply Voltage Range: 102-132 VAC.
- Trip Threshold: 5± 1mA.
- Trip Time: 0.025 sec., nominal per UL Standard.
- 20 Amp feed-thru capacity.

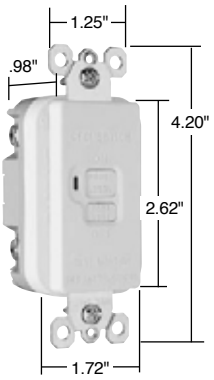

2085W

Catalog Number	Rating A.	VAC	Color	3rd Party Compliance UL943 C22.2 No. 144	UL508 C22.2 No. 14
Specification Grade Dead Front GFCI – 1½ HP Motor Control Rating					
2085I	20	125	Ivory	•	•
2085W	20	125	White	•	•
2085BK	20	125	Black	•	•
2085LA	20	125	Light Almond	•	•

Catalog Number	Description
Accessories – GFCIs	
1594TPAI	7.0 cu. in. Extension Ring, Ivory
1594TPAW	7.0 cu. in. Extension Ring, White
1594TPA	7.0 cu. in. Extension Ring, Brown
1594TPALA	7.0 cu. in. Extension Ring, Light Almond


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices

Decorator Combination Tamper-Resistant Switch/GFCI Receptacles

15A, 125VAC

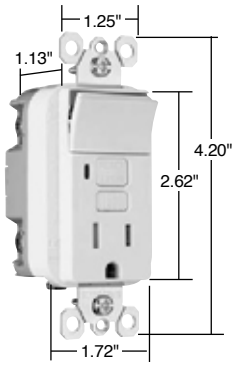

1595SWTTRWCC4

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads – perfect for bath or kitchen vents and garbage disposals.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Switch Rating A.	VAC	Receptacle Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL20 C22.2 No. 111
Combination Tamper-Resistant Single Pole Switch/GFCI									
1595SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1595SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1595SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1595SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•



NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

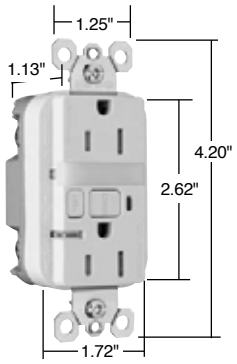


1595NTLTRWCC4

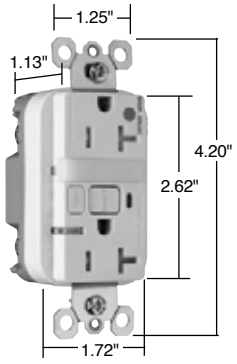

2095HGNTLTRW

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595NTLTRICC4	15	125	0.180	Ivory	5-15R	•	•	•
1595NTLTRWCC4	15	125	0.180	White	5-15R	•	•	•
1595NTLTRBKCC4	15	125	0.180	Black	5-15R	•	•	•
1595NTLTRLACC4	15	125	0.180	Light Almond	5-15R	•	•	•
1595NTLTRBNCC4	15	125	0.180	Brushed Nickel	5-15R	•	•	•
1595NTLTRTICC4	15	125	0.180	Titanium	5-15R	•	•	•
Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095NTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095NTLTRW	20	125	0.180	White	5-20R	•	•	•
2095NTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095NTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•
Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•




NEMA 5-15R NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page S-56 for more information.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Weather-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

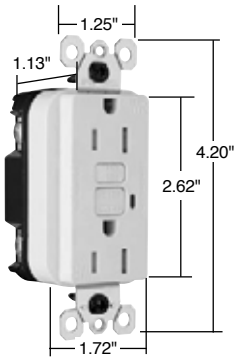

1595TRWRW

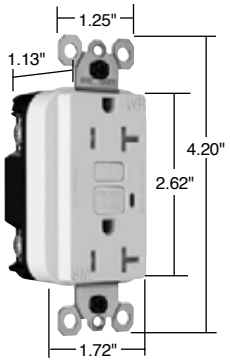

2095TRWRW

Features

- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Tamper-Resistant: Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade Weather-Resistant 15 Amp Duplex GFCI							
1595TRWRI	15	125	Ivory	5-15R	•	•	•
1595TRWRW	15	125	White	5-15R	•	•	•
1595TRWR	15	125	Brown	5-15R	•	•	•
1595TRWRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Weather-Resistant 20 Amp Duplex GFCI							
2095TRWRI	20	125	Ivory	5-20R	•	•	•
2095TRWRW	20	125	White	5-20R	•	•	•
2095TRWR	20	125	Brown	5-20R	•	•	•
2095TRWRGRY	20	125	Gray	5-20R	•	•	•
2095TRWRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

Weather-Resistant DuraShield™ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Features

- Designed for extra durability and a long service life when installed in harsh environments: outdoor, garages, workshops, wash down areas, commercial kitchens, and labs.
- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Dust- and insect-resistant.
- Rubber curtains let plug blades in; keep dust, water and insects out.
- Integral gasket seals receptacle, protecting critical electronic components.
- Exceeds UL corrosion requirements – survives 4X the required corrosion test cycles.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity



1595DSWRBKCC4



Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	3rd Party Compliance: UL498 C22.2 No. 42
Specification Grade Weather-Resistant DuraShield™ 15 Amp Duplex GFCI						
1595DSWRBKCC4	15	125	Black	5-15R	•	•
Specification Grade Weather-Resistant DuraShield™ 20 Amp Duplex GFCI						
2095DSWRBK	20	125	Black	5-20R	•	•



NEMA 5-15R



NEMA 5-20R


National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.

Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
PlugTail™ Specification Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

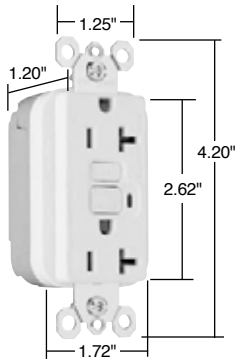


PT2095W



Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade 15 Amp Duplex GFCI							
PT1595I	15	125	Ivory	5-15R	•	•	•
PT1595W	15	125	White	5-15R	•	•	•
PT1595	15	125	Brown	5-15R	•	•	•
PT1595GRY	15	125	Gray	5-15R	•	•	•
PT1595BK	15	125	Black	5-15R	•	•	•
PT1595RED	15	125	Red	5-15R	•	•	•
PT1595LA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
PT2095I	20	125	Ivory	5-20R	•	•	•
PT2095W	20	125	White	5-20R	•	•	•
PT2095	20	125	Brown	5-20R	•	•	•
PT2095GRY	20	125	Gray	5-20R	•	•	•
PT2095BK	20	125	Black	5-20R	•	•	•
PT2095RED	20	125	Red	5-20R	•	•	•
PT2095LA	20	125	Light Almond	5-20R	•	•	•



PTRA6STR

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"



NEMA 5-15R



NEMA 5-20R

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Decorator Devices

PlugTail™ Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

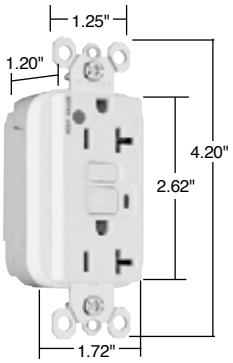

PT2095HGW




Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Hospital Grade 15 Amp Duplex GFCI							
PT1595HGI	15	125	Ivory	5-15R	•	•	•
PT1595HGW	15	125	White	5-15R	•	•	•
PT1595HG	15	125	Brown	5-15R	•	•	•
PT1595HGGRY	15	125	Gray	5-15R	•	•	•
PT1595HGRED	15	125	Red	5-15R	•	•	•
PT1595HGLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade 20 Amp Duplex GFCI							
PT2095HGI	20	125	Ivory	5-20R	•	•	•
PT2095HGW	20	125	White	5-20R	•	•	•
PT2095HG	20	125	Brown	5-20R	•	•	•
PT2095HGGRY	20	125	Gray	5-20R	•	•	•
PT2095HGRED	20	125	Red	5-20R	•	•	•
PT2095HGLA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



PTRA6STR



NEMA 5-15R



NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices

PlugTail™ Specification & Hospital Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

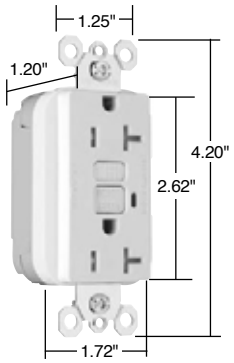

PT2095TRW

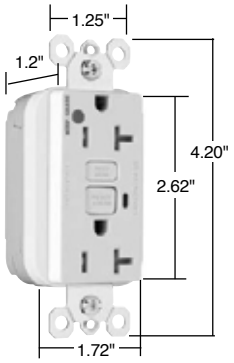

PT2095HGTRW



PTRA6STR



NEMA 5-15R



NEMA 5-20R

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Specification Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595TRI	15	125	Ivory	5-15R	•	•	•
PT1595TRW	15	125	White	5-15R	•	•	•
PT1595TR	15	125	Brown	5-15R	•	•	•
PT1595TRGRY	15	125	Gray	5-15R	•	•	•
PT1595TRBK	15	125	Black	5-15R	•	•	•
PT1595TRRED	15	125	Red	5-15R	•	•	•
PT1595TRLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRI	20	125	Ivory	5-20R	•	•	•
PT2095TRW	20	125	White	5-20R	•	•	•
PT2095TR	20	125	Brown	5-20R	•	•	•
PT2095TRGRY	20	125	Gray	5-20R	•	•	•
PT2095TRBK	20	125	Black	5-20R	•	•	•
PT2095TRRED	20	125	Red	5-20R	•	•	•
PT2095TRLA	20	125	Light Almond	5-20R	•	•	•
Hospital Grade Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connector catalog numbers, see Page D-36.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices

PlugTail™ Specification & Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRI	15	125	Ivory	5-15R	•	•	•
NEW Specification Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRW	20	125	White	5-20R	•	•	•
NEW Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRRED	15	125	Red	5-15R	•	•	•
NEW Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRLA	20	125	Light Almond	5-20R	•	•	•




NEMA 5-15R **NEMA 5-20R**


For PlugTail Connector catalog numbers, see Page D-36.

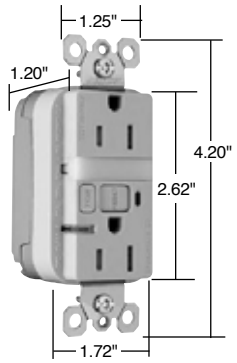

PT1595NTLTRI

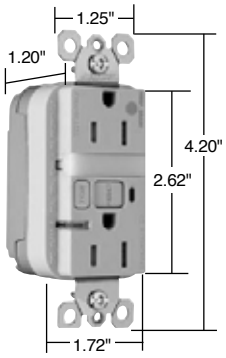

PT1595HGNTLTRI




PTRA6STR


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

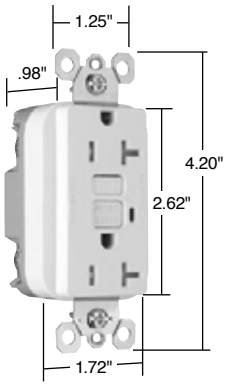

2095TRNAW

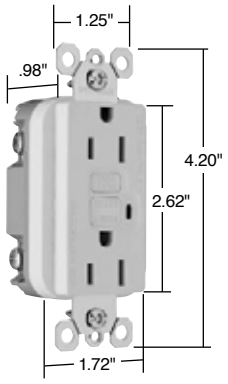

1595NAW

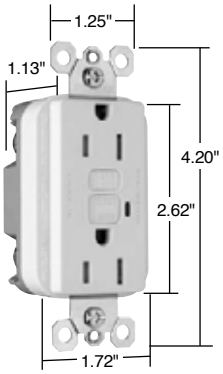

1595RW



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595TRNAI	15	125	Ivory	5-15R	•	•	•
1595TRNAW	15	125	White	5-15R	•	•	•
1595TRNA	15	125	Brown	5-15R	•	•	•
1595TRNAGRY	15	125	Gray	5-15R	•	•	•
1595TRNABK	15	125	Black	5-15R	•	•	•
1595TRNALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095TRNAI	20	125	Ivory	5-20R	•	•	•
2095TRNAW	20	125	White	5-20R	•	•	•
2095TRNA	20	125	Brown	5-20R	•	•	•
2095TRNAGRY	20	125	Gray	5-20R	•	•	•
2095TRNABK	20	125	Black	5-20R	•	•	•
2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595NAI	15	125	Ivory	5-15R	•	•	•
1595NAW	15	125	White	5-15R	•	•	•
1595NA	15	125	Brown	5-15R	•	•	•
1595NAGRY	15	125	Gray	5-15R	•	•	•
1595NABK	15	125	Black	5-15R	•	•	•
1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI							
2095NAI	20	125	Ivory	5-20R	•	•	•
2095NAW	20	125	White	5-20R	•	•	•
2095NA	20	125	Brown	5-20R	•	•	•
2095NAGRY	20	125	Gray	5-20R	•	•	•
2095NABK	20	125	Black	5-20R	•	•	•
2095NALA	20	125	Light Almond	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW RoHS-Compliant TradeMaster®/Spec Grade Tamper-Resistant 15 Amp Duplex GFCI							
1595RI	15	125	Ivory	5-15R	•	•	•
1595RW	15	125	White	5-15R	•	•	•
1595RLA	15	125	Light Almond	5-15R	•	•	•

RoHS-Compliant GFCI Receptacles meet the requirements of Restriction of Hazardous Substances directives and regulations.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Decorator Devices

NAFTA-Compliant Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
2095HGTRNAW	20	125	White	5-20R	•	•	•
2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
2095HGTRNARED	20	125	Red	5-20R	•	•	•
2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade 15 Amp Duplex GFCI							
1595HGNAI	15	125	Ivory	5-15R	•	•	•
1595HGNAW	15	125	White	5-15R	•	•	•
1595HGNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
2095HGNAI	20	125	Ivory	5-20R	•	•	•
2095HGNAW	20	125	White	5-20R	•	•	•
2095HGNA	20	125	Brown	5-20R	•	•	•
2095HGNAGRY	20	125	Gray	5-20R	•	•	•
2095HGNARED	20	125	Red	5-20R	•	•	•
2095HGNALA	20	125	Light Almond	5-20R	•	•	•




NEMA 5-15R

NEMA 5-20R

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

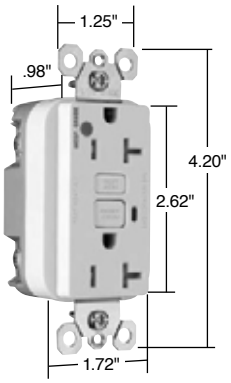

2095HGTRNAW

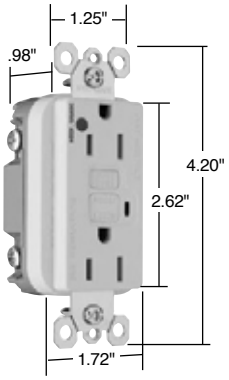


1595HGNAW


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
NAFTA-Compliant PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

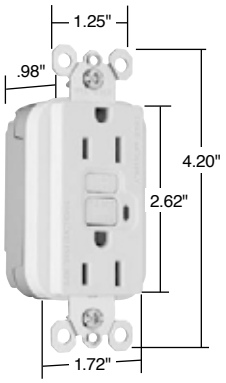

PT1595NAW

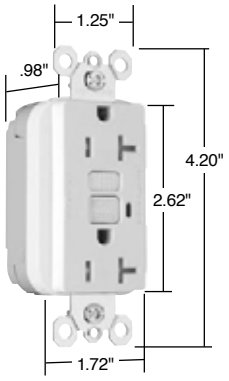

PT2095TRNAW

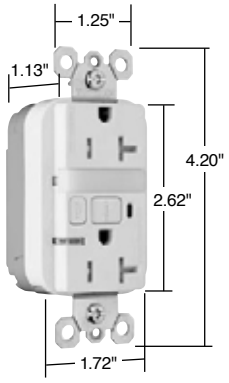

PT2095NTLTRNAW


NEMA 5-15R


NEMA 5-20R

Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Spec Grade 15 Amp Duplex GFCI							
PT1595NAI	15	125	Ivory	5-15R	•	•	•
PT1595NAW	15	125	White	5-15R	•	•	•
PT1595NAGRY	15	125	Gray	5-15R	•	•	•
PT1595NALA	15	125	Light Almond	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade 20 Amp Duplex GFCI							
PT2095NAI	20	125	Ivory	5-20R	•	•	•
PT2095NAW	20	125	White	5-20R	•	•	•
PT2095NAGRY	20	125	Gray	5-20R	•	•	•
PT2095NABK	20	125	Black	5-20R	•	•	•
PT2095NALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095TRNAI	20	125	Ivory	5-20R	•	•	•
PT2095TRNAW	20	125	White	5-20R	•	•	•
PT2095TRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095TRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595NTLTRNAW	15	125	White	5-15R	•	•	•
NEW NAFTA-Compliant Spec Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRNAW	20	125	White	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

For PlugTail Connector catalog numbers, see Page D-36.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Decorator Devices
NAFTA-Compliant PlugTail™ Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Hospital Grade 20 Amp Duplex GFCI							
PT2095HGNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNAW	20	125	White	5-20R	•	•	•
PT2095HGNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNARED	20	125	Red	5-20R	•	•	•
PT2095HGNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRNAW	20	125	White	5-20R	•	•	•
PT2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRNARED	20	125	Red	5-20R	•	•	•
PT2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRNAW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRNAW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRNARED	20	125	Red	5-20R	•	•	•

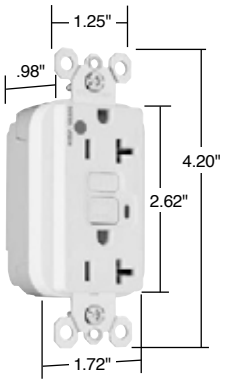

PT2095HGNAW

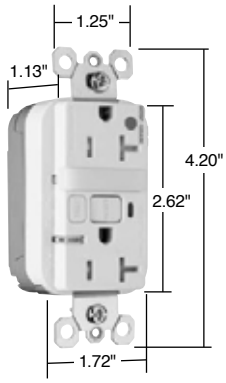

PT2095HGNTLTRNAW



PTRA6STR

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"


For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

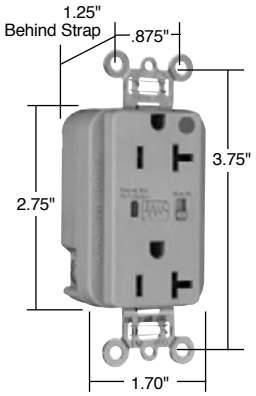

8300GRYSP

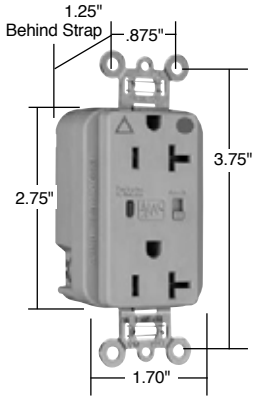

IG8300GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50μs 6000V, 8 x 20μs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance)
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)

5262/5362, IG5262/5362, 8200/8300, IG8200/8300, TR5262/5362, TRIG5262/5362, TR8200/8300, TRIG8200/8300

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20μS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

5252/5352, TR5252/5352, All PlugTail™

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20μS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.
- PlugTail versions – factory-terminated devices and connectors.

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Duplex Receptacles** Back & Side Wire								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200REDSP	15	125	5-15R	Red	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300SP	20	125	5-20R	Brown	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300REDSP	20	125	5-20R	Red	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.



NEMA 5-15R




NEMA 5-20R

Decorator Devices
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Audible Alarm with LED Indicator


Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
5262ISP	15	125	5-15R	Ivory	•	•	•	•
5262WSP	15	125	5-15R	White	•	•	•	•
5262SP	15	125	5-15R	Brown	•	•	•	•
5262GRYSP	15	125	5-15R	Gray	•	•	•	•
5262BKSP	15	125	5-15R	Black	•	•	•	•
5262REDSP	15	125	5-15R	Red	•	•	•	•
5262LASP	15	125	5-15R	Light Almond	•	•	•	•
5262BLSP	15	125	5-15R	Blue	•	•	•	•
5362ISP	20	125	5-20R	Ivory	•	•	•	•
5362WSP	20	125	5-20R	White	•	•	•	•
5362SP	20	125	5-20R	Brown	•	•	•	•
5362GRYSP	20	125	5-20R	Gray	•	•	•	•
5362BKSP	20	125	5-20R	Black	•	•	•	•
5362REDSP	20	125	5-20R	Red	•	•	•	•
5362LASP	20	125	5-20R	Light Almond	•	•	•	•
5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
IG5262ISP	15	125	5-15R	Ivory	•	•	•	•
IG5262WSP	15	125	5-15R	White	•	•	•	•
IG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
IG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
IG5262BLSP	15	125	5-15R	Blue	•	•	•	•
IG5262OSP	15	125	5-15R	Orange	•	•	•	•
IG5362ISP	20	125	5-20R	Ivory	•	•	•	•
IG5362WSP	20	125	5-20R	White	•	•	•	•
IG5362SP	20	125	5-20R	Brown	•	•	•	•
IG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
IG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
IG5362BLSP	20	125	5-20R	Blue	•	•	•	•
IG5362OSP	20	125	5-20R	Orange	•	•	•	•



NEMA 5-15R **NEMA 5-20R**

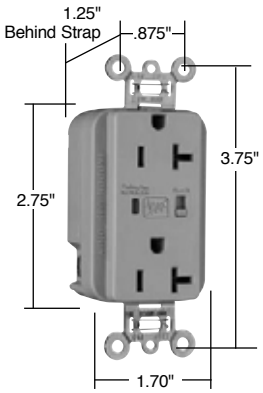

5362GRYSP

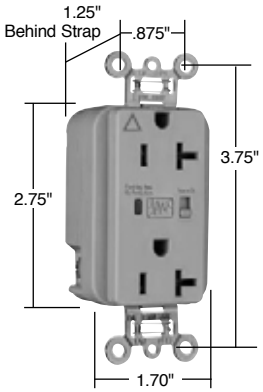


IG5362GRYSP

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

legrand®
Pass & Seymour


Decorator Devices
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

LED Indicator Only

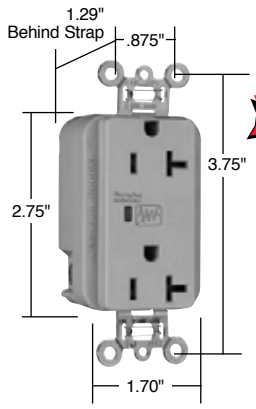

5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252BKSP	15	125	5-15R	Black	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352BKSP	20	125	5-20R	Black	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•

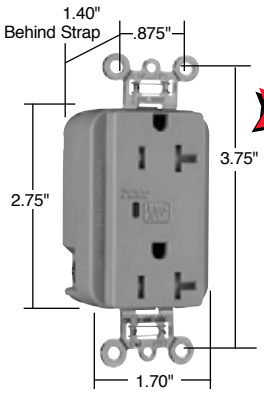

TR5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Duplex Receptacles Back & Side Wire*								
TR5252ISP	15	125	5-15R	Ivory	•	•	•	•
TR5252WSP	15	125	5-15R	White	•	•	•	•
TR5252GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5252BKSP	15	125	5-15R	Black	•	•	•	•
TR5252LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5252BLSP	15	125	5-15R	Blue	•	•	•	•
TR5352ISP	20	125	5-20R	Ivory	•	•	•	•
TR5352WSP	20	125	5-20R	White	•	•	•	•
TR5352GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5352BKSP	20	125	5-20R	Black	•	•	•	•
TR5352LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5352BLSP	20	125	5-20R	Blue	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Decorator Devices
PlugTail™ Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

legrand®
Pass & Seymour


Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT5262ISP	15	125	5-15R	Ivory	•	•	•	•
PT5262WSP	15	125	5-15R	White	•	•	•	•
PT5262SP	15	125	5-15R	Brown	•	•	•	•
PT5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PT5262BKSP	15	125	5-15R	Black	•	•	•	•
PT5262REDSP	15	125	5-15R	Red	•	•	•	•
PT5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PT5262BLSP	15	125	5-15R	Blue	•	•	•	•
PT5362ISP	20	125	5-20R	Ivory	•	•	•	•
PT5362WSP	20	125	5-20R	White	•	•	•	•
PT5362SP	20	125	5-20R	Brown	•	•	•	•
PT5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PT5362BKSP	20	125	5-20R	Black	•	•	•	•
PT5362REDSP	20	125	5-20R	Red	•	•	•	•
PT5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PT5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG5262WSP	15	125	5-15R	White	•	•	•	•
PTIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG5262BKSP	15	125	5-15R	Black	•	•	•	•
PTIG5262REDSP	15	125	5-15R	Red	•	•	•	•
PTIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG5262OSP	15	125	5-15R	Orange	•	•	•	•
PTIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG5362WSP	20	125	5-20R	White	•	•	•	•
PTIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG5362BKSP	20	125	5-20R	Black	•	•	•	•
PTIG5362REDSP	20	125	5-20R	Red	•	•	•	•
PTIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG5362OSP	20	125	5-20R	Orange	•	•	•	•
PTIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR5262WSP	15	125	5-15R	White	•	•	•	•
PTTR5262SP	15	125	5-15R	Brown	•	•	•	•
PTTR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR5262BKSP	15	125	5-15R	Black	•	•	•	•
PTTR5262REDSP	15	125	5-15R	Red	•	•	•	•
PTTR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR5362WSP	20	125	5-20R	White	•	•	•	•
PTTR5362SP	20	125	5-20R	Brown	•	•	•	•
PTTR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR5362BKSP	20	125	5-20R	Black	•	•	•	•
PTTR5362REDSP	20	125	5-20R	Red	•	•	•	•
PTTR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR5362BLSP	20	125	5-20R	Blue	•	•	•	•

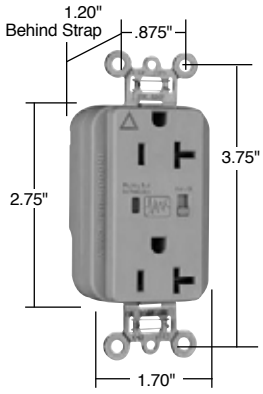


PTIG5362GRYSP



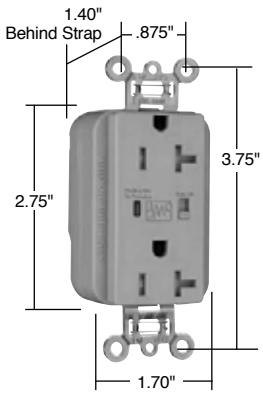

PTTR5362GRYSP

For PlugTail Connectors, see Page B-3.



NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1, WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Available Spring 2011


legrand®
Pass & Seymour

Decorator Devices
PlugTail™ Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


Audible Alarm with LED Indicator

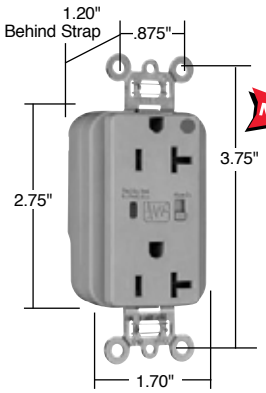

PT8300GRYSP

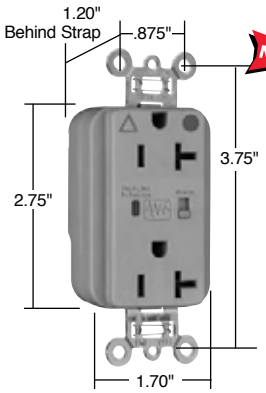

PTIG8300GRYSP

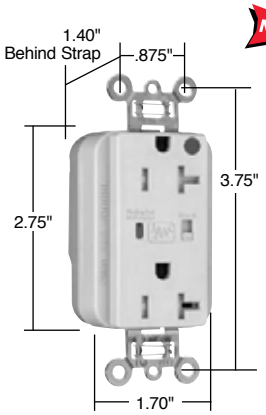

PTTR8300ISP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance: UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT8200ISP	15	125	5-15R	Ivory	•	•	•	•
PT8200WSP	15	125	5-15R	White	•	•	•	•
PT8200SP	15	125	5-15R	Brown	•	•	•	•
PT8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PT8200REDSP	15	125	5-15R	Red	•	•	•	•
PT8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PT8200BLSP	15	125	5-15R	Blue	•	•	•	•
PT8300ISP	20	125	5-20R	Ivory	•	•	•	•
PT8300WSP	20	125	5-20R	White	•	•	•	•
PT8300SP	20	125	5-20R	Brown	•	•	•	•
PT8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PT8300REDSP	20	125	5-20R	Red	•	•	•	•
PT8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PT8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG8200WSP	15	125	5-15R	White	•	•	•	•
PTIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG8200REDSP	15	125	5-15R	Red	•	•	•	•
PTIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG8200OSP	15	125	5-15R	Orange	•	•	•	•
PTIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG8300WSP	20	125	5-20R	White	•	•	•	•
PTIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG8300REDSP	20	125	5-20R	Red	•	•	•	•
PTIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
PTIG8300OSP	20	125	5-20R	Orange	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR8200WSP	15	125	5-15R	White	•	•	•	•
PTTR8200SP	15	125	5-15R	Brown	•	•	•	•
PTTR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR8200REDSP	15	125	5-15R	Red	•	•	•	•
PTTR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR8300WSP	20	125	5-20R	White	•	•	•	•
PTTR8300SP	20	125	5-20R	Brown	•	•	•	•
PTTR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR8300REDSP	20	125	5-20R	Red	•	•	•	•
PTTR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR8300BLSP	20	125	5-20R	Blue	•	•	•	•

For PlugTail Connectors, see Page B-3.

Available Spring 2011



NEMA 5-15R



NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Decorator Devices
Tamper-Resistant Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand® Pass & Seymour

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
TR5262ISP	15	125	5-15R	Ivory	•	•	•	•
TR5262WSP	15	125	5-15R	White	•	•	•	•
TR5262SP	15	125	5-15R	Brown	•	•	•	•
TR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5262BKSP	15	125	5-15R	Black	•	•	•	•
TR5262REDSP	15	125	5-15R	Red	•	•	•	•
TR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5262BLSP	15	125	5-15R	Blue	•	•	•	•
TR5362ISP	20	125	5-20R	Ivory	•	•	•	•
TR5362WSP	20	125	5-20R	White	•	•	•	•
TR5362SP	20	125	5-20R	Brown	•	•	•	•
TR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5362BKSP	20	125	5-20R	Black	•	•	•	•
TR5362REDSP	20	125	5-20R	Red	•	•	•	•
TR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
TRIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG5262WSP	15	125	5-15R	White	•	•	•	•
TRIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG5262BKSP	15	125	5-15R	Black	•	•	•	•
TRIG5262REDSP	15	125	5-15R	Red	•	•	•	•
TRIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG5262OSP	15	125	5-15R	Orange	•	•	•	•
TRIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG5362WSP	20	125	5-20R	White	•	•	•	•
TRIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG5362BKSP	20	125	5-20R	Black	•	•	•	•
TRIG5362REDSP	20	125	5-20R	Red	•	•	•	•
TRIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG5362OSP	20	125	5-20R	Orange	•	•	•	•

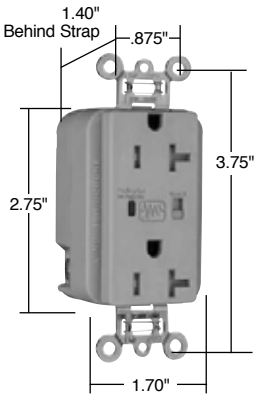

TR5362GRYSP

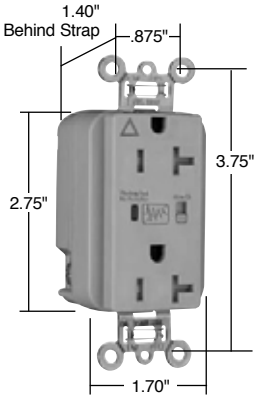

TRIG5362GRYSP



NEMA 5-15R



NEMA 5-20R


Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Decorator Devices
Tamper-Resistant Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

Audible Alarm with LED Indicator

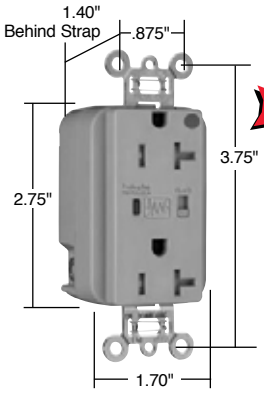

TR8300GRYSP

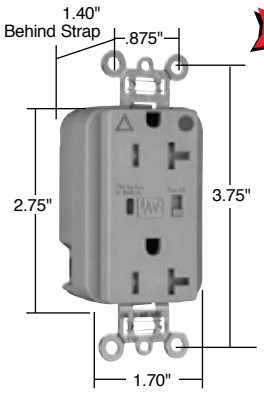

TRIG8300GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Extra Heavy-Duty Duplex Receptacles Back & Side Wire								
TR8200ISP	15	125	5-15R	Ivory	•	•	•	•
TR8200WSP	15	125	5-15R	White	•	•	•	•
TR8200SP	15	125	5-15R	Brown	•	•	•	•
TR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TR8200REDSP	15	125	5-15R	Red	•	•	•	•
TR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TR8200BLSP	15	125	5-15R	Blue	•	•	•	•
TR8300ISP	20	125	5-20R	Ivory	•	•	•	•
TR8300WSP	20	125	5-20R	White	•	•	•	•
TR8300SP	20	125	5-20R	Brown	•	•	•	•
TR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TR8300REDSP	20	125	5-20R	Red	•	•	•	•
TR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TR8300BLSP	20	125	5-20R	Blue	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire								
TRIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG8200WSP	15	125	5-15R	White	•	•	•	•
TRIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG8200REDSP	15	125	5-15R	Red	•	•	•	•
TRIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG8200OSP	15	125	5-15R	Orange	•	•	•	•
TRIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG8300WSP	20	125	5-20R	White	•	•	•	•
TRIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG8300REDSP	20	125	5-20R	Red	•	•	•	•
TRIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG8300OSP	20	125	5-20R	Orange	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Decorator Devices
Residential Vacancy Sensors
Passive Infrared (PIR)

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- California Title 24 compliant.
- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Manual-ON operation.
- Fixed 30-minute time delay, no adjustment necessary.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.² (56m²).
- cULus listed.
- 5-year warranty.


RW500B only
- Incandescent.

RWU600B only
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.

RW600BTC only
- Interchangeable face – Three colors in one box (Ivory, White, Light Almond).


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Single Pole Vacancy Sensors							
RW500BICC4	No neutral required, ideal for bedrooms and baths	120VAC 60 Hz	25-500W Incandescent	No	Yes	No	Ivory
RW500BWCC4				No	Yes	No	White
RW500BBKCC4				No	Yes	No	Black
RW500BLACC4				No	Yes	No	Lt. Almond
RWU600BICC4	Neutral required, ideal for bedrooms and baths	120VAC 60 Hz	0-600W All	No	Yes	No	Ivory
RWU600BWCC4				No	Yes	No	White
RWU600BBKCC4				No	Yes	No	Black
RWU600BLACC4				No	Yes	No	Lt. Almond
NEW **RW600BTC**	No neutral required, ideal for bedrooms and baths Comes with three interchangeable face colors.	120VAC 60 Hz	0-600W All	No	Yes	No	Ivory/ White/ Lt. Almond

Coverage






RW500B Wiring

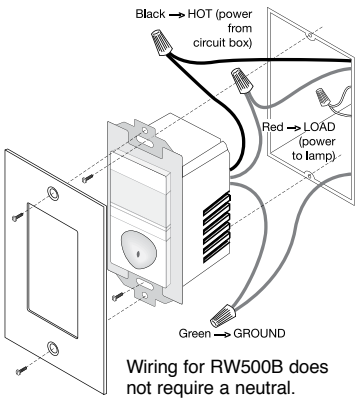


Wiring for RW500B does not require a neutral.

RWU600B Wiring

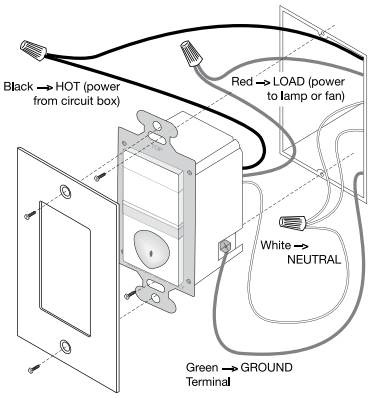


Wiring for RWU600B requires a neutral.

RW600B Wiring

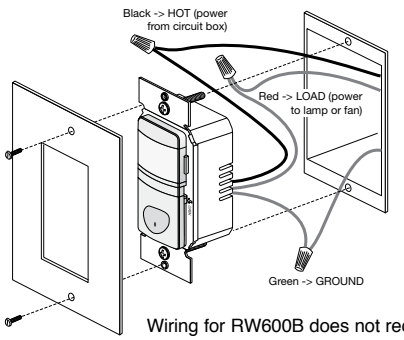


Wiring for RW600B does not require a neutral.


All devices listed on this page conform to NEMA WD-1 and WD-6.

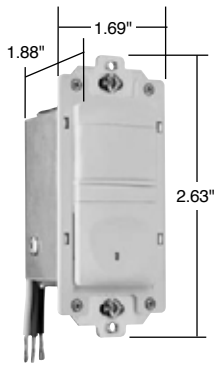

RW500BLACC4

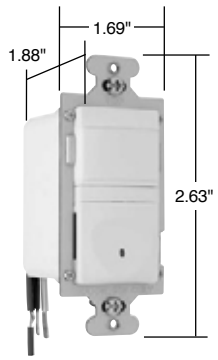


RWU600BLACC4




RW600BTC

legrand®
Pass & Seymour

Decorator Devices
Residential Occupancy Sensors
Passive Infrared (PIR)

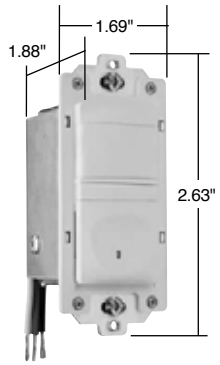

RW500ULACC4

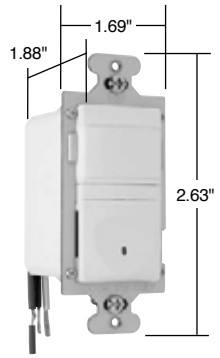

RWU600ULACC4

Features


- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Automatic-ON operation.
- Fixed five-minute time delay.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.² (56m²)
- cULus listed.
- 5-year warranty.
- Works with most common residential lighting types

RWU600U only

- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Single Pole Occupancy Sensors							
RW500UICC4	No neutral required, ideal for storage and utility rooms	120VAC 60 Hz	25-500W Incandescent	Yes	No	No	Ivory
RW500UWCC4				Yes	No	No	White
RW500UBKCC4				Yes	No	No	Black
RW500ULACC4				Yes	No	No	Lt. Almond
RWU600UICC4	Neutral required, controls most types of lighting, ideal for storage & utility rooms	120VAC 60 Hz	0-600W All	Yes	No	No	Ivory
RWU600UWCC4				Yes	No	No	White
RWU600UBKCC4				Yes	No	No	Black
RWU600ULACC4				Yes	No	No	Lt. Almond

Coverage






RW500U Wiring

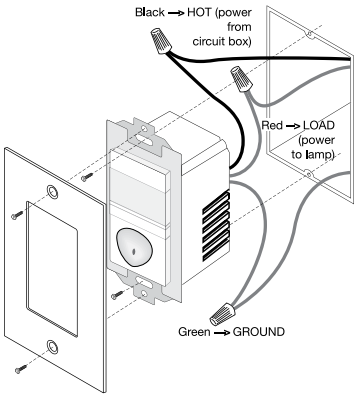

Wiring for RW500U does not require a neutral.

RWU600U Wiring

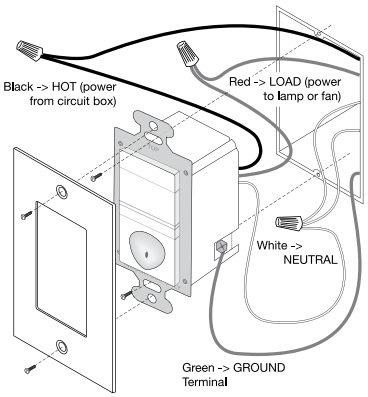

Wiring for RWU600U requires a neutral.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Residential Occupancy/ Vacancy Sensors

3-Way Passive Infrared (PIR)

legrand®
Pass & Seymour

Applications

The RW3U600 has the flexibility to work in a variety of applications including hallways, stairways, bathrooms, living and dining rooms, and other areas with multiple entries. The RW3U600 vacancy sensor allows true multi-way operation with automatic ON/OFF control.

Features

- Occupancy-based control plus multi-way operation.
- Two or more RW3U600s connected together will allow enhanced coverage of the controlled space.
- Works with most common residential lighting types.
- Adjustable time delay of 15 seconds to 30 minutes.
- Light level sensing prevents automatic ON of lights when adequate daylight exists.
- Replaces three-way or four-way switches when used with other RW3U600s.
- Lighted switch for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable light level setting of 10 to 150 fc (100 to 1500 lux).
- Coverage: 180°, max. 600 ft.² (56m²).
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

RW3U603 only


- California Title 24 compliant.
- Time delay 15 seconds, 5, 15, 30 minutes.



RW3U600W shown with SWP26W

Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color	Light Level Sensing
Single Pole/3-Way Occupancy/Vacancy Sensors								
RW3U600I*	Light-level sensing for optimum operation – ideal for rooms with multiple entrances	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Ivory	Yes
RW3U600W*				Yes	Yes	Yes	White	Yes
RW3U600BK*				Yes	Yes	Yes	Black	Yes
RW3U600LA*				Yes	Yes	Yes	Lt. Almond	Yes
NEW **RW3U603I****	Ideal for rooms with multiple entrances	120VAC 60Hz	0-600W All	No	Yes	No	Ivory	No
NEW **RW3U603W****				No	Yes	No	White	No
NEW **RW3U603BK****				No	Yes	No	Black	No
NEW **RW3U603LA****				No	Yes	No	Lt. Almond	No


*RW3U600 requires an additional RW3U600 in multi-way circuits.
**RW3U603 can be used with either a momentary contact switch or an additional RW3U603 unit for multi-way applications. Momentary contact switches on Page A-22.

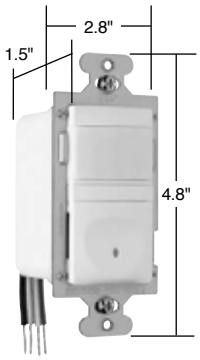

RW3U600W
RW3U603W


Dimensions for RW3U603W:
2.67" (L) x
1.73" (W) x 1.77" (D)

Coverage






Product Controls




RW3U600

RW3U600 Wiring for 3-Way Operation

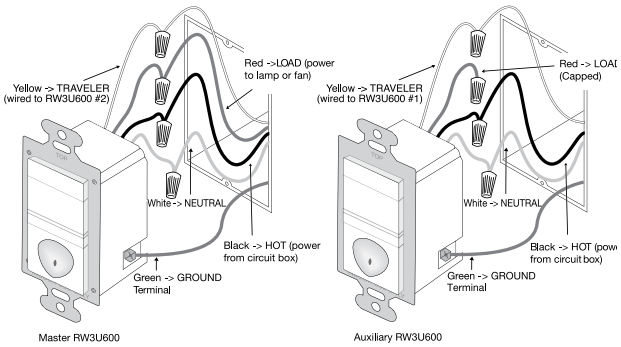

RW3U603 Wiring for 3-Way Operation

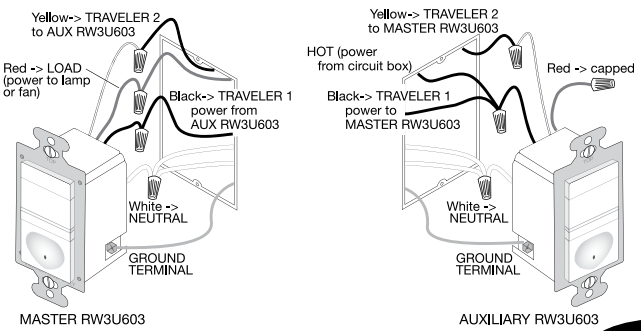

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Decorator Devices
Residential Occupancy/ Vacancy Sensors

Passive Infrared (PIR) with Dimmer

TITLE 24 ENERGY SAVER

Features


- California Title 24 compliant.
- Replaces standard single pole switch or incandescent dimmer.
- Low-profile styling with uniform color-matched lens and device.
- Lighted pushbutton for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable time delay from 15 seconds to 30 minutes.
- Soft start technology to prolong lamp life.
- Air gap isolation switch for safe relamping.
- If enabled, light level sensing prevents automatic-ON when adequate daylight exists.
- Adjustable light level setting from 10-150 fc (100-1500 lux) for daylight sensing.
- Operating conditions: 32°-104°F (0°-40°C), 95% RH, noncondensing.
- Coverage: 180°, max. 600 ft² (56 m²).
- cULus listed.
- 5-year warranty.

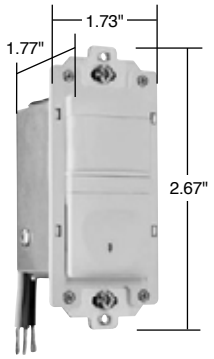

RWDU500W


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Occupancy/Vacancy Sensors with Preset Dimmers							
RWDU500I	Neutral required, ideal			Yes	Yes	Yes	Ivory
RWDU500W	for living, dining and	120VAC	25-500	Yes	Yes	Yes	White
RWDU500BK	family rooms, master	60Hz	Incandescent	Yes	Yes	Yes	Black
RWDU500LA	bathrooms and bedrooms			Yes	Yes	Yes	Lt. Almond

Coverage





RWDU500 Wiring

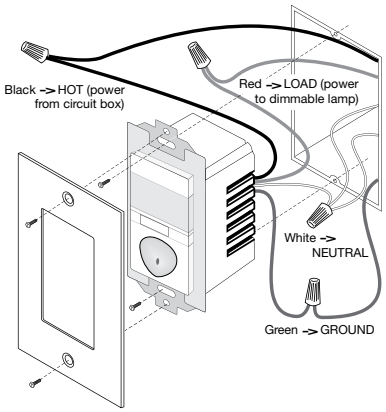


De-rating

When more that one dimmer is installed in a multi-gang box, it is necessary to reduce the maximum load on each dimmer.

- For an RWDU500 in either end position of a multi-gang box, reduce the maximum load by 50W.
- For an RWDU500 in a central position of a multi-gang box, reduce its maximum load by 100W. Mounting in a deep electrical box is recommended.

Product Controls



RWDU500

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Commercial Occupancy Sensors
Wall Box Passive Infrared (PIR)

legrand®
Pass & Seymour

Features

- Detection Signature Analysis provides high immunity to RFI and EMI.
- Compact, decorator design replaces existing wall switch.
- Shallow back body (1")
- Integrated light level sensor works from 10 to 150 footcandles.
- Compatible with all electronic and magnetic ballasts, PL lamp ballasts, compact fluorescent.
- Adjustable time delay of 30 seconds to 30 minutes.
- Dual 120/277VAC operation.
- 30% to 60% energy savings.
- Positive detection indicator.
- No minimum load requirement.
- Adjustable sensitivity from 20% to 100%.
- Patented voltage drop protection.
- Patented Zero Crossing Circuitry.
- 180° coverage of up to 900 sq. ft.
- cULus listed.
- 5-year warranty.

PlugTail™ PTWSP250 Only

- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

WSP250 Only


- 6" flying leads


Catalog Number	Description	Voltage	Load	Color
NEW PlugTail™ Automatic Wall Switches – 3 Wire Technology				
PTWSP250I **PTWSP250W** **PTWSP250GRY** **PTWSP250LA**	PIR Occupancy Sensor	120/277VAC; 60 Hz	800W Max. at 120V 1200W Max. at 277V	Ivory White Gray Light Almond
NEW Automatic Wall Switches – 3 Wire Technology				
WSP250I **WSP250W** **WSP250GRY** **WSP250LA**	PIR Occupancy Sensor	120/277VAC; 60 Hz	800W Max. at 120V 1200W Max. at 277V	Ivory White Gray Light Almond


Planning a Layout

The WSP250's 2-level lens provides superior coverage at desktop level by allowing the sensor to detect vertical as well as horizontal motion. Coverage shown is for walking motion. Under optimum conditions with a high level of activity and with no barriers or obstacles, coverage can reach a maximum of 900 square feet. Under a typical, desktop level of activity, when mounted at 4 feet, coverage is 300 square feet.











Placement for PIR wall switch sensor




WSP250

Factory settings: 30 min. time delay, maximum light level and sensitivity



Single Level Lighting WSP250

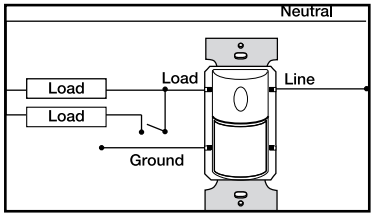


Manual Bi-level Lighting WSP250

All devices listed on this page conform to NEMA WD-1 and WD-6.

Technical Specifications on Page S-139.



PTWSP250W



PTS6STR3

PlugTail™ Wall Switch Sensors use PTS Single Pole PlugTail™ Connectors. See Page A-14.



WSP250W

legrand®
Pass & Seymour

Decorator Devices
Commercial Occupancy Sensors
Dual Technology Wall Box




WDT100W

Features

- Adjusts time delays automatically based on actual usage patterns
- Assigns short delays (as low as 7 minutes) when the space is typically vacant, and longer delays (up to 30 minutes) for busier times
- Differentiates electrical noise from human motion
- Fixed mode – 5, 15, or 30 minutes.
- Walk-through mode – turns lights off 3 minutes after the room is initially occupied if no motion is detected after 30 seconds.
- Test mode – allows quick and easy adjustments.
- Sensitivity adjustment.
- Color-matched lenses and low profile for appealing design.
- Choice of auto-ON or manual-ON operation.
- Fast, easy installation/switch-out.
- Zero-crossing for long relay life.
- High sensitivity and dense coverage for exceptional performance.
- cULus listed.
- 5-year warranty.
- WDT200 offers bi-level control of two loads independently from the same box.
  - Built-in sensor holds secondary lights off until daylight levels drop
  - Each relay can be set for automatic or manual ON
  - Dual ON/OFF buttons can control each of the loads manually as well

Catalog Number	Description	Voltage	Load	Coverage	Color
Dual Technology Wall Switch Sensors					
WDT100I **WDT100W** **WDT100BK** **WDT100GRY** **WDT100LA**	Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft.	Ivory White Black Gray Light Almond
WDT200I **WDT200W** **WDT200BK** **WDT200GRY** **WDT200LA**	Bi-Level Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft.	Ivory White Black Gray Light Almond

Coverage

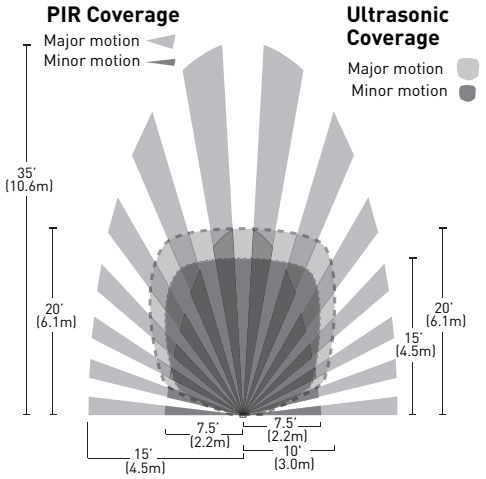

Technical Specifications on Page S-140.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Commercial Occupancy/ Vacancy Sensors


Wall Box Passive Infrared (PIR)

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features


- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Walk-through mode turns lights off 3 minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp




OS300SW

Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
Single-Pole Occupancy/Vacancy Sensors						
OS300SI	Self-adaptive design remembers ON/OFF cycles	120/230/277VAC; 50/60 Hz.	All	Yes	Yes	Ivory
OS300SW		@ 120VAC, 0-800 W ballast or tungsten, 1/6 hp.		Yes	Yes	White
OS300SGRY				Yes	Yes	Gray
OS300SLA		@ 230/277VAC, 0-1200 W ballast.		Yes	Yes	Lt. Almond


Coverage

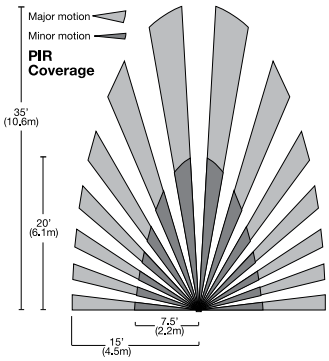



For best performance, Legrand/Pass & Seymour recommends using this sensor in spaces no larger than 15' x 20'.

Product Controls

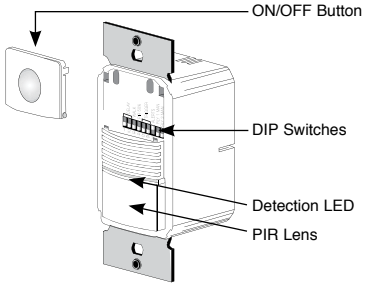

OS300S

DIP Switch Settings

DIP Switch #s:	1	2	3
Time Delay			
SmartSet/Test ◄	↓	↓	↓
5 minutes	↓	↓	↑
10 minutes	↓	↑	↓
15 minutes	↓	↑	↑
20 minutes	↑	↓	↓
25 minutes	↑	↓	↑
30 minutes	↑	↑	↓
override	↑	↑	↑

Bypass occupancy & light level functions. Load is manually controlled with WS300 button.


DIP Switch #	4
Walk Through	
Disabled ◄	↓
Enabled	↑

DIP Switch #	5
ON Mode	
Auto On ◄	↓
Manual On	↑

DIP Switch #	6
Sensitivity	
High ◄	↓
Low, 50%	↑

DIP Switch #	7
Audible Alerts	
Disabled	↓
Enabled ◄	↑

DIP Switch #	8
Visible Alerts	
Disabled ◄	↓
Enabled	↑



◄ Factory Settings ↑=ON ↓=OFF


Technical Specifications on Page S-139.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Commercial Occupancy/ Vacancy Sensors
Bi-Level Wall Box Passive Infrared (PIR)


TITLE 24 ENERGY SAVER

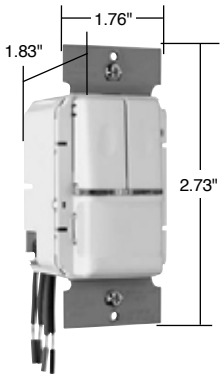



OSR300SW


Features
- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation, selectable for each relay.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Selectable walk-through mode turns lights off three minutes after the room is initially occupied if no motion is detected after the first 30 seconds.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.

Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
Single-Pole Dual-Relay Occupancy/Vacancy Sensors						
OSR300SI	Operates both circuits of a bi-level lighting system	120/230/277VAC; 50/60 Hz.	All	Yes	Yes	Ivory
OSR300SW		@ 120VAC, 0-800 W ballast or tungsten, 1/6 hp.		Yes	Yes	White
OSR300SGRY				Yes	Yes	Gray
OSR300SLA		@ 230/277VAC, 0-1200 W ballast.		Yes	Yes	Lt. Almond


Coverage




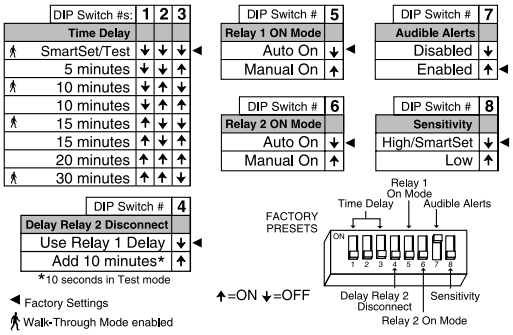
OSR300S Bi-Level Wiring


OSR300S Two Circuit Level Wiring


For best performance, Legrand/Pass & Seymour recommends using this sensor in spaces no larger than 15' x 20'.

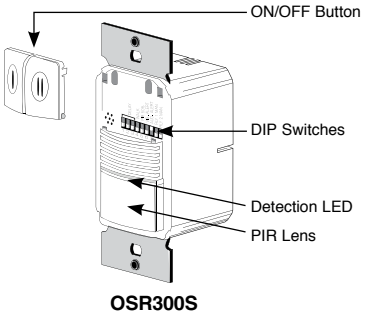Product Controls


OSR300S

DIP Switch Settings


Technical Specifications on Page S-139.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Features

- Seven-button preset time switch.
- Manual ON/OFF.
- Adjustable time delay: 1, 5, 10, 20, 30, 60 minutes.
- Lighted switch for visibility in darkened rooms.
- Controls most types of lighting.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Digital Timers					
RT1I	7-Button Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	No	Ivory
RT1W				No	White
RT1BK				No	Black
RT1LA				No	Light Almond




RT1LA shown with SWP26LA

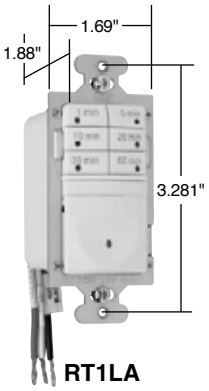


RT1LA

RT1 Wiring

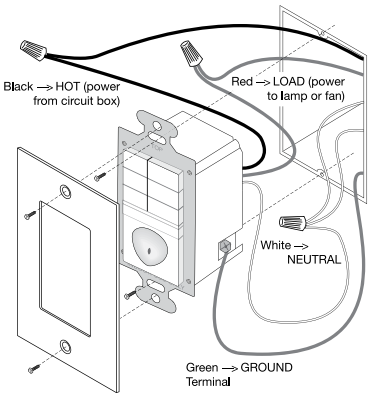

Product Controls



RT1


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
Timers



RT12W
shown with
SWP26W

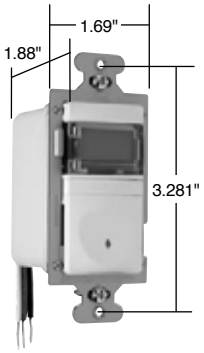


RT12LA

Features


- Programmable countdown time switch
- Manual ON/OFF.
- Digital countdown display.
- Adjustable time delay from 5-55 minutes (five-minute increments) to 1-12 hours (15-minute increments).
- Audible beep and visible light flash warnings before automatic-OFF.
- Lighted switch for visibility in darkened rooms.
- Works with most common lighting types.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Digital Timers					
RT12I	12-Hour Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	Yes	Ivory
RT12W				Yes	White
RT12BK				Yes	Black
RT12LA				Yes	Light Almond

RT12 Wiring

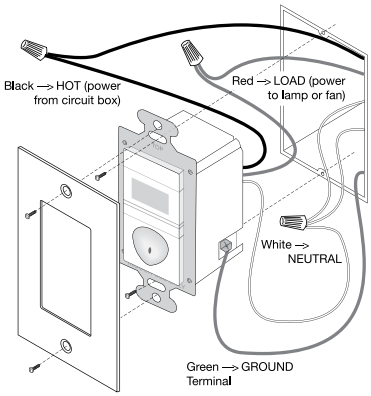

Product Controls



RT12



RT24W
shown with
SWP26W

Features

- Manual or programmed ON/OFF switching.
- Real time clock with day/date calendar.
- Easy to read LED display.
- Programming buttons accessible without removing wall plate.
- Eight programs can be assigned to any day or combination of days of the week.
- Automatically calculates sunrise and sunset times based on latitude and longitude.
- Audible or visual occupant warning before OFF.
- Power failure memory.
- Zero crossing circuitry.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Astronomic Programmable Timers					
RT24I	24-Hour Programmable Timer	0-800W @ 120V 0-1200W @ 277V 1/6 hp @ 120/277V	All	Yes	Ivory
RT24W				Yes	White
RT24BK				Yes	Black
RT24LA				Yes	Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

Decorator Devices
Wall Box Timers
125, 125-T, 250 & 277VAC, 60 Hz


legrand®
Pass & Seymour

Applications

- Lighting
- Exhaust fans
- Whirlpools and spas
- Saunas
- Heating and heat lamps
- Ventilating and air conditioning

Features

- Units with "Hold" feature may be turned counter-clockwise to hold the load on without timing function.
- Turning clockwise causes unit to time load off after desired time delay.
- Quiet operation.
- Time range from 5 minutes to 12 hours.
- Available with or without hold.
- Decorator styling.
- Easily installed.
- Large head screw terminals.
- Accurate to ± 5 percent.
- Motor rated.
- Energy saving.

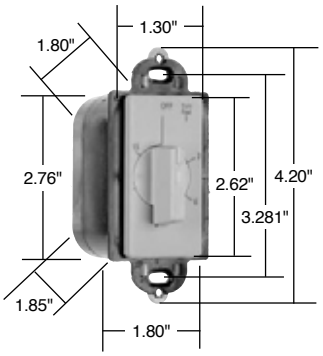

97015I

Catalog Number	Description	Time Range	Color
Specification Grade Decorator Rotary Timers			
97015I **97015W** **97015LA**	Timeout, No Hold	15 Minutes	Ivory White Light Almond
97030I **97030W** **97030LA**	Timeout, No Hold	30 Minutes	Ivory White Light Almond
97060I **97060W**	Timeout, No Hold	60 Minutes	Ivory White
97115I **97115W**	Timeout, With Hold	15 Minutes	Ivory White
97160I **97160W**	Timeout, With Hold	60 Minutes	Ivory White

Catalog Number	Color
Replacement Knobs (without plate)	
PS55A1 **PS55B1** **PS55G1**	White Ivory Light Almond

VAC	Hz	Amp	HP
Ratings			
125 125T 250 277	60 60 60 60	20 10 10	1 7 1

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Decorator Devices
RF Lighting Control System
Dimmers & Switches


TITLE 24 ENERGY SAVER




DRD4A
DRD2A
DRD8AV2

Catalog Number	Description	Ratings	Color
NEW In-Wall Universal Dimmers			
DRD4I **DRD4W** **DRD4B** **DRD4A**	The In-Wall Universal Dimmer operates most dimmable lighting types, including neon and compact fluorescent. Includes a CFL setting to alleviate flickering and premature bulb burn-out.	600W	Ivory White Black Light Almond
NEW In-Wall Incandescent Dimmers			
DRD2I **DRD2W** **DRD2B** **DRD2A**	Easily dim traditional incandescent bulbs, without the requirement of a neutral connection.	600W	Ivory White Black Light Almond
NEW In-Wall 3-Way Switches			
DRD8IV2 **DRD8WV2** **DRD8BV2** **DRD8AV2**	Provides convenient control from multiple access points when used in conjunction with any wireless switch or dimmer.	N/A	Ivory White Black Light Almond
NEW In-Wall Switches			
DRD3IV2 **DRD3WV2** **DRD3BV2** **DRD3AV2**	Perfect for controlling lights that don't need dimming, the In-Wall Switch can be included in scene programming for use with Room and Whole-House Scene Controllers.	800W	Ivory White Black Light Almond

DRD2 Wiring Diagram

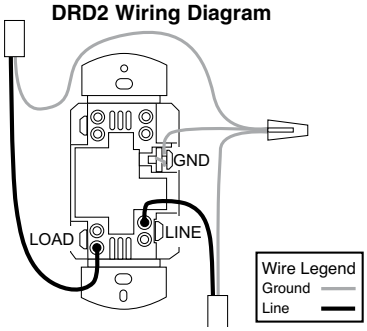

DRD4 Wiring Diagram



Mounting in deep electrical boxes is recommended.

De-rate Dimmers as follows:			
	Single Dimmer	Maximum Capacity	
		Dimmer at End of a Multi-Gang	Dimmer in Middle of a Multi-Gang
Incandescent/Quartz Halogen	600W	500W	400W
Magnetic Low Voltage	500W	400W	300W
Electronic Low Voltage	500W	400W	300W
Cold Cathode/Neon	500W	400W	300W
Fluorescent: 2-Wire Compact Fluorescent	 500W 500W	 400W 400W	 300W 300W

For complete RF Lighting Control System, see Pages M-4 – M-7.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour


Catalog Number	Description	Ratings	Color
In-Wall Fan Speed Controllers			
DRD9I **DRD9W** **DRD9B** **DRD9A**	This controller gives you four options for ceiling fan speed and includes a built-in de-hummer to reduce fan noise.	1.5 A	Ivory White Black Light Almond

Catalog Number	Description	Ratings	Color
In-Wall Whole House Scene Controllers			
DRD5IV2 **DRD5WV2** **DRD5BV2** **DRD5AV2**	This product allows lighting control for the entire home from any location.	N/A	Ivory White Black Light Almond
In-Wall Room Scene Controllers			
DRD6IV2 **DRD6WV2** **DRD6BV2** **DRD6AV2**	Program up to five room scenes with this in-wall controller.	N/A	Ivory White Black Light Almond






DRD9W Shown with SWP26W




DRD5AV2

DRD5/DRD6 Wiring Diagram

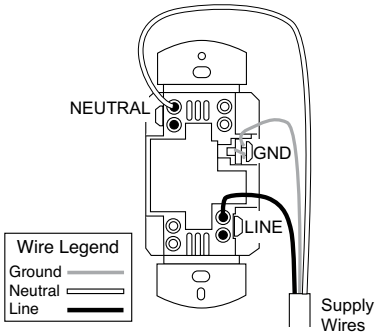

Mounting controls in deep electrical boxes is recommended.

DRD9 Wiring Diagram

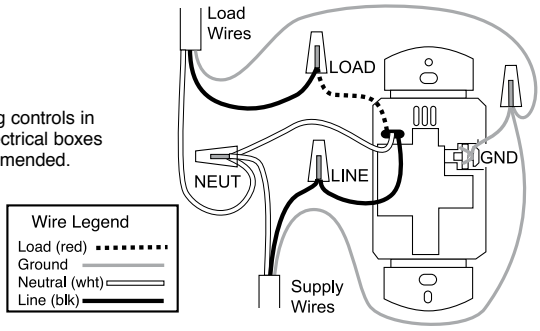

For complete RF Lighting Control System, see Pages M-4 – M-7.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Decorator Devices
Scene Director

TITLE 24 ENERGY SAVER



For everything people do at home, there's a combination of light sources and levels that will work best. P&S Scene Director Controls let homeowners capture these combinations (or scenes) — and recall them whenever they want at the touch of a button.



P&S Scene Director Master

No tools or plate removal necessary for programming with our exclusive, patent-pending system. Set light levels with product fully installed.

Easy to install, program, and operate for sophisticated scene control dimming.

Constant memory returns lights to previously selected level after power failure. No need to reset.

Controls up to 30 dimmers per Master, providing the ability to control even complex, multiroom scenes.

Available infrared remote (SCIR) provides mobile control flexibility.

Matching Fan Speed Control available.

Buttons glow when selected — glow levels are adjustable, too.

Raises or lowers all lights in any scene simultaneously.

One-touch selection for up to five lighting environments (scenes) — plus full Off.



SCMC5WV

Programmable fade rates enable users to easily select the speed of fade-up and fade-down.

Provides powerful control via conventional wall-box wiring. Wires like a 3-way switch. Communication among devices requires just one additional conductor.

P&S Scene Director Dimmer

Works in conjunction with a P&S Scene Director Master.

Red LED glows when dimmer is OFF.

Green LEDs indicate light level selected and preset level.


Can be operated individually.

Touch pad raises or lowers individual light levels without affecting preset.

Unobtrusive set button for simple programming of preset scenes.

Sleek, ergonomic P&S Decorator style matches other Decorator devices.

Constant memory returns lights to previously selected level after power failure.

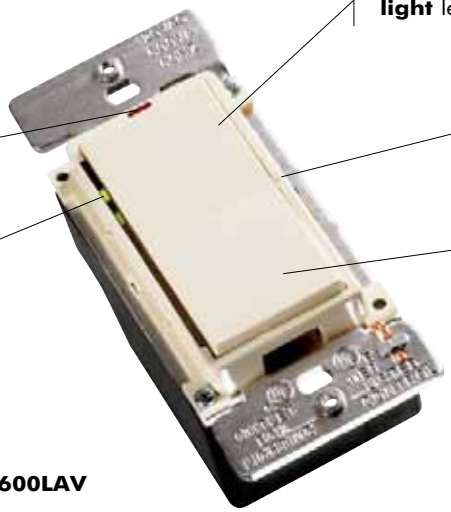

SC600LAV


Decorator Devices
Scene Director

legrand®
Pass & Seymour


Catalog Number	Description	Ratings	Color
600W Incandescent Scene Director Control Dimmers			
SC600IV SC600WV SC600LAV	Preset, Controls 1 Load in a Scene	120V, 600 Watt	Ivory White Light Almond
300VA Electronic Low-Voltage Scene Director Control Dimmers			
SCELV300IV SCELV300WV SCELV300LAV	Preset, Controls 1 Load in a Scene	120V, 300VA	Ivory White Light Almond
600VA Fluorescent Ballast Scene Director Control Dimmers*			
SCFB600IV SCFB600WV SCFB600LAV	Preset, Controls 1 Load in a Scene	120V, 600VA	Ivory White Light Almond
5 Scene Director Master Controllers			
SCMC5IV SCMC5WV SCMC5LAV	5-Button Preset Scene Controller	120V	Ivory White Light Almond
Remote Location Control			
SCRIV SCRWV SCRLAV	For Full Dimming or Fan Speed Control of 1 Load from Two or More Locations	120V	Ivory White Light Almond
Accessories			
SCIR SCMCK	Infrared Hand-Held Remote Preprinted Inserts for Master Controller		
1.5A De-Hummer Fan Speed Controllers**			
SCDH15IV SCDH15WV SCDH15LAV	Preset, Controls 1 Fan Load in a Scene	120V, 1.5A	Ivory White Light Almond

*Use with Advance Mark X® dimmable fluorescent ballasts.
** Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."
Note: All Dimmers on this page may be ganged without de-rating.


TITLE 24 ENERGY SAVER




SC600LAV
SCELV300LAV
SCFB600LAV



SCMC5WV




SCRLAV




SCDH15LAV

Wiring Diagram

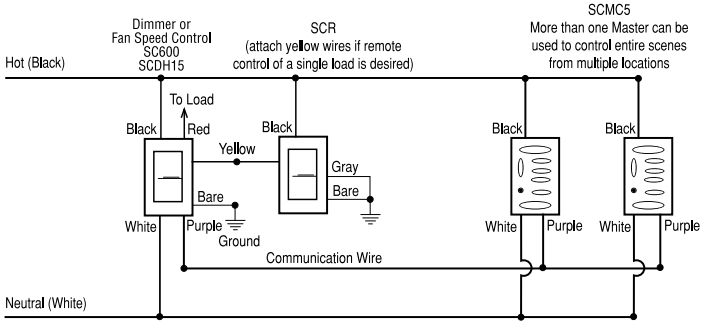

Add additional dimmers, fan speed controls, and remotes (up to 30) as needed to control more loads.
Use same wiring practices as above.




SCIR

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Decorator Devices
Leandro®


TITLE 24 ENERGY SAVER



D600MLAV
DFB600MLAV
DLV600MLAV
DRMLAV



D1000MLAV



DDH15MLAV

Features

- Enables full dimming control from up to 30 locations using the matching remote dimmers.
- Constant memory returns lights to previous level after power failure.
- LED indicators keep you informed. Green LEDs indicate preset level and current light level. Red LED night light glows when load is OFF.
- Easy operation — Tap up once for preset, twice for full ON. Tap down once for full OFF. Hold paddle up to raise lights, down to lower.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Unobtrusive preset selection button helps prevent accidental setting changes.
- Elegant fade ON and OFF extends bulb life. Easy on the eyes, too.
- Installs easily using the same wiring as conventional 3-way switches.
- Change light level without affecting preset.

Catalog Number	Description	Ratings	Color
600W Incandescent Preset Dimmers†			
D600MIV **D600MWV** **D600MBKV** **D600MLAV**	Preset, Single Pole and 3-Way	120V 600 Watt	Ivory White Black Light Almond
1000W Incandescent Preset Dimmers†			
D1000MIV **D1000MWV** **D1000MLAV**	Preset, Single Pole and 3-Way	120V 1000 Watt	Ivory White Light Almond
600VA Low-Voltage Preset Dimmers*†			
DLV600MIV **DLV600MWV** **DLV600MLAV**	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
600VA Fluorescent Ballast Preset Dimmers†**			
DFB600MIV **DFB600MWV** **DFB600MLAV**	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
Remote Dimmers†			
DRMIV **DRMWV** **DRMBKV** **DRMLAV**	Full Dimming or Fan Speed Control from Two or More Locations	120V	Ivory White Black Light Almond
1.5A De-Hummer†† Fan Controls			
DDH15MIV **DDH15MWV** **DDH15MLAV**	Preset, Single Pole, 3-Speed	120V 1.5A	Ivory White Light Almond


* Use with MR16s with magnetic transformers, neon, cold cathode, general inductive loads.
** Use with Advance Mark X® dimmable fluorescent ballasts.
† All dimmers and fan controls can be dimmed from more than one location when used with DRM remotes. Uses standard 3-way wiring. See wiring diagram.
†† Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
600W/VA	No De-Rating Required	
1000W	800W	600W

All devices listed on this page conform to NEMA WD-1 and WD-6.
UL Listed and CSA Certified.


Wiring Diagrams

Single Pole



* Neutral required on DLV, DFB and DDH models.
(No common neutral on dimmed circuits.)

Full Dimming & Fan Speed Control from Two or More Locations

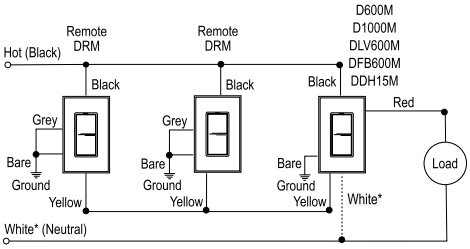

* Neutral required on DLV, DFB and DDH models.
(No common neutral on dimmed circuits.)
Can be used with up to 30 dimmers, fan speed controls, and remotes.

Decorator Devices

Harmony™ TradeMaster® Dimmers

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
- Green LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate back wire terminals save time, space and money.

D703P, DLV703P

- No de-rating.
- No fins to break.

Interchangeable Face Versions


- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (WC).
- Interchangeable faces available in four colors (sold separately, see below).

Catalog Number	Description	Ratings	Color
Incandescent Single Pole/3-Way Dimmers*			
D703PI **D703PW** **D703P** **D703PBK** **D703PLA**	Incandescent Single Pole and 3-Way	120V, 700W	Ivory White Brown Black Light Almond
D1103PI **D1103PW** **D1103P** **D1103PBK** **D1103PLA**	Incandescent Single Pole and 3-Way	120V, 1100W	Ivory White Brown Black Light Almond
NEW **Interchangeable Face Incandescent Single Pole/3-Way Dimmers**			
D703PTC**	Incandescent Single Pole and 3-Way Three Interchangeable Face Colors	120V, 700W	Ivory/ White/ Light Almond
D703PWC	Incandescent Single Pole and 3-Way White Interchangeable Face Only	120V, 700W	White
D1103PTC**	Incandescent Single Pole and 3-Way Three Interchangeable Face Colors	120V, 1100W	Ivory/ White/ Light Almond
D1103PWC	Incandescent Single Pole and 3-Way White Interchangeable Face Only	120V, 1100W	White
NEW **Interchangeable Face Covers†**			
DKITI **DKIT** **DKITBK** **DKITLA**	Harmony™ Interchangeable Face, Ivory Harmony™ Interchangeable Face, Brown Harmony™ Interchangeable Face, Black Harmony™ Interchangeable Face, Light Almond		Ivory Brown Black Light Almond


*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: D703PLAV.
**Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: D703PTCCCV6.
†Available in VisionPak™ packaging, add "BPCCV6" to Catalog Number. Example: DKITIBPCCV6.

Catalog Number	Description	Ratings	Color
Magnetic Low-Voltage Single Pole/3-Way Dimmers			
DLV703PI **DLV703PW** **DLV703P** **DLV703PBK** **DLV703PLA**	Magnetic Low-Voltage Single Pole and 3-Way	120V, 700VA	Ivory White Brown Black Light Almond
DLV1103PI **DLV1103PW** **DLV1103P** **DLV1103PBK** **DLV1103PLA**	Magnetic Low-Voltage Single Pole and 3-Way	120V, 1100VA	Ivory White Brown Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.



D703PW



D1103PLA


DKITI **DKITBK**



DKIT **DKITLA**

For de-rating, see Page D-68.

legrand®
Pass & Seymour

Decorator Devices
Harmony™ TradeMaster® Dimmers & Fan Speed Controls

TITLE 24 ENERGY SAVER

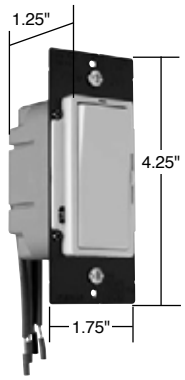

DDH16PLA

Features

- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
- Green LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate backwire terminals save time, space and money.

DDH16P

- No de-rating.
- No fins to break.

Catalog Number	Description	Ratings	Color
Fluorescent Single Pole/3-Way Dimmers*			
DFB8PI **DFB8PW** **DFB8P** **DFB8PBK** **DFB8PLA**	Two Wire Fluorescent Single Pole and 3-Way	120V, 8A	Ivory White Brown Black Light Almond
De-Hummer Fan Speed Controls**			
DDH16PI **DDH16PW** **DDH16P** **DDH16PBK** **DDH16PLA**	De-Hummer Fan Speed Control	120V, 1.6A	Ivory White Brown Black Light Almond

* For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.

** Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for Harmony Dimmers

Catalog Number	Maximum Load	Multi-Gang De-Rating		Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang			2 Gang	3 Gang
D703P	700W	700W	700W	DLV1103P	1100VA	950VA	700VA
D1103P	1100W	1100W	800W	DFB8P	8A	8A	6.5A
DLV703P	700VA	700VA	650VA	DDH16	1.6A	1.6A	1.6A

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Decorator Devices
LS TradeMaster® Series Dimmers

legrand®
Pass & Seymour


TITLE 24 ENERGY SAVER

Features


- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page D-70 for information.

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
600W Incandescent Slide Dimmers*				
LS600I **LS600W** **LS600** **LS600BK** **LS600LA**		Non-Preset	120V, 600W max.	Ivory White Brown Black Light Almond
LS600PI **LS600PW** **LS600P** **LS600PBK** **LS600PLA**	**LS603PI** **LS603PW** **LS603P** **LS603PBK** **LS603PLA**	Preset	120V, 600W max.	Ivory White Brown Black Light Almond
1000W Incandescent Slide Dimmers*				
LS1000I **LS1000W** **LS1000** **LS1000BK** **LS1000LA**		Non-Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
LS1000PI **LS1000PW** **LS1000P** **LS1000PBK** **LS1000PLA**	**LS1003PI** **LS1003PW** **LS1003P** **LS1003PBK** **LS1003PLA**	Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
600VA Magnetic Low-Voltage Slide Dimmers**				
LSLV600I **LSLV600W** **LSLV600** **LSLV600BK** **LSLV600LA**		Non-Preset	120V, 600VA max.	Ivory White Brown Black Light Almond
LSLV600PI **LSLV600PW** **LSLV600P** **LSLV600PBK** **LSLV600PLA**	**LSLV603PI** **LSLV603PW** **LSLV603P** **LSLV603PBK** **LSLV603PLA**	Preset	120V, 600VA max.	Ivory White Brown Black Light Almond


*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.
**Available in boxed packaging only.



LS600LA



LS600PLA



LS1000PLA

For wiring diagrams, see Page S-20.


Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
LS600, LS603	No De-Rating Required	
LS1000P, LS1003P	900W	750W
LS1000	850W	700W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Decorator Devices
LS TradeMaster® Series Dimmers

TITLE 24 ENERGY SAVER



LSDS300PW



LSDD300W



TM8LMCC

Catalog Number	Description	Ratings		Color
		Dimmer	Switch	
Single Pole/3-Way Preset Dimmers & Switches				
LSDS300PI **LSDS300PW** **LSDS300P** **LSDS300PBK** **LSDS300PLA**	Single Pole/3-Way Preset Dimmer and Independent Single Pole/ 3-Way Switch	120V 300W	7A general purpose resistive and ballast, 1/4 hp 900W tungsten	Ivory White Brown Black Light Almond
Dual Slide to OFF Single Pole Dimmers				
LSDD300I **LSDD300W** **LSDD300** **LSDD300BK** **LSDD300LA**	Dual Slide to OFF Single Pole Dimmers	120V 300W	—	Ivory White Brown Black Light Almond

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
De-Rating Chart			
LSDS300	300W	300W	300W
LSDD300	300W	300W	300W

For wiring diagrams, see Page S-20.

Features

- No tool needed, module snaps-in.
- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.

Catalog Number	Rating A. VAC	Color
Snap-In Light Module		
TM8LMCC	15 120/125	Clear

Catalog Number	Description	Color
Accessories for LS Series		
LRKIV **LRKWV** **LRKV** **LRKBKV** **LRKLAV**	Replacement Knobs for Decorator Dual Slides	Ivory White Brown Black Light Almond
LLRKIV **LLRKWV** **LLRKV** **LLRKBKV** **LLRKLAV**	Large Replacement Knobs for Decorator Single Slides	Ivory White Brown Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Decorator Devices
LS TradeMaster® Series Fan Speed Controls

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER


Features

- Tough impact-resistant thermoplastic housing.
- Power-failure memory.
- Superior heat management: no time wasting break off tabs.
- Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.
- Can be used with patented Snap-In Light Module (sold separately).


Catalog Number	Description	Ratings	Color
Decorator Slide Fan Speed Controls*			
LSSC5I **LSSC5W** **LSSC5** **LSSC5BK** **LSSC5LA**	Non-Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
LSSC5PI **LSSC5PW** **LSSC5P** **LSSC5PBK** **LSSC5PLA**	Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
Decorator Slide De-Hummer Controls**			
LSDH16IV **LSDH16WV** **LSDH16V** **LSDH16BKV** **LSDH16LAV**	Non-Preset, 4-Speed Fan Control	1.6A	Ivory White Brown Black Light Almond
Dual Control Decorator Slides**			
LSDC16IV **LSDC16WV** **LSDC16V** **LSDC16BKV** **LSDC16LAV**	Non-Preset, 3-Speed De-Hummer Fan Control with Single Pole Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
LSDC163PIV **LSDC163PWV** **LSDC163PV** **LSDC163PBKV** **LSDC163PLAV**	Preset, Single Pole/3-Way 3-Speed De-Hummer Fan Control with Single Pole/3-Way Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
LSDV25IV **LSDV25WV** **LSDV25V** **LSDV25BKV** **LSDV25LAV**	Non-Preset, Variable Speed Fan Control With Single Pole Dimmer	2.5A/300W	Ivory White Brown Black Light Almond

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LSSC5IV.
**Available in VisionPak™ only.
Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For wiring diagrams, see Page S-20.

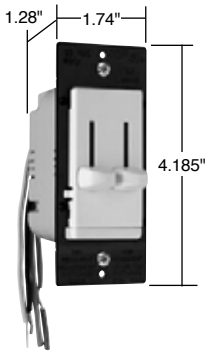

LSDC16LAV

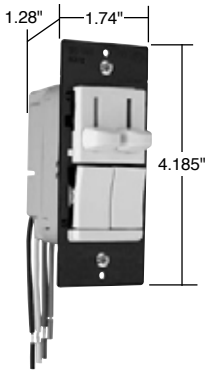


LSDC163PLAV

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Decorator Devices
Decorator Rotary DR TradeMaster® Series

TITLE 24 ENERGY SAVER



DR703PLAV



DR1103PWV



Illuminated knob indicates light level.

Features

- A new style that matches P&S Decorator Combination devices.
- Accepts Snap-In Light Module (sold separately) to convert decorator rotary devices into illuminated-type in moments; makes devices easy to find in the dark. See Page M-14.
- Screw-pressure-plate backwiring speeds installation and ensures solid, high-quality electrical connections. Also supports traditional, wire-loop side wiring.
- Heavy-gauge black anodized aluminum strap provides superior heat management and structural strength for mounting against wall surfaces.
- Slim design leaves more room in the box and makes installation faster and easier.
- Higher ratings of 700 and 1100 watts.
- No de-rating of 700 watt devices.
- Single pole and 3-way in same device.

Catalog Number	Description	Ratings	Color
Incandescent Preset Dimmers			
DR703PIV **DR703PWV** **DR703PV** **DR703PBKV** **DR703PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 700W	Ivory White Brown Black Light Almond
DR1103PIV **DR1103PWV** **DR1103PV** **DR1103PBKV** **DR1103PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100W	Ivory White Brown Black Light Almond
Magnetic Low-Voltage Dimmers			
DRLV703PIV **DRLV703PWV** **DRLV703PV** **DRLV703PBKV** **DRLV703PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 700VA	Ivory White Brown Black Light Almond
DRLV1103PIV **DRLV1103PWV** **DRLV1103PV** **DRLV1103PBKV** **DRLV1103PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100VA	Ivory White Brown Black Light Almond
Continuously Variable Preset Fan Speed Controls			
DRSC53PIV **DRSC53PWV** **DRSC53PV** **DRSC53PBKV** **DRSC53PLAV**	Single Pole/3-Way Fan Speed Control	120V, 5A	Ivory White Brown Black Light Almond
3-Speed De-Hummer* Preset Fan Speed Controls			
DRDH163PIV **DRDH163PWV** **DRDH163PV** **DRDH163PBKV** **DRDH163PLAV**	Single Pole/3-Way Fan Speed Control with back-lit speed indication	120V, 1.6A	Ivory White Brown Black Light Almond

Available in VisionPak™ only.

* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for DR Series

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
DR703	No De-Rating Required		
DR1103	1100W	900W	750W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Features


- Convenient operation – combines ON/OFF Decorator-style switch with separate slider for dimming control.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator-style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Screw-pressure-plate back wire terminals save time, space and money.
- 700W maximum rated dimmers can be ganged without de-rating.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see below).

Catalog Number	Description	Rating	Color
NEW Interchangeable Face Incandescent Dimmers			
WS700TC*	Single Pole, Slide to OFF, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS700W	White Face Only	120V, 700W	White
WS703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS703PW	White Face Only	120V, 700W	White
WS1100TC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1100W	White Face Only	120V, 1100W	White
WS1103PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1103PW	White Face Only	120V, 1100W	White
NEW Interchangeable Face Magnetic Low-Voltage Dimmers			
WSLV700TC*	Single Pole, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV700W	White Face Only	120V, 700VA	White
WSLV703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV703PW	White Face Only	120V, 700VA	White
NEW Interchangeable Face Fan Speed Controls			
WSSC53PTC*	Preset, Variable Speed, 3 Face Colors	120V, 5A	Ivory/White/Lt. Almond
WSSC53PW	White Face Only	120V, 5A	White
NEW Interchangeable Face Covers**			
WSKITI	Wide Slide Interchangeable Face, Ivory		Ivory
WSKIT	Wide Slide Interchangeable Face, White		Brown
WSKITBK	Wide Slide Interchangeable Face, Black		Black
WSKITLA	Wide Slide Interchangeable Face, Light Almond		Light Almond
WSKITPI	Present Wide Slide Interchangeable Face, Ivory		Ivory
WSKITP	Present Wide Slide Interchangeable Face, Brown		Brown
WSKITPBK	Present Wide Slide Interchangeable Face, Black		Black
WSKITPLA	Present Wide Slide Interchangeable Face, Light Almond		Light Almond

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: WS700TCCCV6.


**Available in VisionPak™ packaging, add "BPCC6" to Catalog Number. Example: WSKITIBPCC6.

TITLE 24 ENERGY SAVER



WS700TC
WSLV700TC
Shown with the Three Interchangeable Faces

All 1100W versions are 2.50" W



Preset Models

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
1000W 1000VA	800W 800VA	700W 700VA


Note: Each side removed reduces plate size by 3/8".

No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary, and dual styles with virtually no fan motor noise.

Catalog Number	Description	Ratings	Color
1.5A Max. No-Noise De-Hummer Specification Grade Fan Speed Controls – RFI Protected			
94084I* **94084W*** **94084GRY** **94084LA***	3-Speed, Single Pole	120V 1.5A max.	Ivory White Gray Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94084LAV.



94084

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Decorator Devices
Titan™ Series



A complete solution for easy, economical multi-gang installations.

The P&S Titan™ Series have key features designed to increase installer productivity. Each comes with all the screwless wall plate components necessary for single gang or multi-gang installations. No need to order any additional components such as long-lead time custom wall plates to finish the job. Complete the installation with everything right out of the box, increasing productivity by finishing up in one visit instead of several.

Included screwless wall plate components make it easy to assemble a custom multi-gang wall plate in any configuration — saving money and time.

Power-failure memory retains presets through power outages.

Widest choice of amperage ratings with minimal or no de-rating for faster job planning.

Preset models feature large ON/OFF button and single pole/three-way functionality.

High-reliability design with built-in surge and static protection plus oversize output devices to stand up to abuse.

Exclusive labeling system has a built-in label holder enabling instant circuit identification; looks clean and professional.

Included end-caps and spacers screw directly to heat sinks; center plate snaps easily on and off.



CD703PW

Enclosed slider helps prevent dust and dirt contamination.

Exclusive adjustable limit control in incandescent dimmers saves energy and extends bulb life — reduces maximum output by up to 10 percent.

Air-gap switch

Improved heat management enables superior load ratings.



CDADAPTORKITW



Adaptor kit enables matching installation of standard P&S Decorator Devices – outlets, switches, GFCIs and more.

Decorator Devices
Titan™ Series Incandescent Dimmers


legrand®
Pass & Seymour

Features


- Field configurable wall plate system.
- Labeling system.
- Adjustable top end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Incandescent				
CD700I **CD700W** **CD700** **CD700GRY** **CD700BK** **CD700LA**	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD703PI **CD703PW** **CD703P** **CD703PGRY** **CD703PBK** **CD703PLA**	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD1100I **CD1100W** **CD1100** **CD1100GRY** **CD1100BK** **CD1100LA**	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1103PI **CD1103PW** **CD1103P** **CD1103PGRY** **CD1103PBK** **CD1103PLA**	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1600I **CD1600W** **CD1600** **CD1600GRY** **CD1600BK** **CD1600LA**	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD1603PI **CD1603PW** **CD1603P** **CD1603PGRY** **CD1603PBK** **CD1603PLA**	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD2000I **CD2000W** **CD2000** **CD2000GRY** **CD2000BK** **CD2000LA**	Single Pole, Slide-to-OFF	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond
CD2003PI **CD2003PW** **CD2003P** **CD2003PGRY** **CD2003PBK** **CD2003PLA**	Single Pole/3-Way, Preset	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond







CD703PW
Narrow



CD1100W
Narrow



CD1603PW
Wide



CD2003PW
Wide


For technical specifications, de-rating, and rough-in box charts, see Pages S-147 and S-148.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


legrand®
Pass & Seymour

Decorator Devices
Titan™ Series Magnetic Low-Voltage Dimmers & Adaptor Kit

TITLE 24 ENERGY SAVER



CDLV700W
Narrow



CDLV1103PW
Wide



CDADAPTORKITW

Adaptor kit enables matching installation of standard P&S Decorator Devices – outlets, switches, GFCIs and more.
See Page D-74.

Features

- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system.
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Magnetic Low-Voltage				
CDLV700I **CDLV700W** **CDLV700** **CDLV700GRY** **CDLV700BK** **CDLV700LA**	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV703PI **CDLV703PW** **CDLV703P** **CDLV703PGRY** **CDLV703PBK** **CDLV703PLA**	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1100I **CDLV1100W** **CDLV1100** **CDLV1100GRY** **CDLV1100BK** **CDLV1100LA**	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1103PI **CDLV1103PW** **CDLV1103P** **CDLV1103PGRY** **CDLV1103PBK** **CDLV1103PLA**	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1600I **CDLV1600W** **CDLV1600** **CDLV1600GRY** **CDLV1600BK** **CDLV1600LA**	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CDLV1603PI **CDLV1603PW** **CDLV1603P** **CDLV1603PGRY** **CDLV1603PBK** **CDLV1603PLA**	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
Adaptor Kit				
CDADAPTORKITI **CDADAPTORKITW** **CDADAPTORKIT** **CDADAPTORKITGRY** **CDADAPTORKITBK** **CDADAPTORKITLA**	Decorator Device Adaptor Kit		Narrow	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, and rough-in box charts, see Pages S-147 and S-148.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

Decorator Devices
Titan™ Series Fluorescent 2 Wire Dimmers


legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CDFB5I **CDFB5W** **CDFB5** **CDFB5GRY** **CDFB5BK** **CDFB5LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB8I **CDFB8W** **CDFB8** **CDFB8GRY** **CDFB8BK** **CDFB8LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB10I **CDFB10W** **CDFB10** **CDFB10GRY** **CDFB10BK** **CDFB10LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB16I **CDFB16W** **CDFB16** **CDFB16GRY** **CDFB16BK** **CDFB16LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB7277I **CDFB7277W** **CDFB7277** **CDFB7277GRY** **CDFB7277BK** **CDFB7277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB10277I **CDFB10277W** **CDFB10277** **CDFB10277GRY** **CDFB10277BK** **CDFB10277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond



CDFB5W
Narrow


For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 and S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


legrand®
Pass & Seymour

Decorator Devices
Titan™ Series Fluorescent 2 Wire Dimmers

TITLE 24 ENERGY SAVER



CDFB53PW
Narrow



CDFB103PW
Wide

Features

- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CDFB53PI **CDFB53PW** **CDFB53P** **CDFB53PGRY** **CDFB53PBK** **CDFB53PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB83PI **CDFB83PW** **CDFB83P** **CDFB83PGRY** **CDFB83PBK** **CDFB83PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB103PI **CDFB103PW** **CDFB103P** **CDFB103PGRY** **CDFB103PBK** **CDFB103PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB163PI **CDFB163PW** **CDFB163P** **CDFB163PGRY** **CDFB163PBK** **CDFB163PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB73P277I **CDFB73P277W** **CDFB73P277** **CDFB73P277GRY** **CDFB73P277BK** **CDFB73P277LA**	2 Wire, Electronic, Single Pole/3-Way, Preset	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB103P277I **CDFB103P277W** **CDFB103P277** **CDFB103P277GRY** **CDFB103P277BK** **CDFB103P277LA**	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 and S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


Decorator Devices
Titan™ Series Fluorescent 3 Wire Dimmers

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- For use with 3 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Blank center plate included.



CD3FB163PW
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CD3FB16I **CD3FB16W** **CD3FB16** **CD3FB16GRY** **CD3FB16BK** **CD3FB16LA**	3 Wire Electronic, Single Pole, Slide-to-OFF	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB163PI **CD3FB163PW** **CD3FB163P** **CD3FB163PGRY** **CD3FB163PBK** **CD3FB163PLA**	3 Wire Electronic, Single Pole/3-Way, Preset	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB10277I **CD3FB10277W** **CD3FB10277** **CD3FB10277GRY** **CD3FB10277BK** **CD3FB10277LA**	3 Wire Electronic, Single Pole, Slide-to-OFF	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB103P277I **CD3FB103P277W** **CD3FB103P277** **CD3FB103P277GRY** **CD3FB103P277BK** **CD3FB103P277LA**	3 Wire Electronic, Single Pole/3-Way, Preset	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond


For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

legrand®
Pass & Seymour

Decorator Devices
Titan™ Series Fluorescent 4 Wire Dimmers

TITLE 24 ENERGY SAVER



CD4FB3PW
Narrow

Features

- For use with 0-10V, 4 wire, 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Must be used with power pack.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CD4FBI **CD4FBW** **CD4FB** **CD4FBGRY** **CD4FBBK** **CD4FBLA**	Single Pole, Slide-to-OFF	24VDC	Narrow	Ivory White Brown Gray Black Light Almond
CD4FB3PI **CD4FB3PW** **CD4FB3P** **CD4FB3PGRY** **CD4FB3PBK** **CD4FB3PLA**	Single Pole/3-Way, Preset	24VDC	Narrow	Ivory White Brown Gray Black Light Almond
PWP120277	Power pack for switching load	24VDC	—	

Red available made to order.

For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

Power Pack technical specifications, see Page S-146.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

Titan™ Series Fan Speed Controls


Decorator Devices

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- Field configurable wall plate system.
- Labeling system.
- Shipped with protective film.
- Rugged construction.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page D-76.)
- Available in both continuously variable and de-hummer styles.
- Blank center plate included.



CDSC6W
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fan Speed Controls				
CDSC6I **CDSC6W** **CDSC6** **CDSC6GRY** **CDSC6BK** **CDSC6LA**	Continuously Variable Speed Fan Speed Control	120V, 6A	Narrow	Ivory White Brown Gray Black Light Almond
CDSC12I **CDSC12W** **CDSC12** **CDSC12GRY** **CDSC12BK** **CDSC12LA**	Continuously Variable Speed Fan Speed Control	120V, 12A	Wide	Ivory White Brown Gray Black Light Almond
CDDH16I **CDDH16W** **CDDH16** **CDDH16GRY** **CDDH16BK** **CDDH16LA**	De-Hummer, 4 Speed Low/Low-Mid/High-Mid/High Fan Speed Control	120V, 1.6A	Narrow	Ivory White Brown Gray Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

legrand®
Pass & Seymour


Decorator Devices
Decorative Finish Screwless Wall Plates
Polycarbonate




One Gang
Brushed Nickel



Two Gang
Brushed Copper

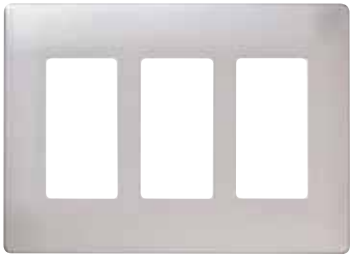

Three Gang
Stainless Steel

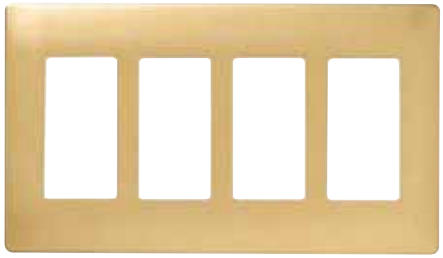


Four Gang
Brass




One Gang
Brushed Bronze





Two Gang
Maple

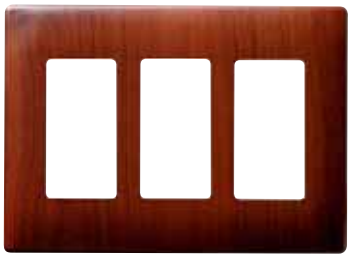

Three Gang
Mahogany

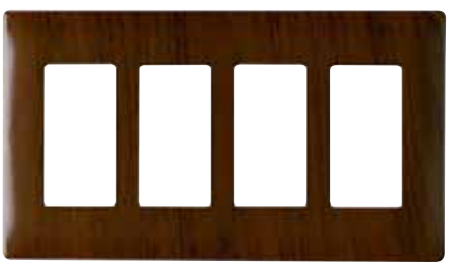

Four Gang
Walnut

Description	Color	Decorator Openings
Screwless Decorator Openings Plastic Subplate included		
One Gang 	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	**SWP26BN** **SWP26BC** **SWP26SS** **SWP26BR** **SWP26BB** **SWP26MA** **SWP26MH** **SWP26WA**
Two Gang 	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	**SWP262BN** **SWP262BC** **SWP262SS** **SWP262BR** **SWP262BB** **SWP262MA** **SWP262MH** **SWP262WA**
Three Gang 	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	**SWP263BN** **SWP263BC** **SWP263SS** **SWP263BR** **SWP263BB** **SWP263MA** **SWP263MH** **SWP263WA**
Four Gang 	Brushed Nickel Brushed Copper Stainless Steel Brass Brushed Bronze Maple Mahogany Walnut	**SWP264BN** **SWP264BC** **SWP264SS** **SWP264BR** **SWP264BB** **SWP264MA** **SWP264MH** **SWP264WA**

For Screwless Wall Plate, and Plastic Subplate dimensions, see Page D-83.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour


Number of Gangs	Color	Decorator Openings
Screwless Wall Plates Plastic Subplate included		
One Gang	Ivory	**SWP26I**
	White	**SWP26W**
	Brown	**SWP26**
	Gray	**SWP26GRY**
	Black	**SWP26BK**
	Light Almond	**SWP26LA**
Two Gang	Ivory	**SWP262I**
	White	**SWP262W**
	Brown	**SWP262**
	Gray	**SWP262GRY**
	Black	**SWP262BK**
	Light Almond	**SWP262LA**
Three Gang	Ivory	**SWP263I**
	White	**SWP263W**
	Brown	**SWP263**
	Gray	**SWP263GRY**
	Black	**SWP263BK**
	Light Almond	**SWP263LA**
Four Gang	Ivory	**SWP264I**
	White	**SWP264W**
	Brown	**SWP264**
	Gray	**SWP264GRY**
	Black	**SWP264BK**
	Light Almond	**SWP264LA**



One Gang

Description	Height	Width
Screwless Wall Plate Dimensions		
One Gang	4.87"	3.10"
Two Gang	4.87"	4.912"
Three Gang	4.87"	6.724"
Four Gang	4.87"	8.536"

Description	Height	Width
Screwless Plastic Subplate Dimensions		
One Gang	4.62"	2.85"
Two Gang	4.62"	4.662"
Three Gang	4.62"	6.474"
Four Gang	4.62"	8.286"

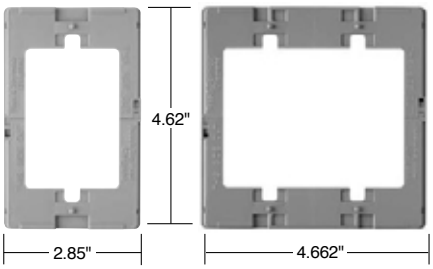

One Gang Plastic Subplate

Two Gang Plastic Subplate

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.


legrand®
Pass & Seymour

Decorator Devices
Studio Wall Plates
Polycarbonate

Revolutionize the look of technology in the home with Studio Wall Plates.
Available in one, two, three, and four gang sizes – and in 17 contemporary color options, these decorator-style wall plates feature a design and form-factor never before available to homeowners. The design, a sculptural flow of curves with titanium edging and a screwless finish, offers a new way to integrate home system products with personal style and taste throughout the entire home.


WP5002WH


WP5002LA


WP5002GB


WP5002CM


WP5002BD


WP5002TI


WP5002KK


WP5002SD


WP5002TP


WP5002AE


WP5002CP


WP5002CR


WP5002CZ


WP5002CY


WP5002MS


WP5002NV








WP5002SP

Color	One Gang	Two Gang	Three Gang	Four Gang
Basic Color – Screwless Decorator Opening Back Plate included				
White	WP5001WH	WP5002WH	WP5003WH	WP5004WH
Light Almond	WP5001LA	WP5002LA	WP5003LA	WP5004LA
Titanium	WP5001TI	WP5002TI	WP5003TI	WP5004TI
Gloss Black	WP5001GB	WP5002GB	WP5003GB	WP5004GB
Neutrals – Screwless Decorator Opening Back Plate included				
Cement	WP5001CM	WP5002CM	WP5003CM	WP5004CM
Khaki	WP5001KK	WP5002KK	WP5003KK	WP5004KK
Sand	WP5001SD	WP5002SD	WP5003SD	WP5004SD
Taupe	WP5001TP	WP5002TP	WP5003TP	WP5004TP
Hues – Screwless Decorator Opening Back Plate included				
Aloe	WP5001AE	WP5002AE	WP5003AE	WP5004AE
Bordeaux	WP5001BD	WP5002BD	WP5003BD	WP5004BD
Cameo Pink	WP5001CP	WP5002CP	WP5003CP	WP5004CP
Citrus	WP5001CR	WP5002CR	WP5003CR	WP5004CR
Cozumel	WP5001CZ	WP5002CZ	WP5003CZ	WP5004CZ
Cyan	WP5001CY	WP5002CY	WP5003CY	WP5004CY
Moss	WP5001MS	WP5002MS	WP5003MS	WP5004MS
Nirvana	WP5001NV	WP5002NV	WP5003NV	WP5004NV
Spanish Red	WP5001SP	WP5002SP	WP5003SP	WP5004SP

Description	Height	Width
Studio Wall Plate Dimensions		
One Gang	4.901"	2.988"
Two Gang	4.901"	4.80"
Three Gang	4.901"	6.613"
Four Gang	4.901"	8.425"

Description	Height	Width
Studio Back Plate Dimensions		
One Gang	4.97"	3.158"
Two Gang	4.97"	4.97"
Three Gang	4.97"	6.783"
Four Gang	4.97"	8.595"



These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Decorator Openings					
One Gang 	Ivory	**TP26I**	**SP26I**		
	White	**TP26W**	**SP26W**	Aluminum	**SA26**
	Brown	**TP26**	**SP26**	Brass	**SB26**
	Gray	**TP26GRY**	**SP26GRY**	Polished Brass	**SB26PB**
	Black	**TP26BK**	**SP26BK**	430S/S	**SL26**
	Red	**TP26RED**		302S/S	**SS26**
	Light Almond	**TP26LA**	**SP26LA**	Brushed Bronze	**SB26BZ**
	Blue	**TP26BL**		Chrome	**SB26CH**
	Orange	**TP26OR**			
Two Gang 	Ivory	**TP262I**	**SP262I**		
	White	**TP262W**	**SP262W**	Aluminum	**SA262**
	Brown	**TP262**	**SP262**	Brass	**SB262**
	Gray	**TP262GRY**	**SP262GRY**	Polished Brass	**SB262PB**
	Black	**TP262BK**	**SP262BK**	430S/S	**SL262**
	Red	**TP262RED**		302S/S	**SS262**
	Light Almond	**TP262LA**	**SP262LA**		
	Blue	**TP262BL**			
	Orange	**TP262OR**			
Three Gang 	Ivory	**TP263I**	**SP263I**		
	White	**TP263W**	**SP263W**	Brass	**SB263**
	Brown	**TP263**		Polished Brass	**SB263PB**
	Gray	**TP263GRY**	**SP263GRY**		
	Black	**TP263BK**	**SP263BK**	302S/S	**SS263**
	Red	**TP263RED**			
	Light Almond	**TP263LA**	**SP263LA**		
Four Gang 	Ivory	**TP264I**	**SP264I**		
	White	**TP264W**	**SP264W**	Brass	**SB264**
	Brown	**TP264**	**SP264**	Polished Brass	**SB264PB**
	Gray	**TP264GRY**	**SP264GRY**		
	Black	**TP264BK**	**SP264BK**	302S/S	**SS264**
	Red	**TP264RED**			
	Light Almond	**TP264LA**	**SP264LA**		
Five Gang 	Ivory	**TP265I**	**SP265I**		
	White	**TP265W**	**SP265W**		
	Brown	**TP265**		302S/S	**SS265**
	Gray	**TP265GRY**	**SP265GRY**		
	Black	**TP265BK**	**SP265BK**		
	Red		**SP265RED**		
	Light Almond	**TP265LA**	**SP265LA**		
Six Gang 	Ivory	**TP266I**	**SP266I**		
	White	**TP266W**	**SP266W**		
	Brown	**TP266**	**SP266**	302S/S	**SS266**
	Gray	**TP266GRY**	**SP266GRY**		
	Black	**TP266BK**	**SP266BK**		
	Light Almond	**TP266LA**	**SP266LA**		
Seven Gang 				302S/S	**SS267**
				302S/S Painted Ivory	**SS267I**
				302S/S Painted White	**SS267W**
Eight Gang 				302S/S	**SS268**
				302S/S Painted Ivory	**SS268I**
				302S/S Painted White	**SS268W**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Decorator Devices
Decorator Openings
Junior-Jumbo & Jumbo Plastic & Metal

Description	Color	Nylon	Thermoset		Metal		
		TradeMaster® Jumbo	Junior-Jumbo	Jumbo		Junior-Jumbo	Jumbo
			Smooth	Smooth	Material	Smooth	Smooth
Decorator Openings							
One Gang 	Ivory	TPJ26I	SPJ26I	SPO26I			
	White	TPJ26W	SPJ26W	SPO26W	Brass	SBJ26	SBO26
	Brown	TPJ26	SPJ26	SPO26	302S/S	SSJ26	SSO26
	Gray	TPJ26GRY					
	Red	TPJ26RED					
	Light Almond	TPJ26LA	SPJ26LA	SPO26LA			
Two Gang 	Ivory	TPJ262I	SPJ262I	SPO262I			
	White	TPJ262W	SPJ262W	SPO262W	302S/S	SSJ262	SSO262
	Brown	TPJ262	SPJ262	SPO262			
	Gray	TPJ262GRY					
	Light Almond	TPJ262LA	SPJ262LA				
Three Gang 	Ivory	TPJ263I	SPJ263I				
	White	TPJ263W	SPJ263W		302S/S	SSJ263	
	Brown	TPJ263	SPJ263				
	Gray	TPJ263GRY					
	Light Almond	TPJ263LA	SPJ263LA				
Four Gang 	Ivory	TPJ264I	SPJ264I				
	White	TPJ264W	SPJ264W				
	Brown	TPJ264	SPJ264				
	Gray	TPJ264GRY					
	Light Almond	TPJ264LA	SPJ264LA				

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Notes

legrand®
Pass & Seymour



HOSPITAL GRADE DEVICES

legrand®

Pass & Seymour

Hospital Grade Devices

legrand®
Pass & Seymour


Auto-ground clip assures positive ground.

Exclusive patented feature, circuit label on face allows permanent circuit identification.

No exposed terminals create a finger safe application before, during, and after installation.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face.

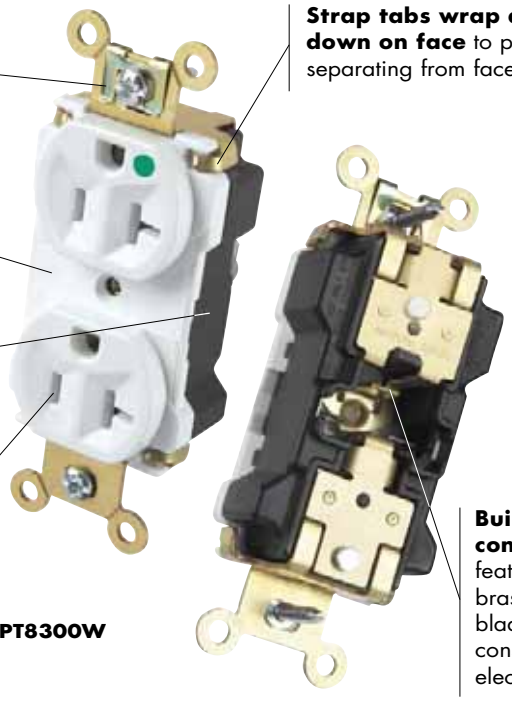

PT8300W


Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

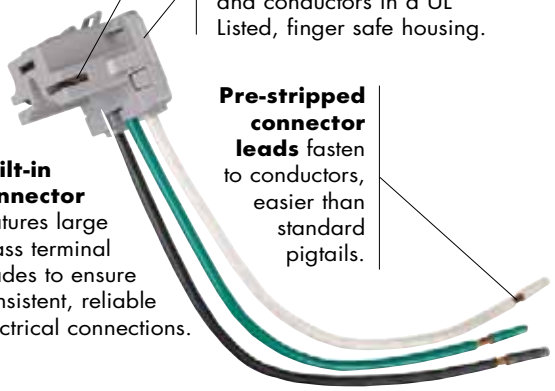

All of our Hospital Grade devices are designed for optimum durability, performance, and reliability — to help make today's facility maintenance operations more productive and consistent.

Device	Rating	Page Number
Receptacle Test Requirements		E-2
PlugTail™ Extra Heavy-Duty & Tamper-Resistant Receptacles	15 & 20A, 125V	E-3, E-4
Extra Heavy-Duty Receptacles	15 & 20A, 125V; 20A, 250V	E-5
Extra Heavy-Duty MRI Receptacles	15 & 20A, 125V	E-6
Heavy-Duty Receptacles	15 & 20A, 125V; 20A, 250V	E-7, E-8
PlugTail™ Specification Grade Receptacles	15 & 20A, 125V	E-9
Single Receptacles	15 & 20A, 125V; 20A, 250V	E-10
Tamper-Resistant Receptacles	15 & 20A, 125V	E-11
Isolated Ground Receptacles	15 & 20A, 125V; 20A, 250V	E-12
Tamper-Resistant Isolated Ground Receptacles	15 & 20A, 125V	E-13
PlugTail™ Decorator Receptacles	15 & 20A, 125V	E-14
Heavy-Duty Decorator Receptacles	15 & 20A, 125V	E-15, E-16
GFCI Receptacles	15 & 20A, 125VAC	E-17, E-23
Illuminated GFCI Receptacles	20A, 125VAC	E-18
Decorator TR Combination Nightlight/GFCI Receptacles	15 & 20A, 125VAC	E-19
PlugTail™ GFCI Receptacles	15 & 20A, 125VAC	E-20, E-21, E-24
PlugTail™ Tamper-Resistant Nightlight/GFCI Receptacles	15 & 20A, 125VAC	E-22
Surge Protective Receptacles	15 & 20A, 125VAC	E-25, E-27
PlugTail™ Surge Protective Receptacles	15 & 20A, 125VAC	E-26
Straight Blade Plugs & Connectors	15 & 20A, 125 & 250V	E-28
Quad Receptacles	20A, 125V	E-29


legrand®
Pass & Seymour

Hospital Grade Devices
Receptacle Test Requirements

All straight blade receptacles must pass a sequence of tests established in UL498. To earn the "Hospital Grade" rating a device must pass an additional series of abuse and performance tests.

Abrupt Plug Removal Test


After ten conditioning insertion and withdrawal cycles of an attachment plug of matching configuration and ground pin, each outlet is to hold without any displacement a fully inserted test pin for at least one minute from a face down horizontal position. Then each receptacle is mounted to represent a typical installation and go through a series of abrupt removal tests – the full insertion of a test plug that is removed by dropping an attached 10-pound weight two feet, thus exerting excessive force on the receptacle face and contacts. Each outlet must go through eight cycles of this test, two in the initial position, then rotated 180 degrees for the next four cycles, then back to the original position for the final two cycles. Duplex receptacles are tested by having one outlet with the ground pin in the 12 o'clock and 6 o'clock positions, the other in the 3 o'clock and 9 o'clock positions. After testing, each outlet, while in the face down horizontal position must hold without displacement a .184" diameter 4-ounce ground pin for one minute. The outlet must have no breakage that would interfere with its function and integrity.

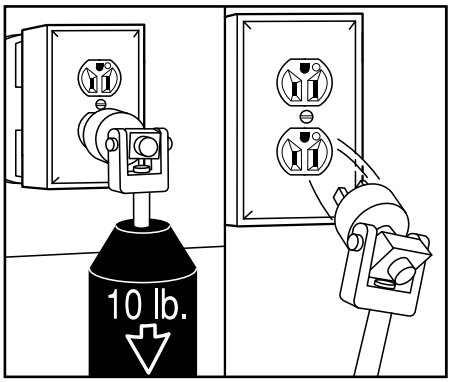

Abrupt Plug Removal Test

Ground Contact Overstress Test


The receptacle ground contact is conditioned with twenty cycles of full insertion and withdrawal of a .204" oversized test pin. Then, with the receptacle in a horizontal face down position, the same contact must retain a .184" diameter 4-ounce test pin for at least one minute without any displacement.

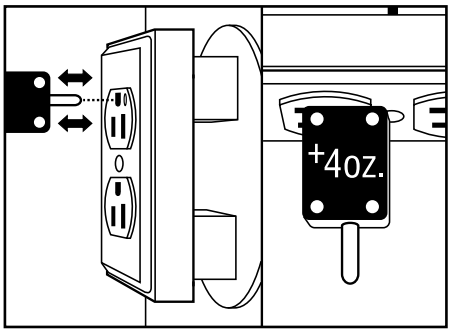

Ground Contact Overstress Test

Impact Test


Receptacles mounted in a cast metal box are placed on a steel plate facing upward. A 5-pound weight is dropped from 18" above the device impacting at the center of the outlet. The device must withstand the impact without having any breakage that hinders its function.

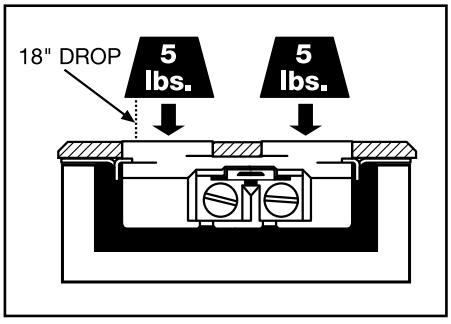

Impact Test

Assembly Security Test

A device, supported at its mounting screws, must withstand 100 pounds through the slots in the receptacle face without cracking the device back body or deforming the yoke.

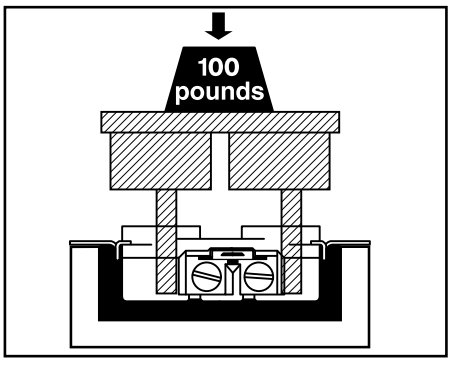

Assembly Security Test

Hospital Grade Devices

PlugTail™ Extra Heavy-Duty Receptacles & Tamper-Resistant Receptacles


15 & 20A, 125V

legrand®
Pass & Seymour


Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance c UL us UL498	FSUL WC596
Duplex Receptacles						
PT8200I	15	125	Ivory	5-15R	•	•
PT8200W	15	125	White	5-15R	•	•
PT8200	15	125	Brown	5-15R	•	•
PT8200GRY	15	125	Gray	5-15R	•	•
PT8200BK	15	125	Black	5-15R	•	•
PT8200RED	15	125	Red	5-15R	•	•
PT8200LA	15	125	Light Almond	5-15R	•	•
PT8200BL	15	125	Blue	5-15R	•	•
PT8300I	20	125	Ivory	5-20R	•	•
PT8300W	20	125	White	5-20R	•	•
PT8300	20	125	Brown	5-20R	•	•
PT8300GRY	20	125	Gray	5-20R	•	•
PT8300BK	20	125	Black	5-20R	•	•
PT8300RED	20	125	Red	5-20R	•	•
PT8300LA	20	125	Light Almond	5-20R	•	•
PT8300BL	20	125	Blue	5-20R	•	•
Tamper-Resistant Duplex Receptacles						
PTTR62HI	15	125	Ivory	5-15R	•	•
PTTR62HW	15	125	White	5-15R	•	•
PTTR62H	15	125	Brown	5-15R	•	•
PTTR62HGRY	15	125	Gray	5-15R	•	•
PTTR62HBK	15	125	Black	5-15R	•	•
PTTR62HRED	15	125	Red	5-15R	•	•
PTTR62HLA	15	125	Light Almond	5-15R	•	•
PTTR62HBL	15	125	Blue	5-15R	•	•
PTTR63HI	20	125	Ivory	5-20R	•	•
PTTR63HW	20	125	White	5-20R	•	•
PTTR63H	20	125	Brown	5-20R	•	•
PTTR63HGRY	20	125	Gray	5-20R	•	•
PTTR63HBK	20	125	Black	5-20R	•	•
PTTR63HRED	20	125	Red	5-20R	•	•
PTTR63HLA	20	125	Light Almond	5-20R	•	•
PTTR63HBL	20	125	Blue	5-20R	•	•

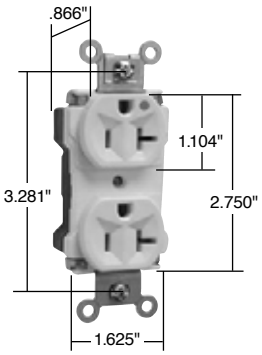


PT8300W

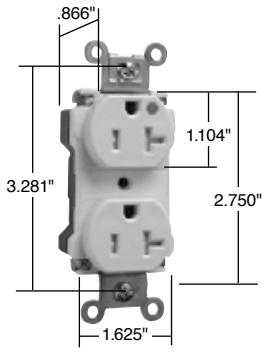

PTTR63HW



2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For PlugTail Connectors, see Page E-14.


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
PlugTail™ Extra Heavy-Duty Illuminated Receptacles
15 & 20A, 125V

Features
- Molded-in "IL" markings on face of product.
- Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

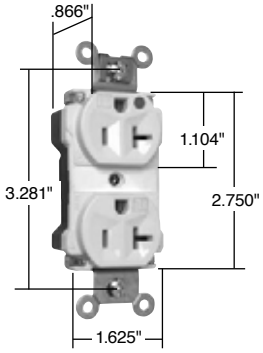


PT8300ILLA



Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Illuminated Duplex Receptacles						
PT8200ILI	15	125	Ivory	5-15R	•	•
PT8200ILW	15	125	White	5-15R	•	•
PT8200IL	15	125	Brown	5-15R	•	•
PT8200ILGRY	15	125	Gray	5-15R	•	•
PT8200ILBK	15	125	Black	5-15R	•	•
PT8200ILRED	15	125	Red	5-15R	•	•
PT8200ILLA	15	125	Light Almond	5-15R	•	•
PT8300ILI	20	125	Ivory	5-20R	•	•
PT8300ILW	20	125	White	5-20R	•	•
PT8300IL	20	125	Brown	5-20R	•	•
PT8300ILGRY	20	125	Gray	5-20R	•	•
PT8300ILBK	20	125	Black	5-20R	•	•
PT8300ILRED	20	125	Red	5-20R	•	•
PT8300ILLA	20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For PlugTail Connectors, see Page E-14.

For Bulk Packaging Solutions consult factory.



PTTESTER

Features
- Ensures proper connections and power presence at both rough-in and device-out stages during P&S PlugTail Device installation.
- Fast, easy identification of circuit connections.
- Easy-to-see indicator lights.
- Sturdy construction for long-term dependability.
- Helps prevent call backs.
- Ensures proper wiring.

Catalog Number	Description
P&S PlugTail™ Tester	
PTTESTER	Red PlugTail Tester for Receptacles and Tails


All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Extra Heavy-Duty Receptacles
15 & 20A, 125V; 20A, 250V


legrand®
Pass & Seymour

Features

- One-piece nickel-plated brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Illuminated version features exclusive LED lamp with solder connection for long durable life (10-12 years).

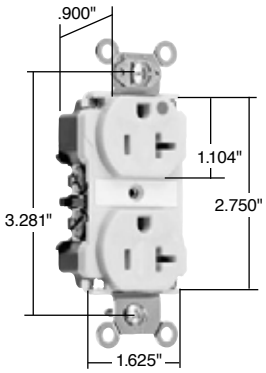

8300I

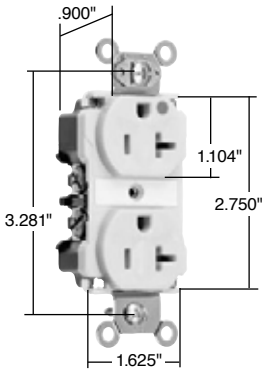

8300ILI

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
8200I	15	125	Ivory	5-15R	•	•	•
8200W	15	125	White	5-15R	•	•	•
8200	15	125	Brown	5-15R	•	•	•
8200GRY	15	125	Gray	5-15R	•	•	•
8200BK	15	125	Black	5-15R	•	•	•
8200RED	15	125	Red	5-15R	•	•	•
8200LA	15	125	Light Almond	5-15R	•	•	•
8300I	20	125	Ivory	5-20R	•	•	•
8300W	20	125	White	5-20R	•	•	•
8300	20	125	Brown	5-20R	•	•	•
8300GRY	20	125	Gray	5-20R	•	•	•
8300BK	20	125	Black	5-20R	•	•	•
8300RED	20	125	Red	5-20R	•	•	•
8300LA	20	125	Light Almond	5-20R	•	•	•
8800I	20	250	Ivory	6-20R	•	•	•
8800W	20	250	White	6-20R	•	•	•
8800	20	250	Brown	6-20R	•	•	•
8800GRY	20	250	Gray	6-20R	•	•	•
8800BK	20	250	Black	6-20R	•	•	•
8800LA	20	250	Light Almond	6-20R	•	•	•
8800RED	20	250	Red	6-20R	•	•	•
LED Illuminated Face Duplex Receptacles Back & Side Wire							
8200ILI	15	125	Ivory	5-15R	•	•	•
8200ILW	15	125	White	5-15R	•	•	•
8200ILRED	15	125	Red	5-15R	•	•	•
NEW **8300ILI**	20	125	Ivory	5-20R	•	•	•
8300ILW	20	125	White	5-20R	•	•	•
8300ILGRY	20	125	Gray	5-20R	•	•	•
8300ILRED	20	125	Red	5-20R	•	•	•
8300ILLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
Extra Heavy-Duty MRI Receptacles
15 & 20A, 125V

Receptacles designed expressly for MRI applications – *We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.*

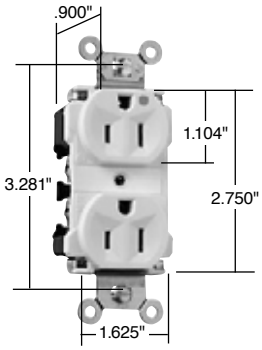


8200LAMRI

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty, one-piece nickel-plated brass mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
8200IMRI	15	125	Ivory	5-15R	•	•	•
8200WMRI	15	125	White	5-15R	•	•	•
8200MRI	15	125	Brown	5-15R	•	•	•
8200GRYMRI	15	125	Gray	5-15R	•	•	•
8200BKMRI	15	125	Black	5-15R	•	•	•
8200REDMRI	15	125	Red	5-15R	•	•	•
8200LAMRI	15	125	Light Almond	5-15R	•	•	•
8300IMRI	20	125	Ivory	5-20R	•	•	•
8300WMRI	20	125	White	5-20R	•	•	•
8300GRYMRI	20	125	Gray	5-20R	•	•	•
8300BKMRI	20	125	Black	5-20R	•	•	•
8300REDMRI	20	125	Red	5-20R	•	•	•
8300LAMRI	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Heavy-Duty Receptacles
15 & 20A, 125V


legrand®
Pass & Seymour

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.
- Smooth face version features an impact-resistant nylon face for ease of cleaning and less dirt build-up.

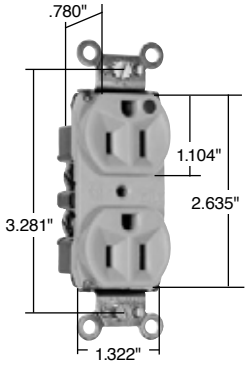


PS8200HI

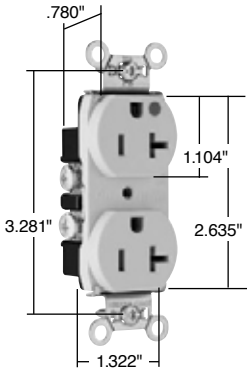

PS8300HSLA

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
PS8200HI	15	125	Ivory	5-15R	•	•	•
PS8200HW	15	125	White	5-15R	•	•	•
PS8200H	15	125	Brown	5-15R	•	•	•
PS8200HGRY	15	125	Gray	5-15R	•	•	•
PS8200HRED	15	125	Red	5-15R	•	•	•
PS8200HLA	15	125	Light Almond	5-15R	•	•	•
PS8300HI	20	125	Ivory	5-20R	•	•	•
PS8300HW	20	125	White	5-20R	•	•	•
PS8300H	20	125	Brown	5-20R	•	•	•
PS8300HGRY	20	125	Gray	5-20R	•	•	•
PS8300HRED	20	125	Red	5-20R	•	•	•
PS8300HLA	20	125	Light Almond	5-20R	•	•	•
Duplex Receptacles – Smooth Face Back & Side Wire							
PS8200HSI	15	125	Ivory	5-15R	•	•	•
PS8200HSW	15	125	White	5-15R	•	•	•
PS8200HS	15	125	Brown	5-15R	•	•	•
PS8200HSGRY	15	125	Gray	5-15R	•	•	•
PS8200HSRED	15	125	Red	5-15R	•	•	•
PS8200HSLA	15	125	Light Almond	5-15R	•	•	•
PS8300HSI	20	125	Ivory	5-20R	•	•	•
PS8300HSW	20	125	White	5-20R	•	•	•
PS8300HS	20	125	Brown	5-20R	•	•	•
PS8300HSGRY	20	125	Gray	5-20R	•	•	•
PS8300HSRED	20	125	Red	5-20R	•	•	•
PS8300HSLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
Heavy-Duty Compact Design Receptacles
15 & 20A, 125V; 20A, 250V

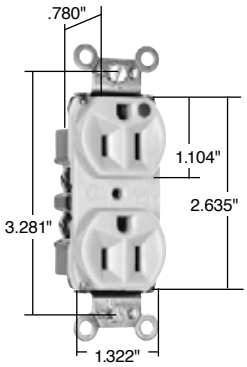

8200HI

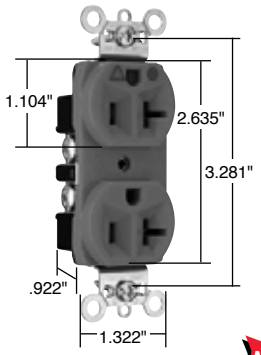

IG8300

Features
- Impact-resistant nylon face.
- One-piece heat-treated triple-wipe brass power contacts.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Back wire holes allow entry of conductor insulation partially into body but not into wiring compartment.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles – Compact Design Back & Side Wire							
8200HI	15	125	Ivory	5-15R	•	•	•
8200HW	15	125	White	5-15R	•	•	•
8200H	15	125	Brown	5-15R	•	•	•
8200HGRY	15	125	Gray	5-15R	•	•	•
8200HRED	15	125	Red	5-15R	•	•	•
8200HLA	15	125	Light Almond	5-15R	•	•	•
8300HI	20	125	Ivory	5-20R	•	•	•
8300HW	20	125	White	5-20R	•	•	•
8300H	20	125	Brown	5-20R	•	•	•
8300HGRY	20	125	Gray	5-20R	•	•	•
8300HBK	20	125	Black	5-20R	•	•	•
8300HRED	20	125	Red	5-20R	•	•	•
8300HLA	20	125	Light Almond	5-20R	•	•	•
NEW **8300HBL**	20	125	Blue	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire							
IG8200I	15	125	Ivory	5-15R	•	•	•
IG8200	15	125	Orange	5-15R	•	•	•
IG8200RED	15	125	Red	5-15R	•	•	•
IG8300I	20	125	Ivory	5-20R	•	•	•
IG8300W	20	125	White	5-20R	•	•	•
IG8300	20	125	Orange	5-20R	•	•	•
IG8300RED	20	125	Red	5-20R	•	•	•
IG8300LA	20	125	Light Almond	5-20R	•	•	•
IG8800	20	250	Orange	6-20R	•	•	•
IG8800LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R | NEMA 5-20R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Hospital Grade Devices
PlugTail™ Specification Grade Receptacles
15 & 20A, 125V

legrand®
Pass & Seymour

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: c UL us UL498	3rd Party Compliance: FSUL WC596
Tamper-Resistant Duplex Receptacles						
PTTR8200I	15	125	Ivory	5-15R	•	•
PTTR8200W	15	125	White	5-15R	•	•
PTTR8200	15	125	Brown	5-15R	•	•
PTTR8200GRY	15	125	Gray	5-15R	•	•
PTTR8200BK	15	125	Black	5-15R	•	•
PTTR8200RED	15	125	Red	5-15R	•	•
PTTR8200LA	15	125	Light Almond	5-15R	•	•
PTTR8300I	20	125	Ivory	5-20R	•	•
PTTR8300W	20	125	White	5-20R	•	•
PTTR8300	20	125	Brown	5-20R	•	•
PTTR8300GRY	20	125	Gray	5-20R	•	•
PTTR8300BK	20	125	Black	5-20R	•	•
PTTR8300RED	20	125	Red	5-20R	•	•
PTTR8300LA	20	125	Light Almond	5-20R	•	•

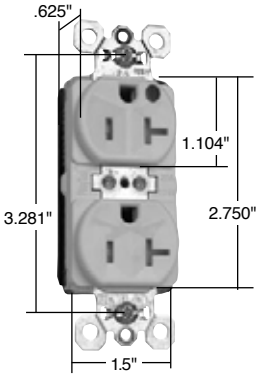


PTTR8300W



Features


- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Crimped and welded contacts.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Features a plastic barrier that isolates grounding terminal from mounting strap and metal boxes.

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance: c UL us UL498	3rd Party Compliance: FSUL WC596
Isolated Ground Duplex Receptacles						
PTIG8200I	15	125	Ivory	5-15R	•	•
PTIG8200	15	125	Orange	5-15R	•	•
PTIG8200RED	15	125	R ed	5-15R	•	•
PTIG8300I	20	125	Ivory	5-20R	•	•
PTIG8300	20	125	Orange	5-20R	•	•
PTIG8300RED	20	125	Red	5-20R	•	•
PTIG8300LA	20	125	Light Almond	5-20R	•	•

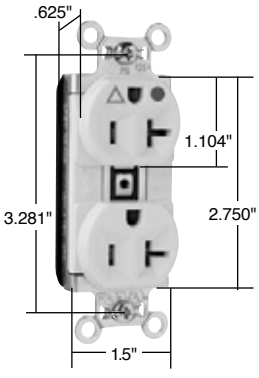

PTIG8300LA

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R


For PlugTail Connectors, see Page E-14.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
Single Receptacles
15 & 20A, 125V; 20A, 250V



8201I



8284I

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Single Receptacles Back & Side Wire							
8201I	15	125	Ivory	5-15R	•	•	•
8201W	15	125	White	5-15R	•	•	•
8201	15	125	Brown	5-15R	•	•	•
8201GRY	15	125	Gray	5-15R	•	•	•
8201BK	15	125	Black	5-15R	•	•	•
8201RED	15	125	Red	5-15R	•	•	•
8201LA	15	125	Light Almond	5-15R	•	•	•
8301I	20	125	Ivory	5-20R	•	•	•
8301W	20	125	White	5-20R	•	•	•
8301	20	125	Brown	5-20R	•	•	•
8301GRY	20	125	Gray	5-20R	•	•	•
8301RED	20	125	Red	5-20R	•	•	•
8801I	20	250	Ivory	6-20R	•	•	•
8801W	20	250	White	6-20R	•	•	•
8801	20	250	Brown	6-20R	•	•	•
8801GRY	20	250	Gray	6-20R	•	•	•
8801RED	20	250	Red	6-20R	•	•	•
Short Strap Single Receptacles 1.937" Screw Spacing, Back & Side Wire							
8284I	15	125	Ivory	5-15R	•	•	•
8284	15	125	Brown	5-15R	•	•	•
8384I	20	125	Ivory	5-20R	•	•	
8384	20	125	Brown	5-20R	•	•	

For Hospital Use Power Interrupting Device consult Turnlok® Section H.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Tamper-Resistant Receptacles
15 & 20A, 125V

legrand®
Pass & Seymour

Features


- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

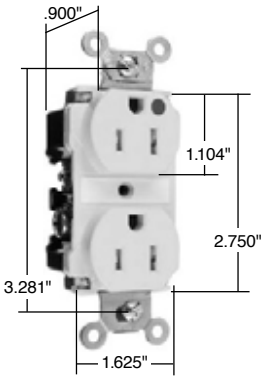

TR62HI

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
TR62HI	15	125	Ivory	5-15R	•	•	•
TR62HW	15	125	White	5-15R	•	•	•
TR62H	15	125	Brown	5-15R	•	•	•
TR62HGRY	15	125	Gray	5-15R	•	•	•
TR62HRED	15	125	Red	5-15R	•	•	•
TR62HLA	15	125	Light Almond	5-15R	•	•	•
TR63HI	20	125	Ivory	5-20R	•	•	•
TR63HW	20	125	White	5-20R	•	•	•
TR63H	20	125	Brown	5-20R	•	•	•
TR63HGRY	20	125	Gray	5-20R	•	•	•
TR63HRED	20	125	Red	5-20R	•	•	•
TR63HLA	20	125	Light Almond	5-20R	•	•	•
TR63HBL	20	125	Blue	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For PlugTail™ Tamper-Resistant Receptacles, see Page E-3.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
Isolated Ground Receptacles
15 & 20A, 125; 20A, 250V

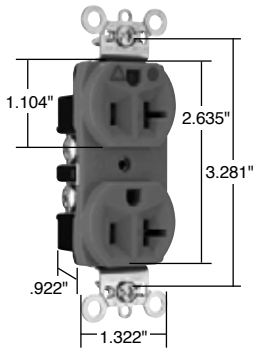

IG8300

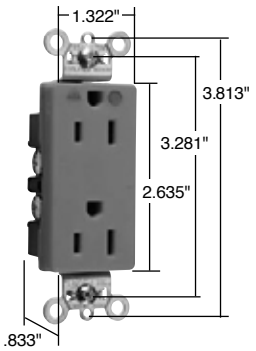


IG26262HG

Catalog Number	Rating A.	V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire							
IG8200I	15	125	Ivory	5-15R	•	•	•
IG8200	15	125	Orange	5-15R	•	•	•
IG8200RED	15	125	Red	5-15R	•	•	•
IG8300I	20	125	Ivory	5-20R	•	•	•
IG8300W	20	125	White	5-20R	•	•	•
IG8300	20	125	Orange	5-20R	•	•	•
IG8300RED	20	125	Red	5-20R	•		•
IG8300LA	20	125	Light Almond	5-20R	•	•	•
IG8800	20	250	Orange	6-20R	•	•	•
IG8800LA	20	250	Light Almond	6-20R	•	•	•
Decorator Duplex Receptacles Back & Side Wire							
IG26262HGW	15	125	White	5-15R	•	•	•
IG26262HG	15	125	Orange	5-15R	•	•	•
IG26262HGRED	15	125	Red	5-15R	•	•	•
IG26362HGW	20	125	White	5-20R	•	•	•
IG26362HG	20	125	Orange	5-20R	•	•	•
IG26362HGBK	20	125	Black	5-20R	•	•	•
IG26362HGRED	20	125	Red	5-20R	•	•	•
Single Receptacles Back & Side Wire							
IG8301	20	125	Orange	5-20R	•	•	•

For Wall Plates for Isolated Ground Systems, consult Wall Plates Section Q.

For Bulk Packaging Solutions consult factory.


2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**



NEMA 6-20R

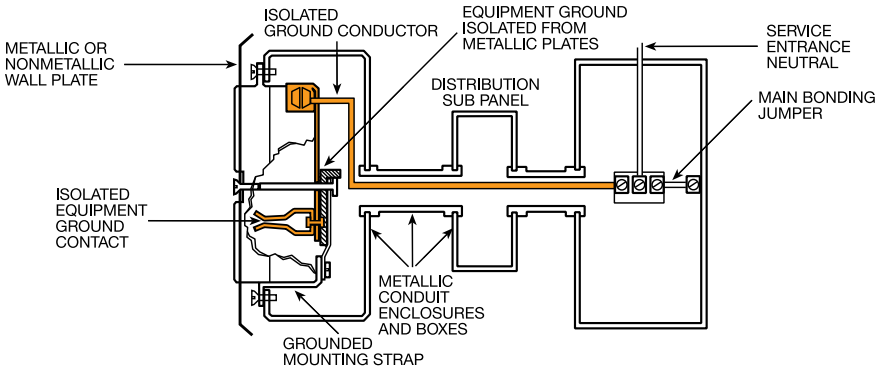

All devices listed on this page conform to NEMA WD-1 and WD-6.


Hospital Grade Devices

Tamper-Resistant Isolated Ground Receptacles


15 & 20A, 125V

legrand®
Pass & Seymour

Catalog Number	Rating A.	Rating V.	NEMA Config. No.	Color	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
NEW Tamper-Resistant Duplex Receptacles Back & Side Wire						
TRIG8200I	15	125	5-15R	Ivory	•	•
TRIG8200W	15	125	5-15R	White	•	•
TRIG8200	15	125	5-15R	Orange	•	•
TRIG8200BK	15	125	5-15R	Black	•	•
TRIG8200GRY	15	125	5-15R	Gray	•	•
TRIG8200RED	15	125	5-15R	Red	•	•
TRIG8200LA	15	125	5-15R	Light Almond	•	•
TRIG8300I	20	125	5-20R	Ivory	•	•
TRIG8300W	20	125	5-20R	White	•	•
TRIG8300	20	125	5-20R	Orange	•	•
TRIG8300BK	20	125	5-20R	Black	•	•
TRIG8300GRY	20	125	5-20R	Gray	•	•
TRIG8300RED	20	125	5-20R	Red	•	•
TRIG8300LA	20	125	5-20R	Light Almond	•	•
NEW Tamper-Resistant Decorator Receptacles Back & Side Wire						
TRIG26262HGI	15	125	5-15R	Ivory	•	•
TRIG26262HGW	15	125	5-15R	White	•	•
TRIG26262HG	15	125	5-15R	Orange	•	•
TRIG26262HGBK	15	125	5-15R	Black	•	•
TRIG26262HGGRY	15	125	5-15R	Gray	•	•
TRIG26262HGRED	15	125	5-15R	Red	•	•
TRIG26262HGLA	15	125	5-15R	Light Almond	•	•
TRIG26362HGI	20	125	5-20R	Ivory	•	•
TRIG26362HGW	20	125	5-20R	White	•	•
TRIG26362HG	20	125	5-20R	Orange	•	•
TRIG26362HGBK	20	125	5-20R	Black	•	•
TRIG26362HGGRY	20	125	5-20R	Gray	•	•
TRIG26362HGRED	20	125	5-20R	Red	•	•
TRIG26362HGLA	20	125	5-20R	Light Almond	•	•

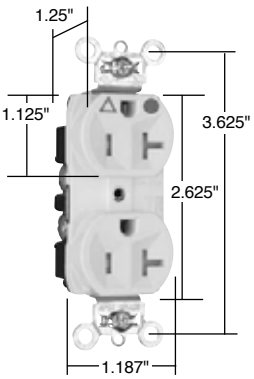


TRIG8300W

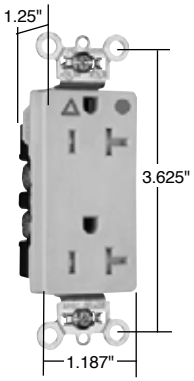

TRIG26362HG

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Hospital Grade Devices
PlugTail™ Decorator Receptacles
15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

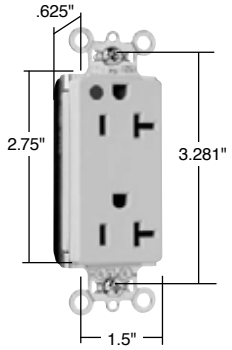


PT26362HGI



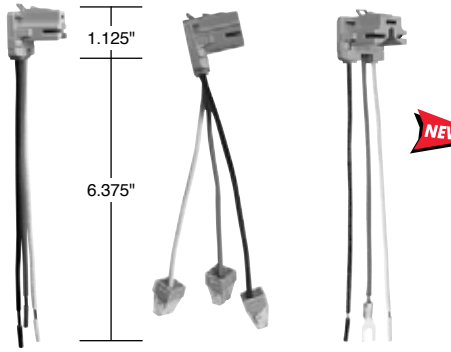

PTRA6STR PTRA6STRBP PTRA6STRG

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance: c UL us UL498	3rd Party Compliance: FSUL WC596
Duplex Receptacles						
PT26262HGI	15	125	Ivory	5-15R	•	•
PT26262HGW	15	125	White	5-15R	•	•
PT26262HGGRY	15	125	Gray	5-15R	•	•
PT26262HGRED	15	125	Red	5-15R	•	•
PT26362HGI	20	125	Ivory	5-20R	•	•
PT26362HGW	20	125	White	5-20R	•	•
PT26362HGGRY	20	125	Gray	5-20R	•	•
PT26362HGRED	20	125	Red	5-20R	•	•
PT26362HGLA	20	125	Light Almond	5-20R	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
NEW **NAFTA-Compliant PlugTail Connectors – Right Angle**		
PTRA6SOLNA	Solid	6"
PTRA6STRNA	Stranded	6"
PlugTail Connectors – Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PlugTail Connectors – Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

For Bulk Packaging Solutions consult factory.

NAFTA-Compliant PlugTail Connectors are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Heavy-Duty Decorator Receptacles
15 & 20A, 125V


legrand®
Pass & Seymour

Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard #26 opening wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

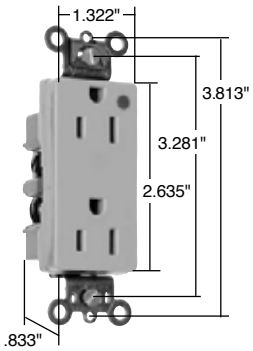


26262HGI



IG26262HG

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire							
26262HGI	15	125	Ivory	5-15R	•	•	•
26262HGW	15	125	White	5-15R	•	•	•
26262HGGRY	15	125	Gray	5-15R	•	•	•
26262HGRED	15	125	Red	5-15R	•	•	•
26362HGI	20	125	Ivory	5-20R	•	•	•
26362HGW	20	125	White	5-20R	•	•	•
26362HG	20	125	Brown	5-20R	•	•	•
26362HGGRY	20	125	Gray	5-20R	•	•	•
26362HGRED	20	125	Red	5-20R	•	•	•
26362HGLA	20	125	Light Almond	5-20R	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire							
IG26262HGW	15	125	White	5-15R	•		•
IG26262HG	15	125	Orange	5-15R	•		•
IG26262HGRED	15	125	Red	5-15R	•		•
IG26362HGW	20	125	White	5-20R	•		•
IG26362HG	20	125	Orange	5-20R	•		•
IG26362HGBK	20	125	Black	5-20R	•		•
IG26362HGRED	20	125	Red	5-20R	•		•
Illuminated Duplex Receptacles Back & Side Wire							
26222HGI	15	125	Ivory	5-15R	•		•
26322HGI	20	125	Ivory	5-20R	•		•
26322HGW	20	125	White	5-20R	•		•
26322HGRED	20	125	Red	5-20R	•		•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Hospital Grade Devices
Heavy-Duty Tamper-Resistant Decorator Receptacles
15 & 20A, 125V




TR26362HGI

Features
- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Duplex Receptacles Back & Side Wire							
TR26262HGI	15	125	Ivory	5-15R	•	•	•
TR26262HGW	15	125	White	5-15R	•	•	•
TR26262HGGRY	15	125	Gray	5-15R	•	•	•
TR26262HGRED	15	125	Red	5-15R	•	•	•
TR26262HGLA	15	125	Light Almond	5-15R	•	•	•
TR26362HGI	20	125	Ivory	5-20R	•	•	•
TR26362HGW	20	125	White	5-20R	•	•	•
TR26362HGGRY	20	125	Gray	5-20R	•	•	•
TR26362HGBK	20	125	Black	5-20R	•	•	•
TR26362HGRED	20	125	Red	5-20R	•	•	•
TR26362HGLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Features

- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Tamper-Resistant Models


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Tamper-Resistant 15 Amp Duplex GFCI							
1595HGTRI	15	125	Ivory	5-15R	•	•	•
1595HGTRW	15	125	White	5-15R	•	•	•
1595HGTR	15	125	Brown	5-15R	•	•	•
1595HGTRGRY	15	125	Gray	5-15R	•	•	•
1595HGTRRED	15	125	Red	5-15R	•	•	•
1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRI	20	125	Ivory	5-20R	•	•	•
2095HGTRW	20	125	White	5-20R	•	•	•
2095HGTR	20	125	Brown	5-20R	•	•	•
2095HGTRGRY	20	125	Gray	5-20R	•	•	•
2095HGTRRED	20	125	Red	5-20R	•	•	•
2095HGTRLA	20	125	Light Almond	5-20R	•	•	•
15 Amp Duplex GFCI							
1595HGI	15	125	Ivory	5-15R	•	•	•
1595HGW	15	125	White	5-15R	•	•	•
1595HG	15	125	Brown	5-15R	•	•	•
1595HGGRY	15	125	Gray	5-15R	•	•	•
1595HGRED	15	125	Red	5-15R	•	•	•
1595HGLA	15	125	Light Almond	5-15R	•	•	•
20 Amp Duplex GFCI							
2095HGI	20	125	Ivory	5-20R	•	•	•
2095HGW	20	125	White	5-20R	•	•	•
2095HG	20	125	Brown	5-20R	•	•	•
2095HGGRY	20	125	Gray	5-20R	•	•	•
2095HGRED	20	125	Red	5-20R	•	•	•
2095HGLA	20	125	Light Almond	5-20R	•	•	•


All devices listed on this page conform to NEMA WD-1 and WD-6.

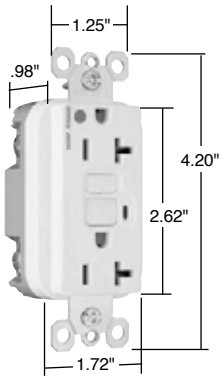

2095HGW

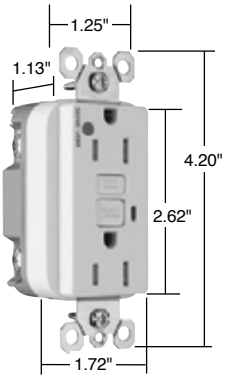

1595HGTRW

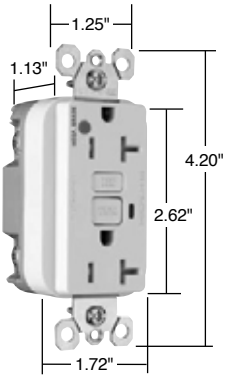

2095HGTRW




NEMA 5-15R



NEMA 5-20R

legrand®
Pass & Seymour

Hospital Grade Devices
Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC

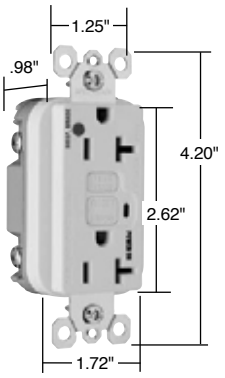

2095HGWL

Features

- Green indicator light (LED) is ON when power is available. Helps identify emergency power branch circuits.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Illuminated 20 Amp Duplex GFCI							
2095HGIL	20	125	Ivory	5-20R	•	•	•
2095HGWL	20	125	White	5-20R	•	•	•
2095HGREDL	20	125	Red	5-20R	•	•	•



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices

Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.


Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

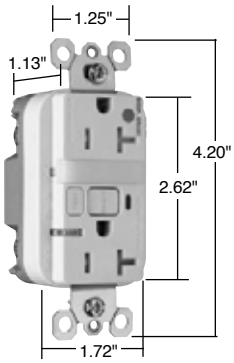

2095HGNTLTRW

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•




NEMA 5-15R **NEMA 5-20R**

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page S-56 for more information.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Hospital Grade Devices
PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

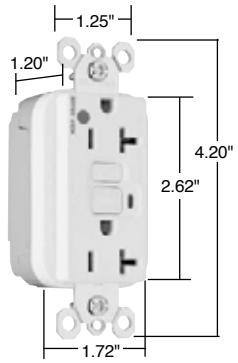

PT2095HGW





PTRA6STR

Features

- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 Amp Duplex GFCI							
PT1595HGI	15	125	Ivory	5-15R	•	•	•
PT1595HGW	15	125	White	5-15R	•	•	•
PT1595HG	15	125	Brown	5-15R	•	•	•
PT1595HGGRY	15	125	Gray	5-15R	•	•	•
PT1595HGRED	15	125	Red	5-15R	•	•	•
PT1595HGLA	15	125	Light Almond	5-15R	•	•	•
20 Amp Duplex GFCI							
PT2095HGI	20	125	Ivory	5-20R	•	•	•
PT2095HGW	20	125	White	5-20R	•	•	•
PT2095HG	20	125	Brown	5-20R	•	•	•
PT2095HGGRY	20	125	Gray	5-20R	•	•	•
PT2095HGRED	20	125	Red	5-20R	•	•	•
PT2095HGLA	20	125	Light Almond	5-20R	•	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page E-14.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.


Hospital Grade Devices
PlugTail™ Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

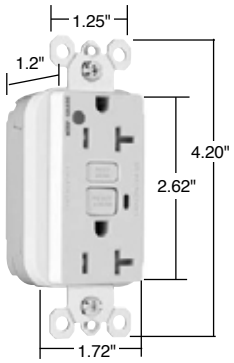

PT2095HGTRW



PTRA6STR

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Tamper-Resistant 15 Amp Duplex GFCI							
PT1595HGTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGTRW	15	125	White	5-15R	•	•	•
PT1595HGTRGRY	15	125	Gray	5-15R	•	•	•
PT1595HGTRRED	15	125	Red	5-15R	•	•	•
PT1595HGTRLA	15	125	Light Almond	5-15R	•	•	•
Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRW	20	125	White	5-20R	•	•	•
PT2095HGTRGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRRED	20	125	Red	5-20R	•	•	•
PT2095HGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For PlugTail Connector catalog numbers, see Page E-14.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Hospital Grade Devices

PlugTail™ Tamper-Resistant Nightlight/ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

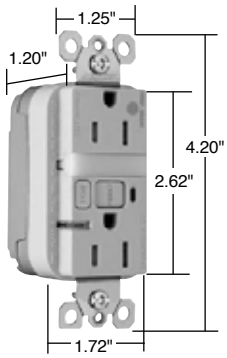

PT1595HGNTLTRI



PTRA6STR

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRRED	15	125	Red	5-15R	•	•	•
NEW Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R


For PlugTail Connector catalog numbers, see Page E-14.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Hospital Grade Devices
NAFTA-Compliant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant Tamper-Resistant 20 Amp Duplex GFCI							
2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
2095HGTRNAW	20	125	White	5-20R	•	•	•
2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
2095HGTRNARED	20	125	Red	5-20R	•	•	•
2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant 15 Amp Duplex GFCI							
1595HGNAI	15	125	Ivory	5-15R	•	•	•
1595HGNAW	15	125	White	5-15R	•	•	•
1595HGNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant 20 Amp Duplex GFCI							
2095HGNAI	20	125	Ivory	5-20R	•	•	•
2095HGNAW	20	125	White	5-20R	•	•	•
2095HGNA	20	125	Brown	5-20R	•	•	•
2095HGNAGRY	20	125	Gray	5-20R	•	•	•
2095HGNARED	20	125	Red	5-20R	•	•	•
2095HGNALA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R NEMA 5-20R

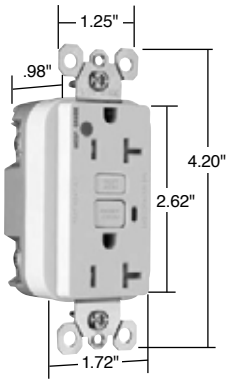

2095HGTRNAW

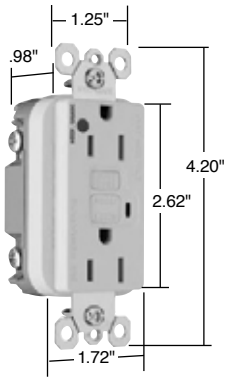


1595HGNAW

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Hospital Grade Devices
NAFTA-Compliant PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

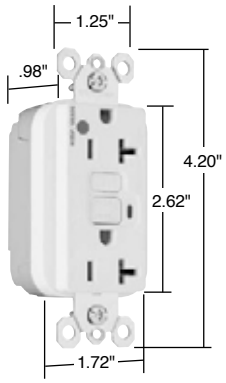

PT2095HGNAW

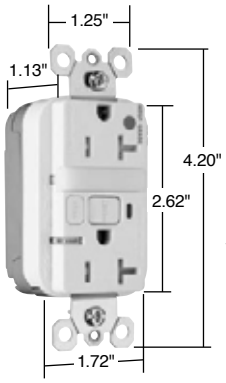

PT2095HGNTLTRNAW



PTRA6STR

Features
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- FSUL Listed (Federal Specification WC596).
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW NAFTA-Compliant 20 Amp Duplex GFCI							
PT2095HGNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNAW	20	125	White	5-20R	•	•	•
PT2095HGNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGNARED	20	125	Red	5-20R	•	•	•
PT2095HGNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Tamper-Resistant 20 Amp Duplex GFCI							
PT2095HGTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGTRNAW	20	125	White	5-20R	•	•	•
PT2095HGTRNAGRY	20	125	Gray	5-20R	•	•	•
PT2095HGTRNARED	20	125	Red	5-20R	•	•	•
PT2095HGTRNALA	20	125	Light Almond	5-20R	•	•	•
NEW NAFTA-Compliant Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRNAI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRNAW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRNARED	15	125	Red	5-15R	•	•	•
NEW NAFTA-Compliant Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRNAI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRNAW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRNARED	20	125	Red	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R



NEMA 5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page E-14.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Specifications


- UL1449 (3rd Edition). (1.2 x 50μs 6000V, 8 x 20μs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance)
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)

5262/5362, IG5262/5362, 8200/8300, IG8200/8300, TR5262/5362, TRIG5262/5362, TR8200/8300, TRIG8200/8300


- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20μS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

5252/5352, TR5252/5352, All PlugTail™

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20μS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.
- PlugTail versions – factory-terminated devices and connectors.

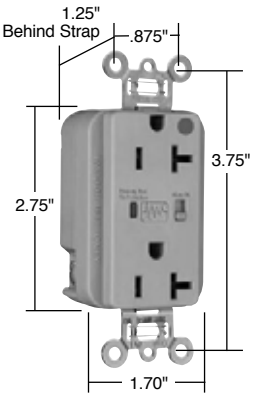

8300GRYSP

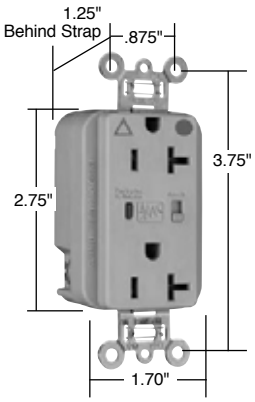


IG8300GRYSP

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Duplex Receptacles** Back & Side Wire								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200REDSP	15	125	5-15R	Red	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300SP	20	125	5-20R	Brown	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300REDSP	20	125	5-20R	Red	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/ IEEE C62.45.




NEMA 5-15R **NEMA 5-20R**


legrand®
Pass & Seymour

Hospital Grade Devices
PlugTail™ Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


Audible Alarm with LED Indicator

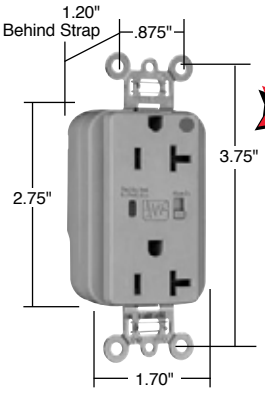

PT8300GRYSP

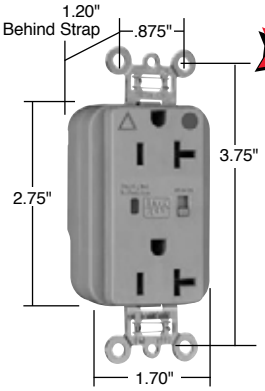

PTIG8300GRYSP

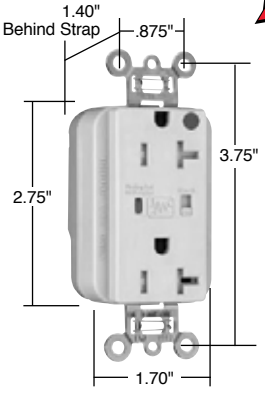

PTTR8300ISP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT8200ISP	15	125	5-15R	Ivory	•	•	•	•
PT8200WSP	15	125	5-15R	White	•	•	•	•
PT8200SP	15	125	5-15R	Brown	•	•	•	•
PT8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PT8200REDSP	15	125	5-15R	Red	•	•	•	•
PT8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PT8200BLSP	15	125	5-15R	Blue	•	•	•	•
PT8300ISP	20	125	5-20R	Ivory	•	•	•	•
PT8300WSP	20	125	5-20R	White	•	•	•	•
PT8300SP	20	125	5-20R	Brown	•	•	•	•
PT8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PT8300REDSP	20	125	5-20R	Red	•	•	•	•
PT8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PT8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG8200WSP	15	125	5-15R	White	•	•	•	•
PTIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG8200REDSP	15	125	5-15R	Red	•	•	•	•
PTIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG8200OSP	15	125	5-15R	Orange	•	•	•	•
PTIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG8300WSP	20	125	5-20R	White	•	•	•	•
PTIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG8300REDSP	20	125	5-20R	Red	•	•	•	•
PTIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
PTIG8300OSP	20	125	5-20R	Orange	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR8200WSP	15	125	5-15R	White	•	•	•	•
PTTR8200SP	15	125	5-15R	Brown	•	•	•	•
PTTR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR8200REDSP	15	125	5-15R	Red	•	•	•	•
PTTR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR8300WSP	20	125	5-20R	White	•	•	•	•
PTTR8300SP	20	125	5-20R	Brown	•	•	•	•
PTTR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR8300REDSP	20	125	5-20R	Red	•	•	•	•
PTTR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR8300BLSP	20	125	5-20R	Blue	•	•	•	•

For PlugTail Connectors, see Page E-14.



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


Hospital Grade Devices
Tamper-Resistant
Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand®
Pass & Seymour

Audible Alarm with LED Indicator


Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles Back & Side Wire								
TR8200ISP	15	125	5-15R	Ivory	•	•	•	•
TR8200WSP	15	125	5-15R	White	•	•	•	•
TR8200SP	15	125	5-15R	Brown	•	•	•	•
TR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TR8200REDSP	15	125	5-15R	Red	•	•	•	•
TR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TR8200BLSP	15	125	5-15R	Blue	•	•	•	•
TR8300ISP	20	125	5-20R	Ivory	•	•	•	•
TR8300WSP	20	125	5-20R	White	•	•	•	•
TR8300SP	20	125	5-20R	Brown	•	•	•	•
TR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TR8300REDSP	20	125	5-20R	Red	•	•	•	•
TR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TR8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles Back & Side Wire								
TRIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG8200WSP	15	125	5-15R	White	•	•	•	•
TRIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG8200REDSP	15	125	5-15R	Red	•	•	•	•
TRIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG8200OSP	15	125	5-15R	Orange	•	•	•	•
TRIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG8300WSP	20	125	5-20R	White	•	•	•	•
TRIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG8300REDSP	20	125	5-20R	Red	•	•	•	•
TRIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG8300OSP	20	125	5-20R	Orange	•	•	•	•

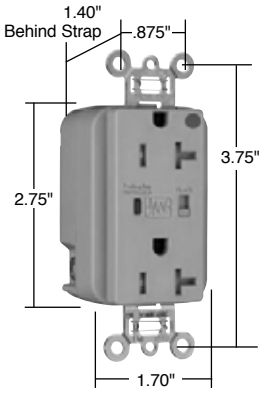

TR8300GRYSP

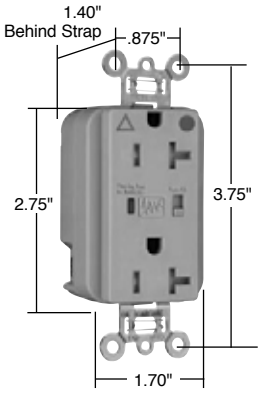

TRIG8300GRYSP



NEMA 5-15R

NEMA 5-20R


Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Hospital Grade Devices
Straight Blade Plugs & Connectors
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20
Suitability




PS5266XHG



PS5269XHG



PS5266HGAN



PS8115




PS8119

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: UL498	FSUL WC596	C22.2 No. 42
Extra-Hard Use (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
MaxGrip® M³								
PS8115	15	125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15	125	Connector, Gray	.230"-.720"	5-15R	•	•	•



NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Hospital Grade Devices
Quad Receptacles
20A, 125V


legrand®
Pass & Seymour

Application

Legrand/Pass & Seymour's quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

Features

- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

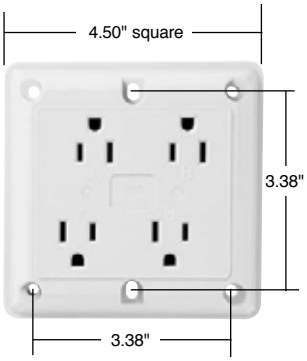

Quad Receptacle

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.	3rd Party Compliance UL498	UL1449	CSA
Isolated Ground Surge Protective Quads							
IG420HISP	20	125	Ivory	5-20R	•	•	
IG420HGRYSP	20	125	Gray	5-20R	•	•	
IG420HBLSP	20	125	Blue	5-20R	•	•	
Quads							
420HI	20	125	Ivory	5-20R	•		•
420HW	20	125	White	5-20R	•		•
420H	20	125	Brown	5-20R	•		•
420HGRY	20	125	Gray	5-20R	•		•
420HRED	20	125	Red	5-20R	•		•

2 Pole, 3 Wire



NEMA 5-20R

Hard Use Spec Grade & Hard Use Surge Protective Spec Grade Quads

• Isolated ground complied with NEC® 410-56(c) and 250-74 exception 4
• Conforms to NEMA WD-1, WD-6.

Electrical	
Frequency	60Hz
Voltage	125V
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 –12 AWG copper and copper-clad
Product Identification	Ratings are permanent part of device
Weight	10.75 oz.
Environmental	
Flammability	UL94 V2
Operating Temperature	-40°C to 65°C (-40°F to 150°F) continuous without impact
Materials	
Face	Nylon
Body	Nylon
Line Terminals	.035" T-type Triple-Wipe Phosphor Bronze
Terminal Screws	Brass #8-32
Hex Head Grounding Screw	Steel (Green)
Mounting Screws	Zinc-plated steel

Additional Specifications for Hard Use Surge Protective Spec Grade Quads

• ANSI /IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45
• Installation Categories "A" (ring wave) and "B" (unidirectional impulse)

Electrical	
MOV Rating	18mm
UL1449 Suppressed Voltage Rating	500V (L-N, L-G, N-G)
Noise Attenuation	-35db Noise Filtering at 5kHz-50MHz
Thermal Protection	Fused
Green LED Indicator	ON when protection is active, OFF when protection is inactive

All devices listed on this page conform to NEMA WD-1 and WD-6.



SURGE PROTECTIVE & ISOLATED GROUND DEVICES

legrand®

Pass & Seymour

Surge Protective & Isolated Ground Devices

legrand®
Pass & Seymour

IG symbol and Isolated Ground markings on strap make for easy identification and circuit delineation.

Dual mechanical shutter system to help prevent insertion of foreign objects.

Solid-state LED monitor has 25-year minimum life expectancy. A high visibility, wide-angle lens indicates protection is in place.

LED indication:
Steady green = protected
Flashing red = not protected
OFF = no power to unit

Plastic barrier isolates grounding terminal from mounting strap and metal boxes.

Audible alarm alert of MOV damage. Alarm able to be turned On/Off.



TRIG8300LASP

Wrap-around steel strap for structural integrity. Auto-ground is standard, for easier installation.

Impact-resistant thermoplastic exterior resists impacts and scrapes.

External screw-pressure-plate back and side wire terminals including ground with external back wire clamps (exclusive) accept #14 – #10 AWG copper or copper-clad, solid or stranded conductors. External pressure plate feature allows two conductors to be terminated by a single screw.

Triple-wipe, copper-alloy contacts for superior, more dependable connection.

Thermal protection in 3 modes. 3 17mm dual pack MOVs absorb up to 340 Joules of excess energy in each leg (L-N, L-G, N-G) with 24,000 amp current handling capability for full, equal and symmetrical protection. Protection response time in less than one nanosecond.

Surge protective device offering with increased transient protection, reliability and protection notification — for industrial, commercial, and residential applications in the electronics age.

Index

Device	Rating	Page Number
Surge Protective Devices Product Description		F-2
Product Specifications		F-3
Hospital Grade Surge Protective Receptacles	15 & 20A, 125VAC	F-4
Surge Protective Receptacles	15 & 20A, 125VAC	F-5, F-6
PlugTail™ Surge Protective Receptacles	15 & 20A, 125V	F-7
PlugTail™ Hospital Grade Surge Protective Receptacles	15 & 20A, 125V	F-8
Tamper-Resistant Surge Protective Receptacles	15 & 20A, 125V	F-9
Tamper-Resistant Hospital Grade Surge Protective Receptacles	15 & 20A, 125V	F-10
Surge Protection Panels	Heavy-, Medium- & Light-Duty	F-11 – F-13
Isolated Ground Product Description		F-14
PlugTail™ Isolated Ground Receptacles	15 & 20A, 125V	F-16
Isolated Ground Receptacles	15 & 20A, 125 & 250V	F-17
Tamper-Resistant Isolated Ground Receptacles	15 & 20A, 125	F-18
Turnlok® Isolated Ground Receptacles	15, 20 & 30A	F-19
Power & Surge Protection Strips & Specifications		F-20, F-21

legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices

Product Description – Surge Protective Devices



Surge Protective Devices

Office buildings, schools and campuses, hospitals and medical facilities, and your own home; the use of microprocessor-based equipment has become prevalent in all day-to-day environments. Commercial and industrial facilities have computer, IT, and telephone systems; and control and automation equipment. Retail locations have sophisticated cash registers, electronic scanning, and security systems. At home, we have desktop and laptop computers, smart telephones, high-definition TVs, audio and home theater equipment, gaming systems, and control systems (thermostats, garage door openers, etc.). In today's world we are dependent on (and take for granted) the performance of all this sophisticated yet sensitive equipment.

All microprocessor-based equipment is extremely sensitive to momentary spikes and surges that occur daily over AC circuits. Sources for these transient spikes and surges range from lightning and utility switching to inductive load switching such as air conditioners, power tools, vacuum cleaners, and copy machines. Externally or internally induced, high energy spikes and surges are capable of causing catastrophic instantaneous damage or cumulative transients that continue to erode the effectiveness of the equipment, hindering performance until it prematurely fails.

The best line of defense for any location is a coordination of protection at the service entrance, branch service locations, and at the point of use. Legrand®/Pass & Seymour's Surge Protection products offer single and multi-phase panel-mounted units for installation at the main service entrance and branch distribution locations and a full line of receptacles and portable/plug-in units with multiple outlets, phone, and data protection. This full package allows you to cost effectively provide the right protection for your specific application.

legrand®
Pass & Seymour

Specifications – 5262/5362, IG5262/5362, 8200/8300, IG8200/8300, TR5262/5362, TRIG5262/5362, TR8200/8300, TRIG8200/8300

- UL1449 (3rd Edition). (1.2 x 50μs 6000V, 8 x 20μs 3000A).
- 340 joules of energy absorption in each of the 3 modes.
  Energy (measured for an 8x20μS duration) = 340J.
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- LED indication:
  Steady green = protected
  Flashing red = not protected
  OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Common mode noise attenuation:
  500 KHz to 30 MHz; up to 20 dB
  (50 ohm source impedance)
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.
- Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.

Specifications – 5252/5352, TR5252/5352, All PlugTail™ Receptacles

- UL1449 (3rd Edition). (1.2 x 50μs 6000V, 8 x 20μs 3000A).
- 340 joules of energy absorption in line-to-neutral and line-to-ground modes.
  680 joules of energy absorption in neutral-to-ground mode.
  Energy (measured for an 8x20μS duration) = 340J (680J for N-G mode).
- 24,000 amps current handling capability in each of 3 modes; line to neutral, line to ground, neutral to ground.
- Nominal let-through (suppressed) voltage:
  Line-to-neutral and line-to-ground modes = 500V;
  neutral-to-ground mode = 1000V.
- LED indication:
  Steady green = protected
  Flashing red = not protected
  OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Common mode noise attenuation:
  500 KHz to 30 MHz; up to 20 dB
  (50 ohm source impedance)
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- PlugTail versions – factory-terminated devices and connectors.
- Operating temperature: -40°C to 85°C (-40°F to 185°F)
- Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE 587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices


Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Audible Alarm with LED Indicator

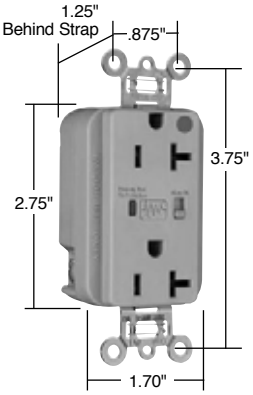

8300GRYSP

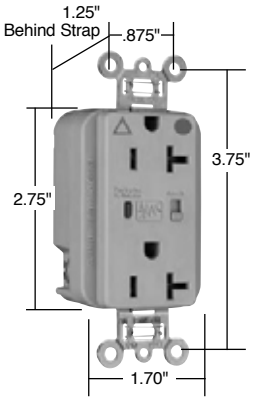

IG8300GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Duplex Receptacles Back & Side Wire								
8200ISP	15	125	5-15R	Ivory	•	•	•	•
8200WSP	15	125	5-15R	White	•	•	•	•
8200SP	15	125	5-15R	Brown	•	•	•	•
8200GRYSP	15	125	5-15R	Gray	•	•	•	•
8200REDSP	15	125	5-15R	Red	•	•	•	•
8200LASP	15	125	5-15R	Light Almond	•	•	•	•
8200BLSP	15	125	5-15R	Blue	•	•	•	•
8300ISP	20	125	5-20R	Ivory	•	•	•	•
8300WSP	20	125	5-20R	White	•	•	•	•
8300SP	20	125	5-20R	Brown	•	•	•	•
8300GRYSP	20	125	5-20R	Gray	•	•	•	•
8300REDSP	20	125	5-20R	Red	•	•	•	•
8300LASP	20	125	5-20R	Light Almond	•	•	•	•
8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles Back & Side Wire								
IG8200ISP	15	125	5-15R	Ivory	•	•	•	•
IG8200WSP	15	125	5-15R	White	•	•	•	•
IG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
IG8200REDSP	15	125	5-15R	Red	•	•	•	•
IG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
IG8200BLSP	15	125	5-15R	Blue	•	•	•	•
IG8200OSP	15	125	5-15R	Orange	•	•	•	•
IG8300ISP	20	125	5-20R	Ivory	•	•	•	•
IG8300WSP	20	125	5-20R	White	•	•	•	•
IG8300SP	20	125	5-20R	Brown	•	•	•	•
IG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
IG8300REDSP	20	125	5-20R	Red	•	•	•	•
IG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
IG8300BLSP	20	125	5-20R	Blue	•	•	•	•
IG8300OSP	20	125	5-20R	Orange	•	•	•	•

Catalog Number	Description	Catalog Number	Description	Color
Wall Plates for Surge Protective Duplex Receptacles				
SS26	Stainless Steel Decorator	**TP26IG***	Thermoplastic Decorator	Orange
SS26IG*	Stainless Steel Decorator	**TP26BL**	Thermoplastic Decorator	Blue
SB26	Brass Decorator		*For Isolated Ground	



NEMA 5-15R



NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Surge Protective & Isolated Ground Devices
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
5262ISP	15	125	5-15R	Ivory	•	•	•	•
5262WSP	15	125	5-15R	White	•	•	•	•
5262SP	15	125	5-15R	Brown	•	•	•	•
5262GRYSP	15	125	5-15R	Gray	•	•	•	•
5262BKSP	15	125	5-15R	Black	•	•	•	•
5262REDSP	15	125	5-15R	Red	•	•	•	•
5262LASP	15	125	5-15R	Light Almond	•	•	•	•
5262BLSP	15	125	5-15R	Blue	•	•	•	•
5362ISP	20	125	5-20R	Ivory	•	•	•	•
5362WSP	20	125	5-20R	White	•	•	•	•
5362SP	20	125	5-20R	Brown	•	•	•	•
5362GRYSP	20	125	5-20R	Gray	•	•	•	•
5362BKSP	20	125	5-20R	Black	•	•	•	•
5362REDSP	20	125	5-20R	Red	•	•	•	•
5362LASP	20	125	5-20R	Light Almond	•	•	•	•
5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
IG5262ISP	15	125	5-15R	Ivory	•	•	•	•
IG5262WSP	15	125	5-15R	White	•	•	•	•
IG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
IG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
IG5262BLSP	15	125	5-15R	Blue	•	•	•	•
IG5262OSP	15	125	5-15R	Orange	•	•	•	•
IG5362ISP	20	125	5-20R	Ivory	•	•	•	•
IG5362WSP	20	125	5-20R	White	•	•	•	•
IG5362SP	20	125	5-20R	Brown	•	•	•	•
IG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
IG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
IG5362BLSP	20	125	5-20R	Blue	•	•	•	•
IG5362OSP	20	125	5-20R	Orange	•	•	•	•

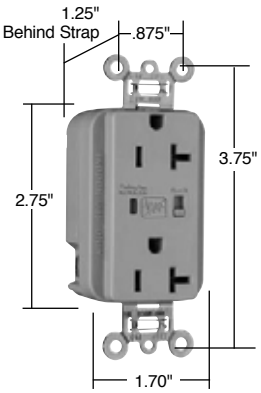

5362GRYSP

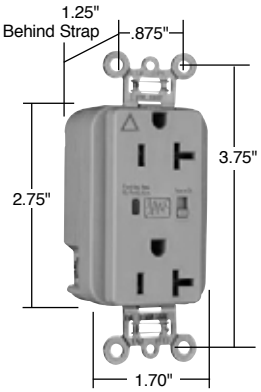

IG5362GRYSP



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

legrand®
Pass & Seymour


Surge Protective & Isolated Ground Devices
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

LED Indicator Only

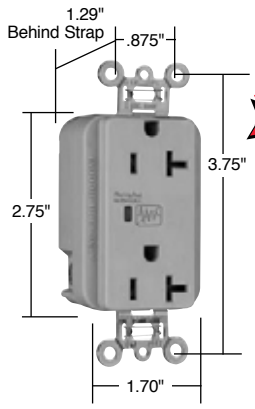

5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Duplex Receptacles Back & Side Wire								
5252ISP	15	125	5-15R	Ivory	•	•	•	•
5252WSP	15	125	5-15R	White	•	•	•	•
5252GRYSP	15	125	5-15R	Gray	•	•	•	•
5252BKSP	15	125	5-15R	Black	•	•	•	•
5252LASP	15	125	5-15R	Light Almond	•	•	•	•
5252BLSP	15	125	5-15R	Blue	•	•	•	•
5352ISP	20	125	5-20R	Ivory	•	•	•	•
5352WSP	20	125	5-20R	White	•	•	•	•
5352GRYSP	20	125	5-20R	Gray	•	•	•	•
5352BKSP	20	125	5-20R	Black	•	•	•	•
5352LASP	20	125	5-20R	Light Almond	•	•	•	•
5352BLSP	20	125	5-20R	Blue	•	•	•	•

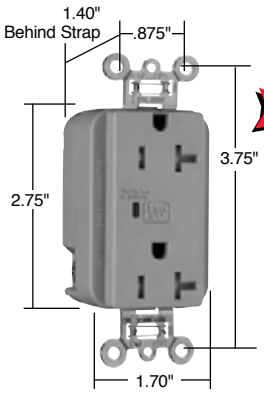

TR5352GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
Tamper-Resistant Duplex Receptacles Back & Side Wire*								
TR5252ISP	15	125	5-15R	Ivory	•	•	•	•
TR5252WSP	15	125	5-15R	White	•	•	•	•
TR5252GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5252BKSP	15	125	5-15R	Black	•	•	•	•
TR5252LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5252BLSP	15	125	5-15R	Blue	•	•	•	•
TR5352ISP	20	125	5-20R	Ivory	•	•	•	•
TR5352WSP	20	125	5-20R	White	•	•	•	•
TR5352GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5352BKSP	20	125	5-20R	Black	•	•	•	•
TR5352LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5352BLSP	20	125	5-20R	Blue	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Surge Protective & Isolated Ground Devices
PlugTail™ Surge Protective Receptacles


2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

legrand®
Pass & Seymour

Audible Alarm with LED Indicator


Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT5262ISP	15	125	5-15R	Ivory	•	•	•	•
PT5262WSP	15	125	5-15R	White	•	•	•	•
PT5262SP	15	125	5-15R	Brown	•	•	•	•
PT5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PT5262BKSP	15	125	5-15R	Black	•	•	•	•
PT5262REDSP	15	125	5-15R	Red	•	•	•	•
PT5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PT5262BLSP	15	125	5-15R	Blue	•	•	•	•
PT5362ISP	20	125	5-20R	Ivory	•	•	•	•
PT5362WSP	20	125	5-20R	White	•	•	•	•
PT5362SP	20	125	5-20R	Brown	•	•	•	•
PT5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PT5362BKSP	20	125	5-20R	Black	•	•	•	•
PT5362REDSP	20	125	5-20R	Red	•	•	•	•
PT5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PT5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG5262WSP	15	125	5-15R	White	•	•	•	•
PTIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG5262BKSP	15	125	5-15R	Black	•	•	•	•
PTIG5262REDSP	15	125	5-15R	Red	•	•	•	•
PTIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG5262OSP	15	125	5-15R	Orange	•	•	•	•
PTIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG5362WSP	20	125	5-20R	White	•	•	•	•
PTIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG5362BKSP	20	125	5-20R	Black	•	•	•	•
PTIG5362REDSP	20	125	5-20R	Red	•	•	•	•
PTIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG5362OSP	20	125	5-20R	Orange	•	•	•	•
PTIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR5262ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR5262WSP	15	125	5-15R	White	•	•	•	•
PTTR5262SP	15	125	5-15R	Brown	•	•	•	•
PTTR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR5262BKSP	15	125	5-15R	Black	•	•	•	•
PTTR5262REDSP	15	125	5-15R	Red	•	•	•	•
PTTR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR5262BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR5362ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR5362WSP	20	125	5-20R	White	•	•	•	•
PTTR5362SP	20	125	5-20R	Brown	•	•	•	•
PTTR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR5362BKSP	20	125	5-20R	Black	•	•	•	•
PTTR5362REDSP	20	125	5-20R	Red	•	•	•	•
PTTR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR5362BLSP	20	125	5-20R	Blue	•	•	•	•

Available Spring 2011

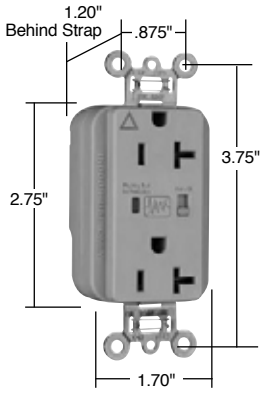


PTIG5362GRYSP



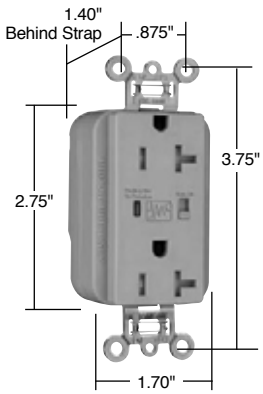

PTTR5362GRYSP

For PlugTail Connectors, see Page B-3.



NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1, WD-6. Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices


PlugTail™ Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


Audible Alarm with LED Indicator

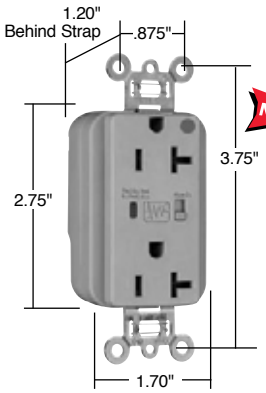

PT8300GRYSP

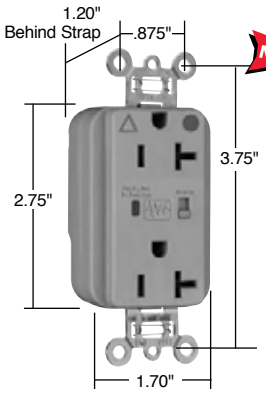

PTIG8300GRYSP

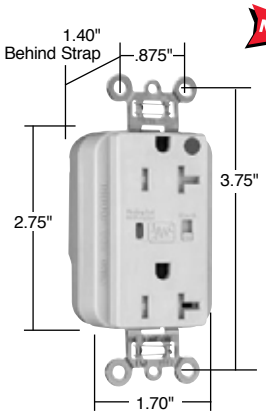

PTTR8300ISP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance: UL1449	UL498	FSUL WC596	cUL/CSA
NEW Extra Heavy-Duty Duplex Receptacles								
PT8200ISP	15	125	5-15R	Ivory	•	•	•	•
PT8200WSP	15	125	5-15R	White	•	•	•	•
PT8200SP	15	125	5-15R	Brown	•	•	•	•
PT8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PT8200REDSP	15	125	5-15R	Red	•	•	•	•
PT8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PT8200BLSP	15	125	5-15R	Blue	•	•	•	•
PT8300ISP	20	125	5-20R	Ivory	•	•	•	•
PT8300WSP	20	125	5-20R	White	•	•	•	•
PT8300SP	20	125	5-20R	Brown	•	•	•	•
PT8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PT8300REDSP	20	125	5-20R	Red	•	•	•	•
PT8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PT8300BLSP	20	125	5-20R	Blue	•	•	•	•
NEW Isolated Ground Duplex Receptacles								
PTIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTIG8200WSP	15	125	5-15R	White	•	•	•	•
PTIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTIG8200REDSP	15	125	5-15R	Red	•	•	•	•
PTIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTIG8200OSP	15	125	5-15R	Orange	•	•	•	•
PTIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTIG8300WSP	20	125	5-20R	White	•	•	•	•
PTIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTIG8300REDSP	20	125	5-20R	Red	•	•	•	•
PTIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
PTIG8300OSP	20	125	5-20R	Orange	•	•	•	•
NEW Tamper-Resistant Duplex Receptacles								
PTTR8200ISP	15	125	5-15R	Ivory	•	•	•	•
PTTR8200WSP	15	125	5-15R	White	•	•	•	•
PTTR8200SP	15	125	5-15R	Brown	•	•	•	•
PTTR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
PTTR8200REDSP	15	125	5-15R	Red	•	•	•	•
PTTR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
PTTR8200BLSP	15	125	5-15R	Blue	•	•	•	•
PTTR8300ISP	20	125	5-20R	Ivory	•	•	•	•
PTTR8300WSP	20	125	5-20R	White	•	•	•	•
PTTR8300SP	20	125	5-20R	Brown	•	•	•	•
PTTR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
PTTR8300REDSP	20	125	5-20R	Red	•	•	•	•
PTTR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
PTTR8300BLSP	20	125	5-20R	Blue	•	•	•	•

For PlugTail Connectors, see Page B-3.



NEMA 5-15R



NEMA 5-20R

Available Spring 2011


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Surge Protective & Isolated Ground Devices
Tamper-Resistant Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand® Pass & Seymour

Audible Alarm with LED Indicator

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance UL1449	UL498	FSUL WC596	cUL/CSA
NEW **Extra Heavy-Duty Duplex Receptacles** Back & Side Wire								
TR5262ISP	15	125	5-15R	Ivory	•	•	•	•
TR5262WSP	15	125	5-15R	White	•	•	•	•
TR5262SP	15	125	5-15R	Brown	•	•	•	•
TR5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TR5262BKSP	15	125	5-15R	Black	•	•	•	•
TR5262REDSP	15	125	5-15R	Red	•	•	•	•
TR5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TR5262BLSP	15	125	5-15R	Blue	•	•	•	•
TR5362ISP	20	125	5-20R	Ivory	•	•	•	•
TR5362WSP	20	125	5-20R	White	•	•	•	•
TR5362SP	20	125	5-20R	Brown	•	•	•	•
TR5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TR5362BKSP	20	125	5-20R	Black	•	•	•	•
TR5362REDSP	20	125	5-20R	Red	•	•	•	•
TR5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TR5362BLSP	20	125	5-20R	Blue	•	•	•	•
NEW **Isolated Ground Duplex Receptacles** Back & Side Wire								
TRIG5262ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG5262WSP	15	125	5-15R	White	•	•	•	•
TRIG5262GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG5262BKSP	15	125	5-15R	Black	•	•	•	•
TRIG5262REDSP	15	125	5-15R	Red	•	•	•	•
TRIG5262LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG5262BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG5262OSP	15	125	5-15R	Orange	•	•	•	•
TRIG5362ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG5362WSP	20	125	5-20R	White	•	•	•	•
TRIG5362GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG5362BKSP	20	125	5-20R	Black	•	•	•	•
TRIG5362REDSP	20	125	5-20R	Red	•	•	•	•
TRIG5362LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG5362BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG5362OSP	20	125	5-20R	Orange	•	•	•	•

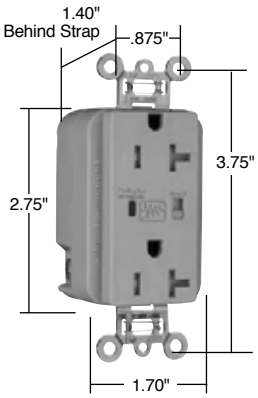

TR5362GRYSP

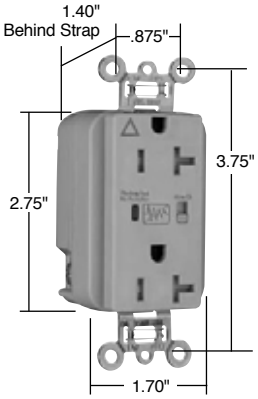

TRIG5362GRYSP



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices


Tamper-Resistant Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

Audible Alarm with LED Indicator

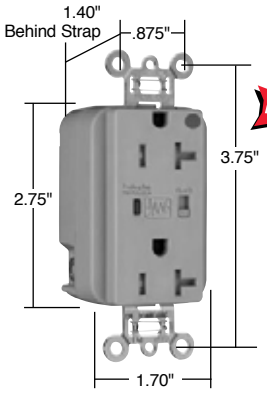

TR8300GRYSP

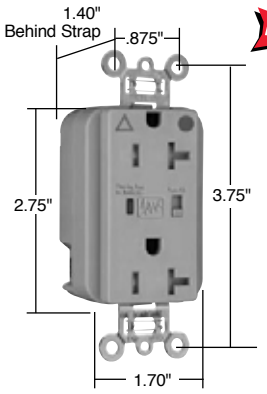

TRIG8300GRYSP

Catalog Number	Rating A.	VAC	NEMA Config. No.	Color	3rd Party Compliance: UL1449	UL498	FSUL WC596	cUL/CSA
Extra Heavy-Duty Duplex Receptacles Back & Side Wire								
TR8200ISP	15	125	5-15R	Ivory	•	•	•	•
TR8200WSP	15	125	5-15R	White	•	•	•	•
TR8200SP	15	125	5-15R	Brown	•	•	•	•
TR8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TR8200REDSP	15	125	5-15R	Red	•	•	•	•
TR8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TR8200BLSP	15	125	5-15R	Blue	•	•	•	•
TR8300ISP	20	125	5-20R	Ivory	•	•	•	•
TR8300WSP	20	125	5-20R	White	•	•	•	•
TR8300SP	20	125	5-20R	Brown	•	•	•	•
TR8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TR8300REDSP	20	125	5-20R	Red	•	•	•	•
TR8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TR8300BLSP	20	125	5-20R	Blue	•	•	•	•
Isolated Ground Duplex Receptacles Back & Side Wire								
TRIG8200ISP	15	125	5-15R	Ivory	•	•	•	•
TRIG8200WSP	15	125	5-15R	White	•	•	•	•
TRIG8200GRYSP	15	125	5-15R	Gray	•	•	•	•
TRIG8200REDSP	15	125	5-15R	Red	•	•	•	•
TRIG8200LASP	15	125	5-15R	Light Almond	•	•	•	•
TRIG8200BLSP	15	125	5-15R	Blue	•	•	•	•
TRIG8200OSP	15	125	5-15R	Orange	•	•	•	•
TRIG8300ISP	20	125	5-20R	Ivory	•	•	•	•
TRIG8300WSP	20	125	5-20R	White	•	•	•	•
TRIG8300GRYSP	20	125	5-20R	Gray	•	•	•	•
TRIG8300REDSP	20	125	5-20R	Red	•	•	•	•
TRIG8300LASP	20	125	5-20R	Light Almond	•	•	•	•
TRIG8300BLSP	20	125	5-20R	Blue	•	•	•	•
TRIG8300OSP	20	125	5-20R	Orange	•	•	•	•



NEMA 5-15R



NEMA 5-20R

Available Spring 2011

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Surge Protective & Isolated Ground Devices
Surge Protection Panels


Heavy-, Medium- & Light-Duty

legrand®
Pass & Seymour


Stronger Protection That's Needed — And Required.

Our most rugged line of Surge Protection Panels deliver premise-wide protection from electrical surges caused by lightning, utility grid switching, and initial startup of electrical equipment such as motors, arc furnaces, and welders.

When surges hit, few business owners can count on insurance to cover full replacement value — and downtime can be devastating to businesses. UL Standard for Safety for Surge Protective Devices, UL1449 3rd Edition requires a higher degree of protection from panel Surge Protection units. P&S Surge Protection Panels meet the new standard, bringing greater protection to any residential, commercial, or industrial application where equipment surge protection is needed.

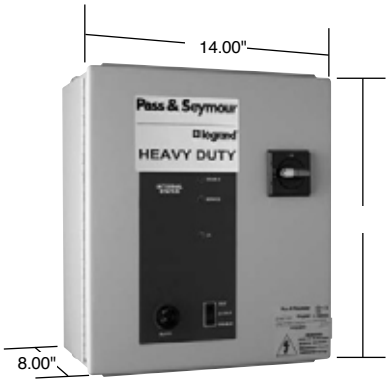

Heavy-Duty



Medium-Duty



Light-Duty

- **NEMA 12 enclosure** made of epoxy painted steel with gasketing, provides for indoor use protection against dust, dirt and non-corrosive liquids.
- **Audible alarm** — visible on the enclosure coverprovides supplementary indication of failed surge suppression components.
- **LED visual indicators** provide a method for determining the status of the surge suppression components. Green LED is illuminated at all times while unit is functioning with no faults. A red LED will come on if any phase/mode has a fault.
- **Flanged mounting feet** are standard with the NEMA 12 enclosure.
- **Lockable rotary disconnect switch** allows for removal of electrical power in the event that servicing is required. Lockable only in the off position for increased safety.
- **Three-position test switch** allows for operational testing of indicator lights and the audible alarm. Functions are: enable/switch/test.



MFKIT





All devices listed on this page are UL & CSA Listed and conform to NEMA LS-1.

legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices
Surge Protection Panels
Heavy-, Medium- & Light-Duty

Catalog Number	Description	Nominal Voltage	System Application	Max Surge Capability	Available Interrupt Current	UL 1449 Voltage Protection Ratings (Vpk)			
						Line to Neutral	Line to Ground	Line to Line	Neutral to Ground
NEW **1224SL**	Light-Duty Surge Protection Panel	120/240 VAC	Single Phase, 3W plus Ground	40KA	42kAIC	600	N/A	1200	N/A
1224SLI				50KA	22kAIC	600	700	1000	700
1224SM	Medium-Duty Surge Protection Panel			100KA	65kAIC	600	1000	1200	600
1224SH	Heavy-Duty Surge Protection Panel			200KA	200kAIC	800	900	1200	700
1224SHB				200KA	200kAIC	800	900	1200	700
1220TWLI	Light-Duty Surge Protection Panel	120/208 VAC	Three Phase, Wye, 4W plus Ground	100KA	22kAIC	600	700	1000	700
1220TWM	Medium-Duty Surge Protection Panel			100KA	65kAIC	600	1000	1200	600
1220TWH	Heavy-Duty Surge Protection Panel			200KA	200kAIC	800	900	1200	700
1220TWHB				200KA	200kAIC	800	900	1200	700
1220TWES	Surge Protection Panel Extension			200KA	200kAIC	800	800	1000	700
1220TWH4B	Heavy-Duty Surge Protection Panel			400KA	200kAIC	800	900	1200	700
2748TWLI	Light-Duty Surge Protection Panel	277/480 VAC	Three Phase, Wye, 4W plus Ground	100KA	22kAIC	1200	1200	2000	1200
2748TWM	Medium-Duty Surge Protection Panel			100KA	65kAIC	1000	1800	2000	1000
2748TWH	Heavy-Duty Surge Protection Panel			200KA	200kAIC	1200	1200	2000	1000
2748TWHB				200KA	200kAIC	1200	1200	2000	1000
2748TWH4B				400KA	200kAIC	1200	1200	2000	1000
480TDH	Heavy-Duty Surge Protection Panel	480 VAC	Three Phase, Delta, 3W plus Ground	200KA	200kAIC	N/A	1800	3000	N/A
240TDM	Medium-Duty Surge Protection Panel	120/240 VAC	Three Phase, Delta, High Leg, 4W plus Ground	100KA	65kAIC	A-N,C-N: 600		B-N: 1200	
						A-G,C-G: 1000		B-G: 1500	
						N-G: 600		A-B: 1500	
						A-C: 1200		B-C: 1500	
MFKIT	Allows for flush mounting of Catalog Numbers 1224SM, 1220TWM, 2748TWM, 240TDM.								

All devices listed on this page are UL & CSA Listed and conform to NEMA LS-1.

Visual Indicators		Audio Alarm	Alarm Disable Switch	Test Switch	Form C Contract	EMI/RFI Filtering	Rotary Disconnect	Connection Means		Transformer Configurations
Red	Green							Type	Gauge	
0	2							Wire	#10	
0	1				X			Wire	#12	
1	2	X			X			Wire	#12	
1	1	X	X	X	X	X	X	Screw Terminal	#4 – #8	
1	1	X	X	X	X	X		Screw Terminal	#10 – #4	
1	1				X			Wire	#12	
1	3	X			X			Wire	#12	
1	1	X	X	X	X	X	X	Screw Terminal	#4 – #8	
1	1	X	X	X	X	X		Screw Terminal	#10 – #4	
1	1	X	X		X	X		Terminal Block	#4 – #10	
1	1	X	X	X	X	X		Screw Terminal	#10 – #4	
0	1				X			Wire	#12	
1	3	X			X			Wire	#12	
1	1	X	X	X	X	X	X	Screw Terminal	#4 – #8	
1	1	X	X	X	X	X		Screw Terminal	#10 – #4	
1	1	X	X	X	X	X		Screw Terminal	#10 – #4	
1	1	X	X	X	X	X	X	Screw Terminal	#1/0 – #8	
1	3	X			X			Wire	#12	

All devices listed on this page are UL & CSA Listed and conform to NEMA LS-1.

legrand®
Pass & Seymour


Surge Protective & Isolated Ground Devices
Product Description – Isolated Ground
Straight Blade & Turnlok®

The Problem of Electromagnetic Interference

Reduction of electromagnetic interference (EMI) in the electrical grounding system is essential for proper operation of many types of electronic equipment. In conventional grounding circuits, the conduit system is used as the grounding path. The conduit system is grounded at the service entrance and connected to intervening sub-panels, structural steel, and other grounded equipment. Although this will provide personnel and equipment protection, the entire conduit system becomes a large antenna which collects EMI (i.e., electrical noise) and transmits it throughout the grounding system. Whenever that occurs, the signals may adversely affect the performance of personal and small business computers, electronic testing and calibration equipment, and solid-state cash registers.

The Legrand®/Pass & Seymour Solution

By running an insulated equipment grounding conductor directly to the neutral at the service entrance, and installing P&S Isolated Ground Receptacles, you effectively isolate the grounding circuit from the conduit grounding system. This significantly reduces the size of the antenna and limits the amount of EMI that can be picked up in the isolated grounding system. This provides a relatively noise-free grounding path and improves the operation of electronic equipment.

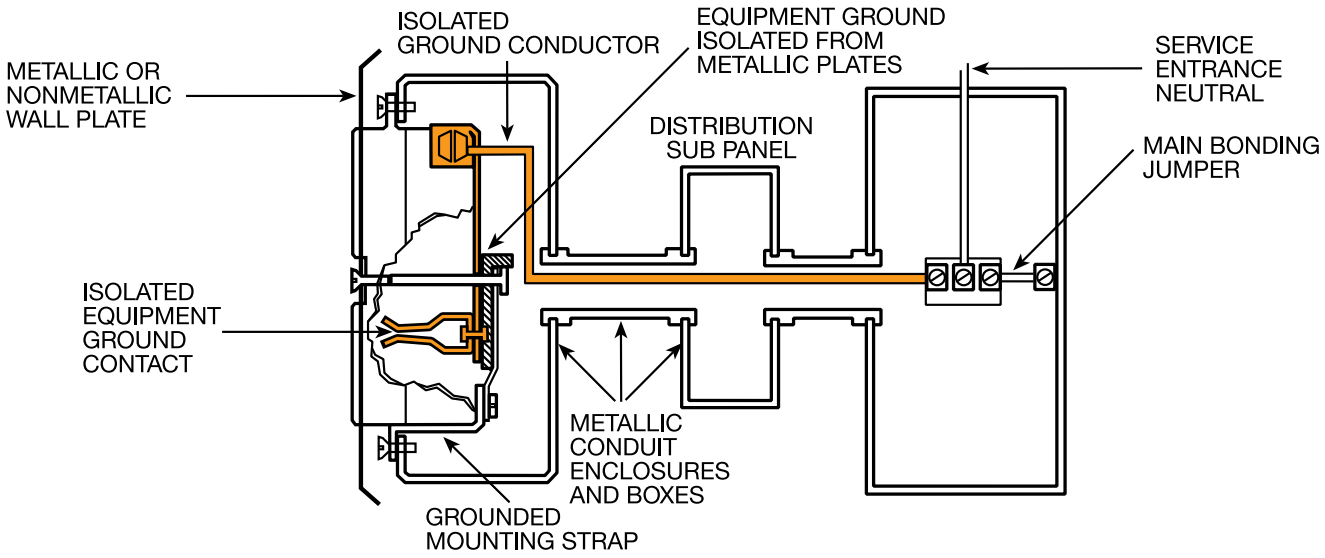

2011 National Electrical Code® Section 250.146(D) Isolated Receptacles.

Where installed for the reduction of electrical noise (electromagnetic interference) on the grounding circuit, a receptacle in which the grounding terminal is purposely insulated from the receptacle mounting means shall be permitted. The receptacle grounding terminal shall be connected to an insulated equipment grounding conductor run with the circuit conductors. This equipment grounding conductor shall be permitted to pass through one or more panelboards without a connection to the panelboard grounding terminal bar as permitted in Section 408.40, Exception, so as to terminate within the same building or structure directly at an equipment grounding conductor terminal of the applicable derived system or service. Where installed in accordance with the provisions of this section, this equipment grounding conductor shall also be permitted to pass through boxes, wireways, or other enclosures without being connected to such enclosures.

2011 National Electrical Code® Section 406.3(D) Isolated Ground Receptacles.

Receptacles incorporating an isolated grounding conductor connection intended for the reduction of electrical noise (electromagnetic interference) as permitted in Section 250.146(D), shall be identified by an orange triangle located on the face of the receptacle.

legrand®
Pass & Seymour

Auto-ground clip assures positive ground.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.


Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Plastic barrier isolates grounding terminal from mounting strap and metal boxes.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.



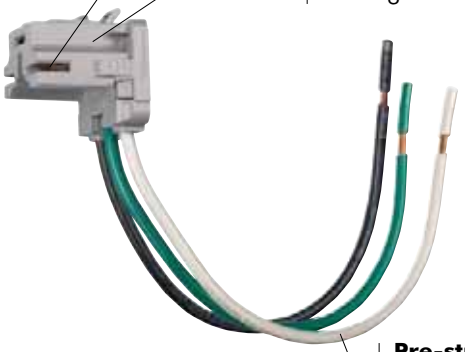

Three drive screws anchor strap to back body and face.

Plated steel wrap strap design for maximum durability and corrosion resistance.

PTIG5362LA

No exposed terminals create a finger safe application before, during, and after installation.


Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

IG symbol and Isolated Ground markings for easy identification and circuit delineation.

Patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.

Triple-wipe brass contacts ensure lasting, positive contact with plug blades.

Plastic barrier isolates grounding terminal from mounting strap and metal boxes.

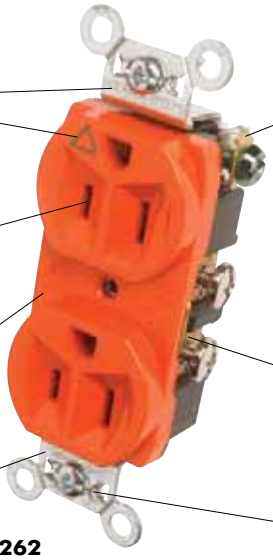

High-impact resistant nylon face resists impacts and scrapes.

Side and internal screw-pressureplate back wire capability with #14 – #10 AWG copper or copper-clad, solid or stranded wire.

Corrosion-resistant plated steel strap.


IG5262

Auto-ground clip assures positive ground.


legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices
PlugTail™ Isolated Ground Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!




PTIG5362LA



PTIG26362LA





PTRA6STR

Features

- .036 inch thick brass triple wire contacts for lasting retention.
- Impact-resistant nylon face.
- Corrosion-resistant plated steel straight strap for increased rigidity and strength.
- Auto-ground clip assures positive ground.
- No exposed terminals for a finger safe application.
- Ultrasonically welded polycarbonate connector housing secures terminations in a UL Listed finger safe housing.
- Pre-stripped connector leads.
- Nylon isolator plate for isolating ground from strap and box system.
- Crimped and welded contacts.


Catalog Number		Rating		NEMA Config. No.	Color	3rd Party Compliance	
Spec Grade	Hospital Grade	A.	V.			c UL us cULus	FSUL WC596
Duplex Receptacles							
PTIG5262I	PTIG8200I	15	125	5-15R	Ivory	•	•
PTIG5262W		15	125	5-15R	White	•	•
PTIG5262	PTIG8200	15	125	5-15R	Orange	•	•
PTIG5262GRY		15	125	5-15R	Gray	•	•
PTIG5262RED	PTIG8200RED	15	125	5-15R	Red	•	•
PTIG5262LA		15	125	5-15R	Light Almond	•	•
PTIG5362I	PTIG8300I	20	125	5-20R	Ivory	•	•
PTIG5362W		20	125	5-20R	White	•	•
PTIG5362	PTIG8300	20	125	5-20R	Orange	•	•
PTIG5362GRY		20	125	5-20R	Gray	•	•
PTIG5362RED	PTIG8300RED	20	125	5-20R	Red	•	•
PTIG5362LA	PTIG8300LA	20	125	5-20R	Light Almond	•	•

Catalog Number	Rating A.	Rating V.	NEMA Config. No.	Color	3rd Party Compliance: c UL us cULus	3rd Party Compliance: FSUL WC596
Decorator Duplex Receptacles						
PTIG26262I	15	125	5-15R	Ivory	•	•
PTIG26262W	15	125	5-15R	White	•	•
PTIG26262	15	125	5-15R	Orange	•	•
PTIG26262GRY	15	125	5-15R	Gray	•	•
PTIG26262RED	15	125	5-15R	Red	•	•
PTIG26262LA	15	125	5-15R	Light Almond	•	•
PTIG26362I	20	125	5-20R	Ivory	•	•
PTIG26362W	20	125	5-20R	White	•	•
PTIG26362	20	125	5-20R	Orange	•	•
PTIG26362GRY	20	125	5-20R	Gray	•	•
PTIG26362RED	20	125	5-20R	Red	•	•
PTIG26362LA	20	125	5-20R	Light Almond	•	•

Catalog Number	Wire Type	Wire Length
PlugTail Connectors – Right Angle		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-3.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



NEMA 5-15R NEMA 5-20R


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


Surge Protective & Isolated Ground Devices
Isolated Ground Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

legrand®
Pass & Seymour


Catalog Number		Rating		NEMA Config.	Color	3rd Party Compliance		
Spec Grade	Hospital Grade	A.	V.	No.		UL498	FSUL WC596	C22.2 No. 42
Duplex Receptacles Back & Side Wire								
IG5262I	IG8200I	15	125	5-15R	Ivory	•	•	•
IG5262W		15	125	5-15R	White	•	•	•
IG5262	IG8200	15	125	5-15R	Orange	•	•	•
IG5262GRY		15	125	5-15R	Gray	•	•	•
IG5262RED	IG8200RED	15	125	5-15R	Red	•	•	•
IG5262LA		15	125	5-15R	Light Almond	•	•	•
IG5362I	IG8300I	20	125	5-20R	Ivory	•	•	•
IG5362W	IG8300W	20	125	5-20R	White	•	•	•
IG5362	IG8300	20	125	5-20R	Orange	•	•	•
IG5362GRY		20	125	5-20R	Gray	•	•	•
IG5362BK		20	125	5-20R	Black	•	•	•
IG5362RED	IG8300RED	20	125	5-20R	Red	•		•
IG5362LA	IG8300LA	20	125	5-20R	Light Almond	•	•	•
IG5362BL		20	125	5-20R	Blue	•	•	•
IG5662		15	250	6-15R	Orange	•	•	•
	IG8800LA	20	250	6-20R	Light Almond	•	•	•
IG5862	IG8800	20	250	6-20R	Orange	•	•	•
Decorator Duplex Receptacles Back & Side Wire								
IG26262I		15	125	5-15R	Ivory	•	•	•
IG26262W	IG26262HGW	15	125	5-15R	White	•	•	•
IG26262	IG26262HG	15	125	5-15R	Orange	•	•	•
IG26262GRY		15	125	5-15R	Gray	•	•	•
IG26262BK		15	125	5-15R	Black	•	•	•
IG26262RED	IG26262HGRED	15	125	5-15R	Red	•	•	•
IG26262LA		15	125	5-15R	Light Almond	•	•	•
IG26362I		20	125	5-20R	Ivory	•	•	•
IG26362W	IG26362HGW	20	125	5-20R	White	•	•	•
IG26362	IG26362HG	20	125	5-20R	Orange	•	•	•
IG26362GRY		20	125	5-20R	Gray	•	•	•
IG26362BK	IG26362HGBK	20	125	5-20R	Black	•	•	•
IG26362RED	IG26362HGRED	20	125	5-20R	Red	•	•	•
IG26362LA		20	125	5-20R	Light Almond	•	•	•
Single Receptacles Back & Side Wire								
IG5261		15	125	5-15R	Orange	•	•	•
IG5361	IG8301	20	125	5-20R	Orange	•	•	•

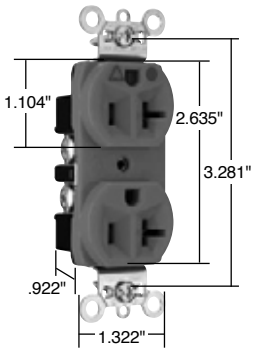

IG8300




IG26262GRY



IG5261

Catalog Number	Rating A.	V.	NEMA Config. No.	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
Straight Blade Plugs, Orange							
PSIG5266X	15	125	5-15P	.230" – .720"	•	•	•



PSIG5266X

Consult Straight Blade Section G for complete line of Straight Blade Plugs & Connectors.


NEMA 5-15R | NEMA 5-15P | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

For Wall Plates for Isolated Ground Systems, consult Wall Plates Section Q.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Surge Protective & Isolated Ground Devices

Tamper-Resistant Isolated Ground Receptacles


2 Pole, 3 Wire Grounding, 15 & 20A, 125V

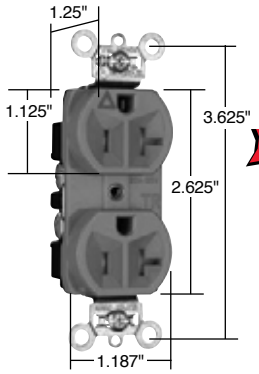

TRIG5362

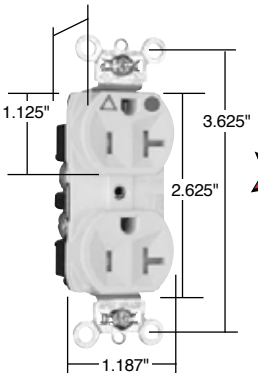

TRIG8300W

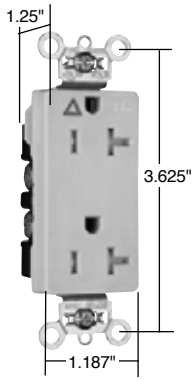

TRIG26362

Catalog Number		Rating		NEMA Config. No.	Color	3rd Party Compliance	
Spec Grade	Hospital Grade	A.	V.			c UL us UL498	FSUL WC596
Tamper-Resistant Duplex Receptacles Back & Side Wire							
TRIG5262I	TRIG8200I	15	125	5-15R	Ivory	•	•
TRIG5262W	TRIG8200W	15	125	5-15R	White	•	•
TRIG5262	TRIG8200	15	125	5-15R	Orange	•	•
TRIG5262GRY	TRIG8200GRY	15	125	5-15R	Gray	•	•
TRIG5262BK	TRIG8200BK	15	125	5-15R	Black	•	•
TRIG5262RED	TRIG8200RED	15	125	5-15R	Red	•	•
TRIG5262LA	TRIG8200LA	15	125	5-15R	Light Almond	•	•
TRIG5362I	TRIG8300I	20	125	5-20R	Ivory	•	•
TRIG5362W	TRIG8300W	20	125	5-20R	White	•	•
TRIG5362	TRIG8300	20	125	5-20R	Orange	•	•
TRIG5362GRY	TRIG8300GRY	20	125	5-20R	Gray	•	•
TRIG5362BK	TRIG8300BK	20	125	5-20R	Black	•	•
TRIG5362RED	TRIG8300RED	20	125	5-20R	Red	•	•
TRIG5362LA	TRIG8300LA	20	125	5-20R	Light Almond	•	•
Tamper-Resistant Decorator Receptacles Back & Side Wire							
TRIG26262I	TRIG26262HGI	15	125	5-15R	Ivory	•	•
TRIG26262W	TRIG26262HGW	15	125	5-15R	White	•	•
TRIG26262	TRIG26262HG	15	125	5-15R	Orange	•	•
TRIG26262GRY	TRIG26262HGGRY	15	125	5-15R	Gray	•	•
TRIG26262BK	TRIG26262HGBK	15	125	5-15R	Black	•	•
TRIG26262RED	TRIG26262HGRED	15	125	5-15R	Red	•	•
TRIG26262LA	TRIG26262HGLA	15	125	5-15R	Light Almond	•	•
TRIG26362I	TRIG26362HGI	20	125	5-20R	Ivory	•	•
TRIG26362W	TRIG26362HGW	20	125	5-20R	White	•	•
TRIG26362	TRIG26362HG	20	125	5-20R	Orange	•	•
TRIG26362GRY	TRIG26362HGGRY	20	125	5-20R	Gray	•	•
TRIG26362BK	TRIG26362HGBK	20	125	5-20R	Black	•	•
TRIG26362RED	TRIG26362HGRED	20	125	5-20R	Red	•	•
TRIG26362LA	TRIG26362HGLA	20	125	5-20R	Light Almond	•	•



NEMA 5-15R



NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Surge Protective & Isolated Ground Devices
Turnlok® Isolated Ground Receptacles


2 Pole, 3 Wire 15, 20 & 30A

legrand®
Pass & Seymour


Catalog Number	Rating A.	V.	NEMA Config. No.	Color	3rd Party Compliance UL498	C22.2 No. 42
2 Pole, 3 Wire Grounding, Orange Back Wire						
IG4700RED	15	125	L5-15R	Red	•	•
IG4700	15	125	L5-15R	Orange	•	•
IG4710	15	125	L5-15R	Orange	•	•
IG4760	15	277	L7-15R	Orange	•	•
IGL520R	20	125	L5-20R	Orange	•	•
IGL620R	20	250	L6-20R	Orange	•	•
IGL720R	20	277	L7-20R	Orange	•	•
IGL820R	20	480	L8-20R	Orange	•	•
IGL530R	30	125	L5-30R	Orange	•	•
IGL630R	30	250	L6-30R	Orange	•	•
3 Pole, 4 Wire Grounding, Orange Back Wire						
IGL1420R	20	125/250	L14-20R	Orange	•	•
IGL1520R	20	3ø, 250	L15-20R	Orange	•	•
IGL1620R	20	3ø, 480	L16-20R	Orange	•	•
IGL1430R	30	125/250	L14-30R	Orange	•	•
IGL1530R	30	3ø, 250	L15-30R	Orange	•	•
4 Pole, 5 Wire Grounding, Orange Back Wire						
IGL2120R	20	3øY, 120/208	L21-20R	Orange	•	•
IGL2220R	20	3øY, 277/480	L22-20R	Orange	•	•
IGL2320R	20	3øY, 347/600	L23-20R	Orange	•	•
IGL2130R	30	3øY, 120/208	L21-30R	Orange	•	•
IGL2230R	30	3øY, 277/480	L22-30R	Orange	•	•
IGL2330R	30	3øY, 347/600	L23-30R	Orange	•	•

Catalog Number	Rating A.	V.	NEMA Config. No.	Cord Diameter	3rd Party Compliance UL498	C22.2 No. 42
Turnlok® Plugs, Orange						
IGL520P	20	125	L5-20P	.385" – 1.150"	•	•
IGL630P	30	250	L6-30P	.385" – 1.150"	•	•

Consult Turnlok Section H for complete line of Turnlok Locking Devices.




NEMA L5-15R | NEMA L5-20R | NEMA L5-30R | NEMA L6-20R | NEMA L6-30R | NEMA L7-15R | NEMA L7-20R | NEMA L8-20R | NEMA L14-20R | NEMA L14-30R




NEMA L15-20R | NEMA L15-30R | NEMA L16-20R | NEMA L21-20R | NEMA L22-20R | NEMA L23-20R | NEMA L21-30R | NEMA L22-30R | NEMA L23-30R


All devices listed on this page conform to NEMA WD-1 and WD-6.




IG4700

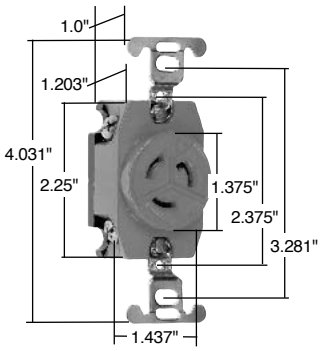


IG4710



20 Amp Receptacle



30 Amp Receptacle



IGL620P

legrand®
Pass & Seymour

Surge Protective & Isolated Ground Devices
Power & Surge Protection Strips

Features

- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Circuit breaker switch.

Catalog Number	Rating A.	Rating V.	Type of Housing	# of Outlets	Cord Length	Color
Power Strips without Surge Protection						
PNS6	15	125	Strip	6	3'	Black
PNS7L	15	125	Strip	7	8'	Black
PNS10	15	125	Block	10	15'	Black

Application

There are an average of over 250 power disturbances per year in each home or office in the United States. Over 8% data loss is a direct result from lightning and the value of equipment and data is sometimes much greater than that of equipment.

Surges and spikes can come through power lines as well as phone and coax lines. So choose a protector which includes phone and/or coax protection.


Features

- 400V clamping voltage.
- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Multiple function protection available for power, phone, fax, modem, coax or data.
- Extremely long life with dependable protection.
- Surge protection indicator on surge devices.
- Circuit breaker switch.
- Heavy-duty high-energy MOVs.
- Ground continuity indicator.


Protection Specifications

- Line protection modes: L-N, L-G, N-G.
- Spike protection for sudden, dramatic surges, over 400V.
- Surge protection lasts for 1/120 of a second, for moderate short term overvoltage.
- EMI/RFI noise attenuation.


Catalog Number	Rating A.	Rating V.	Type of Housing	# of Outlets	Cord Length	Joule Rating Range	Max. Spike Current (Amps)	Type of Protection		Color
								Phone/Fax	Coax	
Power Strips with Surge Protection										
PS1	15	125	Tap	1		740J	48K			PC Gray
PS1P	15	125	Tap	1		740J	48K	X		PC Gray
PS6	15	125	Strip	6	3'	555J	36K			PC Gray
PS7	15	125	Strip	7	6'	740J	48K			PC Gray
PS7P	15	125	Strip	7	6'	740J	48K	X		PC Gray
PS7L	15	125	Strip	7	15'	740J	48K			PC Gray
PS8C	15	125	Block	8	8'	1100J	72K		X	PC Gray
PS8P	15	125	Block	8	8'	1100J	72K	X		PC Gray
PS10PC	15	125	Block	10	8'	1100J	72K	X	X	PC Gray



TAP – PS1

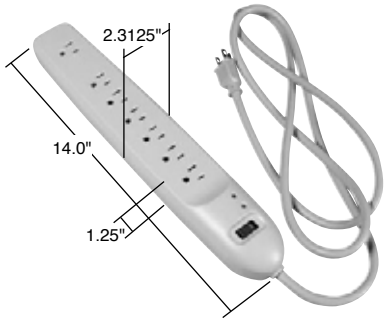

STRIP – PNS7L

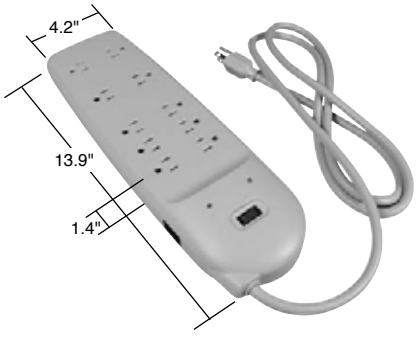

BLOCK – PS10PC

All devices listed on this page conform to NEMA WD-1 and WD-6.


Surge Protective & Isolated Ground Devices
Power & Surge Protection Strips Specifications

legrand®
Pass & Seymour

Power Devices – Ratings			
Catalog Number	**PNS6**	**PNS7L**	**PNS10**
Type of Housing	Strip	Strip	Strip
Total Outlets Standard Grounded Outlets Transformer Ready Outlets	6 6 0	7 6 1	10 6 4
Power Indicator Circuit Breaker Switch	 Unlighted	 Lighted	X Lighted
Cord Length (exposed) ft. Plug	3' Straight	8' Straight	15' Straight
Molded Add-On Safety Covers Molded Housing Color	0 Black	0 Black	5 Black

Power & Surge Protection Devices – Ratings									
Catalog Number	**PS1**	**PS1P**	**PS6**	**PS7**	**PS7P**	**PS7L**	**PS8C**	**PS8P**	**PS10PC**
Type of Housing	Tap	Tap	Strip	Strip	Strip	Strip	Block	Block	Block
Number of Outlets Standard Grounded Outlets Transformer Ready Outlets	1 1 1	1 1 1	6 6 0	7 6 1	7 6 1	7 6 1	8 0 8	8 0 8	10 6 4
Joule Rating Range MOV Configuration Clamping Voltage Max. Spike Current (Amps) EMI Filter Capacitors Protection (L-N, L-G, N-G)	740J 4-20mm 400V 48K X X	740J 4-20mm 400V 48K X X	555J 3-20mm 400V 36K X	740J 4-20mm 400V 48K X X	740J 4-20mm 400V 48K X X	740J 4-20mm 400V 48K X X	1100J 6-20mm 400V 72K X X	1100J 6-20mm 400V 72K X X	1100J 6-20mm 400V 72K X X
Surge Protection Indicator Ground/Wiring Indicator Circuit Breaker Switch	X	X	X Unlighted	X X Lighted	X X Lighted	X X Lighted	X X Lighted	X X Lighted	X X Lighted
Cord Length (exposed) ft. Plug			3' Straight	6' Straight	6' Straight	15' Straight	8' Rt. Angle	8' Rt. Angle	8' Rt. Angle
Phone/Fax Protection Phone Line(s) Configuration Phone Jack Spec		X RJ-11			X 1 in/1 out RJ-11			X 1 in/2 out RJ-45	X 1 in/1 out RJ-45
Nickel-Coaxial Jack Protection 6' Phone Cable (6P2C) 6' Coax Cable (Nickel Plated)		 X			 X		X X	 X	X X X
Molded Add-On Safety Covers Molded Housing Color UL1449 2nd Edition	0 PC Gray X	0 PC Gray X	0 PC Gray X	2 PC Gray X	2 PC Gray X	2 PC Gray X	4 PC Gray X	4 PC Gray X	5 PC Gray X

All devices listed on this page conform to NEMA WD-1 and WD-6.

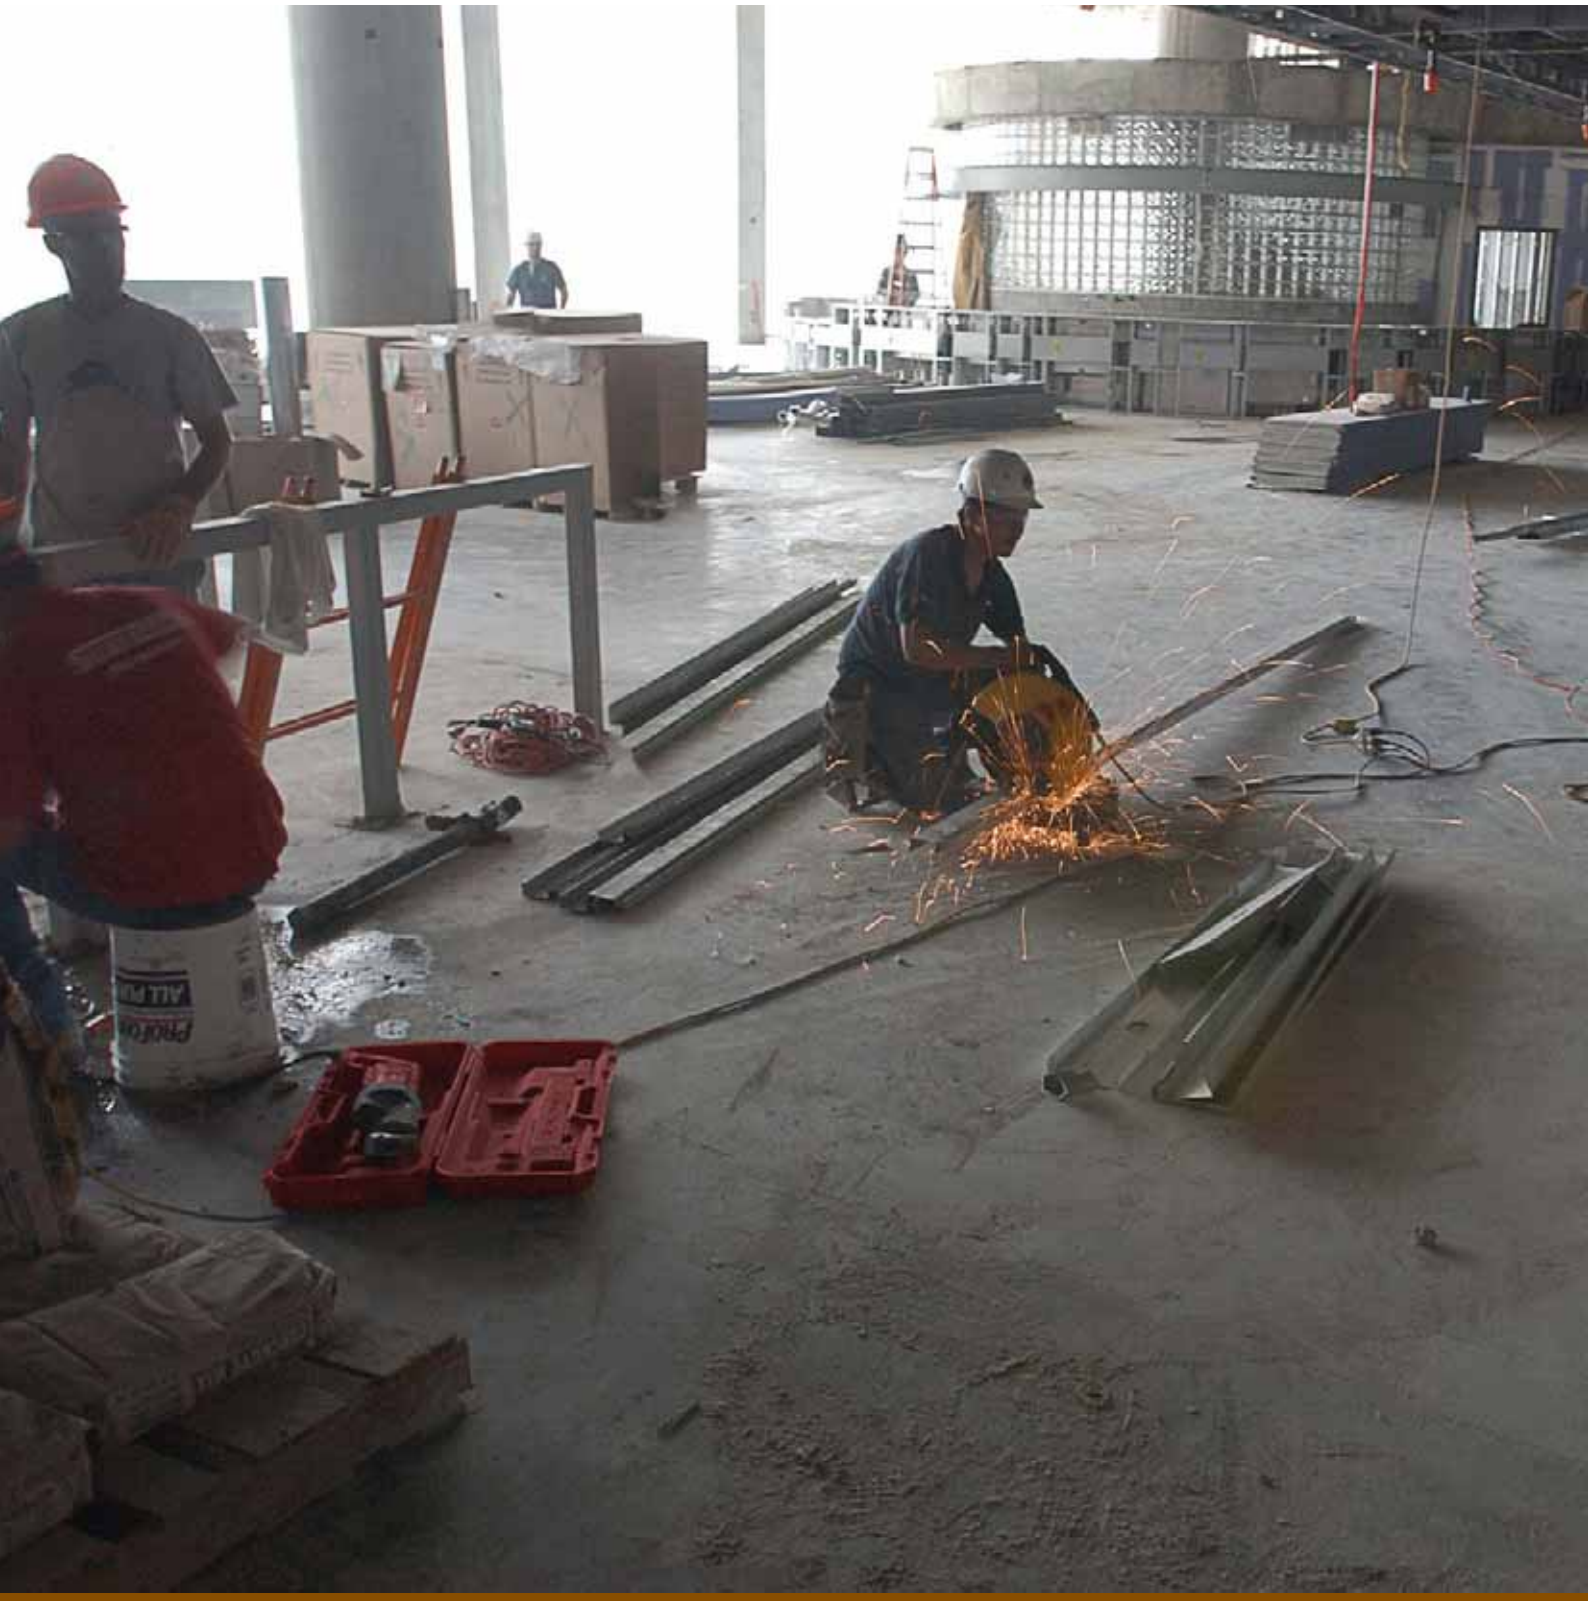

STRAIGHT BLADE PLUGS & CONNECTORS

legrand®

Pass & Seymour

Straight Blade Plugs & Connectors

legrand®
Pass & Seymour

Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire.

Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity; ground pin is reinforced for added strength and safety.

Color-coded terminal screws are positioned on same plane and backed-out for fast installation.

See-through, thermoplastic terminal chamber for clear view of terminals and wire connections.


Double-wipe, firm-grip ground contact and triple-wipe power contacts guarantee a superior connection.

Tapered wire wells guide conductors into captivated, staked clamping nuts.



Rugged external two-piece cord grip provides uniform pressure for superior retention of conductors.

Internal dust shield keeps terminals free of contaminants.



Housing is keyed for fast alignment with terminal section.

Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.

PS5266X and PS5269X

Recessed cord-grip screw reduces screwdriver slippage, improves safety.

Ready-to-wire and ready-to-perform under adverse plant conditions — our Straight Blade Plug & Connector line is an industrial-strength, on-the-job asset.

Index

Device	Rating	Page Number
NEMA Configurations		G-2
Hospital Grade	15 & 20A, 125 & 250V	G-3
Extra-Hard Use Specification Grade	15 & 20A, 125, 250 & 277V	G-4
Extra-Hard Use Angled Devices	15 & 20A, 125 & 250V	G-5
Extra-Hard Use Ground Continuity Monitoring	15 & 20A, 125 & 250V	G-6
MaxGrip® M³	15 & 20A, 125 & 250V	G-7
Rubber Housing	15 & 20A, 125 & 250V	G-8
Watertight	15 & 20A, 125 & 250V	G-9
Medium-Duty Devices	15 & 20A, 125 & 250V	G-10
Flanged Inlets & Outlets	15 & 20A, 125 & 250V	G-11
Miscellaneous Configurations		G-12
Gator Grip Devices	30, 50 & 60A, 125, 250, 277 & 125/250V, 3øY 120/208V	G-13
Clamp-Lock™ Devices	15A, 125 & 250V; 20A, 125V	G-14
Product Specifications & Performance		G-15 – G-17

legrand®
Pass & Seymour

Straight Blade Plugs & Connectors
NEMA Configurations

Straight Blade Plugs & Receptacles

	15 Ampere		20 Ampere		30 Ampere		50 Ampere		60 Ampere	
	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug
2 Pole, 2 Wire Non-Grounding										
1 **125V**	1-15R									
2 **250V**				2-20P						
2 Pole, 3 Wire Grounding										
5 **125V**	5-15R	5-15P	5-20R	5-20P	5-30R	5-30P		5-50P		
6 **250V**	6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
7 **277VAC**	7-15R	7-15P	7-20R	7-20P		7-30P		7-50P		
3 Pole, 3 Wire Non-Grounding										
10 **125/250V**			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 Pole, 4 Wire Grounding										
14 **125/250V**			14-20R	14-20P	14-30R	14-30P	14-50R	14-50P		14-60P
15 **3ø250V**				15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P
4 Pole, 4 Wire Non-Grounding										
18 **3øY 120/208V**			18-20R	18-20P					18-60R	18-60P

Open Slots
Indicate receptacle configurations (female).




Closed Slots
Indicate plug blade configurations (male).



Labels and Their Meanings

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

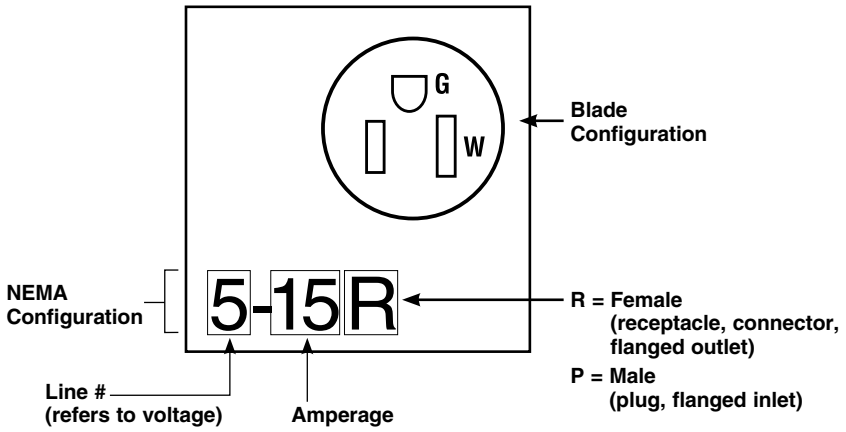

Straight Blade Plugs & Connectors

Hospital Grade Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

IP20
Suitability

Features – Extra-Hard Use (EHU)


- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
						UL498	FSUL WC596	C22.2 No. 42
Hospital Grade – Extra-Hard Use (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
Hospital Grade MaxGrip® M³								
PS8115	15	125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15	125	Connector, Gray	.230"-.720"	5-15R	•	•	•




Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*


*For further information consult the Flexcor® Section K.




PS5266XHG



PS5269XHG



PS5266HGAN



PS8115



PS8119

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Plugs & Connectors
Extra-Hard Use (EHU) Specification Grade

2 Pole, 3 Wire Grounding 15 & 20A, 125, 250 & 277V


IP20
Suitability

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on all Specification Grade plugs and connectors.
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.




PS5266X



PS5269X

Catalog Number	Rating A.	V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: UL498	FSUL WC596	C22.2 No. 42
EHU – Specification Grade								
PS5266X	15	125	Plug, Black & White	.230"-.720"	5-15P	•		•
PS5266XGRY	15	125	Plug, Black & Gray	.230"-.720"	5-15P	•		•
PS5266XBK	15	125	Plug, Black	.230"-.720"	5-15P	•		•
CR5266X	15	125	Plug, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15P	•		•
PS5269X	15	125	Connector, Black & White	.230"-.720"	5-15R	•		•
PS5269XGRY	15	125	Connector, Black & Gray	.230"-.720"	5-15R	•		•
PS5269XBK	15	125	Connector, Black	.230"-.720"	5-15R	•		•
CR5269X	15	125	Connector, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15R	•		•
PS5366X	20	125	Plug, Black & White	.230"-.720"	5-20P	•	•	•
PS5369X	20	125	Connector, Black & White	.230"-.720"	5-20R	•	•	
PS5666X	15	250	Plug, Black & White	.230"-.720"	6-15P	•	•	•
PS5669X	15	250	Connector, Black & White	.230"-.720"	6-15R	•	•	•
PS5466X	20	250	Plug, Black & White	.230"-.720"	6-20P	•	•	•
PS5469X	20	250	Connector, Black & White	.230"-.720"	6-20R	•	•	
PS5766X	15	277	Plug, Black & White	.230"-.720"	7-15P	•		•
PS5866X*	20	277	Plug, Black & White	.385"-1.150"	7-20P	•		•



NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R | NEMA 7-15P | NEMA 7-20P

Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
L15RBC	Weatherproof Boot-Connector**
L15RBP	Weatherproof Boot-Plug**
FC22GL	EHU-Strain Relief Grip†
FC30GL	EHU-Strain Relief Grip†
FC40GL	EHU-Strain Relief Grip†
FC52GL	EHU-Strain Relief Grip†

*PS5866X requires L20303AN right angle adapter.
**For further information consult the Turnlok® Section H.
†For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors

Extra-Hard Use (EHU) Angled Devices

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

IP20
Suitability

Features – Extra-Hard Use (EHU)


- Angle plugs and adapters both allow for 4-position face rotation.
- Tri-drive assembly and cord-grip screws are standard on all angle adapters.
- Angle adapter (sold separately as catalog number EHU15AN) will accommodate all Pass & Seymour EHU-style Straight Blade plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.

Catalog Number	Rating A.	V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
EHU – Hospital Grade								
PS5266HGAN	15	125	Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5366HGAN	20	125	Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5666HGAN	15	250	Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5466HGAN	20	250	Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
EHU – Specification Grade								
PS5266SSAN	15	125	Plug, Black & White	.320"-.655"	5-15P	•	•	•
PS5366SSAN	20	125	Plug, Black & White	.320"-.655"	5-20P	•	•	•
PS5666SSAN	15	250	Plug, Black & White	.320"-.655"	6-15P	•	•	•
PS5466SSAN	20	250	Plug, Black & White	.320"-.655"	6-20P	•	•	•




NEMA 5-15P **NEMA 5-20P** **NEMA 6-15P** **NEMA 6-20P**


Catalog Number	Description
Accessories	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter



PS5266HGAN



PS5266SSAN



EHU15AN


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Plugs & Connectors

Extra-Hard Use Ground Continuity Monitoring (GCM) Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5266XGCM




PS5269XGCM

Features – Extra-Hard Use (EHU) Straight Blade GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive two-piece cord grip accepts a wide range of cord widths. Provides more consistent pressure for superior conductor retention.
- Internal dust shield keeps terminals free of contaminants.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are positioned on the same plane and backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: cULus	3rd Party Compliance: FSUL WC596
EHU – GCM							
PS5266XGCM	15	125	Plug, Black & White	.230"-.720"	5-15P	•	•
PS5266XGCMAN	15	125	Angled Plug, Black & White	.320"-.655"	5-15P	•	•
PS5269XGCM	15	125	Connector, Black & White	.230"-.720"	5-15R	•	•
PS5366XGCM	20	125	Plug, Black & White	.230"-.720"	5-20P	•	•
PS5366XGCMAN	20	125	Angled Plug, Black & White	.320"-.655"	5-20P	•	•
PS5369XGCM	20	125	Connector, Black & White	.230"-.720"	5-20R	•	•
PS5666XGCM	15	250	Plug, Black & White	.230"-.720"	6-15P	•	•
PS5666XGCMAN	15	250	Angled Plug, Black & White	.320"-.655"	6-15P	•	•
PS5669XGCM	15	250	Connector, Black & White	.230"-.720"	6-15R	•	•
PS5466XGCM	20	250	Plug, Black & White	.230"-.720"	6-20P	•	•
PS5466XGCMAN	20	250	Angled Plug, Black & White	.320"-.655"	6-20P	•	•
PS5469XGCM	20	250	Connector, Black & White	.230"-.720"	6-20R	•	•



NEMA 5-15P | **NEMA 5-15R** | **NEMA 6-15P** | **NEMA 6-15R** | **NEMA 5-20P** | **NEMA 5-20R** | **NEMA 6-20P** | **NEMA 6-20R**



Green LED

Plug – There's proper ground continuity from the panel to the outlet and power's present.

Connector – Power's present and there's proper ground continuity throughout the cordset and back to the panel.



Red LED

Plug – Power's present, but there's a ground continuity fault or miswire between the receptacle and the panel.

Connector – Power's present, but there's a ground continuity fault or miswire in the cordset (or, if there's a red indication in the plug as well, between the receptacle and the panel). It's also possible there could be a problem in both.



No LED

Plug – Power loss, open hot or neutral conductor, or hot/ground reversal.

Connector – Assuming power is present at the outlet, there's an open hot or open neutral conductor in the cordset, or a hot/ground reversal.

250V products will show red and green when hot and ground are reversed.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors
MaxGrip® M³

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

legrand®
Pass & Seymour



Molded finger grips promote safe, sure handing.

Enclosed terminals provide solid, internally-clamped connections.


Self-hinge swings wide open to make quick, easy work of tight, clean connections. Insert conductors into terminals and tighten terminal screws; close hinge housing around cord and tighten terminal screws.

Tough nylon construction with crush/impact resistance that exceeds hospital grade and Fed Spec requirements; arc resistance exceeds UL requirements.

PS5965Y and PS5969Y

Hospital Grade version displays the Hospital Grade green dot.


High-visibility yellow and orange, or gray.




PS5965Y



PS5969Y




PS5965O



PS5969O

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: cULus	3rd Party Compliance: FSUL WC596
Hospital Grade MaxGrip® M³							
PS8115	15	125	Hospital Grade Plug, Gray	.230"-.720"	5-15P	•	•
PS8119	15	125	Hospital Grade Connector, Gray	.230"-.720"	5-15R	•	•
MaxGrip M³							
PS5965Y	15	125	Plug, Yellow	.230"-.720"	5-15P	•	
PS5965GRY	15	125	Plug, Gray	.230"-.720"	5-15P	•	
PS5965O	15	125	Plug, Orange	.230"-.720"	5-15P	•	
PS5969Y	15	125	Connector, Yellow	.230"-.720"	5-15R	•	
PS5969GRY	15	125	Connector, Gray	.230"-.720"	5-15R	•	
PS5969O	15	125	Connector, Orange	.230"-.720"	5-15R	•	
PS5364Y	20	125	Plug, Yellow	.230"-.720"	5-20P	•	•
PS5364GRY	20	125	Plug, Gray	.230"-.720"	5-20P	•	•
PS5369Y	20	125	Connector, Yellow	.230"-.720"	5-20R	•	•
PS5369GRY	20	125	Connector, Gray	.230"-.720"	5-20R	•	•
PS5666Y	15	250	Plug, Yellow	.230"-.720"	6-15P	•	•
PS5669Y	15	250	Connector, Yellow	.230"-.720"	6-15R	•	•
PS5464Y	20	250	Plug, Yellow	.230"-.720"	6-20P	•	•
PS5469Y	20	250	Connector, Yellow	.230"-.720"	6-20R	•	•



NEMA 5-15P | **NEMA 5-15R** | **NEMA 6-15P** | **NEMA 6-15R** | **NEMA 5-20P** | **NEMA 5-20R** | **NEMA 6-20P** | **NEMA 6-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Straight Blade Plugs & Connectors
Rubber Housing
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Nickel-plated blades and contacts for long-lasting, superior corrosion resistance.

Terminal screws backed-out, ready-to-wire, saving time and money.

Rubber body construction stands up to impacts, oils, chemicals, heat, and weather.


Floating blades allow self-alignment with contacts for a firm, even electrical connection.

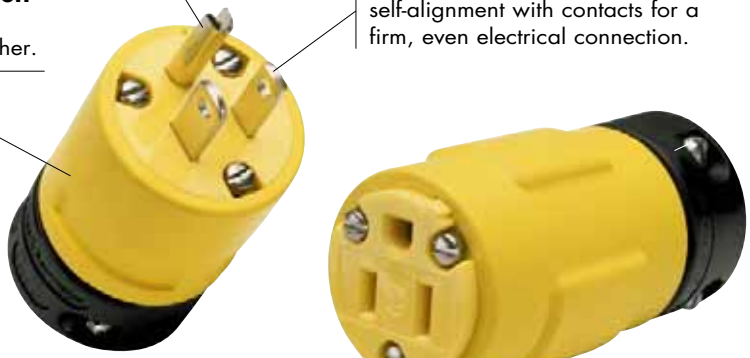


Self-centering cord clamps provide superior strain relief.

Quick-drive assembly screws allow for fast installation, saving time and money.

1447 and 1547




1447



1547

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 No. 42M
Rubber Housing Plugs & Connectors						
1447	15	125	Plug, Yellow	5-15P	•	•
1547	15	125	Connector, Yellow	5-15R	•	•
1433P	20	125	Plug, Yellow	5-20P	•	•
1533	20	125	Connector, Yellow	5-20R	•	•
1449	15	250	Plug, Yellow	6-15P	•	•
1549	15	250	Connector, Yellow	6-15R	•	•
1448	20	250	Plug, Yellow	6-20P	•	•
1548	20	250	Connector, Yellow	6-20R	•	•



NEMA 5-15P | **NEMA 5-15R** | **NEMA 6-15P** | **NEMA 6-15R** | **NEMA 5-20P** | **NEMA 5-20R** | **NEMA 6-20P** | **NEMA 6-20R**

(Inch)	A	B	C	D	E
Rubber Straight Blade Plug					
15A	2.27"	1.44"	1.53"	1.53"	
20A	2.59"	1.76"	1.93"	1.60"	
Rubber Straight Blade Connector					
15A	2.99"	2.16"	1.53"	1.66"	1.53"
20A	3.74"	2.19"	1.93"	2.07"	1.60"
Cord Grip Range: .335"-.640"					

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors
Watertight

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

legrand®
Pass & Seymour

IP67
Suitability

Rubber body construction stands up to impacts, oils, chemicals, heat, and weather.

NEMA 4, 4X, Watertight. IP65, 66, 67. Rated watertight for 1,000 psi high-pressure hose-down.

Terminal screws backed-out, ready-to-wire, saving time and money.

Multiple ring seals between plug and connector ensures protection from water and contaminants.



Compression-type cord grip provides watertight seal and 205 lb. pull out strength.


Floating blades allow self-alignment with contacts for a firm, even electrical connection.

Quick-drive assembly screws allow for fast installation, saving time and money.

15W47 and 14W47

Nickel-plated blades and contacts for long-lasting, superior corrosion resistance.

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 No. 42M
Rubber Housing Plugs & Connectors – Watertight						
14W47	15	125	Plug, Yellow, NEMA 4X	5-15P	•	•
15W47	15	125	Connector, Yellow, NEMA 4X	5-15R	•	•
14W33	20	125	Plug, Yellow, NEMA 4X	5-20P	•	•
15W33	20	125	Connector, Yellow, NEMA 4X	5-20R	•	•
14W49	15	250	Plug, Yellow, NEMA 4X	6-15P	•	•
15W49	15	250	Connector, Yellow, NEMA 4X	6-15R	•	•
14W48	20	250	Plug, Yellow, NEMA 4X	6-20P	•	•
15W48	20	250	Connector, Yellow, NEMA 4X	6-20R	•	•




14W47




14W47 shown with 14WPS cap.
Cap sold separately.

Catalog Number	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 42M
Caps – Watertight Only				
14WPS	Male Cap	All	•	•
50W50PS	Female Replacement Cap	All	•	•




15W47


(Inch)	A	B
Watertight Plug		
15A	2.62"	1.85"
20A	2.62"	1.85"
Watertight Connector		
15A	4.03"	1.85"
20A	4.03"	1.85"
Cord Grip Range: .062"-.625"		



NEMA 5-15P | NEMA 5-15R | NEMA 5-20P | NEMA 5-20R



NEMA 6-15P | NEMA 6-15R | NEMA 6-20P | NEMA 6-20R

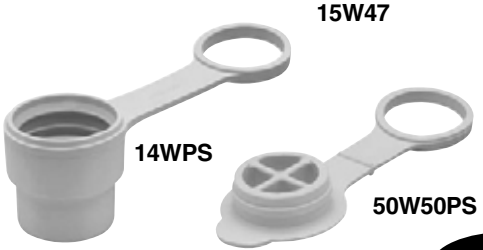

14WPS


50W50PS

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Plugs & Connectors
Medium-Duty Devices
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

IP20
Suitability



5276BK




5296BK

Features

- All nylon construction, provides excellent impact and chemical resistance.
- Simple turn and twist assembly for quick installation.
- Ready-to-wire from factory, saves time and money.
- All black, perfect for stage and entertainment applications.
- Internal finger grips automatically adjust to securely grip the cord jacket.

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: UL498	3rd Party Compliance: FSUL WC596
Dead Front Plugs & Connectors							
5276BK	15	125	Plug, Black	.230"-.655"	5-15P	•	•
5296BK	15	125	Connector, Black	.230"-.655"	5-15R	•	•
5765BK	20	125	Plug, Black	.230"-.655"	5-20P	•	•
5374BK	20	125	Connector, Black	.230"-.655"	5-20R	•	
5666BK	15	250	Plug, Black	.230"-.655"	6-15P	•	•
5669BK	15	250	Connector, Black	.230"-.655"	6-15R	•	•
5864BK	20	250	Plug, Black	.230"-.655"	6-20P	•	•
5866BK	20	250	Connector, Black	.230"-.655"	6-20R	•	•




4867Y

Features

- All nylon construction.
- Termination saddle clamps securely capture stranded wires.
- All yellow, perfect for high-visibility cords.
- External cord grips are one-size-fits-all, no inserts or flipping the clamps to fit the proper cord OD.

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: cULus
Medium-Duty Plugs & Connectors						
4867Y	15	125	Plug, Yellow	.250-.600"	5-15P	•
4887Y	15	125	Connector, Yellow	.250-.600"	5-15R	•


NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

Straight Blade Plugs & Connectors
Flanged Inlets & Outlets

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

IP20
Suitability

Features


- All thermoplastic construction, provides excellent impact and chemical resistance.
- Available in Gray or Black.
- NEMA configuration molded on flange, easy field identification.

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance FSUL WC596
Flanged Inlets & Outlets – Gray						
5278SS	15	125	Inlet, Gray	5-15P	•	•
5279SS	15	125	Outlet, Gray	5-15R	•	•
5378SS	20	125	Inlet, Gray	5-20P	•	•
5379SS	20	125	Outlet, Gray	5-20R	•	•
5678SS	15	250	Inlet, Gray	6-15P	•	•
5679SS	15	250	Outlet, Gray	6-15R	•	•
5478SS	20	250	Inlet, Gray	6-20P	•	•
5479SS	20	250	Outlet, Gray	6-20R	•	•




5278SS

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance FSUL WC596
Flanged Inlets & Outlets – Black						
5278SSBK	15	125	Inlet, Black	5-15P	•	•
5279SSBK	15	125	Outlet, Black	5-15R	•	•



5279SS




NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

Features

- Glass-filled polycarbonate, impact- and corrosion-resistant.
- Stainless steel hardware.
- Molded-in flat surface label area.
- OSHA lock-out/tag-out provision molded-in.
- Accepts competitor inlets and outlets.

Catalog Number	Description
Weatherproof Cover for Flanged Devices	
WPG1	Weatherproof Cover for Flanged Inlets and Outlets

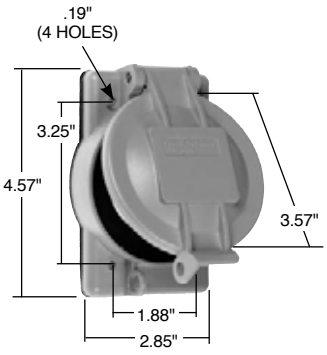

WPG1

For further information consult the Weatherproof Section P.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Straight Blade Plugs & Connectors
Miscellaneous Configurations


IP20
Suitability



3869





3861




3867


Catalog Number	Rating A.	V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	C22.2 No. 42
2 Pole, 3 Wire Grounding								
43379	30	125	Angled Plug, Yellow		5-30P			
43399	50	125	Angled Plug, Yellow		5-50P			
3869	30/50	250	Angled Plug, Black	.56"-1.1"	6-30P/6-50P	•		
3 Pole, 3 Wire Non-Grounding								
3861	30/50	125/250	Angled Plug, Black	.56"-1.1"	10-30P/10-50P	•		
9977	20	125/250	Plug, Nylon		10-20P	•		
7088	20	125/250	Connector, Armored		10-20R			
3 Pole, 4 Wire Grounding								
5746AN	30	125/250	Angled Plug, Yellow		14-30P	•		
5741AN	30	3ø, 250	Angled Plug, Yellow		15-30P	•		•
5745AN	50	125/250	Angled Plug, Yellow		14-50P			•
14629	60	125/250	Angled Plug, Yellow		14-60P			
5751AN	50	3ø, 250	Angled Plug, Yellow		15-50P	•		•
5761AN	60	3ø, 250	Angled Plug, Yellow		15-60P	•		•
3867	30/50	125/250	Angled Plug, Black	.56"-1.1"	14-30P/14-50P	•		•
4 Pole, 4 Wire Non-Grounding								
7251DF	20	3øY, 120/208	Plug, Yellow	.365"-.775"	18-20P	•	•	
8302AN	60	3øY, 120/208	Angled Plug, Yellow		18-60P	•		


NEMA 5-30P | NEMA 5-50P | NEMA 6-30P | NEMA 6-50P | NEMA 10-20P | NEMA 10-20R | NEMA 10-30P | NEMA 10-50P | NEMA 14-30P | NEMA 14-50P



NEMA 14-60P | NEMA 15-30P | NEMA 15-50P | NEMA 15-60P | NEMA 18-20P | NEMA 18-60P




7088




7251DF



5741AN



9977



8302AN

All devices listed on this page conform to NEMA WD-1 and WD-6.


Straight Blade Plugs & Connectors
Gator Grip Devices


legrand®
Pass & Seymour

Features – Gator Grip Devices


- Gator Grip Jaws grab cord tighter as you hand turn the housing.
- Nylon jaws grip securely, but won't damage insulation.
- Self-locking Dardelet Thread holds securely and assures firm clamping.
- Fast wiring — simply insert stranded conductors into individual wiring chambers and tighten oversized terminal screws.
- Transparent wiring chamber cover allows visual inspection of wiring chambers to assure proper connections.
- Sloped shoulders won't catch or snap.
- Automatic cord centering.
- Brilliant high-visibility yellow.
- Neoprene Dust Seal helps keep out dirt & debris.
- Dead front construction.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance FSUL WC596
2 Pole, 3 Wire Grounding 30 & 50A, 125, 250 & 277V						
D0531	30 125	Plug, Yellow	.57"-1.26"	5-30P	•	•
D0533	30 125	Connector, Yellow	.57"-1.26"	5-30R	•	•
D0551	50 125	Plug, Yellow	.57"-1.26"	5-50P	•	•
D0553	50 125	Connector, Yellow	.57"-1.26"	5-50R	•	•
D0631	30 250	Plug, Yellow	.57"-1.26"	6-30P	•	•
D0633	30 250	Connector, Yellow	.57"-1.26"	6-30R		
D0651	50 250	Plug, Yellow	.57"-1.26"	6-50P	•	•
D0653	50 250	Connector, Yellow	.57"-1.26"	6-50R	•	•
D0731	50 277	Plug, Yellow	.57"-1.26"	7-30P	•	•
D0751	50 277	Plug, Yellow	.57"-1.26"	7-50P	•	•
3 Pole, 3 Wire 30 & 50A, 125/250V						
1031	30 125/250	Plug, Yellow	.57"-1.26"	10-30P	•	•
1033	30 125/250	Connector, Yellow	.57"-1.26"	10-30R		
1051	50 125/250	Plug, Yellow	.57"-1.26"	10-50P	•	•
1053	50 125/250	Connector, Yellow	.57"-1.26"	10-50R	•	•
3 Pole, 4 Wire 30 & 50A, 125/250V						
1431	30 125/250	Plug, Yellow	.57"-1.26"	14-30P	•	•
1451	50 125/250	Plug, Yellow	.57"-1.26"	14-50P	•	•
4 Pole, 4 Wire 60A, 3øY 120/208V						
D1861	60 3øY 120/208	Plug, Yellow	.57"-1.26"	18-60P	•	•

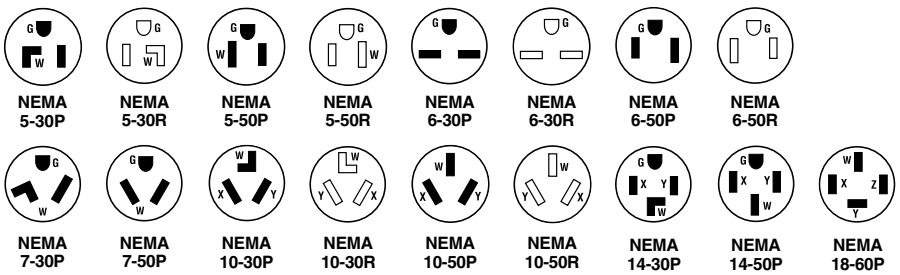





D0531




D0533



D0651



D0653



1431

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Straight Blade Plugs & Connectors
Clamp-Lock™ Devices
2 Pole, 3 Wire Grounding 15A, 125 & 250V; 20A, 125V



Self-centering cord grip helps speed assembly.

Removable inserts accommodate the widest possible range of cable diameters.

Rugged nylon housing and backbody withstand chemicals, heat, wear and impact.

Color-coded levers enable terminal identification at a glance and reduce the chance of wiring errors.

Speedy, patented cam-lever termination provides solid, dependable connections.

Molded-in guide shows correct wire stripping length.


U-drive combination slot/ crosshead screws ensure easy assembly.

Long, deep channels guide conductors and prevent over-insertion.

Solid brass blades and contacts provide excellent conductivity.

Transparent polycarbonate terminal cover makes terminals visible for visual termination verification.

PS515CCLB




PS515PCLB



PS515CCLB

Catalog Number	Rating A.	Rating V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: cULus	3rd Party Compliance: FSUL WC596
P&S Clamp-Lock™ Straight Blade Plugs & Connectors							
PS515PCLB	15	125	Plug, Black & White	.20"-.470"	5-15P	•	•
PS515CCLB	15	125	Connector, Black & White	.20"-.470"	5-15R	•	•
PS520PCLB	20	125	Plug, Black & White	.20"-.470"	5-20P	•	•
PS520CCLB	20	125	Connector, Black & White	.20"-.470"	5-20R	•	•
PS615PCLB	15	250	Plug, Black & White	.20"-.470"	6-15P	•	•
PS615CCLB	15	250	Connector, Black & White	.20"-.470"	6-15R	•	•



NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

EHU & Corrosion-Resistant Plugs & Connectors
15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	*Brass
Terminal Clamp	*Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	*Brass
Terminal Clamp	*Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

* Nickel-Plated for Corrosion-Resistant Product.

EHU Ground Continuity Monitoring (GCM) Plugs & Connectors
15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

legrand®
Pass & Seymour

Straight Blade Plugs & Connectors
Product Specifications & Performance

Gator Grip Devices
Plugs & Connectors
30, 50 & 60A Straight Blade

Plugs

Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel

Connectors

Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Polypropylene
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	Up to 277V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.570"–1.260" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#10 AWG min.– #4 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V0
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

MaxGrip® M³ Plugs & Connectors

Plug

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Blades	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Connector

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Contacts	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperature	Maximum continuous: +75°C; Minimum: -40°C without impact

legrand®
Pass & Seymour

Clamp-Lock™ Plugs & Connectors

Plug

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Blades	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Connector


Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Contacts	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.20"–.470" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperature	Maximum continuous: +75°C; Minimum: -40°C without impact

NEMA Configuration	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.

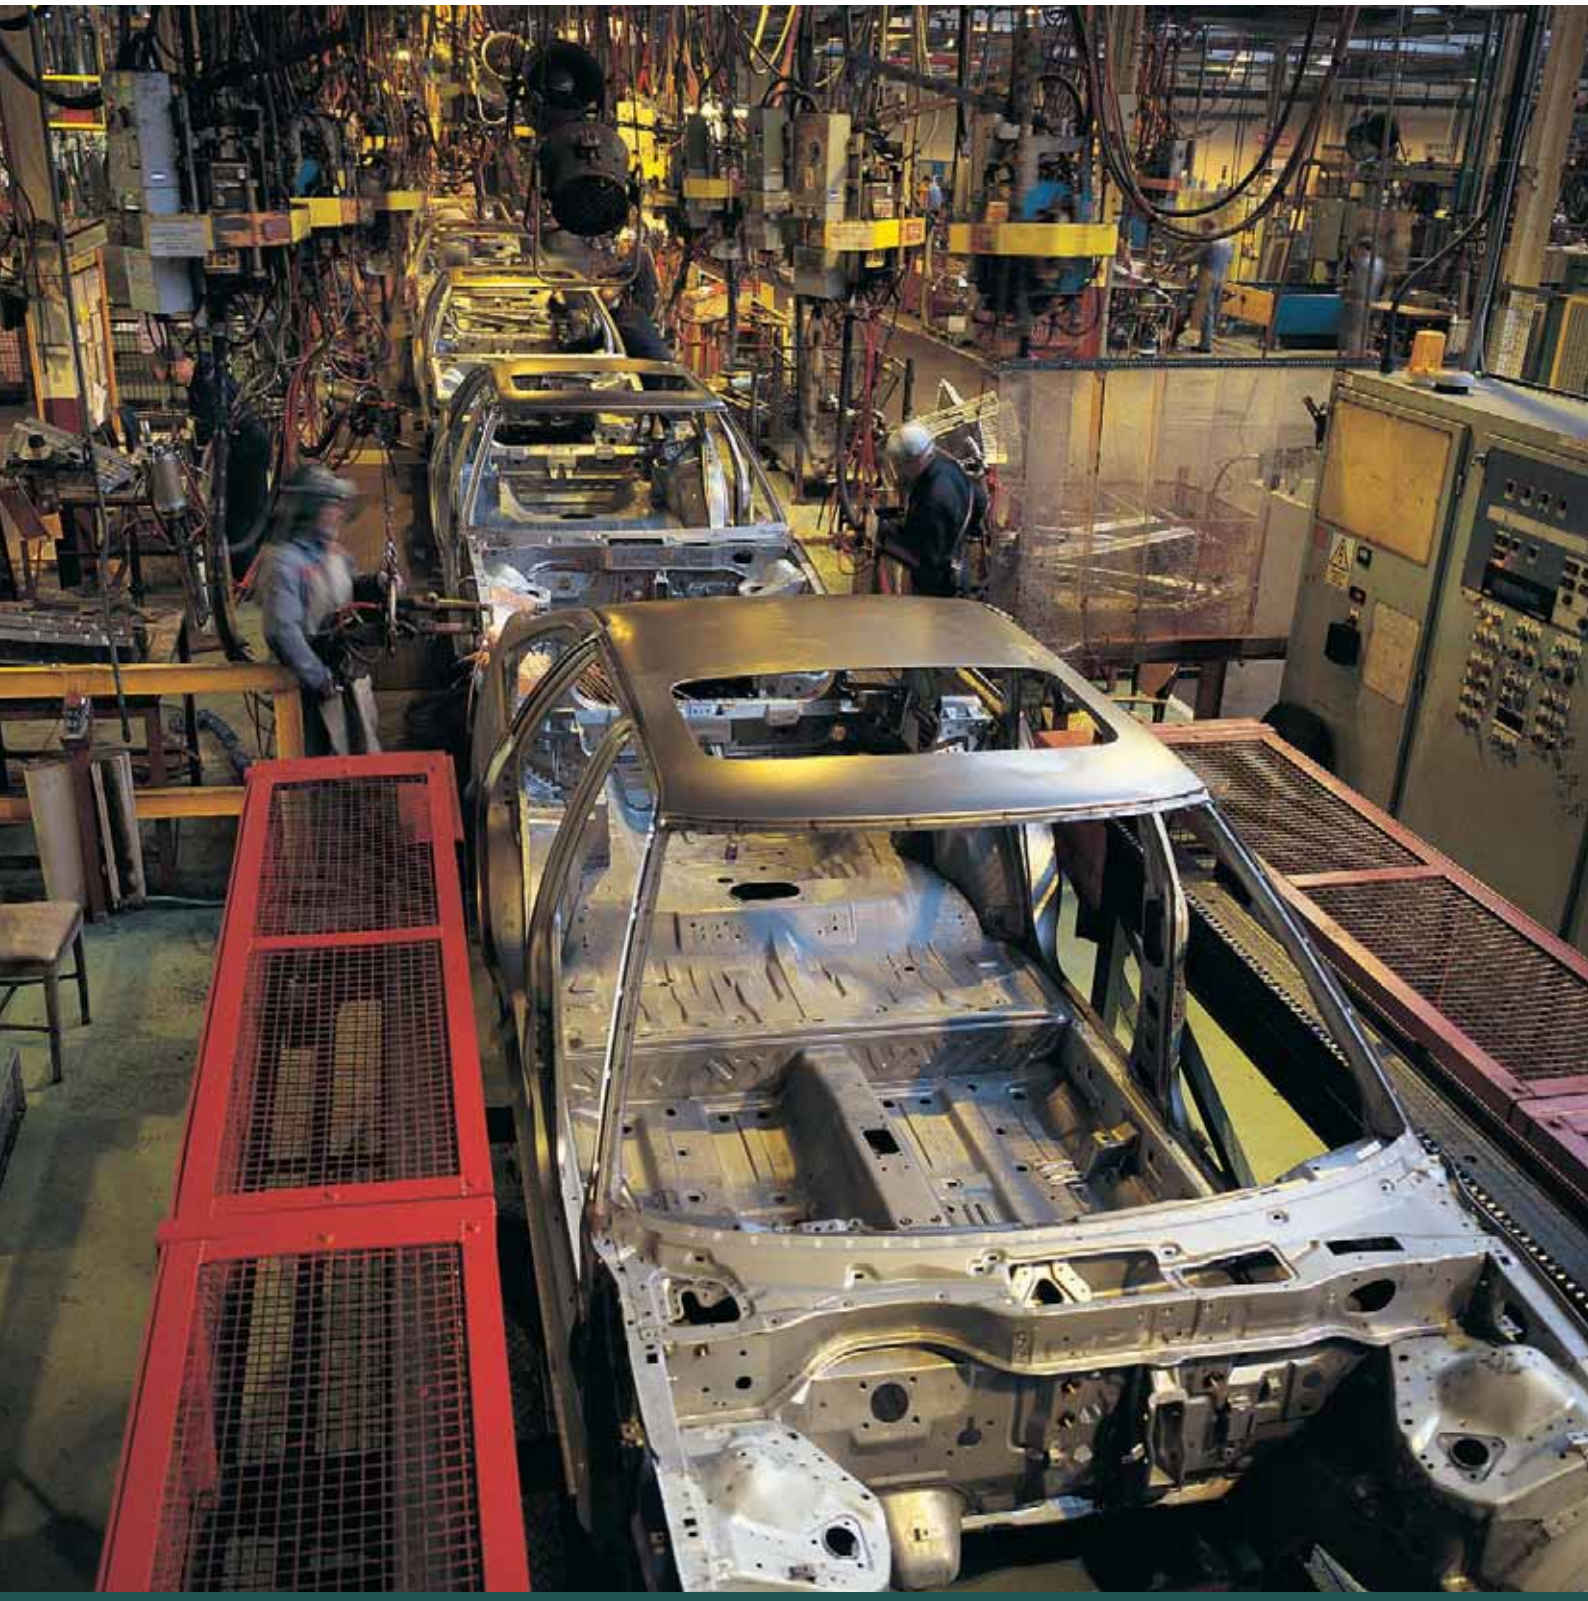

INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES

legrand®

Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices

legrand®
Pass & Seymour

Raised ribs provide non-slip gripping profile for turning to lock and unlock.

Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire.

Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.


Rounded back contour reduces snags and hang-ups on the job site.



Double dovetail design provides superior protection against cord pull-out forces.


Scallop shell design provides non-slip gripping surface for insertion and withdrawal.

Visible stamped NEMA configuration and device rating.

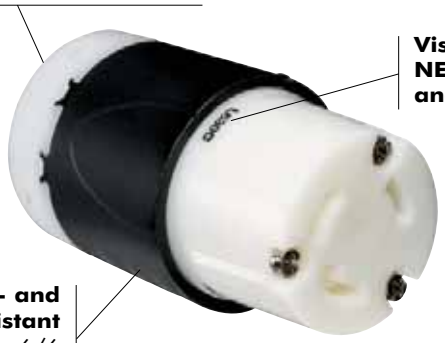

Impact- and corrosion-resistant durable nylon 6/6 shell material.

L630C & L630P



New-design external cord grips provide visible assurance of safe and proper cord retention.

Integral flexible rubber cord grommet conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.

Index

Description	Rating	Page Number
NEMA Configurations		H-3
Ground Continuity Monitoring Devices	15A, 125 & 250V, 277VAC	H-4
	20 & 30A, 125, 250 & 347V, & 277VAC; 20 & 30A, 125/250V	H-5
2 Pole, 2 Wire Non-Grounding	15A, 125V; 20A, 250V	H-6
2 Pole, 3 Wire	15A, 125 & 250V, 277VAC	H-7, H-8
	20A, 125, 250, 347, 480 & 600V, 277VAC	H-9 – H-11
	30A, 125, 250, 480 & 600V, 277VAC	H-12 – H-14
3 Wire Grounding & Non-Grounding	10 & 15A, 125 & 250V; 20 & 30A, 125/250 & 250V	H-15
3 Pole, 3 Wire Non-Grounding	20A, 125/250V; 3ø, 250 & 480V	H-16
	30A, 125/250V; 3ø, 250, 480 & 600V	H-17
3 Pole, 4 Wire	20A, 125/250V; 3ø, 250 & 480V	H-18
	30A, 125/250V; 3ø, 250, 480 & 600V	H-19, H-20
3 Pole, 4 Wire; 4 Pole, 4 Wire	20A, 3øY, 250V; 10A, 600V; 20A, 3øY, 120/208V	H-21
	30A, 3øY, 250V; 10A, 600V; 30A, 3øY, 120/208V	H-22
4 Pole, 4 Wire Non-Grounding	20A, 3øY, 120/208, 277/480 & 347/600V	H-23
	30A, 3øY, 120/208, 277/480 & 347/600V	H-24
4 Pole, 5 Wire	20A, 3øY, 120/208, 277/480 & 347/600V	H-25
	30A, 3øY, 120/208, 277/480 & 347/600V	H-26
Angle Plugs & Adapters	15A, 125 & 250V, 277VAC; 15, 20 & 30A Adapters	H-27
Rubber & Watertight	15, 20 & 30A, 125V; 15A, 277VAC	H-28
California Standard & Corrosion-Resistant	50A, 125, 250 & 480V; 250VDC, 600VAC	H-29
	50A, 125/250V; 3ø, 250 & 480V; 250VDC, 600VAC	H-30
Midget Connectors, Plugs, Inlets, Outlets	15A, 125V, 125/250V	H-31
Power Interrupting Devices, 2 Pole, 3 Wire	20A, 125V Hospital Use; 20A, 125V; 20A, 125V; 10A, 250VDC, 480VAC	H-32
3 Pole, 4 Wire	30A, 480V; 30A, 600VAC; 20A, 250VDC; 60A, 600V	H-33
4 Pole, 5 Wire	30A, 600VAC; 20A 250VDC; 60A, 600V	H-34
Accessories		H-35, H-36
Product Specifications & Performance, Horsepower Ratings		H-37 – H-43

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices

Compact, impact-resistant nylon face and body are ultrasonically welded together for unrivaled strength.

Face color coding by voltage facilitates locating and mating of proper devices.

Clearly marked NEMA configuration, rating, and third party listing on each unit's face.



One-piece, high-grade brass contacts offer excellent conductivity and heat-rise resistance.

Side and external screw-pressure-plate back wire capability. Accepts #14 - #10 AWG.

Single-piece, solid brass mounting strap is free of easily loosened rivets found on other brands.

L630R

P&S Turnlok Receptacles. Voltage color coding on the outside. Proven designs and quality materials on the inside. Any way you look at them, they're the standard of the industry.

125V	250V	277VAC	480VAC	600VAC	125/250V

Industrial Spec Grade Turnlok® Locking Devices
NEMA Configurations

legrand®
Pass & Seymour

Locking Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding						
L1 125V	L1-15R	L1-15P				
L2 250V			L2-20R	L2-20P		
2 Pole, 3 Wire Grounding						
L5 125V	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	L5-30P
L6 250V	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	L6-30P
L7 277VAC	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	L7-30P
L24 347VAC			L24-20R	L24-20P		
L8 480VAC			L8-20R	L8-20P	L8-30R	L8-30P
L9 600VAC			L9-20R	L9-20P	L9-30R	L9-30P
3 Pole, 3 Wire Non-Grounding						
L10 125/250V			L10-20R	L10-20P	L10-30R	L10-30P
L11 3ø250V			L11-20R	L11-20P	L11-30R	L11-30P
L12 3ø480V			L12-20R	L12-20P	L12-30R	L12-30P
L13 3ø600V					L13-30R	L13-30P
3 Pole, 4 Wire Grounding						
L14 125/250V			L14-20R	L14-20P	L14-30R	L14-30P
L15 3ø250V			L15-20R	L15-20P	L15-30R	L15-30P
L16 3ø480V			L16-20R	L16-20P	L16-30R	L16-30P
L17 3ø600V					L17-30R	L17-30P
4 Pole, 4 Wire Non-Grounding						
L18 3øY 120/208V			L18-20R	L18-20P	L18-30R	L18-30P
L19 3øY 277/480V			L19-20R	L19-20P	L19-30R	L19-30P
L20 3øY 347/600V			L20-20R	L20-20P	L20-30R	L20-30P
4 Pole, 5 Wire Grounding						
L21 3øY 120/208V			L21-20R	L21-20P	L21-30R	L21-30P
L22 3øY 277/480V			L22-20R	L22-20P	L22-30R	L22-30P
L23 3øY 347/600V			L23-20R	L23-20P	L23-30R	L23-30P

Midget – Locking

	15 AMPERE	
	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding		
ML1 125V	ML-1R	ML-1P
2 Pole, 3 Wire Grounding		
ML2 125V	ML-2R	ML-2P
3 Pole, 3 Wire Non-Grounding		
ML3 125/250V	ML-3R	ML-3P

Labels & Their Meaning

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).




Closed Slots
Indicate plug blade configurations (male).




legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Heavy-Duty Ground Continuity Monitoring (GCM) Plugs & Connectors
2 Pole, 3 Wire 15A, 125 & 250V & 277VAC



PSL515CGCM




PSL515PGCM

Features – Heavy-Duty Turnlok GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- NEMA configurations always visible for fast identification without disconnecting.
- Exclusive neoprene dust shield on devices seals cable entry. Optional weatherproof boots (sold separately).
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive, rugged two-piece cord grip (15 Amp only) accepts a wide range of cord widths. Provides uniform pressure for superior retention of conductors.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance: cULus	3rd Party Compliance: FSUL WC596
2 Pole, 3 Wire Grounding						
PSL515CGCM	15 125	Connector, Black & White	.230"-.720"	L5-15R	•	•
PSL515PGCM	15 125	Plug, Black & White	.230"-.720"	L5-15P	•	•
PSL615CGCM	15 250	Connector, Black & White	.230"-.720"	L6-15R	•	•
PSL615PGCM	15 250	Plug, Black & White	.230"-.720"	L6-15P	•	•
PSL715CGCM	15 277	Connector, Black & White	.230"-.720"	L7-15R	•	•
PSL715PGCM	15 277	Plug, Black & White	.230"-.720"	L7-15P	•	•


NEMA L5-15P | NEMA L5-15R | NEMA L6-15P | NEMA L6-15R | NEMA L7-15P | NEMA L7-15R


Green LED

Plug – There's proper ground continuity from the panel to the outlet and power's present.

Connector – Power's present and there's proper ground continuity throughout the cordset and back to the panel.


Red LED

Plug – Power's present, but there's a ground continuity fault or miswire between the receptacle and the panel.

Connector – Power's present, but there's a ground continuity fault or miswire in the cordset (or, if there's a red indication in the plug as well, between the receptacle and the panel). It's also possible there could be a problem in both.


No LED

Plug – Power loss, open hot or neutral conductor, or hot/ground reversal.

Connector – Assuming power is present at the outlet, there's an open hot or open neutral conductor in the cordset, or a hot/ground reversal.

250V products will show red and green when hot and ground are reversed.

Industrial Spec Grade Turnlok® Locking Devices


Heavy-Duty Ground Continuity Monitoring (GCM) Plugs & Connectors

2 Pole, 3 Wire 20 & 30A; 125, 250, 277 & 347V
3 Pole, 4 Wire 20 & 30A, 125/250V


legrand®
Pass & Seymour

Features – Heavy-Duty Turnlok GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- NEMA configurations always visible for fast identification without disconnecting.
- Exclusive neoprene dust shield on devices seals cable entry. Optional weatherproof boots (sold separately).
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive, rugged two-piece cord grip (15 Amp only) accepts a wide range of cord widths. Provides uniform pressure for superior retention of conductors.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.





L630CGCM



L630PGCM

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance	
					c UL us cULus	FSUL WC596
2 Pole, 3 Wire Grounding						
L520CGCM	20 125	Connector, Black & White	.225"-.750"	L5-20R	•	•
L520PGCM	20 125	Plug, Black & White	.225"-.750"	L5-20P	•	•
L530CGCM	30 125	Connector, Black & White	.225"-.750"	L5-30R	•	•
L530PGCM	30 125	Plug, Black & White	.225"-.750"	L5-30P	•	•
L620CGCM	20 250	Connector, Black & White	.225"-.750"	L6-20R	•	•
L620PGCM	20 250	Plug, Black & White	.225"-.750"	L6-20P	•	•
L630CGCM	30 250	Connector, Black & White	.225"-.750"	L6-30R	•	•
L630PGCM	30 250	Plug, Black & White	.225"-.750"	L6-30P	•	•
L720CGCM	20 277	Connector, Black & White	.225"-.750"	L7-20R	•	•
L720PGCM	20 277	Plug, Black & White	.225"-.750"	L7-20P	•	•
L730CGCM	30 277	Connector, Black & White	.225"-.750"	L7-30R	•	•
L730PGCM	30 277	Plug, Black & White	.225"-.750"	L7-30P	•	•
L3720CGCM	20 347	Connector, Black & White	.225"-.750"	L24-20R	•	•
L3720PGCM	20 347	Plug, Black & White	.225"-.750"	L24-20P	•	•
3 Pole, 4 Wire Grounding						
L1420CGCM	20 125/250	Connector, Black & White	.225"-1.150"	L14-20R	•	•
L1420PGCM	20 125/250	Plug, Black & White	.225"-1.150"	L14-20P	•	•
L1430CGCM	30 125/250	Connector, Black & White	.225"-1.150"	L14-30R	•	•
L1430PGCM	30 125/250	Plug, Black & White	.225"-1.150"	L14-30P	•	•



NEMA L5-20P · NEMA L5-20R · NEMA L5-30P · NEMA L5-30R · NEMA L6-20P · NEMA L6-20R · NEMA L6-30P · NEMA L6-30R · NEMA L7-20P · NEMA L7-20R · NEMA L7-30P · NEMA L7-30R


NEMA L14-20P · NEMA L14-20R · NEMA L14-30P · NEMA L14-30R · NEMA L24-20P · NEMA L24-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
15 & 20 Amp NEMA L115 & L220
2 Pole, 2 Wire Non-Grounding 15A, 125V & 20A, 250V




7535




7210

Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498
Receptacles					
7535	15 125	Single Receptacle		L1-15R	•
7210	20 250	Single Receptacle		L2-20R	•
Connectors					
7506*	15 125	Black	.296"-.562"	L1-15R	•
7101*	20 250	Black Back, White Front Body	.296"-.562"	L2-20R	
Plugs					
7547DF	15 125	Black	.296"-.625"	L1-15P	•
7102*	20 250	Black Back, White Front Body	.296"-.562"	L2-20P	
Flanged Inlets & Outlets					
L0115	15 125	Inlet		L1-15P	•
7526	15 125	Outlet		L1-15R	•


*For replacement use only.
Reference Pages H-35 and H-36 for Accessories.




NEMA L1-15P **NEMA L1-15R** **NEMA L2-20P** **NEMA L2-20R**




7506




7101



7526



7547DF




7102

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
15 Amp NEMA L515
2 Pole, 3 Wire 15A, 125V

legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
4710	15	125	Single Receptacle		L5-15R	•		•
IG4710	15	125	Single Receptacle, Orange, Isolated Ground		L5-15R	•		•
4700	15	125	Duplex Receptacle		L5-15R	•		•
IG4700	15	125	Duplex Receptacle, Orange, Isolated Ground		L5-15R	•		•
4792	15	125	Combination Straight Blade and Locking		5-15R and L5-15R	•		
Connectors IP20 Suitability								
PSL515C	15	125	Black Back, White Front Body	.230"-.720"	L5-15R	•	•	•
CRL515C	15	125	Yellow Back, White Front Body, Corrosion-Resistant	.230"-.720"	L5-15R	•	•	•
Plugs IP20 Suitability								
PSL515P	15	125	Black Back, White Front Body	.230"-.720"	L5-15P	•	•	•
CRL515P	15	125	Yellow Back, White Front Body, Corrosion-Resistant	.230"-.720"	L5-15P	•	•	•
Flanged Inlets & Outlets								
4716SS	15	125	Gray Inlet		L5-15P	•		•
4715SS	15	125	Gray Outlet		L5-15R	•		•
Straight Blade/Locking Adapters								
44859	15	125	High-Visibility Yellow		5-15R/L5-15P			



4710




4700


Reference Pages H-35 and H-36 for Accessories.




NEMA L5-15P **NEMA L5-15R** **NEMA 5-15R**




15A Connector




4715SS



4792



15A Plug




4716SS


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
15 Amp NEMA L615 & L715
2 Pole, 3 Wire 15A, 250 & 277V




4560



4550




4760




4750

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
4560	15	250	Single Receptacle		L6-15R	•		
4550†	15	250	Duplex Receptacle		L6-15R	•		
4760	15	277	Single Receptacle		L7-15R	•		•
IG4760	15	277	Single Receptacle, Orange, Isolated Ground		L7-15R	•		•
4750	15	277	Duplex Receptacle		L7-15R	•		•
Connectors IP20 Suitability								
PSL615C	15	250	Black Back, White Front Body	.230"-.720"	L6-15R	•	•	•
PSL715C	15	277	Black Back, White Front Body	.230"-.720"	L7-15R	•	•	•
Plugs IP20 Suitability								
PSL615P	15	250	Black Back, White Front Body	.230"-.720"	L6-15P	•	•	•
PSL615PAN	15	250	Angled Plug, Black Back, White Front Body	.320"-.655"	L6-15P	•		
PSL715P	15	277	Black Back, White Front Body	.230"-.720"	L7-15P	•	•	•
PSL715PAN	15	277	Angled Plug, Black Back, White Front Body	.320"-.655"	L7-15P	•		
Flanged Outlets								
614	15	250	Gray Outlet		L6-15R			
L0714	15	277	Gray Outlet		L7-15R			


†Not designed for split circuits.
Reference Pages H-35 and H-36 for Accessories.



NEMA L6-15P **NEMA L6-15R** **NEMA L7-15P** **NEMA L7-15R**



15A Connector




15A Plug

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L520
2 Pole, 3 Wire 20A, 125V

legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L520R	20	125	Single Receptacle		L5-20R	•	•	•
IGL520R	20	125	Single Receptacle, Orange, Isolated Ground		L5-20R	•		•
CRL520R	20	125	Single Receptacle, Yellow, Corrosion-Resistant		L5-20R	•	•	•
Connectors IP20 Suitability								
L520C	20	125	Black Back, White Front Body	.225"-.750"	L5-20R	•	•	•
L520CBK	20	125	Black Back, Black Front Body	.225"-.750"	L5-20R	•	•	•
CRL520C	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L5-20R	•	•	•
Plugs IP20 Suitability								
L520P	20	125	Black Back, White Front Body	.225"-.750"	L5-20P	•	•	•
L520PBK	20	125	Black Back, Black Front Body	.225"-.750"	L5-20P	•	•	•
CRL520P	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L5-20P	•	•	•
Flanged Inlets & Outlets								
L520FI	20	125	Gray Inlet		L5-20P	•		•
L520FO	20	125	Gray Outlet		L5-20R	•		•




20A Receptacle




20A Connector


Reference Pages H-35 and H-36 for Accessories.



NEMA L5-20P **NEMA L5-20R**

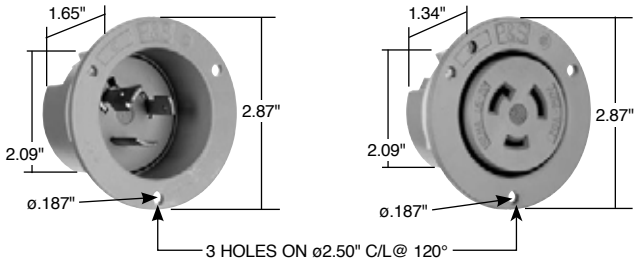


20A Flanged Inlet & Outlet



20A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L620 & L720
2 Pole, 3 Wire 20A, 250 & 277V




20A Receptacle




20A Connector


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L620R	20	250	Single Receptacle		L6-20R	•	•	•
IGL620R	20	250	Single Receptacle, Orange, Isolated Ground		L6-20R	•		•
L720R	20	277	Single Receptacle		L7-20R	•	•	•
IGL720R	20	277	Single Receptacle, Orange, Isolated Ground		L7-20R	•		•
Connectors IP20 Suitability								
L620C	20	250	Black Back, White Front Body	.225"-.750"	L6-20R	•	•	•
CRL620C	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-20R	•	•	•
L720C	20	277	Black Back, White Front Body	.225"-.750"	L7-20R	•	•	•
Plugs IP20 Suitability								
L620P	20	250	Black Back, White Front Body	.225"-.750"	L6-20P	•	•	•
CRL620P	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-20P	•	•	•
L720P	20	277	Black Back, White Front Body	.225"-.750"	L7-20P	•	•	•
Flanged Inlets & Outlets								
L620FI	20	250	Gray Inlet		L6-20P	•		•
L620FO	20	250	Gray Outlet		L6-20R	•		•
L720FI	20	277	Gray Inlet		L7-20P	•		•
L720FO	20	277	Gray Outlet		L7-20R	•		•

Reference Pages H-35 and H-36 for Accessories.




20A Plug



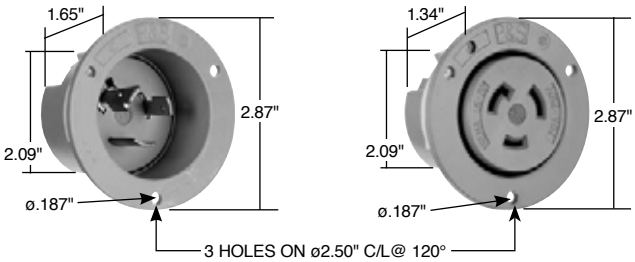

20A Flanged Inlet & Outlet



WPG2

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S


All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L820, L920 & L2420
2 Pole, 3 Wire 20A, 347, 480 & 600V

legrand®
Pass & Seymour


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L820R	20	480	Single Receptacle		L8-20R	•		•
IGL820R	20	480	Single Receptacle, Orange, Isolated Ground		L8-20R	•		•
L920R	20	600	Single Receptacle		L9-20R	•		•
L3720R	20	347	Single Receptacle		L24-20R			•
Connectors IP20 Suitability								
L820C	20	480	Black Back, White Front Body	.225"-.750"	L8-20R	•		•
L920C	20	600	Black Back, White Front Body	.225"-.750"	L9-20R	•		•
L3720C	20	347	Black Back, White Front Body	.225"-.750"	L24-20R			•
Plugs IP20 Suitability								
L820P	20	480	Black Back, White Front Body	.225"-.750"	L8-20P	•		•
L920P	20	600	Black Back, White Front Body	.225"-.750"	L9-20P	•		•
L3720P	20	347	Black Back, White Front Body	.225"-.750"	L24-20P	•	•	•
Flanged Inlets & Outlets								
L820FI	20	480	Gray Inlet		L8-20P	•		•
L820FO	20	480	Gray Outlet		L8-20R	•		•
L920FI	20	600	Gray Inlet		L9-20P	•		•
L920FO	20	600	Gray Outlet		L9-20R	•		•
L3720FO	20	347	Gray Outlet		L24-20R			•

Reference Pages H-35 and H-36 for Accessories.




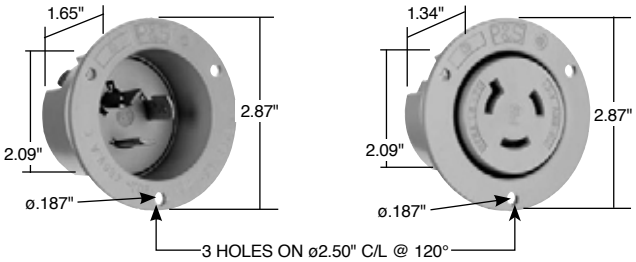


20A Flanged Inlet & Outlet



20A Receptacle




20A Connector



20A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L530
2 Pole, 3 Wire 30A, 125V



30A Receptacle




30A Connector




30A Plug

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L530R	30	125	Single Receptacle		L5-30R	•	•	•
IGL530R	30	125	Single Receptacle, Orange, Isolated Ground		L5-30R	•		•
CRL530R	30	125	Single Receptacle, Yellow, Corrosion-Resistant		L5-30R	•	•	•
Connectors IP20 Suitability								
L530C	30	125	Black Back, White Front Body	.225"-.750"	L5-30R	•	•	•
CRL530C	30	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L5-30R	•	•	•
Plugs IP20 Suitability								
L530P	30	125	Black Back, White Front Body	.225"-.750"	L5-30P	•	•	•
CRL530P	30	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L5-30P	•	•	•
Flanged Inlets & Outlets								
L530FI	30	125	Gray Inlet		L5-30P	•		•
L530FO	30	125	Gray Outlet		L5-30R	•		•


Reference Pages H-35 and H-36 for Accessories.



NEMA L5-30P NEMA L5-30R

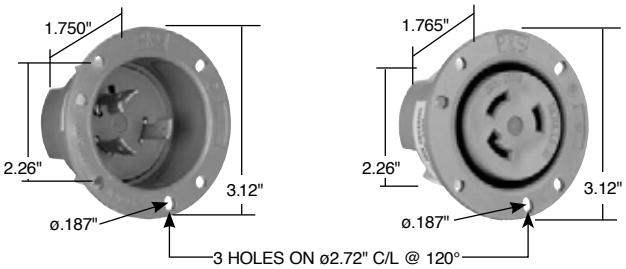

30A Flanged Inlet & Outlet



WPG2


Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L630 & L730
2 Pole, 3 Wire 30A, 250 & 277V

legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L630R	30	250	Single Receptacle		L6-30R	•	•	•
IGL630R	30	250	Single Receptacle, Orange, Isolated Ground		L6-30R	•		•
L730R	30	277	Single Receptacle		L7-30R	•	•	•
Connectors IP20 Suitability								
L630C	30	250	Black Back, White Front Body	.225"-.750"	L6-30R	•	•	•
CRL630C	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30R	•	•	•
L730C	30	277	Black Back, White Front Body	.225"-.750"	L7-30R	•	•	•
Plugs IP20 Suitability								
L630P	30	250	Black Back, White Front Body	.225"-.750"	L6-30P	•	•	•
CRL630P	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30P	•	•	•
L730P	30	277	Black Back, White Front Body	.225"-.750"	L7-30P	•	•	•
Flanged Inlets & Outlets								
L630FI	30	250	Gray Inlet		L6-30P	•		•
L630FO	30	250	Gray Outlet		L6-30R	•		•
L730FI	30	277	Gray Inlet		L7-30P	•		•
L730FO	30	277	Gray Outlet		L7-30R	•		•





30A Receptacle




30A Connector

Reference Pages H-35 and H-36 for Accessories.



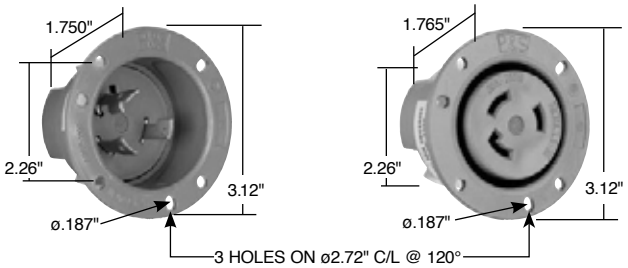


30A Flanged Inlet & Outlet



30A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L830 & L930
2 Pole, 3 Wire 30A, 480 & 600V




30A Receptacle




30A Connector


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L830R	30	480	Single Receptacle		L8-30R	•	•	•
L930R	30	600	Single Receptacle		L9-30R	•	•	•
Connectors IP20 Suitability								
L830C	30	480	Black Back, White Front Body	.225"-.750"	L8-30R	•	•	•
L930C	30	600	Black Back, White Front Body	.225"-.750"	L9-30R	•	•	•
Plugs IP20 Suitability								
L830P	30	480	Black Back, White Front Body,	.225"-.750"	L8-30P	•	•	•
L930P	30	600	Black Back, White Front Body	.225"-.750"	L9-30P	•	•	•
Flanged Inlets & Outlets								
L830FI	30	480	Gray Inlet		L8-30P	•		•
L830FO	30	480	Gray Outlet		L8-30R	•		•
L930FI	30	600	Gray Inlet		L9-30P	•		•
L930FO	30	600	Gray Outlet		L9-30R	•		•

Reference Pages H-35 and H-36 for Accessories.




30A Plug



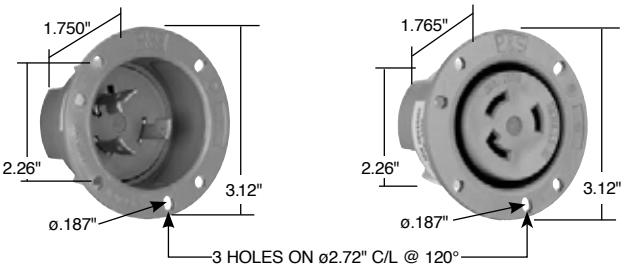

30A Flanged Inlet & Outlet



WPG2

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S

All devices listed on this page conform to NEMA WD-1 and WD-6.

Industrial Spec Grade Turnlok® Locking Devices
Non-NEMA

3 Wire Grounding & Non-Grounding
10 & 15A, 125 & 250V; 20 & 30A, 125/250 & 250V

legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
7582*	15 10	125 250	Single Receptacle				
7580	15 10	125 250	Duplex Receptacle				
7580G	15 10	125 250	Duplex Receptacle, Grounding				
7310*	20	125/250	Single Receptacle				
3330	30	125/250	Single Receptacle				
3330G	30	125/250	Single Receptacle, Grounding				
Connectors IP20 Suitability							
7555SS*	15 10	125 250	Yellow	.296"-.625"			
7555G	15	125	Yellow	.280"-.710"			
7313SS	20	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
7313SSBK	20	125/250	Black Back, Black Front Body	.225"-.750"	•	•	•
3333SS	30	125/250	Black Back, White Front Body	.225"-.750"	•		•
Plugs IP20 Suitability							
S2348DF	14	125-480	Black Back, White Front Body				
7554SS*	15 10	125 250	Yellow	.296"-.625"			
7572G	15	125	Yellow, Grounding	.280"-.710"			
7311SS	20	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
7311SSBK	20	125/250	Black Back, Black Front Body	.225"-.750"	•	•	•
7311G	20	250	Yellow, Grounding	.410"-1.060"			
3331SS	30	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
3331G	30	250	Yellow, Grounding	.410"-1.060"			
Flanged Inlets & Outlets							
S2347	14	125-480	Outlet				
7556SS*	15 10	125 250	Gray Inlet				
7557SS*	15 10	125 250	Gray Outlet				
3334SS	30	125/250	Gray Inlet		•		
3335SS	30	125/250	Gray Outlet		•		

*For replacement use only.
Reference Pages H-35 and H-36 for Accessories.



Non-NEMA 7580, 7580G 7582, 7555SS 7557SS



Non-NEMA 7554SS 7556SS 7572G



Non-NEMA 7310 7313SS



Non-NEMA 7311SS 7311G


Non-NEMA S2348DF



Non-NEMA S2347




Non-NEMA 3331SS 3334SS 3331G




Non-NEMA 3330, 3330G 3333SS 3335SS




7582




7580G




7555SS



7554SS



7556SS




7557SS


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L1020, L1120 & L1220
3 Pole, 3 Wire Non-Grounding, 20A, 125/250V; 3ø, 250 & 480V



20A Receptacle




20A Connector




20A Plug


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L1020R	20	125/250	Single Receptacle		L10-20R	•	•	
L1120R	20	3ø, 250	Single Receptacle		L11-20R	•	•	
L1220R	20	3ø, 480	Single Receptacle		L12-20R	•	•	
Connectors IP20 Suitability								
L1020C	20	125/250	Black Back, White Front Body	.225"-.750""	L10-20R	•	•	•
L1120C	20	3ø, 250	Black Back, White Front Body	.225"-.750"	L11-20R	•	•	•
L1220C	20	3ø, 480	Black Back, White Front Body	.225"-.750"	L12-20R	•	•	•
Plugs IP20 Suitability								
L1020P	20	125/250	Black Back, White Front Body	.225"-.750"	L10-20P	•	•	•
L1120P	20	3ø, 250	Black Back, White Front Body	.225"-.750"	L11-20P	•	•	•
L1220P	20	3ø, 480	Black Back, White Front Body	.225"-.750"	L12-20P	•	•	•
Flanged Inlets & Outlets								
L1020FI	20	125/250	Gray Inlet		L10-20P	•		•
L1020FO	20	125/250	Gray Outlet		L10-20R	•		
L1120FI	20	3ø, 250	Gray Inlet		L11-20P	•		•
L1120FO	20	3ø, 250	Gray Outlet		L11-20R	•		
L1220FI	20	3ø, 480	Gray Inlet		L12-20P	•		•
L1220FO	20	3ø, 480	Gray Outlet		L12-20R	•		

Reference Pages H-35 and H-36 for Accessories.



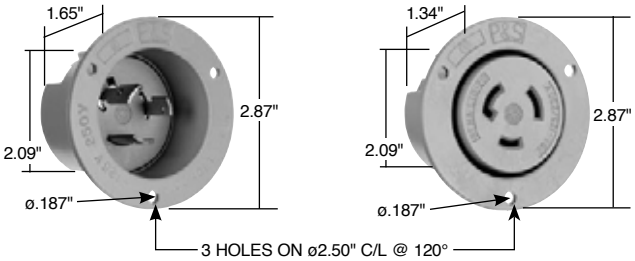

20A Flanged Inlet & Outlet



WPG2

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S


All devices listed on this page conform to NEMA WD-1 and WD-6.

Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L1030, L1130, L1230 & L1330


3 Pole, 3 Wire Non-Grounding 30A, 125/250V; 3ø, 250, 480 & 600V

legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L1030R	30	125/250	Single Receptacle		L10-30R	•	•	
L1130R	30	3ø, 250	Single Receptacle		L11-30R	•	•	
L1230R	30	3ø, 480	Single Receptacle		L12-30R	•	•	
L1330R	30	3ø, 600	Single Receptacle		L13-30R	•	•	
Connectors IP20 Suitability								
L1030C	30	125/250	Black Back, White Front Body	.225"-.750"	L10-30R	•	•	
L1130C	30	3ø, 250	Black Back, White Front Body	.225"-.750"	L11-30R	•	•	•
L1230C	30	3ø, 480	Black Back, White Front Body	.225"-.750"	L12-30R	•	•	•
L1330C	30	3ø, 600	Black Back, White Front Body	.225"-.750"	L13-30R	•	•	•
Plugs IP20 Suitability								
L1030P	30	125/250	Black Back, White Front Body	.225"-.750"	L10-30P	•	•	
L1130P	30	3ø, 250	Black Back, White Front Body	.225"-.750"	L11-30P	•	•	•
L1230P	30	3ø, 480	Black Back, White Front Body	.225"-.750"	L12-30P	•	•	•
L1330P	30	3ø, 600	Black Back, White Front Body	.225"-.750"	L13-30P	•	•	•
Flanged Inlets and Outlets								
L1030FI	30	125/250	Gray Inlet		L10-30P	•		
L1030FO	30	125/250	Gray Outlet		L10-30R	•		•
L1130FI	30	3ø, 250	Gray Inlet		L11-30P	•		•
L1130FO	30	3ø, 250	Gray Outlet		L11-30R	•		•
L1230FI	30	3ø, 480	Gray Inlet		L12-30P	•		•
L1230FO	30	3ø, 480	Gray Outlet		L12-30R	•		•
L1330FO	30	3ø, 600	Gray Outlet		L13-30R	•		•





30A Receptacle




30A Connector

Reference Pages H-35 and H-36 for Accessories.

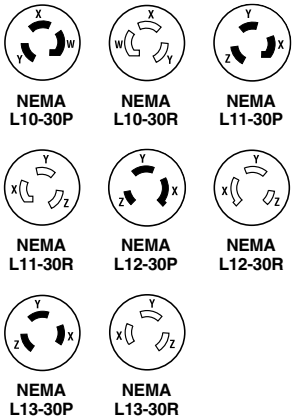

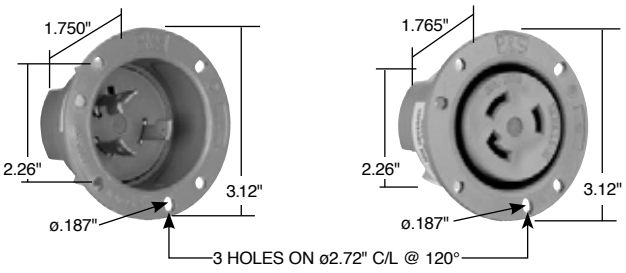


30A Flanged Inlet & Outlet



30A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L1420, L1520 & L1620
3 Pole, 4 Wire 20A, 125/250V; 3ø, 250 & 480V



20A Receptacle




20A Connector




20A Plug

Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
L1420R	20 125/250	Single Receptacle		L14-20R	•	•	•
IGL1420R	20 125/250	Single Receptacle, Orange, Isolated Ground		L14-20R	•		•
L1520R	20 3ø, 250	Single Receptacle		L15-20R	•	•	•
IGL1520R	20 3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-20R	•		•
L1620R	20 3ø, 480	Single Receptacle		L16-20R	•	•	•
IGL1620R	20 3ø, 480	Single Receptacle, Orange, Isolated Ground		L16-20R	•		•
Connectors IP20 Suitability							
L1420C	20 125/250	Black Back, White Front Body	.225"-1.150"	L14-20R	•	•	•
CRL1420C	20 125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20R	•	•	•
L1520C	20 3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20R	•	•	•
L1520CBK	20 3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20R	•	•	•
L1620C	20 3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20R	•	•	•
Plugs IP20 Suitability							
L1420P	20 125/250	Black Back, White Front Body,	.225"-1.150"	L14-20P	•	•	•
CRL1420P	20 125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20P	•	•	•
L1520P	20 3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20P	•	•	•
L1520PBK	20 3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20P	•	•	•
L1620P	20 3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20P	•	•	•
Flanged Inlets & Outlets							
L1420FI	20 125/250	Gray Inlet		L14-20P	•		•
L1420FO	20 125/250	Gray Outlet		L14-20R	•		•
L1520FI	20 3ø, 250	Gray Inlet		L15-20P	•		•
L1520FO	20 3ø, 250	Gray Outlet		L15-20R	•		•
L1620FI	20 3ø, 480	Gray Inlet		L16-20P	•		•
L1620FO	20 3ø, 480	Gray Outlet		L16-20R	•		•

Reference Pages H-35 and H-36 for Accessories.

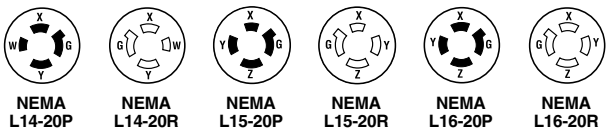

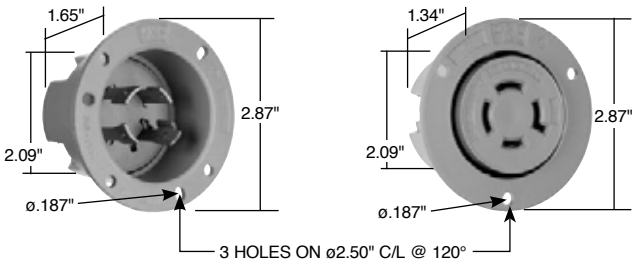


20A Flanged Inlet & Outlet

All devices listed on this page conform to NEMA WD-1 and WD-6.

Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L1430 & L1530
3 Pole, 4 Wire 30A, 125/250V; 3ø, 250V

legrand®
Pass & Seymour


Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
L1430R	30 125/250	Single Receptacle		L14-30R	•	•	•
IGL1430R	30 125/250	Single Receptacle, Orange, Isolated Ground		L14-30R	•		•
L1530R	30 3ø, 250	Single Receptacle		L15-30R	•	•	•
IGL1530R	30 3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-30R	•		•
Connectors IP20 Suitability							
L1430C	30 125/250	Black Back, White Front Body	.225"-1.150"	L14-30R	•	•	•
CRL1430C	30 125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-30R	•	•	•
L1530C	30 3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30R	•	•	•
Plugs IP20 Suitability							
L1430P	30 125/250	Black Back, White Front Body	.225"-1.150"	L14-30P	•	•	•
CRL1430P	30 125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-30P	•	•	•
L1530P	30 3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30P	•	•	•
Flanged Inlets & Outlets							
L1430FI	30 125/250	Gray Inlet		L14-30P	•		•
L1430FO	30 125/250	Gray Outlet		L14-30R	•		•
L1530FI	30 3ø, 250	Gray Inlet		L15-30P	•		•
L1530FIBK	30 3ø, 250	Black Inlet		L15-30P	•		•
L1530FO	30 3ø, 250	Gray Outlet		L15-30R	•		•
L1530FOBK	30 3ø, 250	Black Outlet		L15-30R	•		•



30A Receptacle




30A Connector




30A Plug

Reference Pages H-35 and H-36 for Accessories.


Catalog Number	Description
Weatherproof Locking Inlet Kit for Generator Applications	
L1430FIKIT	Kit includes 30A Locking Gray Flanged Inlet L1430FI, Weatherproof Cover WPG2, and Weatherproof Box WPB23

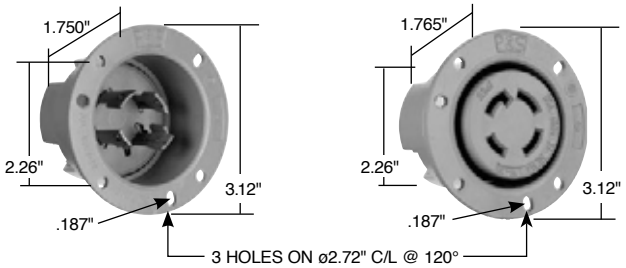

30A Flanged Inlet & Outlet


NEMA L14-30P **NEMA L14-30R** **NEMA L15-30P** **NEMA L15-30R**

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L1630 & L1730
3 Pole, 4 Wire 30A; 3ø, 480 & 600V




30A Receptacle




30A Connector


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles								
L1630R	30	3ø, 480	Single Receptacle		L16-30R	•	•	•
L1730R	30	3ø, 600	Single Receptacle		L17-30R	•	•	•
Connectors IP20 Suitability								
L1630C	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-30R	•	•	•
L1730C	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L17-30R	•	•	•
Plugs IP20 Suitability								
L1630P	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-30P	•	•	•
L1730P	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L17-30P	•	•	•
Flanged Inlets & Outlets								
L1630FI	30	3ø, 480	Gray Inlet		L16-30P	•		•
L1630FO	30	3ø, 480	Gray Outlet		L16-30R	•		•
L1730FI	30	3ø, 600	Gray Inlet		L17-30P	•		•
L1730FO	30	3ø, 600	Gray Outlet		L17-30R	•		•

Reference Pages H-35 and H-36 for Accessories.




30A Plug



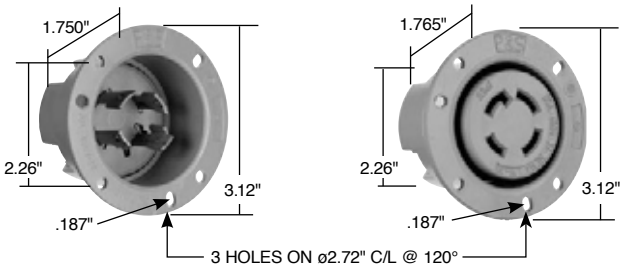

30A Flanged Inlet & Outlet



WPG2

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
20 Amp Non-NEMA

3 Pole, 4 Wire 20A, 3øY, 250V; 10A, 600V
4 Pole, 4 Wire 20A, 3øY, 120/208V

legrand®
Pass & Seymour

Catalog Number	Rating A. V.	Description/Color	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles						
7410G*	20 3øY, 250 10 600	Single Receptacle, Grounded			•	
7410	20 3øY, 120/208	Single Receptacle		•	•	
Connectors IP20 Suitability						
7413G*	20 3øY, 250 10 600	Yellow	.333"-1.060"			
7413SS	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
Plugs IP20 Suitability						
7411G*	20 3øY, 250 10 600	Yellow	.333"-1.060"			
7411SS	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
Flanged Inlets & Outlets						
7408SS	20 3øY, 120/208	Gray Inlet		•		
7409SS	20 3øY, 120/208	Gray Outlet		•		


*For replacement use only.
Reference Pages H-35 and H-36 for Accessories.



20A Receptacle



20A Connector




NON-NEMA 7408SS 7411SS


NON-NEMA 7409SS, 7410 7413SS

NON-NEMA 7411G

NON-NEMA 7410G 7413G

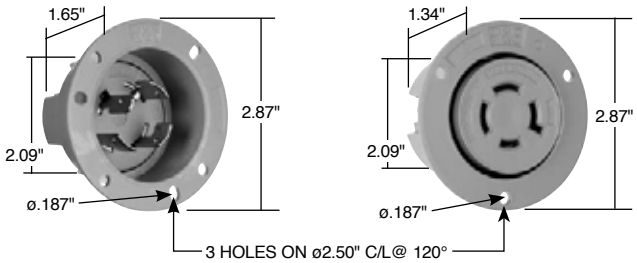


20A Flanged Inlet & Outlet



20A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
30 Amp Non-NEMA
3 Pole, 4 Wire 30A, 3øY 250V; 10A, 600V
4 Pole, 4 Wire 30A, 3øY, 120/208V



30A Receptacle




30A Connector




30A Plug


Catalog Number	Rating A.	V.	Description/Color	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
3430	30	3øY, 120/208	Single Receptacle		•	•	
Connectors IP20 Suitability							
3433SS	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
Plugs IP20 Suitability							
3431G*	30 10	30øY, 250 600	Yellow	.333"-1.060"			
3431SS	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
Flanged Inlets & Outlets							
3434SS	30	3øY, 120/208	Gray Inlet		•		
3435SS	30	3øY, 120/208	Gray Outlet		•		

*For replacement use only.
Reference Pages H-35 and H-36 for Accessories.



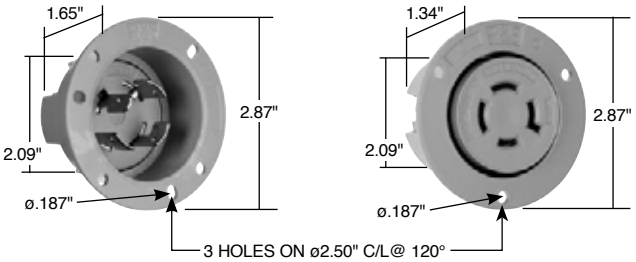

20A Flanged Inlet & Outlet



WPG2

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S


All devices listed on this page conform to NEMA WD-1 and WD-6.

Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L1820, L1920 & L2020

4 Pole, 4 Wire Non-Grounding 20A, 3øY, 120/208, 277/480 & 347/600V

legrand®
Pass & Seymour

Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
L1820R	20 3øY, 120/208	Single Receptacle		L18-20R	•	•	
L1920R	20 3øY, 277/480	Single Receptacle		L19-20R	•	•	
L2020R	20 3øY, 347/600	Single Receptacle		L20-20R	•	•	
Connectors IP20 Suitability							
L1820C	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20R	•	•	•
L1920C	20 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-20R	•	•	•
L2020C	20 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-20R	•	•	•
Plugs IP20 Suitability							
L1820P	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20P	•	•	•
L1920P	20 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-20P	•	•	•
L2020P	20 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-20P	•	•	•
Flanged Inlets & Outlets							
L1820FI	20 3øY, 120/208	Gray Inlet		L18-20P	•		•
L1820FO	20 3øY, 120/208	Gray Outlet		L18-20R	•		•
L1920FI	20 3øY, 277/480	Gray Inlet		L19-20P	•		•
L1920FO	20 3øY, 277/480	Gray Outlet		L19-20R	•		•
L2020FI	20 3øY, 347/600	Gray Inlet		L20-20P	•		•
L2020FO	20 3øY, 347/600	Gray Outlet		L20-20R	•		•





20A Receptacle




20A Connector

Reference Pages H-35 and H-36 for Accessories.



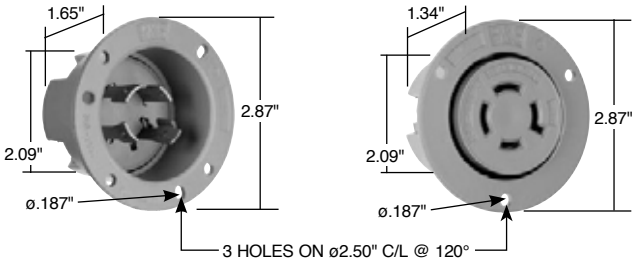


20A Flanged Inlet & Outlet



20A Plug

Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
30 Amp NEMA L1830, L1930 & L2030

4 Pole, 4 Wire Non-Grounding
30A, 3øY, 120/208, 277/480 & 347/600V




30A Receptacle




30A Connector


Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498
Receptacles					
L1830R	30 3øY, 120/208	Single Receptacle		L18-30R	•
L1930R	30 3øY, 277/480	Single Receptacle		L19-30R	•
L2030R	30 3øY, 347/600	Single Receptacle		L20-30R	•
Connectors IP20 Suitability					
L1830C	30 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30R	•
L1930C	30 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-30R	•
L2030C	30 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-30R	•
Plugs IP20 Suitability					
L1830P	30 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30P	•
L1930P	30 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-30P	•
L2030P	30 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-30P	•
Flanged Inlets & Outlets					
L1830FI	30 3øY, 120/208	Gray Inlet		L18-30P	•
L1830FO	30 3øY, 120/208	Gray Outlet		L18-30R	•
L1930FI	30 3øY, 277/480	Gray Inlet		L19-30P	•
L1930FO	30 3øY, 277/480	Gray Outlet		L19-30R	•
L2030FI	30 3øY, 347/600	Gray Inlet		L20-30P	•
L2030FO	30 3øY, 347/600	Gray Outlet		L20-30R	•

Reference Pages H-35 and H-36 for Accessories.




30A Plug



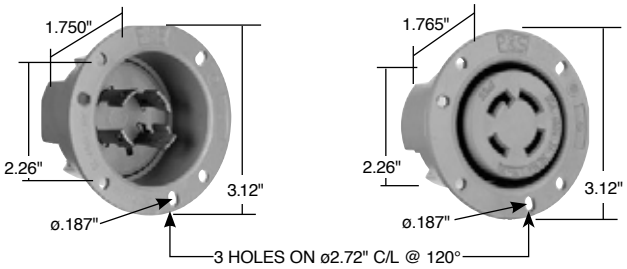

30A Flanged Inlet & Outlet



WPG2


Catalog Number	Description	Color
Weatherproof Cover		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
Stainless Steel Wall Plate		
SS720	Wall Plate for Locking Receptacles	302 S/S

All devices listed on this page conform to NEMA WD-1 and WD-6.

Industrial Spec Grade Turnlok® Locking Devices
20 Amp NEMA L2120, L2220 & L2320
4 Pole, 5 Wire 20A, 3øY, 120/208, 277/480 & 347/600V

legrand®
Pass & Seymour


Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
L2120R	20 3øY, 120/208	Single Receptacle		L21-20R	•	•	•
IGL2120R	20 3øY, 120/208	Single Receptacle, Orange, Isolated Ground		L21-20R	•		•
L2220R	20 3øY, 277/480	Single Receptacle		L22-20R	•	•	•
IGL2220R	20 3øY, 277/480	Single Receptacle, Orange, Isolated Ground		L22-20R	•		•
L2320R	20 3øY, 347/600	Single Receptacle		L23-20R	•	•	•
IGL2320R	20 3øY, 347/600	Single Receptacle, Orange, Isolated Ground		L23-20R	•		•
Connectors IP20 Suitability							
L2120C	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-20R	•	•	•
L2220C	20 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-20R	•	•	•
L2320C	20 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-20R	•	•	•
Plugs IP20 Suitability							
L2120P	20 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-20P	•	•	•
L2220P	20 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-20P	•	•	•
L2320P	20 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-20P	•	•	•
Flanged Inlets & Outlets							
L2120FI	20 3øY, 120/208	Gray Inlet		L21-20P	•		•
L2120FO	20 3øY, 120/208	Gray Outlet		L21-20R	•		•
L2220FI	20 3øY, 277/480	Gray Inlet		L22-20P	•		•
L2220FIBK	20 3øY, 277/480	Black Inlet		L22-20P	•		•
L2220FO	20 3øY, 277/480	Gray Outlet		L22-20R	•		•
L2220FOBK	20 3øY, 277/480	Black Outlet		L22-20R	•		•
L2320FI	20 3øY, 347/600	Gray Inlet		L23-20P	•		•
L2320FO	20 3øY, 347/600	Gray Outlet		L23-20R	•		•.



20A Receptacle





20A Connector



20A Plug

Reference Pages H-35 and H-36 for Accessories.



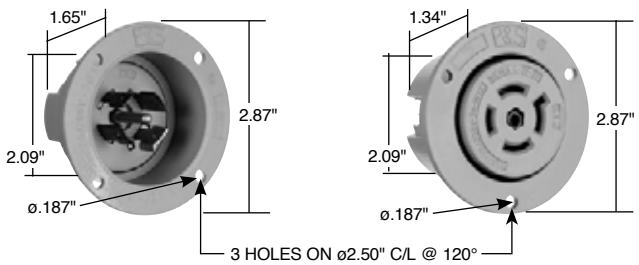


20A Flanged Inlet & Outlet

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
30 Amp L2130, L2230 & L2330
4 Pole, 5 Wire 30A, 3øY, 120/208, 277/480 & 347/600V



30A Receptacle




30A Connector




30A Plug

Catalog Number	Rating A. V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
L2130R	30 3øY, 120/208	Single Receptacle		L21-30R	•	•	•
IGL2130R	30 3øY, 120/208	Single Receptacle, Orange, Isolated Ground		L21-30R	•		•
L2230R	30 3øY, 277/480	Single Receptacle		L22-30R	•	•	•
IGL2230R	30 3øY, 277/480	Single Receptacle, Orange, Isolated Ground		L22-30R	•		•
L2330R	30 3øY, 347/600	Single Receptacle		L23-30R	•	•	•
IGL2330R	30 3øY, 347/600	Single Receptacle, Orange, Isolated Ground		L23-30R	•		•
Connectors IP20 Suitability							
L2130C	30 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-30R	•	•	•
L2230C	30 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-30R	•	•	•
L2330C	30 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-30R	•	•	•
Plugs IP20 Suitability							
L2130P	30 3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-30P	•	•	•
L2230P	30 3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-30P	•	•	•
L2230PBK	30 3øY, 277/480	Black Back, Black Front Body	.225"-1.150"	L22-30P	•	•	•
L2330P	30 3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-30P	•	•	•
Flanged Inlets & Outlets							
L2130FI	30 3øY, 120/208	Gray Inlet		L21-30P	•		•
L2130FO	30 3øY, 120/208	Gray Outlet		L21-30R	•		•
L2230FI	30 3øY, 277/480	Gray Inlet		L22-30P	•		•
L2230FIBK	30 3øY, 277/480	Black Inlet		L22-30P	•		•
L2230FO	30 3øY, 277/480	Gray Outlet		L22-30R	•		•
L2230FOBK	30 3øY, 277/480	Black Outlet		L22-30R	•		•
L2330FI	30 3øY, 347/600	Gray Inlet		L23-30P	•		•
L2330FO	30 3øY, 347/600	Gray Outlet		L23-30R	•		•

Reference Pages H-35 and H-36 for Accessories.



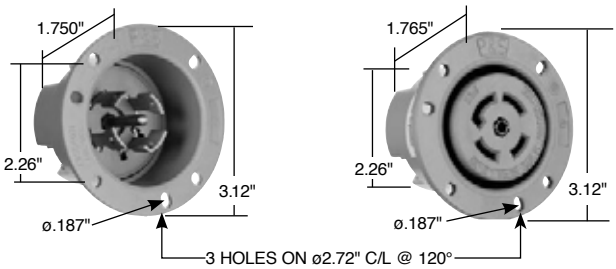

30A Flanged Inlet & Outlet

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
Angle Plugs & Adapters

2 Pole, 3 Wire 15A, 125, 250 & 277V
3, 4 & 5 Wire 15, 20 & 30A Adapters

legrand®
Pass & Seymour


Features

- Angle plugs and adapters both allow for 4-position face rotation. 20/30A 3 Wire Turnlok® Right Angle Adapters are adjustable up to 8 positions.
- Angle adapters (sold separately) will accommodate all P&S Turnlok style plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.
- Tri-drive assembly and cord-grip screws are standard on all angle plugs and adapters.
- Angle plugs and adapters have the same wide cord diameter range (.230"-1.150") that is present on all Turnlok plugs and connectors.




15 Amp Angle Plug

Catalog Number	Rating A.	Rating V.	Description/Color	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance FSUL WC596
Plugs							
PS4720SSAN	15	125	Black Back Body, White Front Body	.230"-.655"	L5-15P	•	•
PSL615PAN	15	250	Black Back Body, White Front Body	.230"-.690"	L6-15P	•	•
PSL715PAN	15	277	Black Back Body, White Front Body	.230"-.690"	L7-15P	•	•




NEMA L5-15P **NEMA L6-15P** **NEMA L7-15P**




L15AN

Catalog Number	Description
Accessories	
L15AN	15A Turnlok Right Angle Adapter
L20303AN	20/30A 3 Wire Turnlok Right Angle Adapter
L203045AN	20/30A 4 and 5 Wire Turnlok Right Angle Adapter



L20303AN



L203045AN


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Rubber & Watertight Plugs & Connectors

2 Pole, 3 Wire 15, 20 & 30A, 125V; 15A, 277V


IP20
Suitability




2447

Features


- Rubber body construction stands up to impacts, oil, chemicals, heat, and weather.
- Floating blades allow self-alignment with contacts and reduce stress on blades and contacts.
- Neoprene grommet keeps out contaminants at cord entrance.
- Terminal screws come backed-out – ready-to-wire.
- Nickel-plated blades and connectors provide an extra measure of corrosion resistance.
- Closure cap on watertight model forms a seal to keep out contaminants when connector is not in use.
- Multiple seals between plug and connector on watertight version protects electrical connection from contaminants.



2547




PS26W47




PS27W47

Catalog Number	Rating A.	Rating V.	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 42M
Rubber						
2447	15	125	Rubber Locking Plug	L5-15P	•	•
2547	15	125	Rubber Locking Connector	L5-15R	•	•
2434	15	277	Rubber Locking Plug	L7-15P	•	•
2534	15	277	Rubber Locking Connector	L7-15R	•	•
NEMA 4X – Watertight Devices						
24W47	15	125	NEMA 4X Locking Plug	L5-15P	•	•
25W47	15	125	NEMA 4X Locking Connector	L5-15R	•	•
PS26W47	20	125	NEMA 4X Locking Plug	L5-20P	•	•
PS27W47	20	125	NEMA 4X Locking Connector	L5-20R	•	•
PS28W47	30	125	NEMA 4X Locking Plug	L5-30P	•	•
PS29W47	30	125	NEMA 4X Locking Connector	L5-30R	•	•
24W34	15	277	NEMA 4X Locking Plug	L7-15P	•	•
25W34	15	277	NEMA 4X Locking Connector	L7-15R	•	•

Catalog Number	Description	NEMA Config. No.	3rd Party Compliance UL498	3rd Party Compliance C22.2 42M
Caps – Watertight Only				
14WPS	Male Cap	All	•	•
50W50PS	Female Replacement Cap	All	•	•



NEMA L5-15P **NEMA L5-15R** **NEMA L7-15P** **NEMA L7-15R**



NEMA L5-20P **NEMA L5-20R** **NEMA L5-30P** **NEMA L5-30R**



14WPS

50W50PS

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices

California Standard & Corrosion-Resistant

3 Wire Grounding 50A, 125, 250 & 480V; 250VDC, 600VAC

legrand®
Pass & Seymour


Catalog Number	Rating A.	V.	Description	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
CR6370	50	125	Corrosion-Resistant		•		•
CS6370	50	125	California Standard		•		•
CS8269	50	250	California Standard		•		•
CS8469	50	480	California Standard		•		•
3771	50	250VDC, 600VAC	Corrosion-Resistant		•		•
Connectors							
CR6360	50	125	Corrosion-Resistant	.680"-1.125"	•		•
CS6360	50	125	California Standard	.680"-1.125"	•		•
CS8264	50	250	California Standard	.680"-1.125"	•		•
CS8464	50	480	California Standard	.680"-1.125"	•		•
3762	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
Plugs							
CR6361	50	125	Corrosion-Resistant	.680"-1.125"	•		•
CS6361	50	125	California Standard	.680"-1.125"	•		•
CS8265	50	250	California Standard	.680"-1.125"	•		•
CS8465	50	480	California Standard	.680"-1.125"	•		•
3763M	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
Flanged Inlets							
CR6377	50	125	Corrosion-Resistant		•		•
CS6377	50	125	California Standard		•		•
CS8275	50	250	California Standard		•		•
CS8475	50	480	California Standard		•		•
3777	50	250VDC, 600VAC	Corrosion-Resistant		•		•



California Standard Receptacle




California Standard Connector




California Standard Plug

Reference Pages H-35 and H-36 for Accessories.

Catalog Number	Description
Accessories	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic Note: 7770 covers not to be used with flanged devices.
CR7716N	Weatherproof Boot, 50A Locking Connector
CR7717N	Weatherproof Boot, 50A Locking Plug



California Standard Flanged Inlet




Non-NEMA CR6370 CR6360 | **Non-NEMA CS6370 CS6360** | **Non-NEMA CS8269 CS8264** | **Non-NEMA CS8469 CS8464** | **Non-NEMA 3771 3762** | **Non-NEMA CR6361 CR6377** | **Non-NEMA CS6361 CS6377** | **Non-NEMA CS8265 CS8275** | **Non-NEMA CS8465 CS8475** | **Non-NEMA 3763 3777**


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Industrial Spec Grade Turnlok® Locking Devices
California Standard & Corrosion-Resistant
4 Wire Grounding 50A, 125/250V; 3ø, 250 & 480V; 250VDC, 600VAC




Corrosion-Resistant Receptacle



Corrosion-Resistant Connector



Corrosion-Resistant Plug




Corrosion-Resistant Flanged Inlet

All devices listed on this page conform to NEMA WD-1 and WD-6.

Catalog Number	Rating A.	V.	Description	Cord Diameter	3rd Party Compliance UL498	FSUL WC596	CSA
Receptacles							
CR6369	50	125/250	Corrosion-Resistant		•		•
CS6369	50	125/250	California Standard		•		•
CS8369	50	3ø, 250	California Standard		•		•
CS8169	50	3ø, 480	California Standard		•		•
3769	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7379*	50	250VDC, 600VAC	Corrosion-Resistant		•		•
Connectors							
CR6364	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6364	50	125/250	California Standard	.680"-1.125"	•		•
CS8364	50	3ø, 250	California Standard	.680"-1.125"	•		•
CS8164	50	3ø, 480	California Standard	.680"-1.125"	•		•
3764	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7764*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
Plugs							
CR6365	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6365	50	125/250	California Standard	.680"-1.125"	•		•
CS8365	50	3ø, 250	California Standard	.680"-1.125"	•		•
CS8165	50	3ø, 480	California Standard	.680"-1.125"	•		•
3765	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7765*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
Flanged Inlets							
CR6375	50	125/250	Corrosion-Resistant		•		•
CS6375	50	125/250	California Standard		•		•
CS8375	50	3ø, 250	California Standard		•		•
CS8175	50	3ø, 480	California Standard		•		•
CS8177	50	3ø, 480	California Standard with Flip Lid		•		•
3775	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7958P*	50	250VDC, 600VAC	Corrosion-Resistant		•		•

*Devices for replacement use only in existing installations. Reference Pages H-35 and H-36 for Accessories.

Catalog Number	Description
Accessories	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic Note: 7770 covers not to be used with flanged devices.
CR7716N	Weatherproof Boot, 50A Locking Connector
CR7717N	Weatherproof Boot, 50A Locking Plug


Non-NEMA CR6364 CR6369 | **Non-NEMA CS6364 CS6369** | **Non-NEMA CS8364 CS8369** | **Non-NEMA CS8164 CS8169** | **Non-NEMA 3764 3769** | **Non-NEMA 7379 7764** | **Non-NEMA CR6365 CR6375** | **Non-NEMA CS6365 CS6375** | **Non-NEMA CS8365 CS8375** | **Non-NEMA CS8165 CS8175** | **Non-NEMA 3765 3775** | **Non-NEMA 7765 7958**

Industrial Spec Grade Turnlok® Locking Devices

Midget Connectors, Plugs, Inlets, Outlets


2 Pole, 2 Wire Non-Grounding 15A, 125V
2 Pole, 3 Wire Grounding 15A, 125V
3 Pole, 3 Wire Non-Grounding 15A, 125/250V

legrand®
Pass & Seymour


Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance UL498
Connectors					
7427	15 125	Black	.312"-.50"	ML1-15R	•
ML1133	15 125	Black	.10"-.35"	ML1-15R	•
ML2133	15 125	Black	.18"-.52"	ML2-15R	•
ML3133	15 125/250	Black	.18"-.52"	ML3-15R	•
Plugs					
ML1113	15 125	Black	.10"-.35"	ML1-15P	•
ML2113	15 125	Black	.18"-.52"	ML2-15P	•
ML3113	15 125/250	Black	.18"-.52"	ML3-15P	•
Flanged Inlets & Outlets					
ML115	15 125	Inlet, Black Face, Gray Flange		ML1-15P	•
ML114	15 125	Outlet, Black Face, Gray Flange		ML1-15R	•
ML215	15 125	Inlet, Black Face, Gray Flange		ML2-15P	•
ML214	15 125	Outlet, Black Face, Gray Flange		ML2-15R	•
ML315	15 125/250	Inlet, Black Face, Gray Flange		ML3-15P	•
ML314	15 125/250	Outlet, Black Face, Gray Flange		ML3-15R	•




7427



ML1133




ML2133




ML3113

2 Pole, 2 Wire




NEMA ML-1P **NEMA ML-1R**

2 Pole, 3 Wire




NEMA ML-2P **NEMA ML-2R**


3 Pole, 3 Wire




NEMA ML-3P **NEMA ML-3R**




ML115




ML215




ML315



ML114



ML214




ML314


legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Power Interrupting Devices

2 Pole, 3 Wire 20A, 125V Hospital Use
2 Pole, 3 Wire 20A, 125V
2 Pole, 3 Wire 20A, 125V; 10A, 250VDC, 480VAC




23000HG




23000

Catalog Number	Rating A.	V.	Description	Cord Diameter	3rd Party Compliance UL498
Receptacles					
23000HG	20	125	Hospital Use, Non-Metallic		•
23050	20	125	Hospital Use, Black Bakelite		•
23000G	20	125;			
	10	250VDC, 480VAC	Grounding, Non-Metallic		•
23000	20	125;			
	10	250VDC, 480VAC	Non-Grounding, Non-Metallic		•
Connectors					
23054N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23002N	20	125;			
	10	250VDC, 480VAC	Non-Metallic	.250"-.656"	•
Plugs					
23056N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23035N	20	125	Non-Metallic	.250"-.656"	•
23005N	20	125;			
	10	250VDC, 480VAC	Non-Metallic	.250"-.656"	•




23005N



23056N
23035N



23002N



23054N

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
Power Interrupting Devices

3 Pole, 4 Wire 30A, 480V
3 Pole, 4 Wire 30A, 600VAC; 20A, 250VDC
3 Pole, 4 Wire 60A, 600V


legrand®
Pass & Seymour

Catalog Number	Rating A.	V.	Description	Cord Diameter	3rd Party Compliance UL498
Receptacles					
20443N	30	480	Non-Metallic		
20403N	30,	600VAC; 20, 250VDC	Non-Metallic		•
21420	30,	600VAC; 20, 250VDC	Angled, 3/4" Tap for Conduit, Die-Cast		•
26420	60	600	Die-Cast with Lift Lid Enclosure		•
Connectors					
20444N	30	480	Non-Metallic	.400"-1.062"	
20414	30,	600VAC; 20, 250VDC	Metallic	.562"-1.000"	
20414N	30,	600VAC; 20, 250VDC	Non-Metallic	.400"-1.062"	•
21414	30,	600VAC; 20, 250VDC	Metallic with Rubber Cord Grip	.360"-0.484"	
26414	60	600	Metallic	.750"-1.250"	
26427	60	600	Metallic	.750"-1.250"	•
Plugs					
20445N	30	480	Non-Metallic	.400"-1.062"	
20415	30,	600VAC; 20, 250VDC	Metallic	.562"-1.000"	
20415N	30,	600VAC; 20, 250VDC	Non-Metallic	.400"-1.062"	
21415	30,	600VAC; 20, 250VDC	Metallic with Rubber Cord Grip	.360"-0.484"	
21426	30,	600VAC; 20, 250VDC	Metallic with Rubber Cord Grip	.484"-0.750"	
21426S	30,	600VAC; 20, 250VDC	Metallic with Tab with Rubber Cord Grip	.484"-0.750"	
26415	60	600	Metallic	.750"-1.250"	
26426	60	600	Metallic	.750"-1.250"	•
Flanged Inlets & Outlets					
20418	30,	600VAC; 20, 250VDC	Inlet, Die-Cast for FS and FD Box		•
26415A	60	600	Inlet, Die-Cast		


Catalog Number	Description
Accessories	
WPG1	Weatherproof Cover for 20403N
26400	Box and Plate for 26420
26401	Box only for 26404 Angle Adapter
26402	Mounting Plate only for 26401 Box
26404	45° Angle Adapter
20446N	Red Nylon Cover and Gasket for 20443N
20416N	Nylon Cover and Gasket for 20403N
20417N	Aluminum Cover (No Gasket) for 20403N




20443N




26420




26415



26414




20418




26426




20445N, 20415N



26427



20444N, 20414N




26415A

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Power Interrupting Devices

4 Pole, 5 Wire 30A, 600VAC; 20A 250VDC
4 Pole, 5 Wire 60A, 600V




25250




26520



25414N




26527




26526

Catalog Number	Rating A.	V.	Description	Cord Diameter	3rd Party Compliance UL498
Receptacles					
25250	30 20	600VAC; 250VDC	Die-Cast with Lift Lid Enclosure		
26520	60	600	Die-Cast with Lift Lid Enclosure		•
Connectors					
25414N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25414	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26514	60	600	Metallic	.750"-1.250"	•
26527	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	•
Plugs					
25415N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25415	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26515	60	600	Metallic	.750"-1.250"	•
26526	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	•
Flanged Inlets & Outlets					
26515A	60	600	Inlet, Die-Cast		•
26514A	60	600	Outlet, Die-Cast		•


Catalog Number	Description	Catalog Number	Description
Accessories			
26400	Box and Plate for 26520	**26402**	Mounting Plate only for 26401 Box
26401	Box only for 26404 Angle Adapter	**26404**	45° Angle Adapter

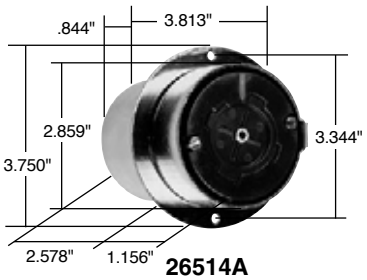


26514A

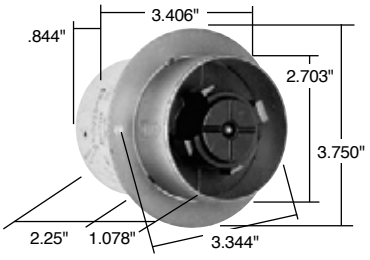


26515A



26401



26402



26404

All devices listed on this page conform to NEMA WD-1 and WD-6.


Industrial Spec Grade Turnlok® Locking Devices
Accessories

legrand®
Pass & Seymour

Catalog Number	Description	Color
Weatherproof Boots		
L15RBC	Boot for 15A Locking Connector	Black
L15RBP	Boot for 15A Locking Plug	Black
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
Corrosion-Resistant Boots		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow
CR7716N	Boot for 50A Locking Connector	Yellow
CR7717N	Boot for 50A Locking Plug	Yellow
Dust Covers		
DC1	Replacement Cover, to be used with “old-style” 20 and 30A Turnlok Plugs and Connectors only.	Black



L15RBC



L15RBP




L2030RBC
CRL2030RBC




DC1



L2030RBP
CRL2030RBP



CR7717N




CR7716N


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Accessories




WPG1




WPG2


Catalog Number	Description	Color
Weatherproof Covers		
WPG1	Cover for 15A Turnlok Flanged Inlets and Outlets	Gray
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
7770	Cover for 50A Locking Receptacle, Thermoplastic	Yellow
3720FS	Clear Cover for Single Receptacle, Thermoplastic	Gray
3710FS	Clear Cover for Duplex Receptacle, Thermoplastic	Gray
3722FS	Clear Cover for Power Outlet, Thermoplastic	Gray
3760	Cover for Single Receptacle	Gray
Stainless Steel Plates		
SS7	Plate for Single Receptacle	S/S
SS8	Plate for Duplex Receptacle	S/S
SS720	Plate for Locking Receptacle	S/S
WP7	Dustproof Cover for Single Receptacle	S/S
WP8	Dustproof Cover for Duplex Receptacle	S/S
Strain Relief Grips		
FC22GL	Strain Relief Grip – .220"-.320"	
FC30GL	Strain Relief Grip – .300"-.430"	
FC40GL	Strain Relief Grip – .400"-.560"	
FC52GL	Strain Relief Grip – .520"-.730"	
FC70GL	Strain Relief Grip – .700"-.940"	
FC94GL	Strain Relief Grip – .940"-1.250"	
Turnlok Right Angle Adapter		
L15AN	15A Turnlok Right Angle Adapter	Black
L20303AN	20 and 30A 3 Wire Turnlok Right Angle Adapter	Black
L203045AN	20 and 30A 4 and 5 Wire Turnlok Right Angle Adapter	Black




7770



L15AN



L20303AN



L203045AN

legrand®
Pass & Seymour

15, 20 & 30 Amp Turnlok GCM Plugs & Connectors

Plugs	
Back Body	Super Tough Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Dust Shield*	Neoprene
Blades	Brass
Terminal Clamp	15A = Zinc-Plated Steel, 20A = Nickel-Plated Steel, 30A = Brass
Terminal Screws	15A = Nickel- or Brass-Plated Steel, 20 & 30A = Brass
Ground Screws	15A = Nickel-Plated Steel, 20 & 30A = Brass
Cord Clamp Screws	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel
Connectors	
Back Body	Super Tough Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Dust Shield*	Neoprene
Contacts	Brass
Terminal Clamp	15A = Zinc-Plated Steel, 20A = Nickel-Plated Steel, 30A = Brass
Terminal Screws	15A = Nickel- or Brass-Plated Steel, 20 & 30A = Brass
Ground Screws	15A = Nickel-Plated Steel, 20 & 30A = Brass
Cord Clamp Screws	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	15A = 1600V minimum, 20 & 30A = 2200V minimum
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	15A = .230"–.720" diameter, 20 & 30A 3 Wire = .225"–.750" diameter 20 & 30A 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	15A = Green = Ground, White = Neutral, Brass = Hot 20 & 30A = "GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	15A = #18 AWG min. – #10 AWG max. 20A = #18 AWG min. – #8 AWG max. 30A = #18 AWG min. – #6 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

*Dust Shield for 20 & 30 Amp Plugs & Connectors.

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Plugs & Connectors
Product Specifications & Performance

15 Amp Turnlok Plugs & Connectors

	Standard Product	Corrosion-Resistant
Plugs		
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Blades	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
Connectors		
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Contacts	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
Performance		
Electrical		
Dielectric Withstand Voltage	1600V minimum	
Maximum Working Voltage	277VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62	
Cord Grip Accommodations	.230"–.720" diameter	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot	
Terminal Accommodation	#18 AWG min. – #10 AWG max.	
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact	

legrand®
Pass & Seymour

15, 20 & 30 Amp Turnlok Receptacles

	Standard	Corrosion-Resistant
Receptacles		
Front Body	Nylon	Nylon
Back Body	Nylon	Nylon
Mounting Strap	15A = Steel; 20 & 30A = Brass	Nickel-Plated Brass
Pressure Plate	Brass	Nickel-Plated Brass
Contacts	Brass	Nickel-Plated Brass
Terminal Clamps	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Brass
Mounting Screws	Zinc-Plated Steel	Stainless Steel
Performance		
Electrical		
Dielectric Withstand Voltage	2000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Terminal Accommodation	15A = #18 AWG min. – #10 AWG max. 20 & 30A = #14 AWG min. – #10 AWG max.	
Product Identification	Amperage, Voltage, NEMA Configuration molded into face	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact	

50 Amp Turnlok Receptacles

	Corrosion-Resistant	California Standard
Receptacles		
Front Body	Glass-Filled Nylon	Glass-Filled Nylon
Back Body	Glass-Filled Nylon	Glass-Filled Nylon
Mounting Strap	Nickel-Plated Brass	Nickel-Plated Brass
Contacts	Nickel-Plated Brass	Brass
Terminal Clamps	Brass	Brass
Ground Shunt	Brass	Brass
Mounting Screws	Stainless Steel	Zinc-Plated Steel
Performance		
Electrical		
Dielectric Withstand Voltage	3000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Terminal Accommodation	#10 AWG min. – #6 AWG max.	
Product Identification	Amperage, Voltage molded into face	
Environmental		
Flammability	UL94 V0	
Operating Temperature	Maximum continuous: +115°C Minimum: -40°C without impact	

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Plugs & Connectors
Product Specifications & Performance

20 & 30 Amp Turnlok Plugs & Connectors

	Standard	Corrosion-Resistant
Plugs		
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Shield	Neoprene	Neoprene
Blades	Brass	20A = Nickel-Plated Brass 30A = Tin-Plated Brass
Terminal Clamp	20A = Nickel-Plated Steel 30A = Brass	20A = Nickel-Plated Steel 30A = Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
Connectors		
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Shield	Neoprene	Neoprene
Contacts	Brass	20A = Nickel-Plated Brass 30A = Tin-Plated Brass
Terminal Clamp	20A = Nickel-Plated Steel 30A = Brass	20A = Nickel-Plated Steel 30A = Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
Performance		
Electrical		
Dielectric Withstand Voltage	2200V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62	
Cord Grip Accommodations	20 & 30A 3 Wire = .225"–.750" diameter 20 & 30A 4 & 5 Wire = .225"–1.150" diameter	
Terminal Identification	“GR” and Green Color = Ground, “WH” and White Color = Neutral, “X”, “Y”, “Z” = Hot	
Terminal Accommodation	#18 AWG min. – #8 AWG max.	
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact	

legrand®
Pass & Seymour

50 Amp Turnlok Plugs & Connectors

	Corrosion-Resistant	California Standard
Plugs		
Plug Shroud	Zytel Super Tough Nylon	Zytel Super Tough Nylon
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Nylon	Nylon
Cord Clamp	Nylon	Nylon
Blades	Nickel-Plated Brass	Brass
Terminal Clamp	Nickel-Plated Brass	Brass
Terminal Screws	Nickel-Plated Brass	Brass
Ground Screw	Nickel-Plated Brass	Brass
Assembly Screws	Stainless Steel	Stainless Steel
Connectors		
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Nylon	Nylon
Cord Clamp	Nylon	Nylon
Contacts	Nickel-Plated Brass	Brass
Terminal Clamp	Nickel-Plated Brass	Brass
Terminal Screws	Nickel-Plated Brass	Brass
Ground Screw	Nickel-Plated Brass	Brass
Assembly Screws	Stainless Steel	Stainless Steel
Performance		
Electrical		
Dielectric Withstand Voltage	3000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62	
Cord Grip Accommodations	.680"–1.125" diameter	
Terminal Identification	Color Coded Terminal Screws	
Terminal Accommodation	#10 AWG min. – #4 AWG max.	
Product Identification	Amperage, Voltage hot stamped on device	
Environmental		
Flammability	UL94 HB or better	
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact	

legrand®
Pass & Seymour

Industrial Spec Grade Turnlok® Locking Devices
Inlets & Outlets
Product Specifications & Performance

15, 20 & 30 Amp Turnlok Inlets & Outlets

	15 Amp	20 Amp	30 Amp
Flanged Inlets			
Flanged Casing	Polycarbonate	Polycarbonate	Polycarbonate
Blade Holder	Polycarbonate	Polycarbonate	Nylon
Blades	Nickel-Plated Brass	Brass	Tin-Plated Stresscon
Terminal Clamp	Zinc-Plated Steel	Zinc-Plated Steel	Brass
Terminal Screws	Zinc- or Brass-Plated Steel	Zinc- or Brass-Plated Steel	Brass
Ground Screws	Zinc-Plated Steel	Zinc-Plated Steel	Brass
Assembly Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Flanged Outlets			
Flanged Casing	Polycarbonate	Polycarbonate	Polycarbonate
Contact Carrier	Polycarbonate	Polycarbonate	Nylon
Contacts	Brass	Brass	Tin-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Zinc-Plated Steel	Brass- or Nickel-Plated Steel
Terminal Screws	Zinc- or Brass-Plated Steel	Zinc- or Brass-Plated Steel	Brass- or Nickel-Plated Steel
Ground Screws	Zinc-Plated Steel	Zinc-Plated Steel	Nickel-Plated Brass
Assembly Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Performance			
Electrical			
Dielectric Withstand Voltage	15A = 2000V minimum, 20 & 30A = 3000V minimum		
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC		
Current Interrupting	Certified for current interrupting at full-rated current		
Temperature Rise	30°C maximum after 50 cycles at 150% rated current		
Mechanical			
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot		
Terminal Accommodation	15A = #18 AWG min.– #10 AWG max., 20 & 30A = #12 AWG min.– #8 AWG max.		
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration		
Environmental			
Flammability	UL94 V2		
Operating Temperature	Maximum continuous: 15 & 20A = +115°C, 30A = +75°C Minimum: -40°C without impact		

Inlets Product Specifications & Performance & Horsepower Rating Chart

50 Amp Inlet

Inlets	
Flanged Casing	Nylon
Contact Carrier	Nylon
Blades	Brass
Terminal Clamps	Brass
Terminal Screws	Brass
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Terminal Accommodation	#10 AWG min. – #4 AWG max.
Product Identification	Amperage, Voltage hot stamped onto face
Environmental	
Flammability	UL94 V0
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

Turnlok Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles

NEMA Configuration	AC HP Rating	NEMA Configuration	AC HP Rating
L1-15	1/2	L21-20	2
L5-15	1/2	L22-20	5
L6-15	1 1/2*	L5-30	2
L7-15	2	L6-30	2*
L2-20	2*	L7-30	3
L5-20	1	L8-30	5
L6-20	2*	L10-30	2 Line to Line*
L7-20	2		2 Line to Neutral
L8-20	3	L11-30	3
L10-20	2 Line to Line*	L12-30	10
	1 Line to Neutral	L14-30	2 Line to Line*
L11-20	3	L15-30	3
L12-20	5	L16-30	10
L14-20	2 Line to Line*	L18-30	3
L15-20	3	L19-30	10
L16-20	5	L21-30	3
L18-20	2	L22-30	10
L19-20	5		

*Suitable for 208V motor applications at the HP rating specified.



CAM-TYPE DEVICES

legrand®

Pass & Seymour

Cam-Type Devices

legrand®
Pass & Seymour

Thermoplastic elastomer housing is chemical- and impact-resistant.

Non-conductive retaining screw insures stability of the fully assembled product.



Heavy-duty brass contacts provide superior and consistent conductivity.



Heavy-duty hex set screws allow greater termination torque.

Copper shim bundles wire strands to reduce "splaying."

Copper wire provides superior strain relief.



P&S Cam-Type Devices are built with top-quality materials for enhanced durability and service life, with increased insulation protection for safety.

Index

Devices	Page Number
Series 16 In-Line Connectors	I-2
Series 16 Panel Mounts	I-3
Series 16 Protective Caps & Adapters	I-4
Series 16 Flip Lid Covers	I-5
Series 16 Accessories	I-6
Series 15 In-Line Connectors, Protective Caps & Adapters	I-7
Series 15 Panel Mounts & Accessories	I-8
Series 18 In-Line Connectors	I-9

legrand®
Pass & Seymour

Cam-Type Devices
Series 16 In-Line Connectors

Features

- Thermoplastic elastomer housing for outstanding impact and chemical resistance, as well as an exceptional seal for maintaining NEMA Type 3R and 4 integrity.
- Non-conductive retaining screw helps to insure no contact with live parts, along with providing stability to the fully assembled product.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws allow greater termination torque.
- Copper wire provides quality strain relief.
- Copper shim bundles wire strands to reduce "splaying."



PS40MBBK

PS40FBBK



PS40MBR
(unassembled)

Catalog Number	Rating* A.	V.	Cable Size	Color	3rd Party Compliance UL	cCSAus
Series 16 In-Line Connectors – Male						
PS20MBBK	400	600	#2 - 2/0	Black	•	•
PS20MBW	400	600	#2 - 2/0	White	•	•
PS20MBR	400	600	#2 - 2/0	Red	•	•
PS20MBBL	400	600	#2 - 2/0	Blue	•	•
PS20MBG	400	600	#2 - 2/0	Green	•	•
PS20MBBR	400	600	#2 - 2/0	Brown	•	•
PS20MBO	400	600	#2 - 2/0	Orange	•	•
PS20MBY	400	600	#2 - 2/0	Yellow	•	•
PS40MBBK	400	600	2/0 - 4/0	Black	•	•
PS40MBW	400	600	2/0 - 4/0	White	•	•
PS40MBR	400	600	2/0 - 4/0	Red	•	•
PS40MBBL	400	600	2/0 - 4/0	Blue	•	•
PS40MBG	400	600	2/0 - 4/0	Green	•	•
PS40MBBR	400	600	2/0 - 4/0	Brown	•	•
PS40MBO	400	600	2/0 - 4/0	Orange	•	•
PS40MBY	400	600	2/0 - 4/0	Yellow	•	•
Series 16 In-Line Connectors – Female						
PS20FBBK	400	600	#2 - 2/0	Black	•	•
PS20FBW	400	600	#2 - 2/0	White	•	•
PS20FBR	400	600	#2 - 2/0	Red	•	•
PS20FBBL	400	600	#2 - 2/0	Blue	•	•
PS20FBG	400	600	#2 - 2/0	Green	•	•
PS20FBBR	400	600	#2 - 2/0	Brown	•	•
PS20FBO	400	600	#2 - 2/0	Orange	•	•
PS20FBY	400	600	#2 - 2/0	Yellow	•	•
PS40FBBK	400	600	2/0 - 4/0	Black	•	•
PS40FBW	400	600	2/0 - 4/0	White	•	•
PS40FBR	400	600	2/0 - 4/0	Red	•	•
PS40FBBL	400	600	2/0 - 4/0	Blue	•	•
PS40FBG	400	600	2/0 - 4/0	Green	•	•
PS40FBBR	400	600	2/0 - 4/0	Brown	•	•
PS40FBO	400	600	2/0 - 4/0	Orange	•	•
PS40FBY	400	600	2/0 - 4/0	Yellow	•	•

*All ratings both AC/DC.

legrand®
Pass & Seymour

Features

- Nylon housing provides outstanding impact and chemical resistance.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws (available on double set screw version only) allow greater termination torque.

Catalog Number	Rating* A.	Rating* V.	Cable Size	Color	3rd Party Compliance UL	3rd Party Compliance cUL
Series 16 Threaded Stud Panel Mounts – Male						
PS40MRSBBK	400	600	#2 - 4/0	Black	•	•
PS40MRSBW	400	600	#2 - 4/0	White	•	•
PS40MRSBR	400	600	#2 - 4/0	Red	•	•
PS40MRSBBL	400	600	#2 - 4/0	Blue	•	•
PS40MRSBG	400	600	#2 - 4/0	Green	•	•
PS40MRSBBR	400	600	#2 - 4/0	Brown	•	•
PS40MRSBO	400	600	#2 - 4/0	Orange	•	•
PS40MRSBY	400	600	#2 - 4/0	Yellow	•	•
Series 16 Threaded Stud Panel Mounts – Female						
PS40FRSBBK	400	600	#2 - 4/0	Black	•	•
PS40FRSBW	400	600	#2 - 4/0	White	•	•
PS40FRSBR	400	600	#2 - 4/0	Red	•	•
PS40FRSBBL	400	600	#2 - 4/0	Blue	•	•
PS40FRSBG	400	600	#2 - 4/0	Green	•	•
PS40FRSBBR	400	600	#2 - 4/0	Brown	•	•
PS40FRSBO	400	600	#2 - 4/0	Orange	•	•
PS40FRSBY	400	600	#2 - 4/0	Yellow	•	•
Series 16 Double Set Screw Panel Mounts – Male						
PS40MRBBK	400	600	2/0 - 4/0	Black	•	•
PS40MRBW	400	600	2/0 - 4/0	White	•	•
PS40MRBR	400	600	2/0 - 4/0	Red	•	•
PS40MRBBL	400	600	2/0 - 4/0	Blue	•	•
PS40MRBG	400	600	2/0 - 4/0	Green	•	•
PS40MRBBR	400	600	2/0 - 4/0	Brown	•	•
PS40MRBO	400	600	2/0 - 4/0	Orange	•	•
PS40MRBY	400	600	2/0 - 4/0	Yellow	•	•
Series 16 Double Set Screw Panel Mounts – Female						
PS40FRBBK	400	600	2/0 - 4/0	Black	•	•
PS40FRBW	400	600	2/0 - 4/0	White	•	•
PS40FRBR	400	600	2/0 - 4/0	Red	•	•
PS40FRBBL	400	600	2/0 - 4/0	Blue	•	•
PS40FRBG	400	600	2/0 - 4/0	Green	•	•
PS40FRBBR	400	600	2/0 - 4/0	Brown	•	•
PS40FRBO	400	600	2/0 - 4/0	Orange	•	•
PS40FRBY	400	600	2/0 - 4/0	Yellow	•	•

*All ratings both AC/DC.



PS40MRSBBK



PS40FRSBBK



PS40MRBBK

PS40FRBBK

legrand®
Pass & Seymour

Cam-Type Devices
Series 16 Protective Caps & Adapters

PS40FCBK



PS40MCBK



Catalog Number	Color
Series 16 Protective Caps – Male	
PS40MCBK	Black
PS40MCW	White
PS40MCR	Red
PS40MCBL	Blue
PS40MCG	Green
PS40MCBR	Brown
PS40MCO	Orange
PS40MCY	Yellow

Catalog Number	Color
Series 16 Protective Caps – Female	
PS40FCBK	Black
PS40FCW	White
PS40FCR	Red
PS40FCBL	Blue
PS40FCG	Green
PS40FCBR	Brown
PS40FCO	Orange
PS40FCY	Yellow

PSPTBK



PSTTBK

Catalog Number	Color	3rd Party Compliance cCSAus
Series 16 Tapping "T" Adapters		
PSTTBK	Black	•
PSTTW	White	•
PSTTR	Red	•
PSTTBL	Blue	•
PSTTG	Green	•
PSTTBR	Brown	•
PSTTO	Orange	•
PSTTY	Yellow	•
Series 16 Paralleling "T" Adapters		
PSPTBK	Black	•
PSPTW	White	•
PSPTR	Red	•
PSPTBL	Blue	•
PSPTG	Green	•
PSPTBR	Brown	•
PSPTO	Orange	•
PSPTY	Yellow	•
Series 16 F-M-M-M 3fer Adapters		
PS3MW	White	
PS3MG	Green	
Series 16 M-F-F-F 3fer Adapters		
PS3FBK	Black	•
PS3FW	White	•
PS3FR	Red	•
PS3FBL	Blue	•
PS3FG	Green	•
PS3FBR	Brown	•
PS3FO	Orange	•
PS3FY	Yellow	•
Series 16 Male-to-Male Coupler		
PSMMBK	Black	•
PSMMW	White	•
PSMMR	Red	•
PSMMBL	Blue	•
PSMMG	Green	•
Series 16 Female-to-Female Coupler		
PSFFCBK	Black	•
PSFFCW	White	•
PSFFCR	Red	•
PSFFCBL	Blue	•
PSFFCG	Green	•

PS3MG



PS3FBK

PSMMBK



PSFFCBK

legrand®
Pass & Seymour

Description

Manufactured in UV-resistant polycarbonate, all snap back plastic covers are made with stainless steel offset, spring and pin. Designed for surface mount or internal mount, the new snap back plastic covers are fully gasketed and NEMA 3R rated for weathertight protection.

Catalog Number	Color
Plastic Flip Lid, Through-Mount for .070–.090 Wall Thickness	
PS40WTCLBK	Black cover
PS40WTCLW	White
PS40WTCLR	Red
PS40WTCLBL	Blue
PS40WTCLG	Green
PS40WTCLBR	Brown
PS40WTCLO	Orange
PS40WTCLY	Yellow
Plastic Flip Lid, Through-Mount for .370–.400 Wall Thickness	
PS40WTCSBK	Black cover
PS40WTCSW	White
PS40WTCSR	Red
PS40WTCSBL	Blue
PS40WTCSG	Green
PS40WTCSBR	Brown
PS40WTCSO	Orange
PS40WTCSY	Yellow
Metal Flip Lid	
PS40WTCMBK	Black cover
PS40WTCMW	White
PS40WTCMBL	Blue
PS40WTCMG	Green




PS40WTCL

legrand®
Pass & Seymour

Cam-Type Devices
Series 16 Accessories



PS430245




PS430244



PS500017PLT



PS520710



PS16CLM PS16CLF



PSCLSPRESS



PS500072



Restores damaged female cam-type contacts.

Catalog Number	Description
Series 16 Accessories	
PS430245	Series 16 Strain Relief Wire
PS430244	Copper Shim
PS520710	Series 16 Retaining Screw
PS500017PLT	Series 16 Set Screw
PS16CLM	Male Connector Extractor
PS16CLF	Female Connector Extractor
PSCLSPRESS	Come-Along Tool
PS500072	Female Reforming Tool

Cam-Type Devices
Series 15 In-Line Connectors, Protective Caps & Adapters

legrand®
Pass & Seymour

Features

- Thermoplastic elastomer housing for outstanding impact and chemical resistance, as well as an exceptional seal for maintaining NEMA Type 3R and 4 integrity.
- Non-conductive retaining screw helps to insure no contact with live parts, along with providing stability to the fully assembled product.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws allow greater termination torque.
- Copper wire provides quality strain relief.
- Copper shim bundles wire strands to reduce "splaying."

Catalog Number	Rating A.	Rating V.	Cable Size	Color	3rd Party Compliance UL	3rd Party Compliance cCSAus
Series 15 In-Line Connectors – Male						
PSM2MBK	150	600	#8 – #2	Black	•	•
PSM2MW	150	600	#8 – #2	White	•	•
PSM2MR	150	600	#8 – #2	Red	•	•
PSM2MBL	150	600	#8 – #2	Blue	•	•
PSM2MG	150	600	#8 – #2	Green	•	•
Series 15 In-Line Connectors – Female						
PSM2FBK	150	600	#8 – #2	Black	•	•
PSM2FW	150	600	#8 – #2	White	•	•
PSM2FR	150	600	#8 – #2	Red	•	•
PSM2FBL	150	600	#8 – #2	Blue	•	•
PSM2FG	150	600	#8 – #2	Green	•	•

PSM2MBK



PSM2FBK

Catalog Number	Color
Series 15 Protective Caps – Male	
PSMMCBK	Black
Series 15 Protective Caps – Female	
PSMFCBK	Black

PSMFCBK



PSMMCBK

Catalog Number	Rating	Color
Series 15 Adapters – Cam Reducers		
PSMADMFBK	400A M – 150A F	Black
PSMADMFW	400A M – 150A F	White
PSMADMFR	400A M – 150A F	Red
PSMADMFBL	400A M – 150A F	Blue
PSMADMFG	400A M – 150A F	Green
PSMADFMBK	400A F – 150A M	Black
PSMADFMW	400A F – 150A M	White
PSMADFMR	400A F – 150A M	Red
PSMADFMBL	400A F – 150A M	Blue
PSMADFMG	400A F – 150A M	Green

PSMADMF



PSMADFM

legrand®
Pass & Seymour

Cam-Type Devices
Series 15 Panel Mounts & Accessories

Features

- Nylon housing provides outstanding impact and chemical resistance.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws (available on double set screw version only) allow greater termination torque.




PSMMRSBK

PSMFRSBK

*For double set screw, dimension is 1.000".

Catalog Number	Rating A.	Rating V.	Cable Size	Color	3rd Party Compliance UL	3rd Party Compliance cCSAus
Series 15 Threaded Stud Panel Mounts – Male						
PSMMRSBK	150	600	#8 – #2	Black	•	•
PSMMRSW	150	600	#8 – #2	White	•	•
PSMMRSR	150	600	#8 – #2	Red	•	•
PSMMRSBL	150	600	#8 – #2	Blue	•	•
PSMMRSG	150	600	#8 – #2	Green	•	•
Series 15 Threaded Stud Panel Mounts – Female						
PSMFRSBK	150	600	#8 – #2	Black	•	•
PSMFRSW	150	600	#8 – #2	White	•	•
PSMFRSR	150	600	#8 – #2	Red	•	•
PSMFRSBL	150	600	#8 – #2	Blue	•	•
PSMFRSG	150	600	#8 – #2	Green	•	•
Series 15 Double Set Screw Panel Mounts – Male						
PSMMRBK	150	600	#8 – #2	Black	•	•
PSMMRW	150	600	#8 – #2	White	•	•
PSMMRR	150	600	#8 – #2	Red	•	•
PSMMRBL	150	600	#8 – #2	Blue	•	•
PSMMRG	150	600	#8 – #2	Green	•	•
Series 15 Double Set Screw Panel Mounts – Female						
PSMFRBK	150	600	#8 – #2	Black	•	•
PSMFRW	150	600	#8 – #2	White	•	•
PSMFRR	150	600	#8 – #2	Red	•	•
PSMFRBL	150	600	#8 – #2	Blue	•	•
PSMFRG	150	600	#8 – #2	Green	•	•



PS430244

Catalog Number	Description
Series 15 Accessories	
PS430246	Series 15 Strain Relief Wire
PS430244	Copper Shim
PS430171	Series 15 Set Screw



PS430171



PS430246

legrand®
Pass & Seymour

Features

- Interchangeable with Canadian CAM devices from other manufacturers.
- Ball nose design achieves NEMA 3R, 4 rating.
- Designed specifically for Sea Way cable.
- Accepts #6 through 4/0 size wire.
- Double set screws for premium wire retention.
- Locking screw prevents contact from rotating inside housing.

Catalog Number	Rating* A.	Rating* V.	Cable Size	Color	3rd Party Compliance UL	cUL	cCSAus
Series 18 In-Line Connectors – Male							
PLS182MBK	400	600	#6 – #2	Black	•	•	•
PLS182MW	400	600	#6 – #2	White	•	•	•
PLS182MR	400	600	#6 – #2	Red	•	•	•
PLS182MBL	400	600	#6 – #2	Blue	•	•	•
PLS182MG	400	600	#6 – #2	Green	•	•	•
PLS1820MBK	400	600	#2 – 2/0	Black	•	•	•
PLS1820MW	400	600	#2 – 2/0	White	•	•	•
PLS1820MR	400	600	#2 – 2/0	Red	•	•	•
PLS1820MBL	400	600	#2 – 2/0	Blue	•	•	•
PLS1820MG	400	600	#2 – 2/0	Green	•	•	•
PLS1840MBK	400	600	4/0	Black	•	•	•
PLS1840MBL	400	600	4/0	Blue	•	•	•
Series 18 In-Line Connectors – Female							
PLS182FBK	400	600	#6 – #2	Black	•	•	•
PLS182FW	400	600	#6 – #2	White	•	•	•
PLS182FR	400	600	#6 – #2	Red	•	•	•
PLS182FBL	400	600	#6 – #2	Blue	•	•	•
PLS182FG	400	600	#6 – #2	Green	•	•	•
PLS1820FBK	400	600	#2 – 2/0	Black	•	•	•
PLS1820FW	400	600	#2 – 2/0	White	•	•	•
PLS1820FR	400	600	#2 – 2/0	Red	•	•	•
PLS1820FBL	400	600	#2 – 2/0	Blue	•	•	•
PLS1820FG	400	600	#2 – 2/0	Green	•	•	•
PLS1840FBK	400	600	4/0	Black	•	•	•
PLS1840FBL	400	600	4/0	Blue	•	•	•

*All ratings both AC/DC.

PLS182MBK



PLS182FBK



IEC 309 INDUSTRIAL PRODUCTS

legrand®

Pass & Seymour

IEC 309 Industrial Products

legrand®
Pass & Seymour



We took a close look at your IEC industrial product needs — and responded with unique solutions.

Installers asked for quick, no-guesswork wiring… Plant and MRO staff asked for maximum durability and minimum downtime… And everyone wanted better selection to meet today's demanding requirements without compromise. Now take a close look at our answers: Fusible Mechanical Interlocks that cut downtime, thanks to the first-ever visible blown-fuse indication. Fusible Safety Switches with the same innovative blown-fuse-indicating LEDs. And capacities in P&S Non-Fusible Interlocks and Safety Switches.

Add proven feature-rich P&S Pin & Sleeve devices, and the result is a problem-solving IEC 309-1 and -2 product family. It's ready to work for you anywhere — because P&S IEC 309 products are guaranteed to be interchangeable with all IEC 309-1 and -2 devices, and because more than 50 countries are IEC participants, including all the world's major trading nations. As a result, manufacturers can easily standardize their electrical component specifications worldwide, simplifying purchasing, training and application to reduce costs.

P&S IEC products work for you, helping you multiply those savings — thanks to uncompromising materials and construction that deliver long-term dependability.

Take a closer look at the complete P&S IEC 309 industrial family. Compare construction, features, and specifications. Add the support of a global company, ready to help you succeed no matter where you do business. And see why this is the selection that works for you.

Our durable, high-performance IEC 309 Industrial Products solutions have a unifying principle: Just because a device has to endure difficult conditions doesn't mean it has to be difficult to wire and use.

Contents

Device	Page Number
Configuration & Clocking System	J-2
Fusible Mechanical Interlock	J-3 – J-7
Non-Fusible Mechanical Interlock	J-8 – J-13
Fusible Safety Switches	J-14 – J-19
Non-Fusible Safety Switches	J-20 – J-24
Pin & Sleeve Devices	J-25 – J-31
Pin & Sleeve Devices Dimensional Information & Technical Specifications	J-32 – J-38
Product Selection Guide	J-39 – J-41

legrand®
Pass & Seymour

IEC 309 Industrial Products
Configuration & Clocking System

Adapting To Worldwide Configuration Standards

Application

Legrand/Pass & Seymour's Pin & Sleeve products are designed to meet IEC 309-1, 309-2 specifications. These specifications are recognized around the world and are intended to prevent the mating of plugs and receptacles of different voltage and current ratings (see Section 406.3(F) of the National Electrical Code® relating to this noninterchangeability feature).

Global Product Offering

Legrand/Pass & Seymour provides IEC 309-1, 309-2 Pin & Sleeve products in both Series I (International) and Series II (North American) current ratings:

Series I (International) 16, 32, 63, 125 Amps
Series II (North American) 20, 30, 60, 100 Amps

North American Catalog Numbering System

Catalog numbers within the North American product offering are structured to communicate the following: manufacturer, number of conductors, amperage rating, device type, clocking position of the ground sleeve, and environmental rating. This applies to all receptacles, inlets, plugs, and connectors in the Legrand/Pass & Seymour North American Pin & Sleeve product line (see sample below).

Here's How It Works


The amperage rating is determined by the size of the device. Voltage rating is determined by the location of the ground sleeve on the receptacle and/or connector along with the number of conductors.

Ground sleeve position for all connectors and receptacles is based on a clock face with the keyway always being at 6 o'clock. The ground sleeve is positioned at a specific hour point, depending on the device's voltage rating.


The clocking position for plugs and inlets is a mirror image of the mating device, allowing for interconnection.

In addition, voltage ratings for all Pin & Sleeve products are color coded for visual identification.

IEC 309 Clocking System

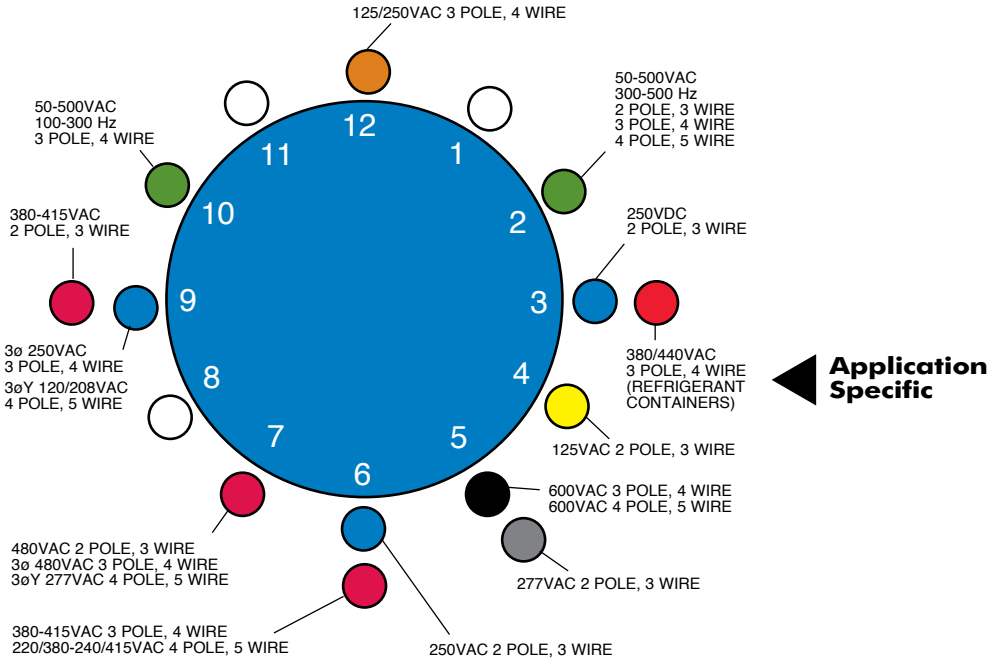

North American Catalog Numbering System

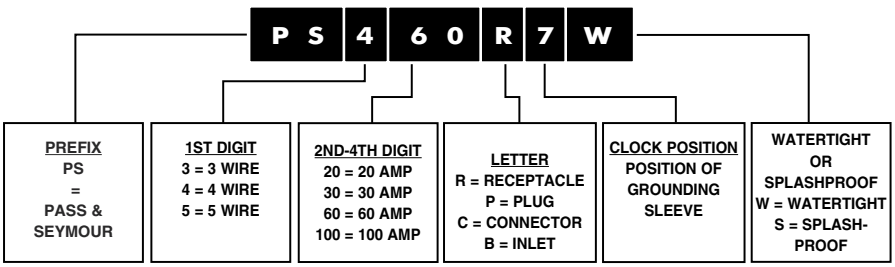

legrand®
Pass & Seymour



See everything you're looking for in a Fusible Mechanical Interlock. Even if it's a blown fuse.

Introducing the first interlocks to include visible blown-fuse indication, a hinged, easy-access fuse door, and integral fuse pullers. At last, you can easily locate and replace a blown fuse in less than a minute.

Of course, saving time isn't your only challenge. You face dirt and dust. Corrosive liquids or vapors. Water or high humidity. Heat. Vibration. And impacts. No wonder ensuring safe, dependable, locally fused power to portable industrial equipment can be tough! But now, these unique P&S Fusible Mechanical Interlocks bring you a better solution.


Here's the extra-rugged construction to stand up to the toughest plant environments. Complete IEC 309 interchangeability. And an easy-installing design that fits into most I-beams. Choose these 20 to 100 amp NEMA 4X and 12 watertight-rated Fusible Mechanical Interlocks for your most demanding applications — and see how Legrand/Pass & Seymour is "The one that works for you."

legrand®
Pass & Seymour

Fusible Mechanical Interlock

Hinged access door with windows allows clear viewing of blown-fuse LED indicators and provides fast, easy access to fuse pullers.

Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

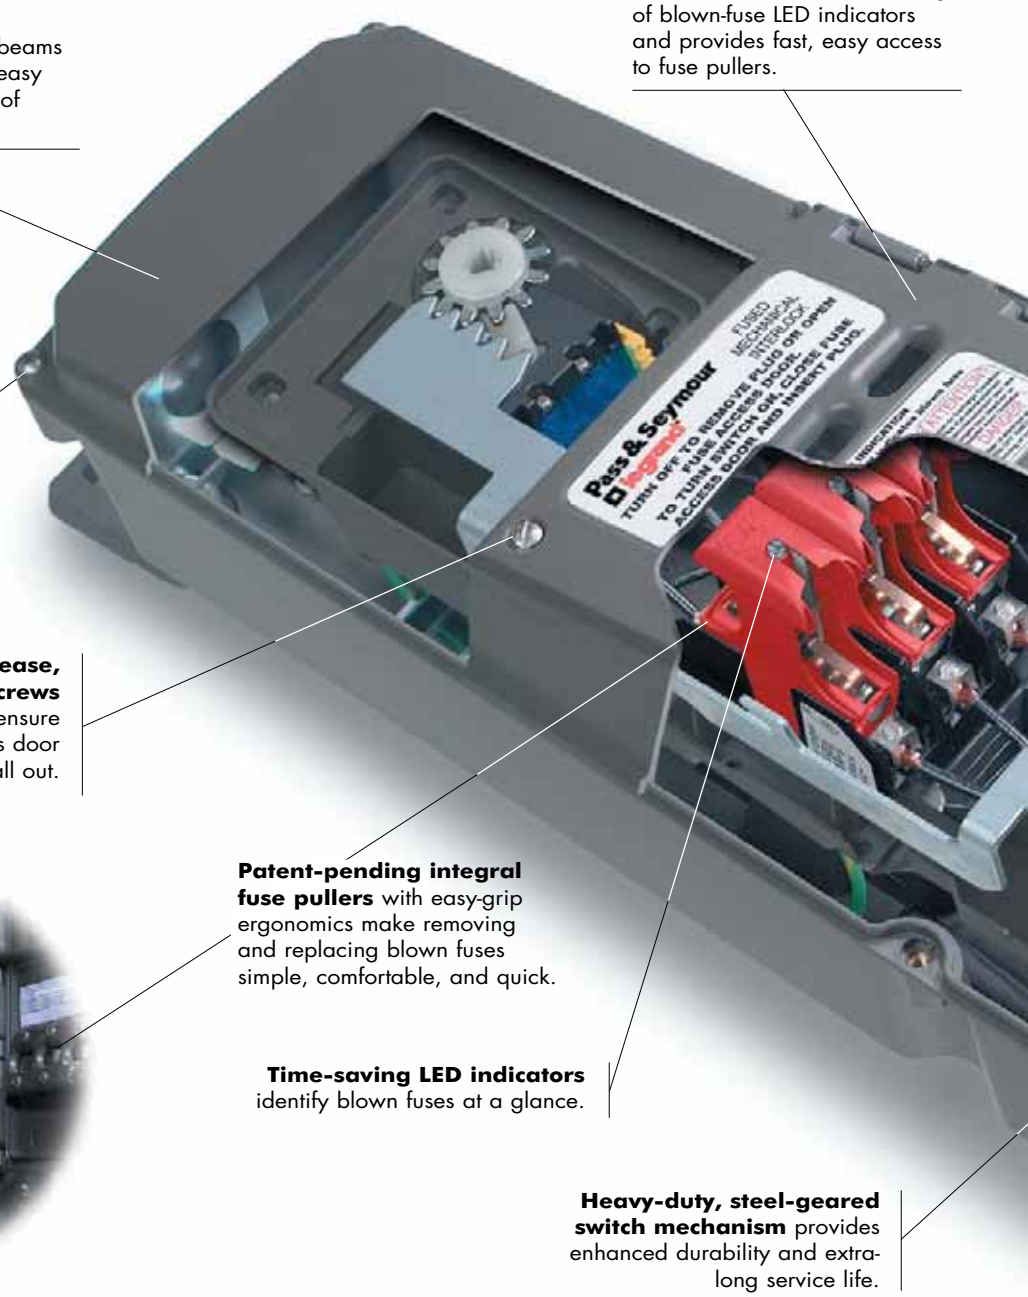

Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.

Captive, quick-release, stainless steel screws speed fuse removal, ensure a watertight access door seal, and won't fall out.



Patent-pending integral fuse pullers with easy-grip ergonomics make removing and replacing blown fuses simple, comfortable, and quick.

Time-saving LED indicators identify blown fuses at a glance.

Heavy-duty, steel-geared switch mechanism provides enhanced durability and extra-long service life.

Fusible Mechanical Interlock Operating Sequence

1. When there is no plug in the device, the lock tab is in the "off" position and prevents the lock gear from turning. The handle cannot be moved to the "on" position.
2. Upon inserting a plug, the lock tab moves from the "off" position, freeing the lock gear.
3. The handle can then be moved to the "on" position. This rotates the lock gear and engages the key on the plug to prevent it from being removed. At the same time, the rack is actuated and rotates the switch gear, turning on the switch and inducing power.
4. Returning the handle to the "off" position frees the lock gear, disengaging the plug key from the switch and allowing the plug to be removed.


Valox® is a registered trademark of the General Electric Co.

Fusible Mechanical Interlock

legrand®
Pass & Seymour

Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

Heavy-duty, ergonomic switch handle meets OSHA Lockout/Tagout requirements and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle.

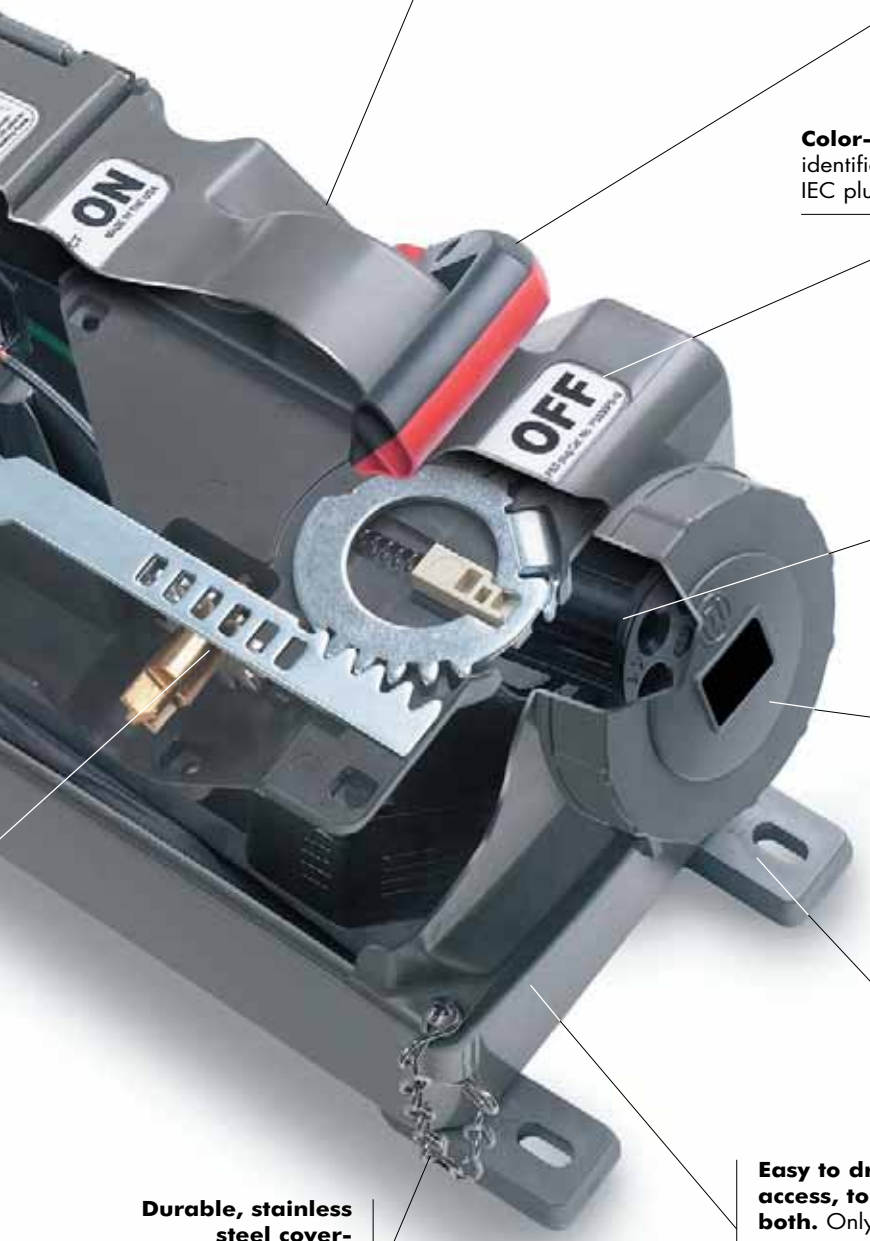

Color-coded label clearly identifies voltage rating of mating IEC plug for fast identification.

Durable brass/nickel-plated contacts ensure reliable, long-lasting electrical performance and corrosion resistance.

Completely interchangeable with all manufacturers' IEC 309-1 and 309-2 plugs for economy and versatility.

Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses. Oversized foot design eliminates the need for washers.

Easy to drill for bottom wiring access, top wiring access — or both. Only one catalog number per amp rating — simplifies ordering and provides maximum application flexibility.

Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.

legrand®
Pass & Seymour

Fusible Mechanical Interlock
Ordering Information & Dimensions

Poles/Wires	Voltage	Standard Horsepower Rating	Maximum Horsepower Rating	Interlock Receptacle Catalog #	Pin & Sleeve Plug Catalog #
20 Amps					
3P4W	120/240VAC	1/4 HP @ 120VAC	1 HP @ 120VAC	PS420FMIR12W	PS420P12W
		1/2 HP @ 208VAC	2 HP @ 208VAC		
		1/2 HP @ 240VAC	2 HP @ 240VAC		
3P4W	3ø 240VAC	1 1/2 HP	5 HP	PS420FMIR9W	PS420P9W
3P4W	3ø 480VAC	3 HP	10 HP	PS420FMIR7W	PS420P7W
3P4W		5 HP	15 HP	PS420FMIR5W	PS420P5W
30 Amps					
2P3W	240VAC	1 HP @ 208VAC	3 HP @ 208VAC	PS330FMIR6W	PS330P6W
		1 1/2 HP @ 240VAC	3 HP @ 240VAC		
		1/2 HP @ 120VAC	2 HP @ 120VAC		
3P4W	120/240VAC	1 HP @ 208VAC	3 HP @ 208VAC	PS430FMIR12W	PS430P12W
		1 1/2 HP @ 240VAC	3 HP @ 240VAC		
3P4W	3ø 240VA C	3 HP	7 1/2 HP	PS430FMIR9W	PS430P9W
3P4W	3ø 480VAC	5 HP	15 HP	PS430FMIR7W	PS430P7W
3P4W	3ø 600VAC	7 1/2 HP	15 HP	PS430FMIR5W	PS430P5W
3P4W	380/440VAC	5 HP @ 380VAC	15 HP @ 380VAC	PS430FMIR3W	PS430P3W
		5 HP @ 440VAC	15 HP @ 440VAC		
4P5W	3øY 120/208VAC	2 HP	5 HP	PS530FMIR9W	PS530P9W
4P5W	3øY 277/480VAC	5 HP	15 HP	PS530FMIR7W	PS530P7W
60 Amps					
2P3W	240VAC	3 HP @ 208VAC	7 1/2 HP @ 208VAC	PS360FMIR6W	PS360P6W
		3 HP @ 240VAC	7 1/2 HP @ 240VAC		
		1 1/2 HP @ 120VAC	3 HP @ 120VAC		
3P4W	120/240VAC	3 HP @ 208VAC	7 1/2 HP @ 208VAC	PS460FMIR12W	PS460P12W
		3 HP @ 240VAC	10 HP @ 240VAC		
3P4W	3ø 240VAC	5 HP	15 HP	PS460FMIR9W	PS460P9W
3P4W	3ø 480VAC	10 HP	30 HP	PS460FMIR7W	PS460P7W
3P4W	3ø 600VAC	15 HP	40 HP	PS460FMIR5W	PS460P5W
4P5W	3øY 120/208VAC	5 HP	15 HP	PS560FMIR9W	PS560P9W
4P5W	3øY 277/480VAC	10 HP	30 HP	PS560FMIR7W	PS560P7W
4P5W	3øY 347/600VAC	15 HP	40 HP	PS560FMIR5W	PS560P5W
100 Amps					
3P4W	120/240VAC	2 HP @ 120VAC	5 HP @ 120VAC	PS4100FMIR12W	PS4100P12W
		5 HP @ 208VAC	10 HP @ 208VAC		
		5 HP @ 240VAC	15 HP @ 240VAC		
3P4W	3ø 240VAC	10 HP	25 HP	PS4100FMIR9W	PS4100P9W
3P4W	3ø 480VAC	20 HP	50 HP	PS4100FMIR7W	PS4100P7W
3P4W	3ø 600VAC	30 HP	50 HP	PS4100FMIR5W	PS4100P5W
4P5W	3øY 120/208VAC	10 HP	20 HP	PS5100FMIR9W	PS5100P9W
4P5W	3øY 277/480VAC	20 HP	50 HP	PS5100FMIR7W	PS5100P7W
4P5W	3øY 347/600VAC	30 HP	50 HP	PS5100FMIR5W	PS5100P5W

(HP Ratings subject to change.)

Fusible Mechanical Interlock Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
20	9.13	1.19	10.09	23.34	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
3 & 4 Wire 30	9.13	1.19	9.53	23.69	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
5 Wire 30	9.13	1.19	9.53	23.78	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
60	9.13	1.19	9.94	24.59	24.50	2.25	4.75	6.88	7.75	20.13	22.25	23.13
100	11.13	1.75	11.06	27.94	28.31	2.41	6.75	8.88	9.75	23.94	26.06	26.94

All measurements shown in inches.

Fusible Mechanical Interlock
Materials of Manufacture
Typical/Sample Spec

legrand®
Pass & Seymour

Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour PS560FMIR5W
Description: Fusible Pin & Sleeve Mechanical Interlock
Electrical Type: 3 Pole + Neutral + Earth
Rating: 60A 3ø 600VAC 15 HP standard, 50 HP maximum
Configuration: IEC clock position 5
Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

Materials

Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Door	Valox 357®
Enclosure Gasket	Neoprene
Door Hinge	316 Stainless Steel
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Locktab	10% Glass-Filled Nylon
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Receptacle Lid	Valox 357®
Receptacle Gasketing	Neoprene
Receptacle Lid Hinge Spring	300 Series Stainless Steel
Receptacle Contact Carrier	Polyamide 6
Receptacle Sleeves	20-60 amp Brass/Nickel Plate 100 amp Brass/Silver Plate
Receptacle Terminal Screws	Zinc-Plated Steel
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc 20/30 amp shipped with one (1) 1" 60 amp shipped with one (1) 1¼" 100 amp shipped with one (1) 1½" (will also fit a 2" hub, not provided)
Viewing Slots in Fuse-Access Door	1/8" thick glass lens

Performance

Electrical:	
Fuse Type	Class "J"
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL, CSA, and IEC specifications
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

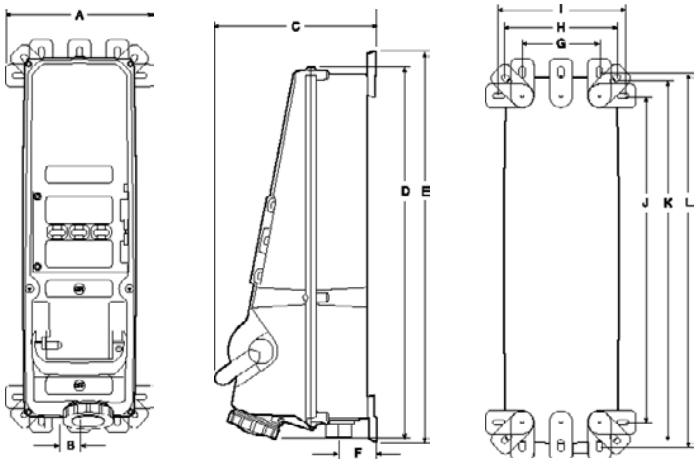

Front Side Back

Hub shown at bottom of unit for reference only; may be field-installed for top or bottom entry.

(See dimensions on Page J-6.)

legrand®
Pass & Seymour

Non-Fusible Mechanical Interlock



legrand®
Pass & Seymour



Performance and quality you can see at a distance. Now take a closer look.

P&S Non-Fusible Interlocks are easy to apply, thanks to their versatile, adjustable mounting feet, compact dimensions, and flexible wiring via either top or bottom feed. And once installed, they'll withstand tough conditions — including water in wash-down areas, contamination from shavings, dirt, and dust; accidental impacts, heat from furnaces, welding or other processes; and vibration from any type of equipment.

Here's the safety that goes beyond ordinary requirements. These Interlocks feature a patent-pending, tamper-resistant activating assembly and cover-integral switch mechanism that protect against unauthorized overrides. And high-visibility ON/OFF designations plus a hefty black/red handle make status easy to read at a glance.

Take a close look at our 20 to 100 amp Non-Fusible Interlocks — and see the design and construction that works for you.


legrand®
Pass & Seymour

Non-Fusible Mechanical Interlock

Top- or bottom-feed models offer installation flexibility and eliminate the need for time-consuming modifications like drilling and plugging that may nullify the NEMA 4X enclosure rating. Off-center cable entry directs condensation away from internal circuitry — reducing the risk of shorts and corrosion.

Compact design doesn't protrude, avoids unnecessary knocks, allows for versatile mounting, and fits into standard I-beams and channels.

Stainless steel captive screws speed up installation, minimize risk of lost parts, and resist corrosion.

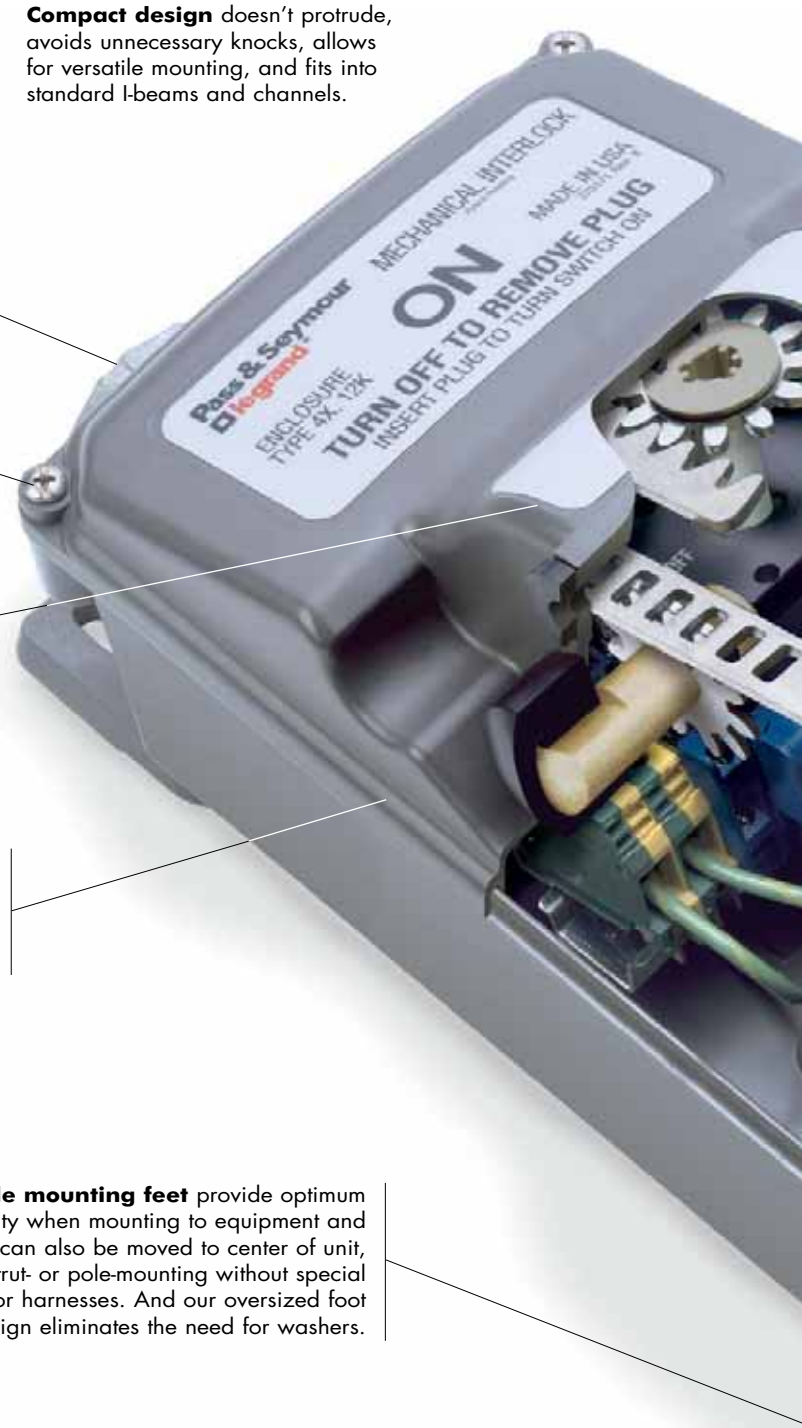

Exclusive circuit ID pad for fast identification of the motor circuit. Accepts preprinted labels or handwritten data.

Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings, withstands the harshest industrial environments.

Adjustable mounting feet provide optimum flexibility when mounting to equipment and walls. Feet can also be moved to center of unit, for instant strut- or pole-mounting without special brackets or harnesses. And our oversized foot design eliminates the need for washers.

Non-Fusible Mechanical Interlock Operating Sequence

1. When there is no plug in the device, the lock tab is in the "off" position and prevents the lock gear from turning. The handle cannot be moved to the "on" position.
2. Upon inserting a plug, the lock tab moves from the "off" position, freeing the lock gear.
3. The handle can then be moved to the "on" position. This rotates the lock gear and engages the key on the plug to prevent it from being removed. At the same time, the rack is actuated and rotates the switch gear, turning on the switch and inducing power.
4. Returning the handle to the "off" position frees the lock gear, disengaging the plug key from the switch and allowing the plug to be removed.

Non-Fusible Mechanical Interlock

legrand®
Pass & Seymour



Handle meets OSHA Lockout/ Tagout requirements.

Heavy-duty, lever-style switch handle ensures a firm grip — even with wet, greasy hands. Black/red color-coded handle and high-visibility ON/OFF markings clearly indicate power supply status from a distance and from all angles. Handle enters enclosure from one side to minimize damage due to frontal impacts; entry is offset and sealed to prevent moisture contamination during washdowns.

Label is color coded to correspond with the voltage ratings of all mating IEC plugs for easy visual identification.

Stainless steel cover retaining chain allows for easy installation and maintenance.

Durable brass/nickel-plated contacts ensure reliable, long-lasting electrical performance and corrosion resistance.

Completely interchangeable with all manufacturers' IEC 309-1 and 309-2 plugs.

Top mount auxiliary contacts are standard to simplify ordering, purchasing, inventory, and installation requirements.

Patent-pending, tamper-resistant activating assembly and cover-integral switch mechanism protect against unauthorized overrides, ensuring operator safety.

Valox® is a registered trademark of the General Electric Co.

legrand®
Pass & Seymour

Non-Fusible Mechanical Interlock
Ordering Information & Dimensions


Poles/Wires	Voltage	Horsepower Rating	Receptacle Catalog #	Pin & Sleeve Plug Catalog #
20 Amps				
3P4W	120/240VAC	1 HP (120VAC); 2 HP (208-240VAC L-L)	PS420MIR12W	PS420P12W
3P4W	3ø 240VAC	5 HP	PS420MIR9W	PS420P9W
3P4W	3ø 480VAC	10 HP	PS420MIR7W	PS420P7W
3P4W	3ø 600VAC	15 HP	PS420MIR5W	PS420P5W
30 Amps				
2P3W	120VAC	2 HP	PS330MIR4W	PS330P4W
3P4W	3ø 240VAC	7½ HP	PS430MIR9W	PS430P9W
3P4W	3ø 480VAC	15 HP	PS430MIR7W	PS430P7W
3P4W	3ø 600VAC	20 HP	PS430MIR5W	PS430P5W
3P4W	380/440VAC	15 HP	PS430MIR3W	PS430P3W
4P5W	3øY 120/208VAC	5 HP	PS530MIR9W	PS530P9W
4P5W	3øY 277/480VAC	15 HP	PS530MIR7W	PS530P7W
4P5W	3øY 347/600VAC	20 HP	PS530MIR5W	PS530P5W
60 Amps				
2P3W	240VAC	7½ HP (208-240VAC)	PS360MIR6W	PS360P6W
2P3W	480VAC	10 HP	PS360MIR7W	PS360P7W
3P4W	120/240VAC	3 HP (120VAC); 7½ HP (208-240VAC L-L)	PS460MIR12W	PS460P12W
3P4W	3ø 240VAC	15 HP	PS460MIR9W	PS460P9W
3P4W	3ø 480VAC	30 HP	PS460MIR7W	PS460P7W
3P4W	3ø 600VAC	40 HP	PS460MIR5W	PS460P5W
4P5W	3øY 120/208VAC	15 HP	PS560MIR9W	PS560P9W
4P5W	3øY 277/480VAC	30 HP	PS560MIR7W	PS560P7W
4P5W	3øY 347/600VAC	40 HP	PS560MIR5W	PS560P5W
100 Amps				
2P3W	240VAC	10 HP (208VAC); 15 HP (240VAC)	PS3100MIR6W	PS3100P6W
2P3W	480VAC	30 HP	PS3100MIR7W	PS3100P7W
3P4W	3ø 600VAC	50 HP	PS4100MIR5W	PS4100P5W
3P4W	3ø 480VAC	50 HP	PS4100MIR7W	PS4100P7W
3P4W	3ø 240VAC	25 HP	PS4100MIR9W	PS4100P9W
3P4W	120/240VAC	5 HP (120VAC); 10 HP (208VAC L-L); 15 HP (240VAC L-L)	PS4100MIR12W	PS4100P12W
4P5W	3øY 347/600VAC	50 HP	PS5100MIR5W	PS5100P5W
4P5W	3øY 277/480VAC	50 HP	PS5100MIR7W	PS5100P7W
4P5W	3øY 120/208VAC	20 HP	PS5100MIR9W	PS5100P9W

All products are top or bottom feed.
Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locking hole saw or knockout.
End user decides whether top or bottom feed is appropriate.
No closure plug kits required. HP ratings subject to change.


Non-Fusible Mechanical Interlock Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
20	1.38	6.88	9.13	8.00	12.38	11.06	4.75	6.88	7.75	8.00	10.13	11.00
30	1.38	6.88	9.13	8.25	12.38	11.50	4.75	6.88	7.75	8.00	10.13	11.00
60	1.19	6.88	9.13	9.00	13.63	14.13	4.75	6.88	7.75	9.75	11.88	12.75
100	1.19	6.88	9.13	9.50	14.13	14.13	4.75	6.88	7.75	9.75	11.88	12.75


All measurements shown in inches.



Front



Side



Back

(See dimensions above.)

Non-Fusible Mechanical Interlock
Materials of Manufacture
Typical/Sample Spec

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS560MIR5W
Description: Non-Fusible Pin & Sleeve Mechanical Interlock
Electrical Type: 3 Pole + Neutral + Earth
Rating: 60A 3ø 600VAC 15 HP standard, 40 HP maximum
Configuration: IEC clock position 5
Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

Materials

Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Gasket	Neoprene
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Locktab	10% Glass-Filled Nylon
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Receptacle Lid	Valox 357®
Receptacle Gasketing	Neoprene
Receptacle Lid Hinge Spring	300 Series Stainless Steel
Receptacle Contact Carrier	Polyamide 6
Receptacle Sleeves	Brass/Nickel Plate
Receptacle Terminal Screws	Zinc-Plated Steel
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc 20/30 amp shipped with one (1) 1" 60 amp shipped with one (1) 1¼" 100 amp shipped with one (1) 1½" (will also fit a 2" hub, not provided)

Performance

Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL, CSA, and IEC specifications
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

legrand®
Pass & Seymour

Fusible Safety Switches



legrand®
Pass & Seymour



See blown fuses at a glance in these Fusible Safety Switches.

Looking for safety switches that cut downtime? Take a close look at these innovative P&S Fusible Safety Switches. Here's the same first-ever blown-fuse indication system that's in our pace-setting Fusible Mechanical Interlocks — with individual LED indicators for each line, patent-pending integral fuse pullers, and a hinged fuse-access door. That means no time lost to locating a blown fuse — and no time wasted in fuse replacement.


P&S Fusible Safety Switches deliver the same ultra-heavy-duty construction as our Fusible Mechanical Interlocks, too. So they provide maximum protection against water, dirt, heat, and vibration — and just about any other harsh condition you'll encounter. You get the same installation flexibility, too. With capacities available from 30 to 100 amps, there's a P&S Fusible Safety Switch that's ready to work for you in any industrial environment.

legrand®
Pass & Seymour

Fusible Safety Switches

Hinged access door with windows allows clear viewing of blown-fuse LED indicators and provides fast, easy access to fuse pullers.

Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

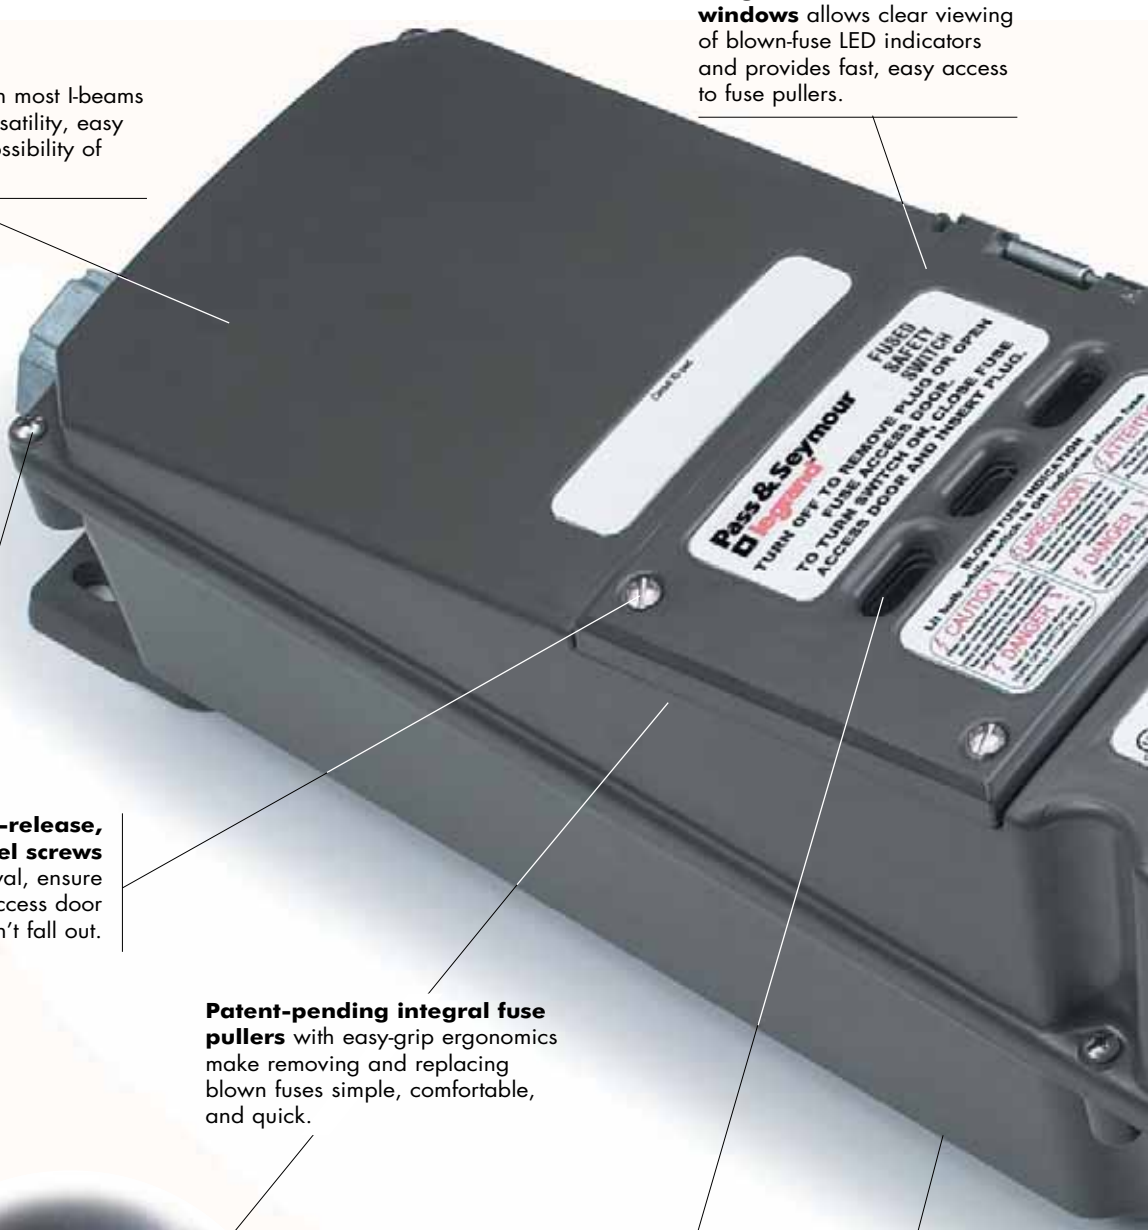

Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.

Captive, quick-release, stainless steel screws speed fuse removal, ensure a watertight access door seal, and won't fall out.

Patent-pending integral fuse pullers with easy-grip ergonomics make removing and replacing blown fuses simple, comfortable, and quick.



Time-saving LED indicators identify blown fuses at a glance.

Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

Valox® is a registered trademark of the General Electric Co.

legrand®
Pass & Seymour



Heavy-duty, steel-geared switch mechanism provides enhanced durability and extra-long service life.

Heavy-duty, ergonomic switch handle meets OSHA Lockout/Tagout requirements and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle.

Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses. Oversized foot design eliminates the need for washers.


Easy to drill for bottom wiring access, top wiring access — or both. Only one catalog number per amp rating — simplifies ordering and provides maximum application flexibility.


Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.

legrand®
Pass & Seymour

Fusible Safety Switches
Ordering Information & Dimensions

Voltage	Standard Horsepower Rating	Maximum Horsepower Rating	Fusible Safety Switch Catalog #
30 Amps	**600VAC**		
120VAC	½ HP	2 HP	PS30FSS
208VAC	1 HP	5 HP	
240VAC	1½ HP	5 HP	
277VAC	1½ HP	5 HP	
480VAC	3 HP	10 HP	
120/240VAC	½ HP @ 120VAC 1½ HP @ 240VAC	2 HP @ 120VAC 5 HP @ 240VAC	
3ø 240VAC	3 HP	10 HP	
3ø 480VAC	5 HP	20 HP	
3ø 600VAC	7½ HP	20 HP	
3øY 120/208VAC	2 HP	7½ HP	
3øY 277/480VAC	5 HP	20 HP	
3øY 347/600VAC	7½ HP	20 HP	
60 Amps	**600VAC**		
120VAC	1½ HP	3 HP	PS60FSS
208VAC	3 HP	7½ HP	
240VAC	3 HP	10 HP	
277VAC	3 HP	10 HP	
480VAC	5 HP	20 HP	
120/240VAC	1½ HP @ 120VAC 3 HP @ 240VAC	3 HP @ 120VAC 10 HP @ 240VAC	
3ø 240VAC	5 HP	20 HP	
3ø 480VAC	10 HP	40 HP	
3ø 600VAC	15 HP	50 HP	
3øY 120/208VAC	5 HP	20 HP	
3øY 277/480VAC	10 HP	40 HP	
3øY 347/600VAC	15 HP	50 HP	
100 Amps	**600VAC**		
120VAC	2 HP	5 HP	PS100FSS
208VAC	5 HP	10 HP	
240VAC	5 HP	15 HP	
277VAC	7½ HP	15 HP	
480VAC	10 HP	30 HP	
120/240VAC	2 HP @ 120VAC 5 HP @ 240VAC	5 HP @ 120VAC 15 HP @ 240VAC	
3ø 240VAC	10 HP	25 HP	
3ø 480VAC	20 HP	50 HP	
3ø 600VAC	30 HP	50 HP	
3øY 120/208VAC	10 HP	20 HP	
3øY 277/480VAC	20 HP	50 HP	
3øY 347/600VAC	30 HP	50 HP	


Front


Side


Back

(HP Ratings subject to change.)

Hub shown at bottom of unit for reference only; may be field-installed for top or bottom entry.

(See dimensions below.)

Fusible Safety Switches Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
30	9.13	1.19	10.09	22.59	22.59	1.97	4.75	6.88	7.75	20.13	22.25	23.13
60	9.13	1.19	10.09	22.59	22.59	2.25	4.75	6.88	7.75	20.13	22.25	23.13
100	11.13	1.75	11.06	26.59	28.31	2.41	6.75	8.88	9.75	23.94	26.06	26.94

All measurements shown in inches.

Fusible Safety Switches
Materials of Manufacture
Typical/Sample Spec

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identifications: Legrand/Pass & Seymour PS60FSS
Description: Fusible Safety Switch
Rating: 60A, 600VAC maximum
Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

Materials

Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Door	Valox 357®
Enclosure Gasket	Neoprene
Door Hinge	316 Stainless Steel
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc
	30 amp shipped with one (1) 1"
	60 amp shipped with one (1) 1¼"
	100 amp shipped with one (1) 1½" (will also fit a 2" hub, not provided)
Viewing Slots in Fuse-Access Door	1/8" thick glass lens

Performance

Electrical:	
Fuse Type	Class "J"
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles
	Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown)
	Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt)
	IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C
	Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

legrand®
Pass & Seymour

Non-Fusible Safety Switches UL Listed as "Suitable as Motor Disconnect."

Here's the first non-metallic NEMA 4X Non-Fusible Safety Switch line UL Listed as "Suitable as Motor Disconnect" — per NEC® Article 430.109(A)(6).

P&S Non-Fusible Safety Switches feature extra-tough components, including an impact-resistant Valox® NEMA 4X enclosure. And an innovative design that delivers safe, sure operation under the worst conditions. These rugged performers are available in capacities from 30 to 100 amps.

And when you take a closer look, you'll see even more to like. For example, the fits-anywhere compact design. The adjustable mounting feet that speed installation. Or the no-confusion, at-a-glance ON/OFF status indication.

See how P&S Non-Fusible Safety Switches work better for you.



Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

Heavy-duty, ergonomic switch handle meets OSHA Lockout/Tagout provisions and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle. Switch entry into the enclosure is offset to the side and sealed to provide enhanced water resistance.

Nonconductive, watertight, corrosion-, heat-, and impact-resistant thermoplastic enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.



Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.



Bottom and top wiring access options. No unnecessary openings to compromise water resistance.

Top mount auxiliary contact enables additional control functions or signal lights.

Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses.

legrand®
Pass & Seymour

Non-Fusible Safety Switches
Ordering Information

Voltage	Maximum Horsepower Rating	Non-Fusible Safety Switch Catalog #	Non-Fusible Safety Switch with Auxiliary Contact Catalog #	Auxiliary Contact Kit*	Replacement Switch	Replacement Switch with Auxiliary Contact	Replacement Cover
30 Amps	**600VAC**						
120VAC	1 HP	PS30SS	PS30SSAX	AX30	RS30	PS30RSAX	PS30SSRC
208VAC	2 HP						
240VAC	3 HP						
277VAC	3 HP						
480VAC	5 HP						
3ø 240VAC	5 HP						
3ø 480VAC	10 HP						
3ø 600VAC	10 HP						
3øY 120/208VAC	5 HP						
3øY 277/480VAC	10 HP						
3øY 347/600VAC	10 HP						
60 Amps	**600VAC**						
120VAC	3 HP	PS60SS	PS60SSAX	AX60	RS60	N/A	PS60SSRC
208VAC	10 HP						
240VAC	10 HP						
277VAC	15 HP						
480VAC	20 HP						
3ø 240VAC	20 HP						
3ø 480VAC	40 HP						
3ø 600VAC	50 HP						
3øY 120/208VAC	20 HP						
3øY 277/480VAC	40 HP						
3øY 347/600VAC	50 HP						
100 Amps	**600VAC**						
120VAC	5 HP	PS100SS	PS100SSAX	AX60	N/A	N/A	PS100SSRC
208VAC	10 HP						
240VAC	15 HP						
277VAC	15 HP						
480VAC	30 HP						
3ø 240VAC	25 HP						
3ø 480VAC	50 HP						
3ø 600VAC	50 HP						
3øY 120/208VAC	20 HP						
3øY 277/480VAC	50 HP						
3øY 347/600VAC	50 HP						

*For replacement of side mount auxiliary contact on previous design.

Mounting Feet Replacement Kit

Catalog Number	Description
SSMF	Mounting Feet Replacement Kit for PS30SS and PS30SSAX





RS30



AX30

Non-Fusible Safety Switches
Materials of Manufacture
Typical/Sample Spec

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification PS60SS
Description: Non-Fusible Safety Switch
Rating: 60A, 600VAC maximum
Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
Conduit Location: Top, bottom, or back feed. Units are shipped without holes for conduit. Spot drills for locating hole saw or knockouts are provided for top, bottom, or back feed. End user decides at installation whether top, bottom, or back feed is appropriate. No closure plug kits required. Units are not provided with conduit hubs.

Materials

Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Gasket	Neoprene
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass (60 and 100 amp units only)
Grounding Plate	Galvanized Steel
Cover Chain	300 Series Stainless Steel

Performance

Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than (see chart below) RMS amps at 600VAC
Operations	Mechanical: 15,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts (optional)	10A @ 600VAC 1 N.O. & 1 N.C.

Interrupting Ratings — RMS Symmetrical Amperes

Suitable for use on circuits capable of delivering not more than (see chart below for cat. no. and application) RMS symmetrical amperes, 600VAC maximum.

Catalog Number	Manual Motor Controller	Motor Disconnect
PS30SS (AX)	10,000 AMP	10,000 AMP
PS60SS (AX)	10,000 AMP	5,000 AMP
PS100SS (AX)		

Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) • IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C • Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable


legrand®
Pass & Seymour

Non-Fusible Safety Switches
Dimensions

Non-Fusible Safety Switches Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K
30	5.75	7.38	4.88	7.19	9.69	3.75	5.75	6.56	6.13	8.06	8.88
60	7.19	9.13	6.31	9.63	12.38	4.75	7.19	8.13	8.00	10.38	11.38
100	7.19	9.13	6.31	9.63	12.38	4.75	7.19	8.13	8.00	10.38	11.38

All measurements shown in inches.

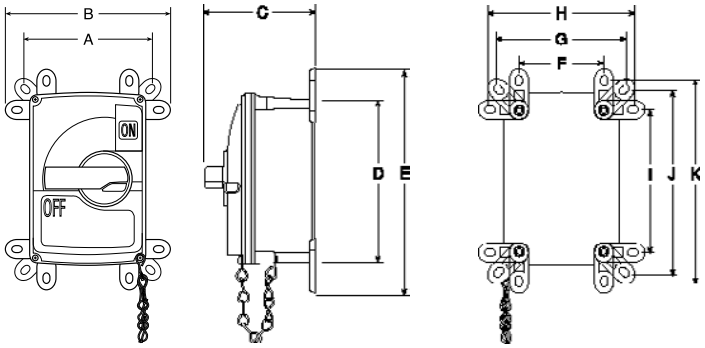

Front Side Back

(See dimensions above.)

legrand®
Pass & Seymour



Take a closer look at fast-installing Pin & Sleeve products that work for you.

There's no better protection against moisture and industrial contaminants than P&S IEC Pin & Sleeve products. With spring-loaded covers, locking rings, and neoprene gaskets, everything from water to dirt is completely shut out of the electrical system — even if the connection is accidentally submerged!

All P&S Watertight Pin & Sleeve plugs, connectors, receptacles, and inlets bring you the features to enhance versatility, reliability, and safety. For example, North American products come completely ready to wire, for quick, simple installation. And all feature impact- and chemical-resistant thermoplastic construction. Shrouded, nickel-plated, solid-brass pins provide corrosion protection and excellent conductivity. And an exclusive, hinged cord grip eliminates loose parts that get lost.

With a complete range of choices rated from 20 to 100 amps, you'll find a Legrand/Pass & Seymour works-for-you solution for every Pin & Sleeve application in and around your plant.

legrand®
Pass & Seymour

Pin & Sleeve Devices

Ratings, compliances visible on strap for fast, long-lasting I.D.

Combination-head screws for added convenience and quick installation.

Arrives ready to wire, with cord grip open and cable-ready; terminal screws come backed out and ready to wire; front and back body require no disassembly prior to assembly.

Cover with integral neoprene gasket provides watertight seal.

Revolutionary, hinged cord grip for durable performance and ease of installation.



Natural-rubber grommets provide watertight protection at cable entry.

Nylon construction for high-impact and corrosion resistance.

Nickel-plated brass pins provide extra corrosion resistance without sacrificing electrical conductivity.

Locking ring with an integral neoprene gasket provides watertight seal when plug and connector/receptacle are mated.







P&S Pin & Sleeve products provide installation ease, enduring performance in harsh conditions, and guaranteed IEC 309 compatibility.

North American Watertight Devices Ordering Information

legrand® Pass & Seymour

North American Product Offering

IP67 Suitability	Configuration			Watertight			Back Boxes		Replacement Parts			
												
									Bodies		Caps	
Poles & Wires	Recep./ Conn.	Plug/ Inlet	Voltage/ Color Coding	Receptacle	Plug	Connector	Metallic Back Box	Non-Metallic Back Box	Plug	Connector	Receptacle	Connector
20 Amps												
2P3W			125	PS320R4W	PS320P4W	PS320C4W	PSBB201W	PSBBN201W	PS320P4WR	PS320C4WR	PS320R4WL	
2P3W			250	PS320R6W	PS320P6W	PS320C6W	PSBB201W	PSBBN201W	PS320P6WR	PS320C6WR	PS320R6WL	
2P3W			480	PS320R7W	PS320P7W	PS320C7W	PSBB201W	PSBBN201W	PS320P7WR	PS320C7WR	PS320R7WL	
2P3W			277	PS320R5W	PS320P5W	PS320C5W	PSBB201W	PSBBN201W	PS320P5WR	PS320C5WR	PS320R5WL	
3P4W			125/250	PS420R12W	PS420P12W	PS420C12W	PSBB202W	PSBBN202W	PS420P12WR	PS420C12WR	PS420R12WL	
3P4W			3ø 250	PS420R9W	PS420P9W	PS420C9W	PSBB202W	PSBBN202W	PS420P9WR	PS420C9WR	PS420R9WL	
3P4W			3ø 480	PS420R7W	PS420P7W	PS420C7W	PSBB202W	PSBBN202W	PS420P7WR	PS420C7WR		
3P4W			3ø 600	PS420R5W	PS420P5W	PS420C5W	PSBB202W	PSBBN202W	PS420P5WR	PS420C5WR		
4P5W			3øY 120/208	PS520R9W	PS520P9W	PS520C9W	PSBB202W	PSBBN202W	PS520P9WR	PS520C9WR		
4P5W			3øY 277/480	PS520R7W	PS520P7W	PS520C7W	PSBB202W	PSBBN202W	PS520P7WR	PS520C7WR		
4P5W			3øY 347/600	PS520R5W	PS520P5W	PS520C5W	PSBB202W	PSBBN202W	PS520P5WR	PS520C5WR		
30 Amps												
2P3W			125	PS330R4W	PS330P4W	PS330C4W	PSBB301W	PSBBN301W			PS330R4WL	PS330C4WL
2P3W			250	PS330R6W	PS330P6W	PS330C6W	PSBB301W	PSBBN301W	PS330P6WR	PS330C6WR	PS330R6WL	PS330C6WL
2P3W			480	PS330R7W	PS330P7W	PS330C7W	PSBB301W	PSBBN301W	PS330P7WR	PS330C7WR	PS330R7WL	PS330C7WL
3P4W			125/250	PS430R12W	PS430P12W	PS430C12W	PSBB301W	PSBBN301W	PS430P12WR	PS430C12WR	PS430R12WL	PS430C12WL
3P4W			3ø 250	PS430R9W	PS430P9W	PS430C9W	PSBB301W	PSBBN301W	PS430P9WR	PS430C9WR	PS430R9WL	PS430C9WL
3P4W			3ø 480	PS430R7W	PS430P7W	PS430C7W	PSBB301W	PSBBN301W	PS430P7WR	PS430C7WR	PS430R7WL	
3P4W			3ø 600	PS430R5W	PS430P5W	PS430C5W	PSBB301W	PSBBN301W			PS430R5WL	PS430C5WL
3P4W*			380/440	PS430R3W	PS430P3W	PS430C3W	PSBB301W	PSBBN301W	PS430P3WR	PS430C3WR	PS430R3WL	PS430C3WL
4P5W			3øY 120/208	PS530R9W	PS530P9W	PS530C9W	PSBB301W	PSBBN301W	PS530P9WR	PS530C9WR	PS530R9WL	PS530C9WL
4P5W			3øY 277/480	PS530R7W	PS530P7W	PS530C7W	PSBB301W	PSBBN301W	PS530P7WR	PS530C7WR	PS530R7WL	PS530C7WL
4P5W			3øY 347/600	PS530R5W	PS530P5W	PS530C5W	PSBB301W	PSBBN301W	PS530P5WR	PS530C5WR	PS530R5WL	PS530C5WL

*Application specific, reference Page J-2.



PS330C4WR PS330P4WR

legrand®
Pass & Seymour

Pin & Sleeve Devices
North American Watertight Devices Ordering Information

North American Product Offering

IP67 Suitability




Poles & Wires	Configuration: Recep./ Conn.	Configuration: Plug/ Inlet	Voltage/ Color Coding	Watertight: Receptacle†	Watertight: Plug	Watertight: Connector	Watertight: Inlet	Back Boxes: Metallic Back Box	Back Boxes: Non-Metallic Back Box	Replacement Parts: Bodies: Plug	Replacement Parts: Bodies: Connector	Replacement Parts: Caps: Receptacle	Replacement Parts: Caps: Connector
60 Amps													
2P3W			125	PS360R4W	PS360P4W	PS360C4W	PS360B4W	PSBB601W	PSBBN601W	PS360P4WR	PS360C4WR	PS360R4WL	PS360C4WL
2P3W			250	PS360R6W	PS360P6W	PS360C6W	PS360B6W	PSBB601W	PSBBN601W	PS360P6WR	PS360C6WR		PS360C6WL
2P3W			480	PS360R7W	PS360P7W	PS360C7W	PS360B7W	PSBB601W	PSBBN601W	PS360P7WR	PS360C7WR	PS360R7WL	PS360C7WL
3P4W			125/250	PS460R12W	PS460P12W	PS460C12W	PS460B12W	PSBB601W	PSBBN601W	PS460P12WR	PS460C12WR	PS460R12WL	PS460C12WL
3P4W			3ø 250	PS460R9W	PS460P9W	PS460C9W	PS460B9W	PSBB601W	PSBBN601W		PS460C9WR		
3P4W			3ø 480	PS460R7W	PS460P7W	PS460C7W	PS460B7W	PSBB601W	PSBBN601W				
3P4W			3ø 600	PS460R5W	PS460P5W	PS460C5W	PS460B5W	PSBB601W	PSBBN601W			PS460R5WL	
4P5W			3øY 120/208	PS560R9W	PS560P9W	PS560C9W	PS560B9W	PSBB601W	PSBBN601W	PS560P9WR			
4P5W			3øY 277/480	PS560R7W	PS560P7W	PS560C7W	PS560B7W	PSBB601W	PSBBN601W	PS560P7WR	PS560C7WR	PS560R7WL	PS560C7WL
4P5W			3øY 347/600	PS560R5W	PS560P5W	PS560C5W	PS560B5W	PSBB601W	PSBBN601W	PS560P5WR	PS560C5WR	PS560R5WL	PS560C5WL
100 Amps													
2P3W			125	PS3100R4W	PS3100P4W	PS3100C4W		PSBB1001W		PS3100P4WR	PS3100C4WR	PS3100R4WL	PS3100C4WL
2P3W			250	PS3100R6W	PS3100P6W	PS3100C6W	PS3100B6W	PSBB1001W			PS3100C6WR	PS3100R6WL	PS3100C6WL
2P3W			480	PS3100R7W	PS3100P7W	PS3100C7W	PS3100B7W	PSBB1001W		PS3100P7WR	PS3100C7WR	PS3100R7WL	PS3100C7WL
3P4W			125/250	PS4100R12W	PS4100P12W	PS4100C12W	PS4100B12W	PSBB1001W			PS4100C12WR	PS4100R12WL	PS4100C12WL
3P4W			3ø 250	PS4100R9W	PS4100P9W	PS4100C9W	PS4100B9W	PSBB1001W			PS4100C9WR	PS4100R9WL	PS4100C9WL
3P4W			3ø 480	PS4100R7W	PS4100P7W	PS4100C7W	PS4100B7W	PSBB1001W				PS4100R7WL	PS4100C7WL
3P4W			3ø 600	PS4100R5W	PS4100P5W	PS4100C5W	PS4100B5W	PSBB1001W			PS4100C5WR	PS4100R5WL	PS4100C5WL
4P5W			3øY 120/208	PS5100R9W	PS5100P9W	PS5100C9W	PS5100B9W	PSBB1001W		PS5100P9WR	PS5100C9WR	PS5100R9WL	PS5100C9WL
4P5W			3øY 277/480	PS5100R7W	PS5100P7W	PS5100C7W	PS5100B7W	PSBB1001W		PS5100P7WR		PS5100R7WL	PS5100C7WL
4P5W			3øY 347/600	PS5100R5W	PS5100P5W	PS5100C5W	PS5100B5W	PSBB1001W		PS5100P5WR	PS5100C5WR	PS5100R5WL	PS5100C5WL

† Note: For straight 60 and 100 amp watertight receptacles, add "S" to catalog number after the R, example: PS4100RS5W.

North American Splashproof Devices Ordering Information

legrand®
Pass & Seymour

North American Product Offering

IP44 Suitability				Splashproof				Back Boxes		Non-Metallic Back Box
	Configuration						 *	 Angled Box	 **	
Poles & Wires	Recep./ Conn.	Plug/ Inlet	Voltage/ Color Coding	Receptacle	Plug	Connector	Inlet	Receptacle	Inlet	Receptacle
20 Amps										
2P3W			125	PS320R4S	PS320P4S	PS320C4S		PSBB201W	PSBB201SP	PSBBN201W
2P3W			250	PS320R6S	PS320P6S	PS320C6S	PS320B6S	PSBB201W	PSBB201SP	PSBBN201W
2P3W			277	PS320R5S	PS320P5S			PSBB201W	PSBB201SP	PSBBN201W
3P4W			125/250	PS420R12S	PS420P12S	PS420C12S		PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 250	PS420R9S	PS420P9S	PS420C9S	PS420B9S	PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 480	PS420R7S	PS420P7S	PS420C7S	PS420B7S	PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 600	PS420R5S			PS420B5S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 120/208	PS520R9S		PS520C9S	PS520B9S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 277/480			PS520C7S	PS520B7S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 347/600	PS520R5S		PS520C5S	PS520B5S	PSBB202W	PSBB201SP	PSBBN202W
30 Amps										
2P3W			125	PS330R4S	PS330P4S	PS330C4S	PS330B4S	PSBB301W	PSBB301SP	PSBBN301W
2P3W			250	PS330R6S	PS330P6S	PS330C6S	PS330B6S	PSBB301W	PSBB301SP	PSBBN301W
2P3W			480		PS330P7S	PS330C7S	PS330B7S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			125/250	PS430R12S		PS430C12S	PS430B12S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 250	PS430R9S	PS430P9S	PS430C9S	PS430B9S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 480	PS430R7S	PS430P7S	PS430C7S	PS430B7S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 600	PS430R5S	PS430P5S	PS430C5S	PS430B5S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 120/208	PS530R9S	PS530P9S	PS530C9S	PS530B9S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 277/480		PS530P7S		PS530B7S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 347/600	PS530R5S	PS530P5S	PS530C5S	PS530B5S	PSBB301W	PSBB301SP	PSBBN301W
60 Amps										
2P3W			250	PS360R6S	PS360P6S	PS360C6S	PS360B6S	PSBB601W	PSBB601W	PSBBN601W
2P3W			480	PS360R7S	PS360P7S	PS360C7S	PS360B7S	PSBB601W	PSBB601W	PSBBN601W
3P4W			125/250	PS460R12S	PS460P12S	PS460C12S	PS460B12S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 250	PS460R9S	PS460P9S	PS460C9S	PS460B9S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 480	PS460R7S	PS460P7S	PS460C7S	PS460B7S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 600	PS460R5S	PS460P5S	PS460C5S	PS460B5S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 120/208	PS560R9S	PS560P9S	PS560C9S	PS560B9S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 277/480	PS560R7S	PS560P7S	PS560C7S	PS560B7S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 347/600	PS560R5S	PS560P5S	PS560C5S	PS560B5S	PSBB601W	PSBB601W	PSBBN601W

* Line art for 60 amp only. 20 and 30 amp inlets are angled.
** Line art for 20 and 30 amp only. 60 amp back box is angled.

legrand®
Pass & Seymour

Pin & Sleeve Devices
International Splashproof Devices Ordering Information

International Product Offering



	Configuration			Splashproof (IP44 Suitability)				
								
Poles & Wires	Recep./ Conn.	Plug/ Inlet	Voltage/ Color Coding	Receptacle	Plug	Connector	Inlet	Non-Metallic Back Box
16 Amps								
2P3W			110/120	51920	51940	51980	51970*	52029
2P3W			220/240	52022	52042	52082	52172*	52029
2P3W			380/415	52222	52242	52282	52272*	52029
3P4W			220/240	52023	52043	52083	52073*	52229
3P4W			380/415	52223	52243	52283	52173*	52229
4P5W			220/240		52044	52084	52074*	52229
4P5W			220/380 240/415	52224	52244	52284	52174	52229
32 Amps								
2P3W			110/120				51972*	
2P3W			220/240	52718	52742	52782	52872*	
2P3W			380/415		52942	52982	52972*	
3P4W			220/240		52743	52783	52773*	
3P4W			380/415		52943	52983	52873*	
4P5W			220/240		52744		52774*	
4P5W			220/380 240/415		52944	52984		
63 Amps								
2P3W			110/120	53542	53582			53889
2P3W			220/240	53622	53642	53682	53772*	53889
3P4W			220/240	53623	53643	53683		53889
3P4W			380/415	53823	53843	53883	53773*	53889
4P5W			220/240		53644	53684		53889
4P5W			220/380 240/415	53824	53844	53884	53774*	53889

*Use with Back Box listed for surface mounting. Refer to chart on Page J-31.

Additional international configuration available — consult Factory Export Department.

legrand®
Pass & Seymour

Special Voltages and Frequencies

IP44 Suitability				Splashproof			
	Configuration						
Poles & Wires	Recep./ Conn.	Plug/ Inlet	Voltage/ Color-Coding	Surface Receptacle	Receptacle	Plug	Connector
16 Amps							
2P			24V			52421	
2P			42VDC				
3P			24V	52402*	52402		
3P4W			50-500V 100/300Hz				
32 Amps							
2P			24V				
2P			42V				
3P4W			50-500V 100/300Hz			52371	

* Use with Back Box listed below for surface mounting.


Additional international configuration available—consult Factory Export Department.


Size	
Back Box for IP44 Non-Metallic Inlets and Receptacles	
16A: 2P3W	**52079**
16A: 3P4W, 4P5W	**52279**
63A: All	**53879**

Device Type	Adapter Plate Leviton, Crouse Hinds/Appleton	Device Type	Adapter Plate Hubbell
Competitor Back Box Adapter Plate			
20A 3 Wire	**PSAP320CA**	20A 3 Wire	**PSAP320HBL**
20A 4, 5 Wire	**PSAP4520CA**	20A 4 Wire	**PSAP420HBL**
All 30A	**PSAP30CA**	20A 5 Wire & All 30A	**PSAP52030HBL**
All 60A		All 60A	**PSAP60HB**


legrand®
Pass & Seymour


Pin & Sleeve Devices
Watertight Dimensional Information







Receptacles







Plugs






Connectors





Inlets



Receptacle/Inlet
Drilling Pattern

16/20 & 30/32 Amp Watertight Devices/Dimensional Information

Amps	Wire Configurations	A	B	C	D	E	F
Watertight Receptacles							
16/20	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	2.85 3.20 3.40	1.80 1.90 2.00	1.60 1.60 1.70	3.40 3.80 3.80	2.05 2.36 2.36	2.36 2.75 2.75
30/32	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	3.72 3.72 3.98	2.60 2.60 2.70	1.80 1.90 1.95	4.30 4.30 4.30	2.75 2.75 2.75	3.15 3.15 3.15
Watertight Plugs							
16/20	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	5.30 5.50 6.00	2.85 3.20 3.40		.31-.59 .31-.59 .39-.71		
30/32	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	6.50 6.50 6.70	3.70 3.70 3.98		.39-.71 .47-.87 .47-.87		
Watertight Connectors							
16/20	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	5.90 6.00 6.70	2.85 3.20 3.40	3.00 3.40 3.50	.31-.59 .31-.59 .39-.71		
30/32	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	7.00 7.00 7.30	3.70 3.70 3.98	3.90 3.90 4.10	.39-.71 .47-.87 .47-.87		

60/63 Amp Watertight Devices/Dimensional Information

Amps	Wire Configurations	A	B	C	D	E	F
Watertight Receptacles							
60/63	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	4.20 4.20 4.20	3.10 3.10 3.10	3.50 3.50 3.50	5.00 5.00 5.00	3.03 3.03 3.03	3.35 3.35 3.35
Watertight Plugs							
60/63	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	10.00 10.00 10.00	4.50 4.50 4.50		.63-1.04 .73-1.14 .80-1.26		
Watertight Connectors							
60/63	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	10.90 10.90 10.90	4.50 4.50 4.50	4.70 4.70 4.70	.63-1.04 .73-1.14 .80-1.26		
Watertight Inlets							
60/63	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	4.50 4.50 4.50	4.25 4.25 4.25			3.03 3.03 3.03	3.35 3.35 3.35

100/125 Amp Watertight Devices/Dimensional Information

Amps	Wire Configurations	A	B	C	D	E	F
Watertight Receptacles							
100/125	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	5.20 5.20 5.20	2.20 2.20 2.20	4.40 4.40 4.40	5.60 5.60 5.60	4.88 4.88 4.88	4.88 4.88 4.88
Watertight Plugs							
100/125	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	13.40 13.40 13.40	5.20 5.20 5.20		.59-1.97 .59-1.97 .59-1.97		
Watertight Connectors							
100/125	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	14.30 14.30 14.30	5.20 5.20 5.20	5.30 5.30 5.30	.59-1.97 .59-1.97 .59-1.97		
Watertight Inlets							
100/125	2 Pole, 3 Wire 3 Pole, 4 Wire 4 Pole, 5 Wire	5.75 5.75 5.75	5.71 5.71 5.71			4.88 4.88 4.88	4.88 4.88 4.88

All measurements shown in inches.

Splashproof Dimensional Information


16/20 & 30/32 Amp Splashproof Devices/Dimensional Information


Amps	Wire Configurations	A	B	C	D	E	F
Splashproof Receptacles							
16/20	2 Pole, 3 Wire	2.50	1.57	1.60	3.10	2.05	2.36
	3 Pole, 4 Wire	2.90	1.57	1.73	3.46	2.36	2.75
	4 Pole, 5 Wire	2.90	1.73	1.73	3.66	2.36	2.75
30/32	2 Pole, 3 Wire	3.30	2.10	1.97	4.06	2.75	3.15
	3 Pole, 4 Wire	3.30	2.10	1.97	4.06	2.75	3.15
	4 Pole, 5 Wire	3.30	2.20	2.05	4.20	2.75	3.15
Splashproof Plugs							
16/20	2 Pole, 3 Wire	5.30	2.17		.31-.59		
	3 Pole, 4 Wire	5.50	2.36		.31-.59		
	4 Pole, 5 Wire	6.00	2.60		.39-.71		
30/32	2 Pole, 3 Wire	6.50	2.78		.39-.71		
	3 Pole, 4 Wire	6.50	2.78		.47-.87		
	4 Pole, 5 Wire	6.70	3.03		.47-.87		
Splashproof Connectors							
16/20	2 Pole, 3 Wire	5.79	2.15	2.91	.31-.59		
	3 Pole, 4 Wire	5.94	2.42	3.19	.31-.59		
	4 Pole, 5 Wire	6.77	2.73	3.54	.39-.71		
30/32	2 Pole, 3 Wire	6.97	2.80	3.66	.39-.71		
	3 Pole, 4 Wire	6.97	2.80	3.66	.47-.87		
	4 Pole, 5 Wire	7.20	3.05	3.94	.47-.87		
Splashproof Inlets							
16/20	2 Pole, 3 Wire	2.83	3.07			2.44	3.70
	3 Pole, 4 Wire	3.70	3.39			3.27	4.29
	4 Pole, 5 Wire	3.70	3.39			3.27	4.29
30/32	2 Pole, 3 Wire	3.98	4.37			3.54	5.86
	3 Pole, 4 Wire	3.98	4.37			3.54	5.86
	4 Pole, 5 Wire	3.98	4.25			3.54	5.86

60/63 Amp Splashproof Devices/Dimensional Information


Amps	Wire Configurations	A	B	C	D	E	F
Splashproof Receptacles							
60/63	2 Pole, 3 Wire	4.20	3.50	2.76	5.08	3.03	3.35
	3 Pole, 4 Wire	4.20	3.50	2.76	5.08	3.03	3.35
	4 Pole, 5 Wire	4.20	3.50	2.76	5.08	3.03	3.35
Splashproof Plugs							
60/63	2 Pole, 3 Wire	10.00	4.02		.63-1.04		
	3 Pole, 4 Wire	10.00	4.02		.73-1.14		
	4 Pole, 5 Wire	10.00	4.02		.80-1.26		
Splashproof Connectors							
60/63	2 Pole, 3 Wire	10.75	3.78	4.67	.63-1.04		
	3 Pole, 4 Wire	10.75	3.78	4.67	.73-1.14		
	4 Pole, 5 Wire	10.75	3.78	4.67	.80-1.26		
Splashproof Inlets							
60/63	2 Pole, 3 Wire	4.50	4.25			3.03	3.35
	3 Pole, 4 Wire	4.50	4.25			3.03	3.35
	4 Pole, 5 Wire	4.50	4.25			3.03	3.35

All measurements shown in inches.






Receptacles







Plugs






Connectors





Inlets



Receptacle/Inlet
Drilling Pattern

legrand®
Pass & Seymour

Pin & Sleeve Devices
Watertight & Splashproof Material & Performance

Pin & Sleeve Product Specifications

	16/20 Amp	30/32 Amp	60/63 Amp	100/125 Amp
Receptacles				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Inlets				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Mounting Flange	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Plugs				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Connectors				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Metallic Back Box				
Housing	Cast Aluminum			
Hub	Cast Iron			
Non-Metallic Back Box				
Housing	Polyamide 6			
Hub				

† Does not apply to splashproof.


* 16/20A and 30/32A sleeves and pins on splashproof products are brass only. Splashproof inlets and plugs do not have locking rings.
Consult factory for additional details.

Performance

Electrical:

Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30˚C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 amp: 5000 cycles with full-rated current and voltage
	30, 60, 100 amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical:

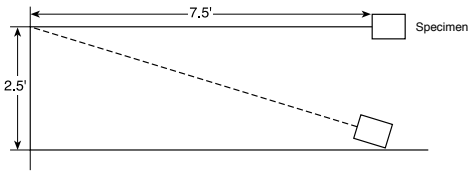

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)

Cord Grip Retention

	Force, Lbs.**	Torque, Ft.lbs.**
20A	30	0.4
30A	75	0.5
60A	150	1.0
100A	150	1.0

**Applied to minimum recommended cable size.

Cord Accommodation	Round portable service cords
	Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental:


Moisture Resistance	Per IEC 309-1
Flammability	Contact with live parts: V2 or V0 Enclosure: HB or better per UL94
Operating Temperature	+80˚C maximum continuous; -50˚C minimum without impact

legrand®
Pass & Seymour


Metallic Back Boxes Dimensions

Catalog Number	A	B	C	D	E	F	G	H	J DIA	K	L
PSBB201W	5.60	5.00	3.17	5.00	2.05	2.36	8-32UNC	2.04	.20 DIA	1/2" NPT	2.75
PSBB202W	6.82	6.12	4.11	6.07	2.36	2.76	8-32UNC	2.55	.20 DIA	3/4" NPT	3.61
PSBB201SP	7.00	5.98	2.00	6.00	3.27	4.29	8-32UNC	3.00	.20 DIA	3/4" NPT	3.96
PSBB301W	6.82	6.12	4.11	6.07	2.76	3.15	8-32UNC	2.55	.20 DIA	3/4" NPT	3.61
PSBB301SP	8.60	7.58	2.00	7.60	3.54	5.87	8-32UNC	3.00	.20 DIA	3/4" NPT	4.22
PSBB601W	8.63	7.75	4.92	7.70	3.03	3.35	10-24UNC	3.87	.28 DIA	1½" NPT	4.75
PSBB1001W	12.50	11.00	6.25	11.00	4.88	4.88	1/4-20UNC	4.75	.28 DIA	1½" NPT	6.25
PSBB1002W	12.50	11.00	6.25	11.00	4.88	4.88	1/4-20UNC	4.75	.28 DIA	2" NPT	6.25

Watertight: Inlets and Receptacles
Splashproof: 20, 30 & 60A Receptacles
60A Inlets

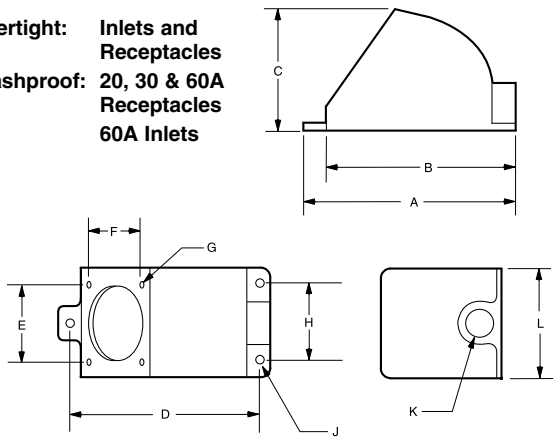

Splashproof: 20 & 30A Inlets

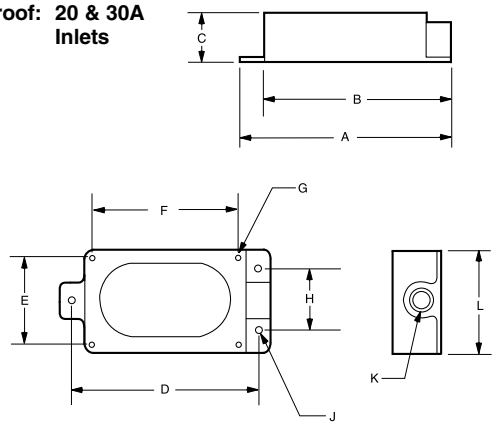


Non-Metallic Back Boxes Dimensions

Catalog Number	A	B	C	D	E	Hub Size
PSBBN201W	2.50	2.31	4.16	2.28	0.78	3/4" NPT
PSBBN202W	3.34	3.78	4.81	2.38	0.63	3/4" NPT
PSBBN301W	3.53	4.03	6.38	3.53	1.03	1" NPT
PSBBN601W	6.00	6.69	11.81	5.91	1.56	1½" NPT


All measurements shown in inches.




In both non-metallic (left) and metallic (right) Back Boxes, you'll find easy installation and no-compromises durability.




PSBBN201W



PSBBN202W




PSBBN301W




PSBBN601W

legrand®
Pass & Seymour

Pin & Sleeve Devices
Accessories/Dimensional Information





Pin & Sleeve Strain Relief Adapters

Catalog Number	A	B	C	D	E	F	G	H (Metric Thread)
PSAD2050	1/2" NPT	1.38	1.13	.54	.25	.47	.75	M25X1.5
PSAD2034	3/4" NPT	1.50	1.50	.56	.25	.47	.75	M25X1.5
PSAD3050	1/2" NPT	1.38	1.13	.54	.25	.47	.88	M32X1.5
PSAD3034	3/4" NPT	1.50	1.50	.56	.25	.47	.88	M32X1.5
PSAD301	1" NPT	1.75	1.75	.70	.25	.47	.88	M32X1.5
PSAD601	1" NPT	2.00	1.75	.70	.38	1.00	1.38	M45X2
PSAD60125	1¼" NPT	2.00	2.00	.70	.38	1.00	1.38	M45X2
PSAD60150	1½" NPT	2.38	2.38	.70	.38	1.00	1.38	M45X2
PSAD100125	1¼" NPT	2.50	2.38	.70	.38	1.10	2.00	M60X2
PSAD100150	1½" NPT	2.50	2.38	.70	.38	1.10	2.00	M60X2
PSAD1002	2" NPT	2.75	2.70	.75	.38	1.10	2.00	M60X2

All measurements shown in inches.



PSCP320



PSCP60



Choose from a full range of P&S Strain Relief Adapters, all built extra-tough for no-worries dependability.

Back Box & Protective Covers

Device Type	Back Box	Hub Size	Protective Plug & Inlet Cover
20A 3 Wire	PSBB201W	1/2"	PSCP320
20A 4 Wire	PSBB202W	3/4"	PSCP420
20A 5 Wire	PSBB202W	3/4"	PSCP520
20A 3, 4, 5 Wire (Inlet)	PSBB201SP	3/4"	
30A 3, 4 Wire	PSBB301W	3/4"	PSCP3430
30A 5 Wire	PSBB301W	3/4"	PSCP530
30A 3, 4, 5 Wire (Inlet)	PSBB301SP	3/4"	
All 60A	PSBB601W*	1½"	PSCP60
All 100A	PSBB1001W	1½"	PSCP100
All 100A	PSBB1002W	2"	

*1¼" Reducer Supplied

Strain Relief Adapter Fittings

Device Type	Fitting Size	Catalog Number
20A 3, 4 Wire	1/2" NPT	PSAD2050
20A 3, 4 Wire	3/4" NPT	PSAD2034
20A 5W, All 30A	1/2" NPT	PSAD3050
30A 3, 4 Wire	3/4" NPT	PSAD3034
30A 3, 4 Wire	1" NPT	PSAD301
All 60A	1" NPT	PSAD601
All 60A	1¼" NPT	PSAD60125
All 60A	1½" NPT	PSAD60150
All 100A	1¼" NPT	PSAD100125
All 100A	1½" NPT	PSAD100150
All 100A	2" NPT	PSAD1002

Watertight Pin & Sleeve Plugs

20, 30, 60 & 100A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460P7W
Description: Plug, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Watertight Pin & Sleeve Connectors

20, 30, 60 & 100A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460C7W
Description: Connector, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Splashproof Pin & Sleeve Plugs

20, 30 & 60A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460P7S
Description: Plug, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Splashproof Pin & Sleeve Connectors

20, 30 & 60A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460C7S
Description: Connector, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

legrand®
Pass & Seymour

Pin & Sleeve Devices
Technical Specifications

IP Suitability Rating

IP Suitability Ratings are an international system for classifying the degree of protection provided by enclosures of electrical equipment. The higher the number, the greater the degree of protection; they apply ONLY to properly installed equipment. The numerals stand for the following:

1. First Number: Degree of protection for persons against access to hazardous parts inside the enclosure and/or against solid bodies.
2. Second Number: Degree of protection of equipment inside enclosures against damage from the ingress of water.

IEC Enclosure Classification Designation		
Code Letters	**First Number**	**Second Number**
Ingress Protection	**Against Ingress of Solid Bodies**	**Against Ingress of Water with Harmful Effects**
IP	0 - Nonprotected 1 - >=50 mm diameter 2 - >=12.5 mm diameter 3 - >=2.5 mm diameter 4 - >=1.0 mm 5 - Dust-protected 6 - Dusttight	0 - Nonprotected 1 - Vertically dripping 2 - Dripping (15° Tilted) 3 - Spraying 4 - Splashing 5 - Jetting 6 - Power jetting 7 - Temporary immersion 8 - Continuous immersion

Note: >= denotes greater than or equal to. Dimensions in millimeters (mm).

Example: IP44=Ingress Protection; Solid bodies >=1.0 mm; Splashing

IP44
Suitability

Conversion Chart

Fractions to Decimals to Millimeters

Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm
1/64	0.0156	0.3969	17/64	0.2656	6.7469	33/64	0.5156	13.0969	49/64	0.7656	19.4469
1/32	0.0312	0.7938	9/32	0.2812	7.1438	17/32	0.5312	13.4938	25/32	0.7812	19.8437
3/64	0.0468	1.1906	19/64	0.2968	7.5406	35/64	0.5468	13.8906	51/64	0.7968	20.2406
1/16	0.0625	1.5875	5/16	0.3125	7.9375	9/16	0.5625	14.2875	13/16	0.8125	20.6375
5/64	0.0781	1.9844	21/64	0.3281	8.3344	37/64	0.5781	14.6844	53/64	0.8281	21.0344
3/32	0.0937	2.3812	11/32	0.3437	8.7312	19/32	0.5937	15.0812	27/32	0.8437	21.4312
7/64	0.1093	2.7781	23/64	0.3593	9.1281	39/64	0.6093	15.4781	55/64	0.8593	21.8281
1/8	0.1250	3.1750	3/8	0.3750	9.5250	5/8	0.6250	15.8750	7/8	0.8750	22.2250
9/64	0.1406	3.5719	25/64	0.3906	9.9219	41/64	0.6406	16.2719	57/64	0.8906	22.6219
5/32	0.1562	3.9688	13/32	0.4062	10.3188	21/32	0.6562	16.6688	29/32	0.9062	23.0188
11/64	0.1718	4.3656	27/64	0.4218	10.7156	43/64	0.6718	17.0656	59/64	0.9218	23.4156
3/16	0.1875	4.7625	7/16	0.4375	11.1125	11/16	0.6875	17.4625	15/16	0.9375	23.8125
13/64	0.2031	5.1594	29/64	0.4531	11.5094	45/64	0.7031	17.8594	61/ 64	0.9531	24.2094
7/32	0.2187	5.5562	15/32	0.4687	11.9062	23/32	0.7187	18.2562	31/32	0.9687	24.6062
15/64	0.2343	5.9531	31/64	0.4843	12.3031	47/64	0.7343	18.6531	63/64	0.9843	25.0031
1/4	0.2500	6.3500	1/2	0.5000	12.7000	3/4	0.7500	19.0500	1	1.0000	25.4000

North American Watertight

Pg. J-14-19	Pg. J-20-24			Pg. J-3-7	Pg. J-8-13	Pg. J-25-28				Pg. J-35	
Fusible Safety Switches	Non-Fusible Safety Switches	Amps	Volts	Fusible Mec. Interlock	Non-Fusible Mec. Interlock	Plug	Receptacle	Connector	Inlet	Metallic Back Box	Non-Metallic Back Box
N/A	N/A	20	120VAC			PS320P4W	PS320R4W	PS320C4W		PSBB201W	PSBBN201W
			240VAC			PS320P6W	PS320R6W	PS320C6W		PSBB201W	PSBBN201W
			480VAC			PS320P7W	PS320R7W	PS320C7W		PSBB201W	PSBBN201W
			277VAC			PS320P5W	PS320R5W	PS320C5W		PSBB201W	PSBBN201W
			120/240VAC	PS420FMIR12W	PS420MIR12W	PS420P12W	PS420R12W	PS420C12W		PSBB202W	PSBBN202W
			3ø 240VAC	PS420FMIR9W	PS420MIR9W	PS420P9W	PS420R9W	PS420C9W		PSBB202W	PSBBN202W
			3ø 480VAC	PS420FMIR7W	PS420MIR7W	PS420P7W	PS420R7W	PS420C7W		PSBB202W	PSBBN202W
			3ø 600VAC	PS420FMIR5W	PS420MIR5W	PS420P5W	PS420R5W	PS420C5W		PSBB202W	PSBBN202W
			3øY 120/208VAC			PS520P9W	PS520R9W	PS520C9W		PSBB202W	PSBBN202W
			3øY 277/480VAC			PS520P7W	PS520R7W	PS520C7W		PSBB202W	PSBBN202W
			3øY 347/600VAC			PS520P5W	PS520R5W	PS520C5W		PSBB202W	PSBBN202W
PS30FSS	PS30SS	30	120VAC		PS330MIR4W	PS330P4W	PS330R4W	PS330C4W		PSBB301W	PSBBN301W
			240VAC	PS330FMIR6W		PS330P6W	PS330R6W	PS330C6W		PSBB301W	PSBBN301W
			480VAC			PS330P7W	PS330R7W	PS330C7W		PSBB301W	PSBBN301W
			120/240VAC	PS430FMIR12W			PS430R12W	PS430C12W		PSBB301W	PSBBN301W
			3ø 240VAC	PS430FMIR9W	PS430MIR9W	PS430P9W	PS430R9W	PS430C9W		PSBB301W	PSBBN301W
			3ø 480VAC	PS430FMIR7W	PS430MIR7W	PS430P7W	PS430R7W	PS430C7W		PSBB301W	PSBBN301W
			3ø 600VAC	PS430FMIR5W	PS430MIR5W	PS430P5W	PS430R5W	PS430C5W		PSBB301W	PSBBN301W
			380/440 VAC	PS430FMIR3W	PS430MIR3W	PS430P3W	PS430R3W	PS430C3W		PSBB301W	PSBBN301W
			3øY 120/208VAC	PS530FMIR9W	PS530MIR9W	PS530P9W	PS530R9W	PS530C9W		PSBB301W	PSBBN301W
			3øY 277/480VAC	PS530FMIR7W	PS530MIR7W	PS530P7W	PS530R7W	PS530C7W		PSBB301W	PSBBN301W
			3øY 347/600VAC		PS530MIR5W		PS530R5W	PS530C5W		PSBB301W	PSBBN301W
PS60FSS	PS60SS	60	120VAC			PS360P4W	PS360R4W	PS360C4W	PS360B4W	PSBB601W	PSBBN601W
			240VAC	PS360FMIR6W	PS360MIR6W	PS360P6W	PS360R6W	PS360C6W	PS360B6W	PSBB601W	PSBBN601W
			480VAC		PS360MIR7W	PS360P7W	PS360R7W	PS360C7W	PS360B7W	PSBB601W	PSBBN601W
			120/240VAC	PS460FMIR12W	PS460MIR12W	PS460P12W	PS460R12W	PS460C12W	PS460B12W	PSBB601W	PSBBN601W
			3ø 240VAC	PS460FMIR9W	PS460MIR9W	PS460P9W	PS460R9W	PS460C9W	PS460B9W	PSBB601W	PSBBN601W
			3ø 480VAC	PS460FMIR7W	PS460MIR7W	PS460P7W	PS460R7W	PS460C7W	PS460B7W	PSBB601W	PSBBN601W
			3ø 600VAC	PS460FMIR5W	PS460MIR5W	PS460P5W	PS460R5W	PS460C5W	PS460B5W	PSBB601W	PSBBN601W
			3øY 120/208VAC	PS560FMIR9W	PS560MIR9W	PS560P9W	PS560R9W	PS560C9W	PS560B9W	PSBB601W	PSBBN601W
			3øY 277/480VAC	PS560FMIR7W	PS560MIR7W	PS560P7W	PS560R7W	PS560C7W	PS560B7W	PSBB601W	PSBBN601W
			3øY 347/600VAC	PS560FMIR5W	PS560MIR5W	PS560P5W	PS560R5W	PS560C5W	PS560B5W	PSBB601W	PSBBN601W
PS100FSS	PS100SS	100	120VAC			PS3100P4W	PS3100R4W	PS3100C4W		PSBB1001W	
			240VAC		PS3100MIR6W	PS3100P6W	PS3100R6W	PS3100C6W	PS3100B6W	PSBB1001W	
			480VAC		PS3100MIR7W	PS3100P7W	PS3100R7W	PS3100C7W	PS3100B7W	PSBB1001W	
			120/240VAC	PS4100FMIR12W	PS4100MIR12W	PS4100P12W	PS4100R12W	PS4100C12W	PS4100B12W	PSBB1001W	
			3ø 240VAC	PS4100FMIR9W	PS4100MIR9W	PS4100P9W	PS4100R9W	PS4100C9W	PS4100B9W	PSBB1001W	
			3ø 480VAC	PS4100FMIR7W	PS4100MIR7W	PS4100P7W	PS4100R7W	PS4100C7W	PS4100B7W	PSBB1001W	
			3ø 600VAC	PS4100FMIR5W	PS4100MIR5W	PS4100P5W	PS4100R5W	PS4100C5W	PS4100B5W	PSBB1001W	
			3øY 120/208VAC	PS5100FMIR9W	PS5100MIR9W	PS5100P9W	PS5100R9W	PS5100C9W	PS5100B9W	PSBB1001W	
			3øY 277/480VAC	PS5100FMIR7W	PS5100MIR7W	PS5100P7W	PS5100R7W	PS5100C7W	PS5100B7W	PSBB1001W	
			3øY 347/600VAC	PS5100FMIR5W	PS5100MIR5W	PS5100P5W	PS5100R5W	PS5100C5W	PS5100B5W	PSBB1001W	

North American Splashproof

		Pg. J-29				Pg. J-35	
Amps	Volts	Plug	Receptacle	Connector	Inlet	Metallic Back Box	Non-Metallic Back Box
20	120VAC	PS320P4S	PS320R4S	PS320C4S		PSBB201W	PSBBN201W
	240VAC	PS320P6S	PS320R6S	PS320C6S	PS320B6S	PSBB201W	PSBBN201W
	277VAC	PS320P5S	PS320R5S			PSBB201W	PSBBN201W
	120/240VAC	PS420P12S	PS420R12S	PS420C12S		PSBB202W	PSBBN202W
	3ø 240VAC	PS420P9S	PS420R9S	PS420C9S	PS420B9S	PSBB202W	PSBBN202W
	3ø 480VAC	PS420P7S	PS420R7S	PS420C7S	PS420B7S	PSBB202W	PSBBN202W
	3ø 600VAC		PS420R5S		PS420B5S	PSBB202W	PSBBN202W
	3øY 120/208VAC		PS520R9S	PS520C9S	PS520B9S	PSBB202W	PSBBN202W
	3øY 277/480VAC			PS520C7S	PS520B7S	PSBB202W	PSBBN202W
	3øY 347/600VAC		PS520R5S	PS520C5S	PS520B5S	PSBB202W	PSBBN202W
30	120VAC	PS330P4S	PS330R4S	PS330C4S	PS330B4S	PSBB301W	PSBBN301W
	240VAC	PS330P6S	PS330R6S	PS330C6S	PS330B6S	PSBB301W	PSBBN301W
	480VAC	PS330P7S		PS330C7S	PS330B7S	PSBB301W	PSBBN301W
	120/240VAC		PS430R12S	PS430C12S	PS430B12S	PSBB301W	PSBBN301W
	3ø 240VAC	PS430P9S	PS430R9S	PS430C9S	PS430B9S	PSBB301W	PSBBN301W
	3ø 480VAC	PS430P7S	PS430R7S	PS430C7S	PS430B7S	PSBB301W	PSBBN301W
	3ø 600VAC	PS430P5S	PS430R5S	PS430C5S	PS430B5S	PSBB301W	PSBBN301W
	3øY 120/208VAC	PS530P9S	PS530R9S	PS530C9S	PS530B9S	PSBB301W	PSBBN301W
	3øY 277/480VAC	PS530P7S			PS530B7S	PSBB301W	PSBBN301W
	3øY 347/600VAC	PS530P5S	PS530R5S	PS530C5S	PS530B5S	PSBB301W	PSBBN301W
60	240VAC	PS360P6S	PS360R6S	PS360C6S	PS360B6S	PSBB601W	PSBBN601W
	480VAC	PS360P7S	PS360R7S	PS360C7S	PS360B7S	PSBB601W	PSBBN601W
	120/240VAC	PS460P12S	PS460R12S	PS460C12S	PS460B12S	PSBB601W	PSBBN601W
	3ø 240VAC	PS460P9S	PS460R9S	PS460C9S	PS460B9S	PSBB601W	PSBBN601W
	3ø 480VAC	PS460P7S	PS460R7S	PS460C7S	PS460B7S	PSBB601W	PSBBN601W
	3ø 600VAC	PS460P5S	PS460R5S	PS460C5S	PS460B5S	PSBB601W	PSBBN601W
	3øY 120/208VAC	PS560P9S	PS560R9S	PS560C9S	PS560B9S	PSBB601W	PSBBN601W
	3øY 277/480VAC	PS560P7S	PS560R7S	PS560C7S	PS560B7S	PSBB601W	PSBBN601W
	3øY 347/600VAC	PS560P5S	PS560R5S	PS560C5S	PS560B5S	PSBB601W	PSBBN601W

International Splashproof

		Pg. J-30				Pg. J-30
Amps	Volts	Receptacle	Plug	Connector	Inlet	Non-Metallic Back Box
16	110/120	51920	51940	51980	51970	52029
	220/240	52022	52042	52082	52172	52029
	380/415	52222	52242	52282	52272	52029
	220/240	52023	52043	52083	52073	52229
	380/415	52223	52243	52283	52173	52229
	220/240		52044	52084	52074	52229
	220/380; 240/415	52224	52244	52284	52174	52229
32	110/120				51972	
	220/240	52718	52742	52782	52872	
	380/415		52942	52982	52972	
	220/240		52743	52783	52773	
	380/415		52943	52983	52873	
	220/240		52744		52774	
	220/380; 240/415		52944	52984		
63	110/120	53542	53582			53889
	220/240	53622	53642	53682	53772	53889
	220/240	53623	53643	53683		53889
	380/415	53823	53843	53883	53773	53889
	220/240		53644	53684		53889
	220/380; 240/415	53824	53844	53884	53774	53889



FLEXCOR® WIRE MESH GRIPS

legrand®

Pass & Seymour


Flexcor® Wire Mesh Grips

legrand®
Pass & Seymour

Fittings available in male straight, female straight, 45° and 90° designs for fast installation in all kinds of applications.

No special installation tools required.

Corrosion-resistant, die cast aluminum fitting with watertight seal (Deluxe Cord Connector Strain Relief) protects connections from cable stress in damp applications.

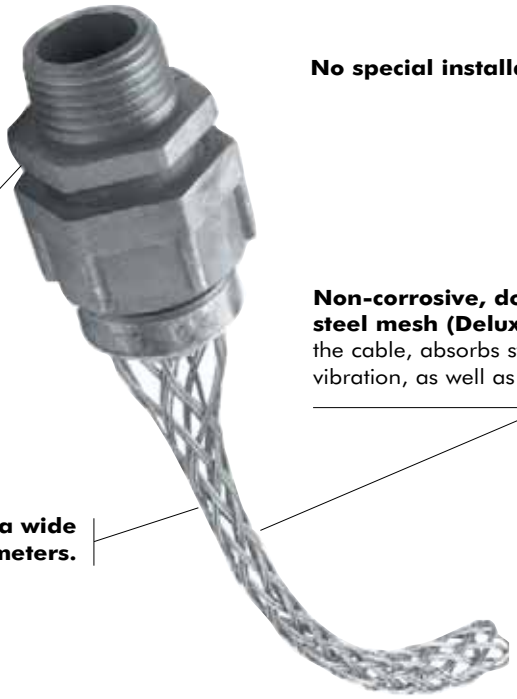

Non-corrosive, double-weave stainless steel mesh (Deluxe Cord Grip) supports the cable, absorbs stress caused by flexure and vibration, as well as controls arc of cable.

Mesh readily expands for a wide range of cord diameters.

CG610
Male Straight, Deluxe Cord Connectors Strain Relief


Rugged, easy-to-install and available in a wide range of sizes — our Flexcor® Wire Mesh Strain Relief, Cable-Pulling, and Cable-Support Grips are engineered to take some of the strain off of you.


Index

Device	Page Number
Applications	K-2, K-3
Product Description	K-4
Split Support Grip Lace & Rod Mesh Termination	K-5
Strain Relief Deluxe Cord Grips	K-6
Strain Relief Grips	K-7
Strain Relief Liquid-Tight Grips	K-8
Support Grips Standard-Duty, Closed Mesh	K-9
Support Grips Standard-Duty, Split Lace	K-10
Support Grips Standard-Duty, Split Rod	K-11
Support Grips Heavy-Duty	K-12
Support Grips Service & Bus Drop	K-13
Support Grips Fiber Optic	K-14
Pulling Grips Junior- & Light-Duty	K-15
Pulling Grips Medium-Duty	K-16
Pulling Grips Heavy-Duty	K-17
Pulling Grips Multi-Weave	K-18
Pulling Grips High Strength & Fiber Optic	K-19
Pulling Grips Slack	K-20
Selecting Properly Sized Pulling & Support Grips	K-21, K-22
Pulling & Support Grips Strength Information	K-23

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Applications

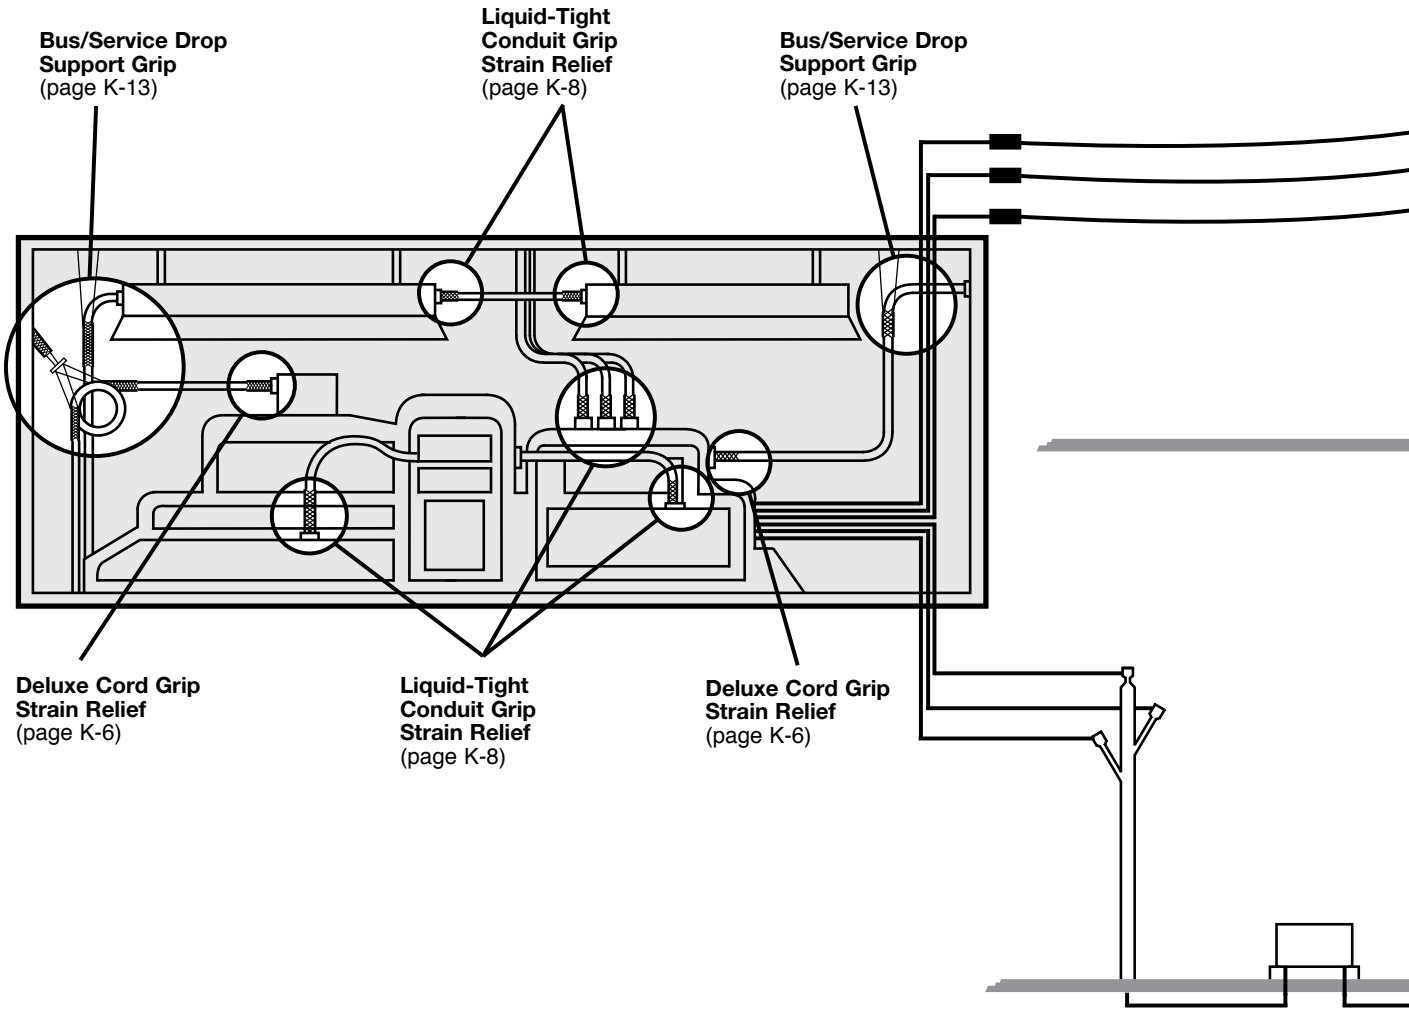


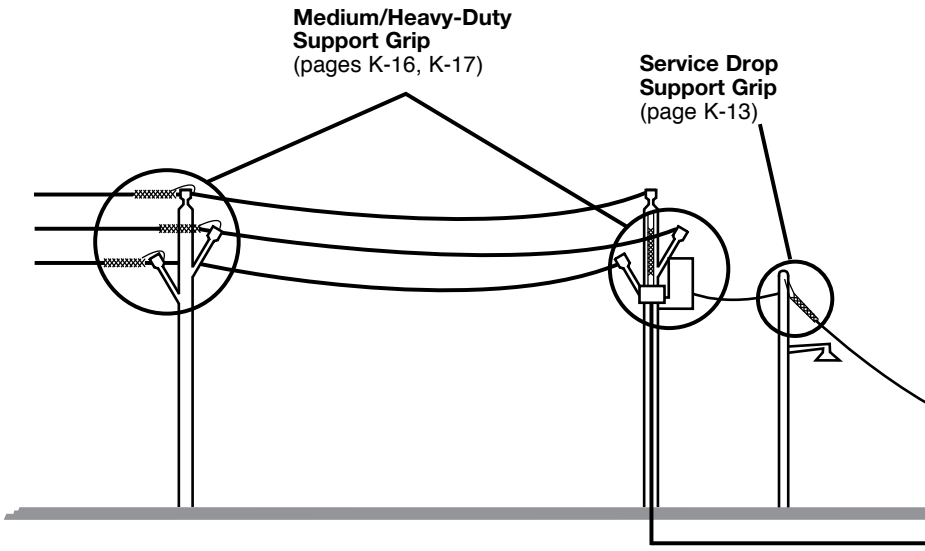


For assistance in selecting Flexcor® Wire Mesh Grips, see pages K-21 – K-23.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

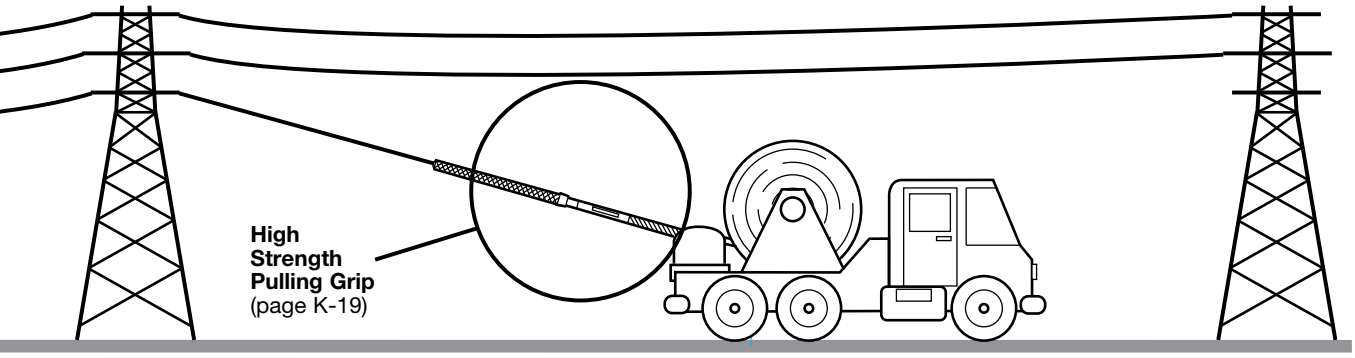

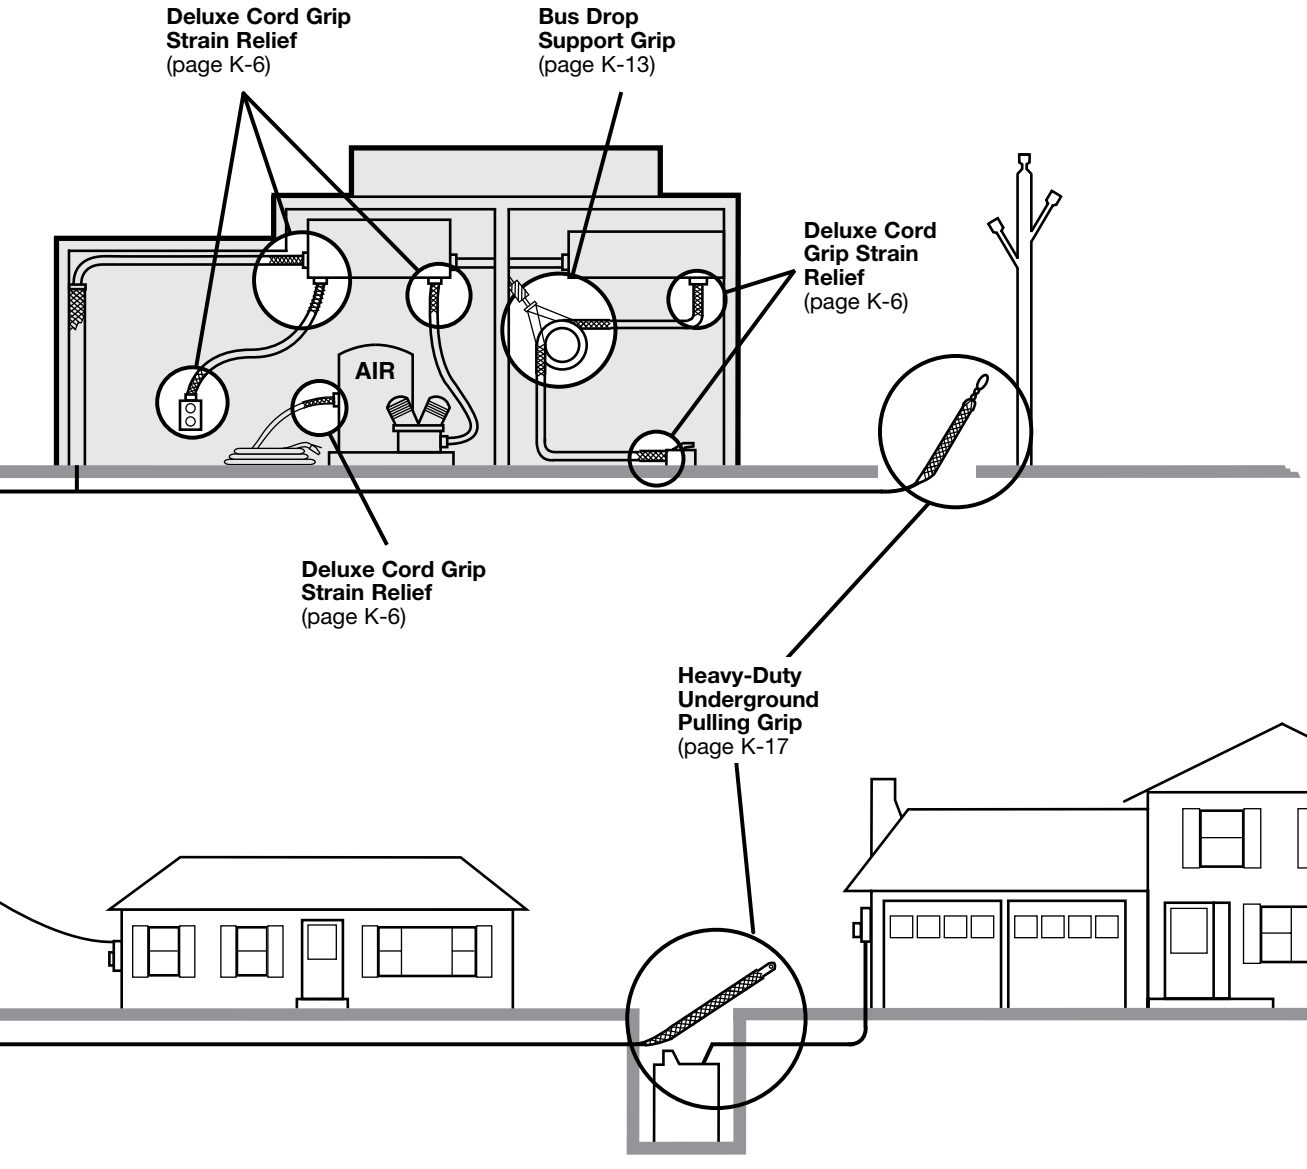

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.





legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Product Description

Application





Flexcor® Wire Mesh Grips are used to support cable or conductor after it has been installed, pull electrical cable or conductor into place, provide strain relief at the point of wiring connections. Flexcor® devices protect cables, relieve stress, and prevent cable pull-out from fittings and terminations.

Support Grip Attachments

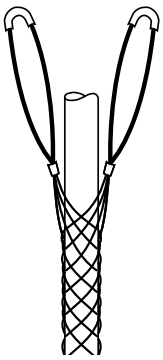Double Eye	Single Eye	Offset Eye	Locking Bail Eye
			


Available in four different attachments. Load is distributed over entire length of grip and will not injure cable.

Strain Relief Grip Fittings

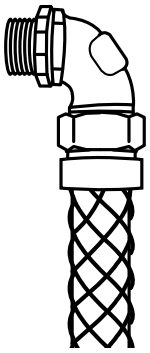Male Straight	Female Straight	Male 45°	Male 90°
			



Prevents pull-out or damage to cable due to constant motion or flexing. Also for Liquid-Tight, hose and box connections.

Pulling Grips

Flexible Eye	Rotating Eye
	

Assortment of rugged pulling grips available individually or in kits to make wire pulling easier.

Support Grip Mesh Types

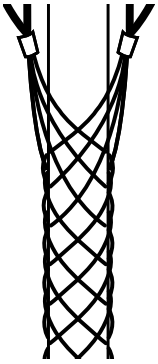Closed Mesh	Split Lace Mesh	Split Rod Mesh
		

Available in three types and depends on availability of wire end.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Split Support Grip
Lace & Rod Mesh Termination


legrand®
Pass & Seymour

Split Lace/Split Rod Attachments
(for use where end of cable is not accessible)

Split Lace Support Grip Mesh Termination

For Split Lace mesh termination, Flexcor® single weave Split Lace grips are provided with an additional single lace, two laces are provided with each double weave Split Lace grip. Lace strands should be same material as the grip.


1. Wrap split mesh grip around cable. Start lacing at top or bottom end of mesh. Thread lace through first two loops of split mesh and pull through until the lace is centered at this point. Lace as you would your shoe, crossing laces before lacing the next two loops.
2. Leave a space between adjoining loops approximately equal to the width of one diamond of the mesh.
3. Twist ends of lace strands together at end of grip or tie in a knot.
4. Wrap ends of lace tightly around grip. Excess lace may be cut off.

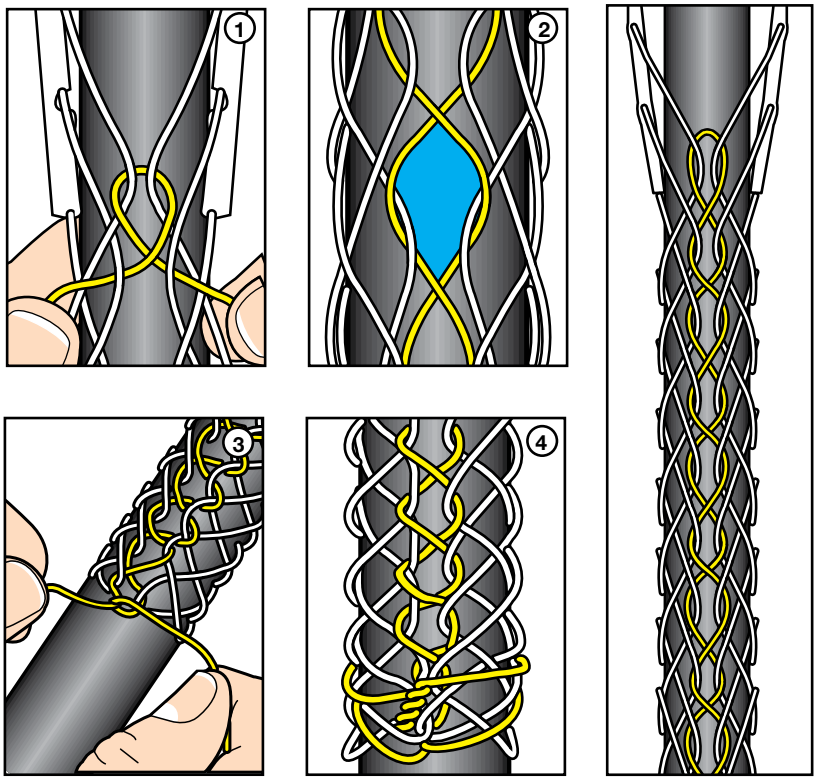

Split Rod Support Grip Mesh Termination

For Split Rod mesh termination, a weaving rod is supplied with each grip. The open mesh passes around the rod and matches up with the open mesh from the opposite direction. Split Rod support grips are quick and easy to use and reusable.

1. Wrap split mesh grip around cable. Thread rod through the open loops in a weaving motion, using end of the rod to engage loops.
2. A steady push and twist motion is required. Use other hand to bring mesh loops together so as to weave through them.
3. To remove, pull rod out.

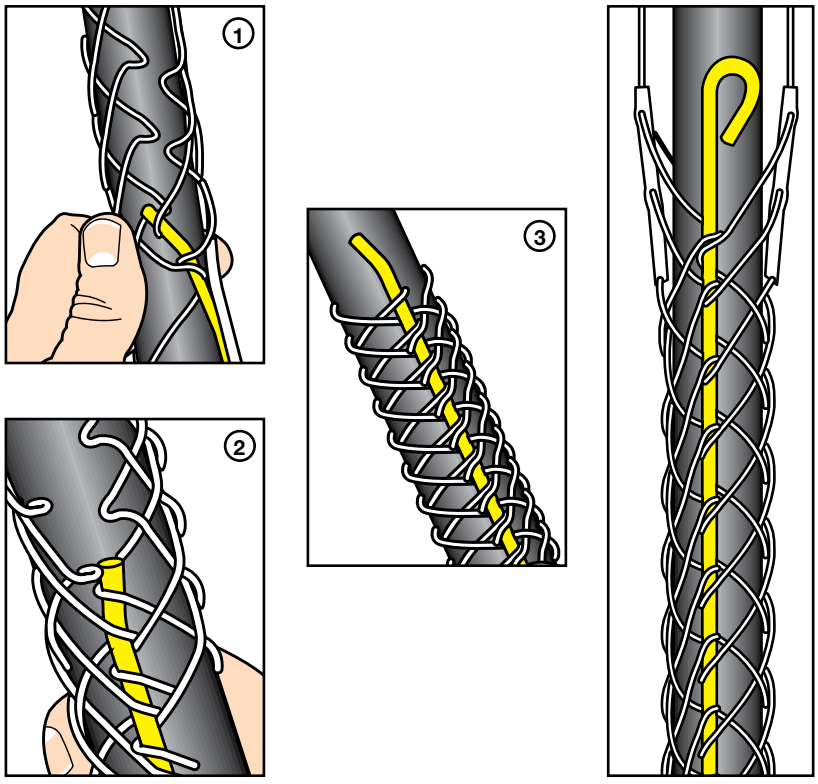

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Strain Relief Deluxe Cord Grips


Straight Male Connector


90° Male Connector


45° Male Connector


Straight Female Connector

Description

Deluxe cord grips are woven of stainless steel mesh with an aluminum body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.

Deluxe grips are suitable for use in hazardous locations per Class I, Div. 2; Class II, Div. 1 & 2; and Class III, Div. 1 & 2. NOTE: Stainless steel mesh is not suitable for marine use.

Straight Male Catalog Number	90° Male Catalog Number	45° Male Catalog Number	Straight Female Catalog Number	Cable Diameter Range
1/2" NPT Deluxe Cord Grips				
CG405	CG40590	CG40545	—	0.250"-0.300"
CG406	CG40690	CG40645	—	0.310"-0.375"
CG407	CG40790	—	—	0.375"-0.430"
CG408	CG40890	—	—	0.440"-0.500"
CG409	CG40990	CG40945	—	0.500"-0.550"
CG410	CG41090	—	CG410F	0.560"-0.625"
CG411	—	—	—	0.625"-0.750"
CG412	—	—	—	0.750"-0.875"
3/4" NPT Deluxe Cord Grips				
CG606	—	—	—	0.250"-0.375"
CG607	—	—	—	0.375"-0.440"
CG608	CG60890	CG60845	—	0.440"-0.500"
CG609	CG60990	CG60945	—	0.500"-0.550"
CG610	CG61090	—	—	0.560"-0.625"
CG611	CG61190	—	—	0.625"-0.670"
CG612	CG61290	CG61245	—	0.670"-0.750"
1" NPT Deluxe Cord Grips				
CG809	—	—	—	0.437"-0.562"
CG811	—	—	—	0.562"-0.687"
CG812	CG81290	CG81245	CG812F	0.625"-0.750"
CG814	CG81490	CG81445	—	0.750"-0.875"
CG816	CG81690	CG81645	CG816F	0.875"-1.000"

Straight Male Catalog Number	90° Male Catalog Number	45° Male Catalog Number	Cable Diameter Range
1-1/4" NPT Deluxe Cord Grips			
CG1016	CG101690		0.875"-1.000"
CG1018	CG101890		1.000"-1.125"
CG1020	—		1.125"-1.250"
CG1022	—	CG102245	1.250"-1.375"
1-1/2" NPT Deluxe Cord Grips			
CG1218	—		1.000"-1.125"
CG1220	CG122090		1.125"-1.250"
CG1222	CG122290	CG122245	1.250"-1.375"
2" NPT Deluxe Cord Grips			
CG1422	CG142290		1.250"-1.375"
CG1424	CG142490		1.312"-1.437"
CG1426	CG142690		1.437"-1.562"
CG1428	CG142890		1.562"-1.687"
CG1430	CG143090		1.687"-1.812"
CG1432	CG143290		1.750"-1.875"
CG1434	—		1.812"-1.937"
CG1436	—		1.937"-2.062"
CG1438	—		2.062"-2.187"
CG1440	—		2.187"-2.312"
CG1442	—		2.312"-2.437"

Straight Male Catalog Number	Cable Diameter Range
2-1/2" NPT Deluxe Cord Grips	
CG1630	1.687"-1.812"
CG1634	1.812"-1.937"
CG1636	1.937"-2.062"
CG1638	2.062"-2.187"
CG1640	2.187"-2.312"
CG1642	2.312"-2.437"
3" NPT Deluxe Cord Grips	
CG1830	1.688"-1.812"
CG1834	1.812"-1.937"
CG1836	1.937"-2.062"
CG1838	2.062"-2.187"
CG1840	2.187"-2.312"
CG1842	2.312"-2.437"
CG1844	2.437"-2.625"
CG1846	2.625"-2.812"
CG1848	2.812"-3.000"
CG1850	3.000"-3.250"

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.


Flexcor® Wire Mesh Grips
Strain Relief Grips

legrand®
Pass & Seymour

Description

Wide range grips are recommended for use in wiring of enclosures, power boxes, machine tools, and power centers. Includes insulated bushing.

Catalog Number	NPT Size	Cable Diameter Range
Wide Range, Straight Male, Dust Tight Grips		
BOX22	1/2"	0.220"-0.320"
BOX30	1/2"	0.300"-0.430"
BOX40	1/2"	0.400"-0.540"
BOX52	3/4"	0.520"-0.730"
BOX70	1"	0.700"-1.000"
BOX94	1-1/4"	0.940"-1.250"
BOX120	1-1/2"	1.200"-1.500"
BOX140	2"	1.400"-1.750"




Wide Range, Straight Male, Dust Tight

Description

Wire mesh grips for Turnlok and EHU straight blade plugs and connectors provide additional strain-relief for wiring device plugs and connectors used on portable equipment in commercial and institutional applications, and industrial plant and construction site areas, which incur abnormally high abuse.

Catalog Number	Cable Diameter Range	Mesh Length
Turnlok/EHU Strain Relief Grips		
FC22GL	0.220"-0.320"	4.00"
FC30GL	0.300"-0.430"	5.00"
FC40GL	0.400"-0.560"	5.00"
FC52GL	0.520"-0.730"	9.00"
FC70GL	0.700"-0.940"	7.50"
FC94GL	0.940"-1.250"	11.50"

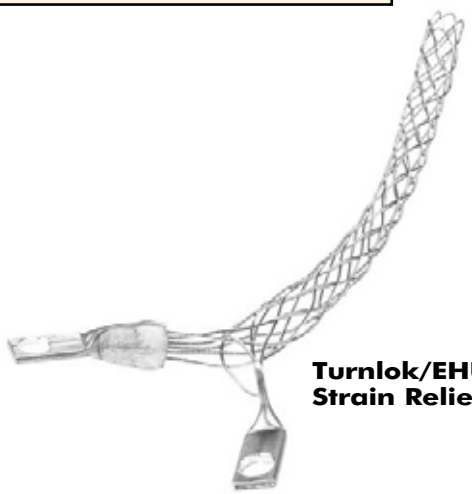

Turnlok/EHU Strain Relief Grips

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Strain Relief Liquid-Tight Grips



Straight Male Connector

Description

Liquid-Tight grips are woven of stainless steel mesh with zinc plated steel or malleable iron bodies and nuts for corrosion resistance. They are used to connect liquid-tight flexible conduit to electrical enclosures to prevent conduit pullout. Each fitting is supplied with an insulated throat to provide conductor insulation and protect against damage by flexing, heat expansion and contraction.

Liquid-Tight grips are recommended in the wiring of motors and any electrical enclosure where liquid-tight conduit is subject to motion or strain. NOTE: Stainless steel mesh is not suitable for marine use.

Straight Male Catalog Number	90° Male Catalog Number	45° Male Catalog Number	NPT Size	Mesh Length
Liquid-Tight for Metallic Flexible Conduit				
STB38SF	—	STB4538SF	3/8"	2.625"
STB50SF	STB9050SF	STB4550SF	1/2"	3.875"
STB75SF	STB9075SF	STB4575SF	3/4"	4.375"
STB100SF	STB90100SF	STB45100SF	1"	5.25"
STB125SF	STB90125SF	STB45125SF	1-1/4"	5.625"
STB150SF	STB90150SF	—	1-1/2"	5.75"
STB200SF	STB90200SF	STB45200SF	2"	7.5"
STB250SF	—	STB45250SF	2-1/2"	9.625"
STB300SF	STB90300SF	STB45300SF	3"	10.625"



90° Male Connector

Straight Male Catalog Number	NPT Size	Mesh Length
Liquid-Tight Grips for Non-Metallic Type "A" Flexible Conduit		
STBN38SF	3/8"	9"
STBN50SF	1/2"	10"
STBN75SF	3/4"	10.5"
STBN100SF	1"	12"
STBN125SF	1-1/4"	17"
STBN150SF	1-1/2"	21.5"
STBN200SF	2"	24"



45° Male Connector



Straight Female Connector



Non-Metallic Straight Male Connector

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Support Grips
Standard-Duty, Closed Mesh

legrand®
Pass & Seymour

Description

Standard closed mesh support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Closed mesh support grips are used when the end of the cable is accessible. Support grips are woven of corrosion-resistant tinned-bronze wire.


Catalog Number*	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength**
Standard-Duty, Closed Mesh, Single Eye Grips				
FC050U	0.500"-0.610"	7"	11"	770 lbs.
FC062U	0.620"-0.740"	8"	11"	960 lbs.
FC075U	0.750"-0.990"	8"	14"	1,300 lbs.
FC100U	1.000"-1.240"	9"	15"	1,680 lbs.
FC125U	1.250"-1.490"	10"	16"	1,680 lbs.
FC150U	1.500"-1.740"	12"	18"	1,680 lbs.
FC175U	1.750"-1.990"	14"	20"	2,640 lbs.
FC200U	2.000"-2.490"	16"	22"	3,760 lbs.
FC250U	2.500"-2.990"	18"	24"	3,760 lbs.
FC300U	3.000"-3.490"	21"	26"	5,040 lbs.
Standard-Duty, Closed Mesh, Double Eye Grips				
FC050UU	0.500"-0.610"	4"	11"	770 lbs.
FC062UU	0.620"-0.740"	4"	11"	1,150 lbs.
FC075UU	0.750"-0.990"	4"	14"	1,320 lbs.
FC100UU	1.000"-1.240"	5"	15"	1,920 lbs.
FC125UU	1.250"-1.490"	5"	16"	1,920 lbs.
FC150UU	1.500"-1.740"	6"	18"	1,920 lbs.
FC175UU	1.750"-1.990"	6"	20"	3,150 lbs.
FC200UU	2.000"-2.490"	6"	22"	3,360 lbs.
FC250UU	2.500"-2.990"	6"	24"	3,360 lbs.
Standard-Duty, Closed Mesh, Offset Eye Grips				
FC050OF	0.500"-0.610"	4"	11"	770 lbs.
FC062OF	0.620"-0.740"	4"	11"	960 lbs.
FC075OF	0.750"-0.990"	4"	14"	960 lbs.
FC100OF	1.000"-1.240"	5"	15"	1,680 lbs.
FC125OF	1.250"-1.490"	5"	16"	1,680 lbs.
FC150OF	1.500"-1.740"	5"	18"	1,680 lbs.
FC175OF	1.750"-1.990"	6"	20"	2,640 lbs.
FC200OF	2.000"-2.490"	6"	22"	3,760 lbs.
FC250OF	2.500"-2.990"	8"	24"	3,760 lbs.
FC300OF	3.000"-3.490"	9"	26"	5,040 lbs.
FC350OF	3.500"-3.990"	9"	28"	5,040 lbs.
Standard-Duty, Closed Mesh, Locking Bale Grips (Universal Eye)				
FC050LB	0.500"-0.610"	18"	11"	770 lbs.
FC062LB	0.620"-0.740"	18"	11"	1,150 lbs.
FC075LB	0.750"-0.990"	18"	14"	1,320 lbs.
FC100LB	1.000"-1.240"	18"	15"	1,920 lbs.
FC125LB	1.250"-1.490"	18"	16"	1,920 lbs.
FC150LB	1.500"-1.740"	18"	18"	1,920 lbs.
FC175LB	1.750"-1.990"	18"	20"	3,150 lbs.
FC200LB	2.000"-2.490"	18"	22"	3,360 lbs.
FC250LB	2.500"-2.990"	18"	24"	3,360 lbs.
FC300LB	3.000"-3.490"	18"	26"	5,280 lbs.
FC350LB	3.500"-3.990"	18"	28"	5,280 lbs.

*For stainless steel support grips, add "SS" suffix to the catalog no.; For example, FC050UU becomes FC050UUSS. Consult factory for price, availability and application. Stainless steel mesh is not suitable for marine use.

**To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.



Single Eye Grips

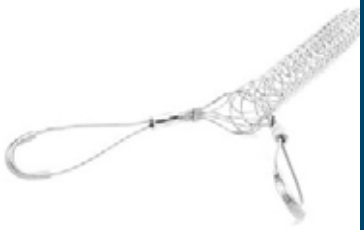

Double Eye Grips



Offset Eye Grips



Locking Bale Grips (Universal Eye)

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Support Grips
Standard-Duty, Split Lace



Split Lace, Single Eye



Split Lace, Double Eye



Split Lace, Offset Eye



Split Lace, Locking Bale (Universal Eye)

Description

Split lace support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Split lace support grips are used when the end of the cable cannot easily be accessed and the support grip is intended for permanent installation. Support grips are woven of corrosion-resistant tinned-bronze wire.

Catalog Number*	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength**
Standard-Duty, Split Lace, Single Eye				
FS050U	0.500"-0.610"	7"	11"	770 lbs.
FS062U	0.620"-0.740"	8"	11"	960 lbs.
FS075U	0.750"-0.990"	8"	14"	1,320 lbs.
FS100U	1.000"-1.240"	9"	15"	1,680 lbs.
FS125U	1.250"-1.490"	10"	16"	1,680 lbs.
FS150U	1.500"-1.740"	12"	18"	1,680 lbs.
FS175U	1.750"-1.990"	14"	20"	2,640 lbs.
FS200U	2.000"-2.490"	16"	22"	3,760 lbs.
FS250U	2.500"-2.990"	18"	24"	3,760 lbs.
FS300U	3.000"-3.490"	21"	26"	5,040 lbs.
FS350U	3.500"-3.990"	24"	28"	5,040 lbs.
Standard-Duty, Split Lace, Double Eye				
FS050UU	0.500"-0.610"	4"	11"	770 lbs.
FS062UU	0.620"-0.740"	4"	11"	1,150 lbs.
FS100UU	1.000"-1.240"	5"	15"	1,920 lbs.
FS125UU	1.250"-1.490"	5"	16"	1,920 lbs.
FS150UU	1.500"-1.740"	5"	18"	1,920 lbs.
FS175UU	1.750"-1.990"	6"	20"	3,150 lbs.
FS200UU	2.000"-2.490"	6"	22"	3,360 lbs.
FS250UU	2.500"-2.990"	6"	24"	3,360 lbs.
FS300UU	3.000"-3.490"	8"	26"	5,280 lbs.
FS350UU	3.500"-3.990"	8"	28"	5,280 lbs.
Standard-Duty, Split Lace, Offset Eye				
FS050OF	0.500"-0.610"	4"	11"	770 lbs.
FS062OF	0.620"-0.740"	4"	11"	960 lbs.
FS075OF	0.750"-0.990"	4"	14"	960 lbs.
FS100OF	1.000"-1.240"	5"	15"	1,680 lbs.
FS125OF	1.250"-1.490"	5"	16"	1,680 lbs.
FS150OF	1.500"-1.740"	5"	18"	1,680 lbs.
FS175OF	1.750"-1.990"	8"	20"	2,640 lbs.
FS200OF	2.000"-2.490"	8"	22"	3,760 lbs.
FS250OF	2.500"-2.990"	8"	24"	3,760 lbs.
FS300OF	3.000"-3.490"	9"	26"	5,040 lbs.
FS350OF	3.500"-3.990"	9"	28"	5,040 lbs.
Standard-Duty, Split Lace, Locking Bale (Universal Eye)				
FS050LB	0.500"-0.610"	18"	11"	770 lbs.
FS062LB	0.620"-0.740"	18"	11"	1,150 lbs.
FS100LB	1.000"-1.240"	18"	15"	1,920 lbs.
FS125LB	1.250"-1.490"	18"	16"	1,920 lbs.
FS150LB	1.500"-1.740"	18"	18"	1,920 lbs.
FS175LB	1.750"-1.990"	18"	20"	3,150 lbs.
FS200LB	2.000"-2.490"	18"	22"	3,360 lbs.
FS250LB	2.500"-2.990"	18"	24"	3,360 lbs.
FS300LB	3.000"-3.490"	18"	26"	5,280 lbs.
FS350LB	3.500"-3.990"	18"	28"	5,280 lbs.

*For stainless steel support grips, add "SS" suffix to the catalog no.; For example, FS050OF becomes FS050OFSS. Consult factory for price, availability and application. Stainless steel mesh is not suitable for marine use.

**To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Support Grips
Standard-Duty, Split Rod

legrand®
Pass & Seymour

Description

Split rod support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Split rod support grips are used when the end of the cable cannot be easily accessed and the installation is temporary. Support grips are woven of corrosion-resistant tinned-bronze wire.


Catalog Number*	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength**
Standard-Duty, Split Rod, Single Eye				
FR050U	0.500"-0.610"	7"	11"	770 lbs.
FR062U	0.620"-0.740"	8"	11"	960 lbs.
FR075U	0.750"-0.990"	8"	14"	1,320 lbs.
FR100U	1.000"-1.240"	9"	15"	1,680 lbs.
FR125U	1.250"-1.490"	10"	16"	1,680 lbs.
FR150U	1.500"-1.740"	12"	18"	1,680 lbs.
FR175U	1.750"-1.990"	14"	20"	2,640 lbs.
FR200U	2.000"-2.490"	16"	22"	3,760 lbs.
Standard-Duty, Split Rod, Double Eye				
FR050UU	0.500"-0.610"	4"	11"	770 lbs.
FR062UU	0.620"-0.740"	4"	11"	1,150 lbs.
FR075UU	0.750"-0.990"	4"	14"	1,320 lbs.
FR100UU	1.000"-1.240"	5"	15"	1,920 lbs.
FR125UU	1.250"-1.490"	5"	16"	1,920 lbs.
FR150UU	1.500"-1.740"	5"	18"	1,920 lbs.
FR175UU	1.750"-1.990"	6"	20"	3,150 lbs.
FR200UU	2.000"-2.490"	6"	22"	3,360 lbs.
Standard-Duty, Split Rod, Offset Eye				
FR050OF	0.500"-0.610"	4"	11"	770 lbs.
FR062OF	0.620"-0.740"	4"	11"	960 lbs.
FR075OF	0.750"-0.990"	4"	14"	960 lbs.
FR100OF	1.000"-1.240"	5"	15"	1,680 lbs.
FR125OF	1.250"-1.490"	5"	16"	1,680 lbs.
FR150OF	1.500"-1.740"	5"	18"	1,680 lbs.
FR175OF	1.750"-1.990"	6"	20"	2,640 lbs.
FR200OF	2.000"-2.490"	6"	22"	3,760 lbs.
Standard-Duty, Split Rod, Locking Bale (Universal Eye)				
FR050LB	0.500"-0.610"	10"	9"	770 lbs.
FR062LB	0.620"-0.740"	10"	9"	1,150 lbs.
FR075LB	0.750"-0.990"	10"	11"	1,320 lbs.
FR100LB	1.000"-1.240"	14"	13"	1,920 lbs.
FR125LB	1.250"-1.490"	14"	15"	1,920 lbs.
FR150LB	1.500"-1.740"	14"	16"	1,920 lbs.
FR175LB	1.750"-1.990"	14"	17"	3,150 lbs.
FR200LB	2.000"-2.490"	18"	20"	3,360 lbs..

*For stainless steel support grips, add "SS" suffix to the catalog no.; For example, FR050LB becomes FR050LBSS. Consult factory for price, availability and application. Stainless steel mesh is not suitable for marine use.

**To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.



Split Rod, Single Eye



Split Rod, Double Eye



Split Rod, Offset Eye



Split Rod, Locking Bale (Universal Eye)

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Support Grips
Heavy-Duty



Closed Mesh, Single Eye



Closed Mesh, Double Eye



Split Lace, Single Eye



Split Lace, Double Eye

Description

Heavy-duty support grips feature a double weave mesh and are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Support grips are woven of corrosion-resistant tinned-bronze wire.

Catalog Number*	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength**
Heavy-Duty, Closed Mesh, Single Eye				
FCHL075U	0.750"-0.990"	10"	26"	2,700 lbs.
FCHL100U	1.000"-1.240"	10"	29"	4,720 lbs.
FCHL125U	1.250"-1.490"	10"	31"	4,720 lbs.
FCHL150U	1.500"-1.990"	10"	35"	4,720 lbs.
Heavy-Duty, Closed Mesh, Double Eye				
FCHL075UU	0.750"-0.990"	10"	26"	2,700 lbs.
FCHL100UU	1.000"-1.240"	10"	29"	4,720 lbs.
FCHL125UU	1.250"-1.490"	10"	31"	4,720 lbs.
FCHL150UU	1.500"-1.990"	10"	35"	4,720 lbs.
FCHL200UU	2.000"-2.490"	10"	37"	10,080 lbs.
FCHL250UU	2.500"-2.990"	10"	39"	10,080 lbs.
FCHL300UU	3.000"-3.490"	10"	41"	10,080 lbs.
FCHL350UU	3.500"-3.990"	10"	45"	13,120 lbs.

Catalog Number*	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength**
Heavy-Duty, Split Lace, Single Eye				
FSHL075U	0.750"-0.990"	10"	26"	2,700 lbs.
FSHL100U	1.000"-1.240"	10"	29"	4,720 lbs.
FSHL125U	1.250"-1.490"	10"	31"	4,720 lbs.
FSHL150U	1.500"-1.990"	10"	35"	4,720 lbs.
Heavy-Duty, Split Lace, Double Eye				
FSHL075UU	0.750"-0.990"	10"	26"	2,700 lbs.
FSHL100UU	1.000"-1.240"	10"	29"	4,720 lbs.
FSHL125UU	1.250"-1.490"	10"	31"	4,720 lbs.
FSHL150UU	1.500"-1.990"	10"	35"	4,720 lbs.
FSHL200UU	2.000"-2.490"	10"	37"	10,080 lbs.
FSHL250UU	2.500"-2.990"	10"	39"	10,080 lbs.
FSHL300UU	3.000"-3.490"	10"	41"	10,080 lbs.
FSHL350UU	3.500"-3.990"	10"	45"	13,120 lbs.
FSHL400UU	4.000"-4.490"	10"	47"	13,120 lbs.

*For stainless steel support grips, add "SS" suffix to the catalog no.; For example, FSHL075U becomes FSHL075USS. Consult factory for price, availability and application. Stainless steel mesh is not suitable for marine use.

**To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Support Grips
Service & Bus Drop

legrand®
Pass & Seymour

Description

Service drop grips provide support for utility distribution lines from service pole to building or from pole to pole. They can also be used for cable TV and fiber optic cable support. They are woven from tinned bronze wire to provide superior corrosion resistance, and are available in single eye and locking bale configurations.

Catalog Number	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength*
Service Drop, Closed Mesh, Single Eye				
FCSD22	0.220"-0.320"	4"	4"	290 lbs.
FCSD30	0.300"-0.430"	5"	5"	500 lbs.
FCSD40	0.410"-0.560"	6"	5"	500 lbs.
FCSD52	0.530"-0.730"	8"	8"	790 lbs.
FCSD70	0.700"-0.970"	8"	9"	1,020 lbs.
FCSD94	0.940"-1.250"	10"	11"	1,020 lbs.
Service Drop, Closed Mesh, Locking Bale				
FCSD30LB	0.300"-0.430"	11"	5"	500 lbs.
FCSD52LB	0.530"-0.730"	14"	8"	790 lbs.
FCSD70LB	0.700"-0.970"	14"	9"	1,020 lbs.
FCSD94LB	0.940"-1.250"	16"	11"	1,020 lbs.

*To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.



Service Drop Closed Mesh Single Eye



Service Drop Closed Mesh Locking Bale

Description

Bus drop grips are used as cable support. They relieve any direct tension from the critical connection and absorb vibration and flexing. Bus drop grips are woven of galvanized steel wire. They are offered with either the single eye or locking bale attachment.

Catalog Number	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength*
Bus Drop, Closed Mesh, Single Eye				
FC22	0.220"-0.320"	9"	3.5"	1,100 lbs.
FC30	0.300"-0.430"	9"	4.5"	1,100 lbs.
FC40	0.410"-0.560"	9"	5.0"	1,100 lbs.
FC52	0.530"-0.730"	9"	6.5"	1,100 lbs.
FC70	0.700"-0.850"	9"	8.5"	1,900 lbs.
FC94	0.940"-1.250"	9"	11.0"	1,900 lbs.
Bus Drop, Closed Mesh, Locking Bale				
FC30LB	0.300"-0.430"	12"	4.5"	1,100 lbs.
FC40LB	0.410"-0.560"	12"	5.0"	1,100 lbs.
FC52LB	0.530"-0.730"	15"	6.5"	1,100 lbs.
FC70LB	0.700"-0.850"	16"	8.5"	1,900 lbs.
FC94LB	0.940"-1.250"	17"	11.0"	1,900 lbs.

*To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.



Bus Drop Closed Mesh Single Eye



Bus Drop Closed Mesh Locking Bale

Catalog Number	Description
Bus Drop Accessories	
S40	Safety Spring, 40 Lb. Load
S80	Safety Spring, 80 Lb. Load
GH5	Support Hook



Bus Drop Accessories

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Support Grips
Fiber Optic

Description

Fiber optic support grips are designed to reduce stress on fragile cables in vertical or sloping runs. They are woven of nonmagnetic tinned bronze wire, and are available in both single eye and locking bale configurations. A split rod version is offered for use on existing runs of cable or where specific placement of the grip along the cable is desired.



Fiber Optic, Closed Mesh, Locking Bale



Fiber Optic, Split Rod, Single Eye

Catalog Number	Cable Diameter Range	Bale Length	Mesh Length	Approximate Break Strength*
Fiber Optic, Closed Mesh, Single Eye				
FFO18U	0.180"-0.250"	3"	1.7"	300 lbs.
FFO24U	0.230"-0.320"	3"	2.5"	300 lbs.
FFO30U	0.300"-0.390"	4"	2.5"	300 lbs.
FFO38U	0.370"-0.480"	5"	4.0"	300 lbs.
FFO46U	0.460"-0.580"	6"	4.0"	400 lbs.
FFO56U	0.560"-0.710"	7"	5.5"	600 lbs.
FFO70U	0.690"-0.880"	8"	6.0"	800 lbs.
Fiber Optic, Closed Mesh, Locking Bale				
FFO18LB	0.180"-0.250"	9"	2.5"	300 lbs.
FFO24LB	0.230"-0.320"	9"	2.0"	300 lbs.
FFO30LB	0.300"-0.390"	9"	2.5"	300 lbs.
FFO38LB	0.370"-0.480"	10"	4.0"	300 lbs.
FFO46LB	0.460"-0.580"	10"	4.0"	400 lbs.
FFO56LB	0.560"-0.710"	10"	5.5"	600 lbs.
FFO70LB	0.690"-0.880"	10"	6.0"	800 lbs.
Fiber Optic, Split Rod, Single Eye				
FFRO18U	0.180"-0.250"	3"	2.5"	300 lbs.
FFRO24U	0.230"-0.320"	3"	2.5"	300 lbs.
FFRO30U	0.300"-0.390"	4"	2.5"	300 lbs.
FFRO38U	0.370"-0.480"	5"	4.0"	300 lbs.
FFRO46U	0.460"-0.580"	6"	5.0"	400 lbs.
FFRO56U	0.560"-0.710"	7"	5.0"	600 lbs.
FFRO70U	0.690"-0.880"	8"	6.0"	800 lbs.

*To determine workload safety factor, divide approximate break strength by 10. See Page K-23 for strength information.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Pulling Grips
Junior-Duty & Light-Duty

legrand®
Pass & Seymour

Description

Junior-duty series grips are indispensable tools for electricians with small job requirements. They are used to connect insulated wire bundles to pulling tape or to pull wire or rope through conduit.

Catalog Number	Cable Diameter Range	Mesh Length	Approximate Break Strength*
Junior-Duty, Flexible Eye			
PJ25	0.250"-0.360"	5"	1,700 lbs.
PJ37	0.370"-0.490"	7"	1,700 lbs.
PJ50	0.500"-0.610"	8"	1,700 lbs.
PJ62	0.620"-0.740"	10"	2,800 lbs.
PJ75	0.750"-0.990"	10"	4,100 lbs.
PJ100	1.000"-1.240"	12"	4,100 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.



Junior-Duty Flexible Eye

Description

Light-Duty grips are the most economical pulling grips for many applications, such as industrial plant wiring, and rewiring, and underground electrical pulls.

Catalog Number	Cable Diameter Range	Mesh Length	Approximate Break Strength*
Light-Duty, Short Length, Flexible Eye			
PL0501	0.500"-0.610"	11"	3,400 lbs.
PL0621	0.620"-0.740"	11"	4,100 lbs.
PL0751	0.750"-0.990"	13"	4,100 lbs.
PL1001	1.000"-1.240"	14"	5,800 lbs.
PL1251	1.250"-1.490"	15"	5,800 lbs.
PL1501	1.500"-1.740"	16"	7,500 lbs.
PL1751	1.750"-1.990"	18"	10,000 lbs.
PL2001	2.000"-2.490"	19"	10,000 lbs.
PL2501	2.500"-2.990"	19"	13,000 lbs.
Light-Duty, Standard Length, Flexible Eye			
PL0622	0.620"-0.740"	16"	4,100 lbs.
PL0752	0.750"-0.990"	20"	4,100 lbs.
PL1002	1.000"-1.240"	20"	7,500 lbs.
PL1252	1.250"-1.490"	22"	7,500 lbs.
PL1502	1.500"-1.990"	25"	7,500 lbs.
PL2002	2.000"-2.490"	26"	10,000 lbs.
PL2502	2.500"-2.990"	28"	13,000 lbs.
PL3002	3.000"-3.490"	30"	16,200 lbs..

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.



Light-Duty Short Length Flexible Eye

Catalog Number	Description
Junior-Duty, Flexible Eye Kit	
PJ1KIT	Kit contains 1 each of PJ25, PJ37, PJ50, PJ62, PJ75, PJ100



PJ1KIT

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Pulling Grips Medium-Duty

Description

Medium-duty pulling grips are ideal for overhead and underground pulling applications that require additional durability at an economical price. Medium-duty pulling grips are hand crafted with single weave strands that graduate to a double weave design for added strength and durability.



Medium-Duty Flexible Eye

Catalog Number	Cable Diameter Range	Mesh Length	Approximate Break Strength*
Medium-Duty, Flexible Eye			
PM037	0.370"-0.490"	13"	2,600 lbs.
PM050	0.500"-0.740"	17"	3,400 lbs.
PM075	0.750"-0.990"	20"	5,500 lbs.
PM100	1.000"-1.240"	28"	8,100 lbs.
PM125	1.250"-1.490"	33"	8,100 lbs.
PM150	1.500"-1.740"	36"	8,100 lbs.
Medium-Duty, Long Length, Flexible Eye			
PM0753	0.750"-0.990"	48"	8,100 lbs.
PM1003	1.000"-1.490"	48"	11,600 lbs.
PM1503	1.500"-1.990"	48"	19,400 lbs.
PM2003	2.000"-2.490"	48"	19,400 lbs.
PM2503	2.500"-2.990"	48"	25,900 lbs.
PM3003	3.000"-3.490"	48"	25,900 lbs.
PM3503	3.500"-3.990"	48"	32,400 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.

Catalog Number	Description
Medium-Duty, Flexible Eye Kit	
PM1KIT	Kit contains 1 each of PM037, PM050, PM075, PM100, PM125, PM150



Short Length, Flexible Eye, T-Type

Catalog Number	Cable Diameter Range	Mesh Length	Eye Diameter	Approximate Break Strength*
Medium-Duty, Short Length, Flexible Eye, T-Type				
PM0501	0.500"-0.610"	21"	7/32"	4,500 lbs.
PM0751	0.750"-0.990"	24"	1/4"	6,800 lbs.
PM1001	1.000"-1.490"	24"	5/16"	9,600 lbs.
PM1501	1.500"-1.990"	24"	7/16"	16,400 lbs.
PM2001	2.000"-2.490"	24"	7/16"	18,500 lbs.
PM2501	2.500"-2.990"	24"	1/2"	24,500 lbs.
PM3001	3.000"-3.490"	24"	1/2"	24,500 lbs.
PM3501	3.500"-3.990"	26"	5/8"	31,000 lbs.
Medium-Duty, Standard Length, Flexible Eye, T-Type				
PM0752	0.750"-0.990"	36"	1/4"	6,800 lbs.
PM1002	1.000"-1.490"	36"	5/16"	9,600 lbs.
PM1502	1.500"-1.990"	36"	7/16"	16,400 lbs.
PM2002	2.000"-2.490"	36"	7/16"	18,500 lbs.
PM2502	2.500"-2.990"	36"	1/2"	24,500 lbs.
PM3002	3.000"-3.490"	36"	1/2"	24,500 lbs.
PM3502	3.500"-3.990"	40"	5/8"	31,000 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Pulling Grips Heavy-Duty

legrand®
Pass & Seymour

Description

K-type pulling grips feature a double weave of galvanized steel for greater strength and added mesh contact with the cable as well as a forged steel compact rotating eye, which can be attached to a swivel. They are designed to handle longer or heavier pulling jobs such as an installation of underground cables, communication lines and service lines.

Catalog Number	Cable Diameter Range	Mesh Length	Eye Diameter	Approximate Break Strength*
Heavy-Duty, Short Length, Rotating Eye, K-Type				
PS0501	0.500"-0.610"	11"	7/8"	5,600 lbs.
PS0751	0.750"-0.990"	20"	1"	9,600 lbs.
PS1001	1.000"-1.240"	20"	1-3/8"	16,400 lbs.
PS1251	1.250"-1.490"	21"	1-3/8"	16,400 lbs.
PS1501	1.500"-1.990"	25"	1-5/8"	27,200 lbs.
PS2001	2.000"-2.490"	26"	1-7/8"	33,000 lbs.
PS2501	2.500"-2.990"	28"	1-7/8"	41,000 lbs.
PS3001	3.000"-3.490"	30"	1-7/8"	48,000 lbs.
PS3501	3.500"-3.990"	32"	1-7/8"	48,000 lbs.
PS4001	4.000"-4.490"	33"	1-7/8"	48,000 lbs
Heavy-Duty, Standard Length, Rotating Eye, K-Type				
PS0502	0.500"-0.610"	16"	7/8"	5,600 lbs.
PS0622	0.620"-0.740"	16"	7/8"	6,800 lbs.
PS0752	0.750"-0.990"	32"	1"	9,600 lbs.
PS1002	1.000"-1.490"	33"	1-3/8"	16,400 lbs.
PS1502	1.500"-1.990"	34"	1-3/8"	16,400 lbs.
PS2002	2.000"-2.490"	36"	1-5/8"	27,200 lbs.
PS2502	2.500"-2.990"	38"	1-7/8"	33,000 lbs.
PS3002	3.000"-3.490"	39"	1-7/8"	41,000 lbs.
PS3502	3.500"-3.990"	41"	1-7/8"	48,000 lbs.
PS4002	4.000"-4.490"	42"	1-7/8"	48,000 lbs.
PS4502	4.500"-4.990"	58"	1-7/8"	48,000 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.



Short Length, Rotating Eye, K-Type

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Pulling Grips
Multi-Weave

Description — Multi-Weave

Multi-weave pulling grips are constructed of high strength galvanized steel and are designed for pulling aluminum or copper bare conductor, wire rope and insulated cables. These grips are used in applications such as distribution line stringing and overhead transmission. Multi-weave pulling grips are available with a flexible and rotating eye, which can be attached to a swivel.

Description — Rotating Eye

The forged steel rotating eye will thread through sheaves and blocks without binding, but is not a swivel and will not turn under tension. The rotating eye can turn to relieve pulling torque when tension is relaxed.



Multi-Weave Flexible Eye

Catalog Number	Cable Diameter Range	Mesh Length	Eye Diameter	Approximate Break Strength*	Color Code
Multi-Weave, Rotating Eye					
P0501	0.500"-0.740"	32"	1"	10,000 lbs.	Brown
P0751	0.750"-0.990"	41"	1"	14,400 lbs.	Lt Blue
P1001	1.000"-1.240"	52"	1-3/8"	24,600 lbs.	Gold
P1501	1.500"-1.740"	60"	1-7/8"	30,600 lbs.	Red
P2001	2.000"-2.490"	50"	1-7/8"	48,000 lbs.	Yellow
P2501	2.500"-2.990"	52"	1-7/8"	48,000 lbs.	Orange
P3001	3.000"-3.490"	54"	1-7/8"	48,000 lbs.	Aluminum
P3501	3.500"-3.990"	56"	1-7/8"	48,000 lbs.	Lt Green
Multi-Weave, Flexible Eye					
P0752	0.750"-0.990"	41"	3/8"	14,400 lbs.	Lt Blue
P1002	1.000"-1.240"	52"	1/2"	24,600 lbs.	Gold
P1502	1.500"-1.740"	60"	1/2"	30,600 lbs.	Red
P2002	2.000"-2.490"	50"	5/8"	48,000 lbs.	Yellow
P2502	2.500"-2.990"	52"	5/8"	48,000 lbs.	Orange
P3002	3.000"-3.490"	54"	5/8"	48,000 lbs.	Aluminum
P3502	3.500"-3.990"	56"	5/8"	48,000 lbs.	Lt Green

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.

Note: it is recommended that a swivel be used for release of torque during a pull. Use a connecting link when a swivel is not needed. Do not run grips or swivels over bullwheels while under tension. Do not use multi-weave for pulling rope. When higher loads are required, use Legrand/Pass & Seymour's high strength-style pulling grips. See installation instructions supplied with grip for recommended swivels, links and clamps or accessories listing.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Pulling Grips
High Strength & Fiber Optic

legrand®
Pass & Seymour

Description

High strength pulling grips are designed for situations where loads and safety considerations require an extra high strength grip. They are most commonly used for attaching pulling lines to conductors, conductors to running boards and conductor-to-conductor connections. These grips can be used for pulling bare or insulated conductor, wire rope or synthetic rope.

Catalog Number	Cable Diameter Range*	Mesh Length	Approx. Break Strength**
With Swivel Eye Single-Double-Triple Weave			
MSPS025	0.250"-0.490"	26"	6,800 lbs.
MSPS050	0.500"-0.740"	32"	10,000 lbs.
MSPS075	0.750"-0.990"	41"	14,400 lbs.
MSPS100	1.000"-1.240"	52"	24,600 lbs.
MSPS125	1.250"-1.490"	56"	30,600 lbs.
MSPS150	1.500"-1.740"	60"	30,600 lbs.
MSPS175	1.750"-2.240"	70"	48,000 lbs.
MSPS200	2.000"-2.490"	50"	48,000 lbs.
MSPS250	2.500"-2.990"	52"	48,000 lbs.
MSPS300	3.000"-3.490"	54"	48,000 lbs.

Catalog Number	Cable Diameter Range*	Mesh Length	Approx. Break Strength**
With Flexible Eye Single-Double-Triple Weave			
MSP025	0.250"-.0490"	26"	6,800 lbs.
MSP050	0.500"-0.740"	32"	10,000 lbs.
MSP075	0.750"-0.990"	41"	14,400 lbs.
MSP100	1.000"-1.240"	52"	24,600 lbs.
MSP125	1.250"-1.490"	56"	30,600 lbs.
MSP150	1.500"-1.740"	60"	30,600 lbs.
MSP175	1.750"-2.240"	70"	48,000 lbs.
MSP200	2.000"-2.490"	50"	48,000 lbs.
MSP250	2.500"-2.990"	52"	48,000 lbs.

*For rope, select smallest size grip which meets required workload.
**To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.



High Strength Flexible Eye

Rope Assembly Using High Strength Feed Tube

A feed tube is recommended when assembling synthetic rope into the High Strength Pulling Grip and is required on the two largest grip sizes.

1. Insert feed tube into high strength pulling grip.
2. Insert rope end fully into feed tube.
3. Hold rope in feed tube by pinning rope to the ground with end of tube. Pull mesh down onto feed so feed tube nose is protruding through shoulder protectors.
4. Push mesh to end of feed tube and pull feed tube through mesh. When pulled, the mesh gripping action will hold rope in place.
5. Position rope so that its end is inside the shoulder protectors. Remove slack by smoothing mesh tight to rope.
6. Apply clamps to mesh end as necessary.

Description

Fiber optic pulling grips are used for installation of fiber optic communication lines. Easily installed on cables and reusable. Applications include underground, overhead, through conduit and/or enclosure-type pulls.

Catalog Number	Cable Diameter Range	Mesh Length	Eye Diameter	Nose Diameter	Approximate Break Strength*
Fiber Optic, Closed Mesh, Rotating Eye					
PF100	0.100"-0.200"	9"	4.75"	0.8"	1,000 lbs.
PF210	0.210"-0.350"	14"	4.75"	0.8"	1,500 lbs.
PF350	0.350"-0.480"	18"	5.00"	0.9"	2,200 lbs.
PF420	0.420"-0.610"	21"	5.00"	0.9"	2,800 lbs.
PF540	0.530"-0.740"	24"	5.00"	1.2"	3,300 lbs.
PF640	0.640"-0.870"	27"	5.00"	1.2"	4,700 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.



Closed Mesh, Rotating Eye

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Pulling Grips
Slack

Description

Slack grips are reusable grips used for pulling slack in underground cable preparatory to final placement. They may also be used for cable removal. Slack grips feature an offset eye for easy attachment to the pulling line.



Double Weave, Standard Length, Closed Mesh, Offset Eye



Double Weave, Standard Length, Split Lace, Offset Eye



Single Weave, Standard Length, Split Rod, Offset Eye

Catalog Number	Cable Diameter Range	Mesh Length	Approximate Break Strength*
Double Weave, Standard Length, Closed Mesh, Offset Eye			
SCK0751	0.750"-0.990"	13"	3,000 lbs.
SCK1001	1.000"-1.240"	16"	4,200 lbs.
SCK1251	1.250"-1.490"	17"	5,500 lbs.
SCK1501	1.500"-1.740"	18"	7,400 lbs.
SCK1751	1.750"-1.990"	19"	11,000 lbs.
SCK2501	2.500"-2.990"	21"	11,000 lbs.
SCK3001	3.000"-3.490"	22"	16,000 lbs.
SCK3501	3.500"-3.990"	23"	16,000 lbs.
Double Weave, Long Length, Closed Mesh, Offset Eye			
SCK1502	1.500"-1.740"	26"	7,400 lbs.
SCK2002	2.000"-2.490"	27"	11,000 lbs.
SCK2502	2.500"-2.990"	30"	11,000 lbs.
SCK3002	3.000"-3.490"	33"	16,000 lbs.
Double Weave, Standard Length, Split Lace, Offset Eye			
SSK0751	0.750"-0.990"	13"	3,000 lbs.
SSK1251	1.250"-1.490"	17"	4,100 lbs.
SSK1501	1.500"-1.740"	18"	5,500 lbs.
SSK1751	1.750"-1.990"	19"	7,300 lbs.
SSK2001	2.000"-2.490"	20"	7,300 lbs.
SSK3001	3.000"-3.490"	22"	9,200 lbs.
SSK3501	3.500"-3.990"	23"	11,000 lbs.
Double Weave, Long Length, Split Lace, Offset Eye			
SSK1002	1.000"-1.240"	21"	4,100 lbs.
SSK1252	1.250"-1.490"	24"	4,100 lbs.
SSK1502	1.500"-1.740"	25"	5,500 lbs.
SSK2002	2.000"-2.490"	27"	7,300 lbs.
SSK2502	2.500"-2.990"	30"	7,300 lbs.
SSK3002	3.000"-3.490"	33"	9,200 lbs.
Single Weave, Standard Length, Split Rod, Offset Eye			
SRK050OF	0.500"-0.610"	7"	1,800 lbs.
SRK062OF	0.620"-0.740"	9"	1,900 lbs.
SRK075OF	0.750"-0.990"	11"	3,000 lbs.
SRK100OF	1.000"-1.240"	12"	4,100 lbs.
SRK125OF	1.250"-1.490"	14"	5,700 lbs.
SRK150OF	1.500"-1.740"	16"	5,800 lbs.
SRK175OF	1.750"-1.990"	17"	7,700 lbs.
SRK200OF	2.000"-2.490"	20"	9,300 lbs.
SRK250OF	2.500"-2.990"	21"	11,300 lbs.
SRK300OF	3.000"-3.490"	22"	15,100 lbs.
SRK350OF	3.500"-3.990"	25"	15,100 lbs.

*To determine workload safety factor, divide approximate break strength by 5. See Page K-23 for strength information.


Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

Flexcor® Wire Mesh Grips
Selecting Properly Sized Pulling & Support Grips

legrand®
Pass & Seymour

Select grip size based upon the outside diameter or circumference of the cable(s). See the following reference tables for convenience in determining cable diameters.

Use the following grip selection tables to determine the grip diameter range for your application.

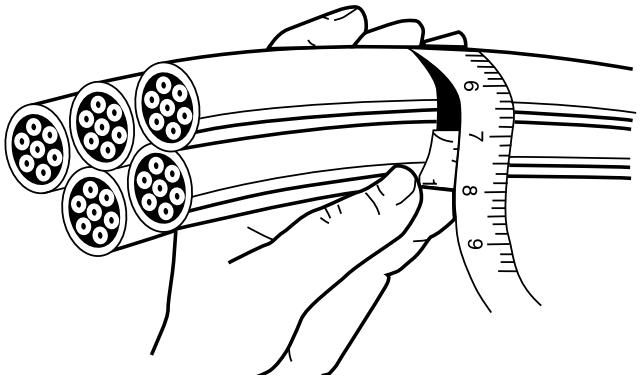

Grip selection for one or more cables of equal diameter

1. Read across top line for number of cables in one grip.
2. Read down for diameter of each cable.
3. Read across to the right to grip diameter range column.

Example: For five cables together with diameter of 0.42" each

1. Locate “5 cables” column.
2. Read down column to range (0.38"-0.48").
3. Read across line to grip diameter range (1.00"-1.25").

Decimal & Fractional Inch Cable Diameters – For One or More Cables of Equal Diameter


1 Cable	2 Cables	3 Cables	4 Cables	Grip Diameter Range
0.25-0.37 = ¼ - ⅜	0.16-0.25 = 1/64 - ¼	0.15-0.22 = 5/32 - 7/32	0.12-0.20 = ⅛ - 13/64	0.25"-0.375"
0.37-0.50 = ⅜ - ½	0.25-0.36 = ¼ - 23/64	0.22-0.33 = 7/32 - 21/64	0.20-0.28 = 13/64 - 9/32	0.375"-0.50"
0.50-0. 62 = ½ - ⅝	0.27-0.36 = 17/64 - 23/64	0.26-0.33 = 17/64 - 21/64	0.24-0.28 = 15/64 - 9/32	0.50"-0.62"
0.62-0.75 = ⅝ - ¾	0.36-0.45 = 23/64 - 29/64	0.33-0.36 = 21/64 - 23/64	0.28-0.31 = 9/32 - 5/16	0.62"-0.75"
0.75-1.00 = ¾ - 1	0.45-0.60 = 29/64 - 39/64	0.36-0.49 = 23/64 - 31/64	0.31-0.42 = 5/16 - 27/64	0.75"-1.00"
1.00-1.25 = 1 - 1¼	0.60-0.76 = 39/64 - 49/64	0.49-0.63 = 31/64 - ⅝	0.42-0.54 = 27/64 - 35/64	1.00"-1.25"
1.25-1.50 = 1¼ - 1½	0.76-0.91 = 49/64 - 29/32	0.63-0.75 = ⅝ - 49/64	0.54-0.65 = 35/64 - 21/32	1.25"-1.50"
1.50-1.75 = 1½ - 1¾	0.91-1.23 = 29/32 - 1 15/64	0.76-0.89 = 49/64 - 57/64	0.65-0.77 = 21/32 - 49/64	1.50"-1.75"
1.75-2.00 = 1¾ - 2	1.23-1.54 = 1 15/64 - 1 35/64	0.89-1.02 = 57/64 - 1 1/64	0.77-0.88 = 49/64 - ⅞	1.75"-2.00"
2.00-2.50 = 2 - 2½	1.54-1.84 = 1 35/64 - 1 27/32	1.02-1.28 = 1 1/64 - 1 9/32	0.88-1.00 = ⅞ - 1	2.00"-2.50"
2.50-3.00 = 2½ - 3	1.84-2.15 = 1 27/32 - 2 5/32	1.28-1.53 = 1 9/32 - 1 17/32	1.10-1.32 = 1 3/32 - 1 21/64	2.50"-3.00"
3.00-3.50 = 3 - 3½	2.15-2.45 = 2 5/32 - 2 29/64	1.53-1.79 = 1 17/32 - 1 51/64	1.32-1.54 = 1 21/64 - 1 35/64	3.00"-3.50"
3.50-4.00 = 3½ - 4		1.79-2.05 = 1 51/64 - 2 3/64	1.54-1.76 = 1 35/64 - 1 49/64	3.50"-4.00"

Decimal & Fractional Inch Cable Diameters – For One or More Cables of Equal Diameter

5 Cable	6 & 7 Cables	8 Cables	9 Cables	Grip Diameter Range
0.11-0.14 = 7/64 - 9/64	0.10-0.11 = 3/32 - 7/64	0.09-0.10 = 3/32 - 7/64	0.06-0.09 = 1/16 - 3/32	0.25"-0.375"
0.14-0.21 = 9/64 - ¼	0.11-0.25 = 7/64 - ¼	0.10-0.20 = 7/64 - 13/64	0.09-0.19 = 3/32 - 3/16	0.375"-0.50"
0.21-0.25 = 7/32 - ¼	0.19-0.22 = 3/16 - 7/32	0.17-0.20 = 11/64 - 13/64	0.15-0.19 = 5/32 - 3/16	0.50"-0.62"
0.25-0.29 = ¼ - 19/64	0.22-0.26 = 7/32 - 17/64	0.20-0.23 = 13/64 - 15/64	0.19-0.22 = 3/16 - 7/32	0.62"-0.75"
0.29-0.38 = 19/64 - ⅜	0.26-0.34 = 17/64 - 11/32	0.23-0.31 = 15/64 - 5/16	0.22-0.31 = 7/32 - 5/16	0.75"-1.00"
0.38-0.48 = ⅜ - 31/64	0.34-0.43 = 11/32 - 7/16	0.31-0.39 = 5/16 - 25/64	0.29-0.36 = 19/64 - 23/64	1.00"-1.25"
0.48-0.58 = 31/64 - 41/64	0.43-0.52 = 7/16 - 33/64	0.39-0.46 = 25/64 - 15/32	0.36-0.43 = 23/64 - 7/16	1.25"-1.50"
0.58-0.67 = 37/64 - 43/64	0.52-0.60 = 33/64 - 39/64	0.46-0.54 = 15/32 - 35/64	0.43-0.49 = 7/16 - 31/64	1.50"-1.75"
0.67-0.77 = 43/64 - 49/64	0.60-0.69 = 39/64 - 11/16	0.54-0.62 = 35/64 - 5/8	0.49-0.57 = 31/64 - 37/64	1.75"-2.00"
0.77-0.96 = 49/64 - 31/32	0.69-0.86 = 11/16 - 55/64	0.62-0.77 = 5/8 - 49/64	0.57-0.72 = 37/64 - 23/32	2.00"-2.50"
0.96-1.16 = 31/32 - 1 5/32	0.86-1.03 = 55/64 - 1 1/32	0.77-0.93 = 49/64 - 15/16	0.72-0.86 = 23/32 - 55/64	2.50"-3.00"
1.16-1.35 = 1 5/32 - 1 23/64	1.03-1.20 = 1 1/32 - 1 13/64	0.93-1.08 = 15/16 - 1 5/64	0.86-1.00 = 55/64 - 1	3.00"-3.50"
1.35-1.54 = 1 23/64 - 1 35/64	1.20-1.37 = 1 13/64 - 1⅜	1.08-1.24 = 1 5/64 - 1 15/64	1.00-1.14 = 1 - 1 9/64	3.50"-4.00"

legrand®
Pass & Seymour

Flexcor® Wire Mesh Grips
Selecting Properly Sized Pulling & Support Grips

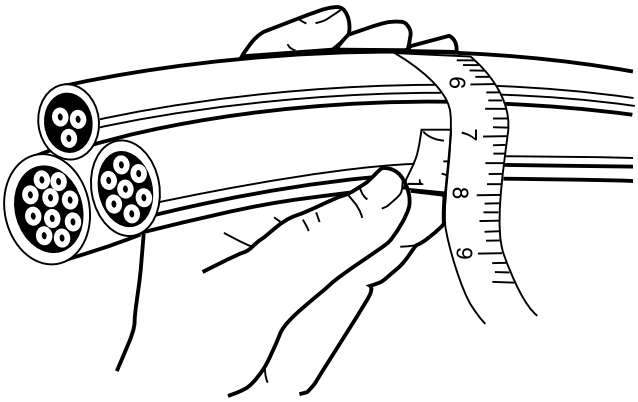


Grip circumference range refers to circumference of all cables held together.

1. Determine grip circumference range by measuring circumference of bundle of cables to be held (as shown in illustration).
2. Read down to locate correct range.
3. Read across to grip diameter column.

Example: For three cables together with combined circumference of 6.35"

1. Read down “inches (decimal)” column for 6.35" (6.29"-7.86").
2. Read across line to grip diameter range (2.00"-2.50").




AWG or MCM Wire Sizes

AWG or MCM	Approx. Dia. THHM	Approx. Dia. THW
14	0.105"	0.162"
12	0.122"	0.179"
10	0.153"	0.199"
8	0.201"	0.259"
6	0.257"	0.323"
4	0.328"	0.372"
3	0.356"	0.401"
2	0.388"	0.433"
1	0.450"	0.508"
1/0	0.491"	0.549"
2/0	0.537"	0.595"
3/0	0.588"	0.647"
4/0	0.646"	0.705"
250	0.716"	0.788"
300	0.771"	0.843"
350	0.822"	0.895"
400	0.869"	0.942"
500	0.955"	1.03"
600	1.06"	1.14"
700	1.13"	1.21"
750	1.16"	1.25"
1000	1.32"	1.40"

This table to be used as a guide only.
Sizes may vary by manufacturer.

Grip Circumference Range – For Cables of Different Diameters

Inches (Fractional)	Inches (Decimal)	Grip Diameter Range
25/32 - 1 11/64 "	0.78"-1.17"	0.25"-.375"
1 11/64 - 1 37/64"	1.17"-1.57"	0.375"-0.50"
1 37/64 - 2 3/8"	1.57"-2.37"	0.50"-0.75"
1 15/16 - 2 3/8"	1.94"-2.37"	0.625"-0.75"
2 3/8 - 3 5/32"	2.37"-3.15"	0.75"-1.00"
3 5/32 - 3 15/16"	3.15"-3.94"	1.00"-1.25"
3 15/16 - 4"	3.94"-4.72"	1.25"-1.50"
4 23/32 - 5 33/64"	4.72"-5.51"	1.50"-1.75"
5 33/64 - 6 19/64"	5.51"-6.29"	1.75"-2.00"
6 19/64 - 7 55/64"	6.29"-7.86"	2.00"-2.50"
7 55/64 - 9 7/16"	7.86"-9.43"	2.50"-3.00"
9 7/16 - 11 1/64"	9.43"-11.01"	3.00"-3.50"
11 1/64 - 12 37/64"	11.01"-12.58"	3.50"-4.00"



Reference Table: Cord Diameters

Average Wire Size And Type	2 Conductors	3 Conductors	4 Conductors	5 Conductors
18 SO, STO	0.36"	0.38"	0.41"	0.49"
18 SJO, SJTO	0.30"	0.32"	0.35"	—
16 SO, STO	0.39"	0.41"	0.44"	0.52"
16 SJO, SJTO	0.32"	0.34"	0.37"	—
14 SO, STO	0.52"	0.55"	0.59"	0.67"
12 SO, STO	0.60"	0.62"	0.68"	0.74"
10 SO, STO	0.65"	0.69"	0.74"	0.80"
8 SO, STO	0.83"	0.88"	0.99"	1.08"
6 SO, STO	0.99"	1.04"	1.12"	1.25"

Nominal overall diameters (in inches) for flexible cord.

Strength Information

The approximate breaking strength of any Legrand/Pass & Seymour wire mesh cable grip is based on working load information established by Legrand/Pass & Seymour engineering laboratories. In making these determinations, it is not possible to cover all applications and operating conditions. Variables such as diameters, gripping surfaces, number of items gripped, tension, movement, attachment, abrasion, corrosion, prior use, or abuse must be assessed by the user. Greater safety factors should be utilized when the conditions of application are vague or unknown.

For specific applications where strength and holding power are important, consult the manufacturer. To determine the recommended working load safety factor for listed cable grips, divide the approximate breaking strength by 5 for pulling grips and 10 for support grips. Legrand/Pass & Seymour maintains a 6 sigma safety factor for pulling grips and a 5 sigma safety factor for support grips for these recommended working loads (using average break strengths obtained on new grips under lab test conditions).

Example: For pulling grips – 33,000÷5=6,600 lbs. which is the workload factor.

Example: For support grips – 10,080÷10=1,008 lbs. which is the workload factor.

All warranties concerning product quality or performance are based on wire mesh grips that are properly stored and handled by the user, and grips that are maintained and inspected at a proper frequency in keeping with their use and condition.

Grip Cable Range Conversion

Inches (Fractional)	Inches (Decimal)	Metric (mm)
¼ - 23⁄64"	0.25"-0.36"	6.35 mm-9.13 mm
⅜ - 31⁄64"	0.37"-0.49"	9.52 mm-12.30 mm
½ - 39⁄64"	0.50"-0.61"	12.70 mm-15.48 mm
⅝ - 47⁄64"	0.62"-0.74"	15.88 mm-18.65 mm
¾ - 63⁄64"	0.75"-0.99"	19.05 mm-25.00 mm
1 - 1 15⁄64"	1.00"-1.24"	25.40 mm-31.35 mm
1¼ - 1 31⁄64"	1.25"-1.49"	31.75 mm-37.70 mm
1½ - 1 63⁄64"	1.50"-1.99"	38.10 mm-50.40 mm
2 - 2 31⁄64"	2.00"-2.49"	50.80 mm-63.10 mm
2½ - 2 63⁄64"	2.50"-2.99"	63.50 mm-75.80 mm
3 - 3 31⁄64"	3.00"-3.49"	76.20 mm-88.50 mm
3½ - 3 63⁄64"	3.50"-3.99"	88.90 mm-101.20 mm



OCCUPANCY & VACANCY SENSORS & TIMERS

legrand®

Pass & Seymour

Occupancy & Vacancy Sensors & Timers

legrand®
Pass & Seymour



Occupancy & Vacancy Sensors & Timers make saving energy and saving money easy.

- Occupancy sensors turn lights on when you enter a room and save energy by automatically turning them off when room is unoccupied.
- Vacancy sensors save more energy by requiring anyone entering the room to manually turn on the lights. When the room is unoccupied, the lights will turn off.
- Using occupancy and vacancy sensors may contribute to LEED certification and help make buildings sustainable.

P&S Sensors and Timers help meet energy codes. They are convenient, easy-to-install, and compatible with all standard types of lighting.

Sensors add to the comfort, safety and security of the people who occupy the building.

Timers turn loads off when no longer needed.

TITLE 24 ENERGY SAVER

U.S. GREEN BUILDING COUNCIL MEMBER

Index

Device	Page Number
Technology	L-2
Applications	L-3
Residential Vacancy Sensors	L-4
Residential Occupancy Sensors	L-5
Residential Occupancy/Vacancy Sensors	L-6, L-7
Commercial Occupancy Sensors	
PlugTail™ Wall Box	L-8
Wall Box	L-8
Dual Technology Wall Box	L-9
Wall or Ceiling Mount	L-12
Ceiling Mount	L-13
Ultrasonic Ceiling Mount	L-14
Dual Technology Ceiling Mount	L-15
Commercial Occupancy/Vacancy Wall Box Sensors	L-10, L-11
Power Packs & Add-A-Relay	L-16
Useful Calculations	L-17
Timers	L-18, L-19
Wall Box Timers	L-20

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Technology

Passive Infrared Sensors (PIR)

Using a patented fresnel lens which minimizes optical aberrations, each Legrand/Pass & Seymour PIR sensor breaks its coverage area into zones. Upon detecting an infrared energy change within a zone, one of the elements in the dual-element pyroelectric sensing device of an occupancy sensor generates a positive pulse. Within milliseconds, the other element produces a negative pulse and the lights are turned on. Vacancy sensors turn lights off when the room is vacant for a period of time, or when there is no infrared energy detected within a zone.

Passive infrared sensors are unable to detect occupancy around barriers, and are more effective when sensing movement across their field of sight rather than towards or away from it.

All Legrand/Pass & Seymour PIR occupancy sensors feature:

- Patented fresnel lenses with multi-segment design
- Dual-element pyroelectric sensors
- Low-profile design
- Daylight filter systems
- Adjustable settings for time and sensitivity
- Custom Detection Signature Analysis for high immunity to RFI and EMI, and reliability
- Self-adaptive technology is available on some models

Ultrasonic Sensors

Ultrasonic sensors use a multi-directional transmitter/receiver system to broadcast ultrasonic sound waves generated by a quartz crystal oscillator, and then measure the amount of time it takes the waves to return. Movement within the area results in the sound waves returning to the sensor at a slower or faster rate, and thus occupancy is detected.

Ultrasonic sensors broadcast in three dimensions, and are therefore able to detect smaller movements than PIR sensors. Proper placement of the sensors is essential as sound waves can escape through open doorways, resulting in false triggering.

While Legrand/Pass & Seymour ultrasonic sensors use special circuitry to filter out air-flow movement caused by HVAC equipment or fans, sensors should be kept away from breezy areas. Also, heavy carpeting and other sound-absorbing materials used in the construction of a room will reduce coverage.

Legrand/Pass & Seymour ultrasonic occupancy sensor features:

- Temperature- and humidity-resistant tuned receivers
- Signal Processing Circuitry
- Solid-state, crystal-controlled transmitter
- Adjustable controls for time and sensitivity

Dual Technology

Dual Technology sensors combine PIR and Ultrasonic sensing in one device. This minimizes false ONs and nuisance OFFs. Sensitivity adjustments and user selectable operational characteristics make dual technology sensors the most versatile, even in the most difficult installations.


Use dual technology sensors for the most demanding sensor applications. Odd shaped rooms, lots of partitions, and changing floor plans can be handled best by dual technology sensors.

P&S Model	Catalog Page #	Best Suited For:
Residential Occupancy Sensors		
RW500U	L-5	Storage rooms, walk-in closets, pantries, garage where no neutral is available
RWU600U	L-5	Storage rooms, walk-in closets, pantries, garage where a neutral is available
Residential Vacancy Sensors (T24 Compliant)		
RW500B	L-4	Bedrooms, basements bathrooms, laundry rooms, where no neutral is available
RWU600B	L-4	Bedrooms, basements bathrooms, laundry rooms, where a neutral is available
RW600BTC	L-4	Bedrooms, basements bathrooms, laundry rooms, where no neutral is available
3-Way Residential Occupancy/Vacancy Sensor		
RW3U600	L-6	Any room/hall with multiple entrances — allows manual ON/OFF control from both locations. Can be switched between occupancy and vacancy.
RW3U603	L-6	**T24 Compliant.** Any room/hall with multiple entrances — allows manual ON/OFF control from both locations. Can be switched between occupancy and vacancy.
Residential Occupancy/Vacancy Sensor with Dimmer		
RWDU500	L-7	Any room where adjustable light level is desired
Commercial Passive Infrared (PIR) Wall Box Sensors		
PTWSP250	L-8	Small offices, closets, utility rooms with no partitions or obstructions
WSP250	L-8	Small offices, closets, utility rooms with no partitions or obstructions
OS300S	L10	Small offices, closets, small conference rooms with no partitions or obstructions
OSR300S	L-11	Small rooms with two individually-controlled loads or bi-level lighting with no partitions or obstructions
Commercial Passive Infrared (PIR) and Ultrasonic Wall Sensors		
WDT100	L-9	Small offices, executive suites, conference rooms, break rooms.
WDT200	L-9	
Commercial Passive Infrared (PIR) Ceiling Sensors		
CS500	L-13	Open offices, lunch, utility, storage, and computer rooms with no partitions or obstructions
CS1200	L-13	Larger rooms, up to 1200 sq. ft., with open floor plans, no partitions or obstructions
Commercial Passive Infrared (PIR) Wall or Ceiling Mount Sensors		
HS1001	L-12	Hallways, or aisles
WA1001	L-12	Entrances, vestibules, classrooms, for wide-angle applications
Commercial Ultrasonic Ceiling Mount Sensors		
CSU600	L-14	Offices, computer, meeting, copy, and restrooms
CSU1100	L-14	Offices, lunch, break and classrooms, restrooms, and conference rooms
CSU2200	L-14	Offices, lunch, break and classrooms, restrooms, conference rooms, halls, storage areas
Commercial Dual Technology Sensors		
CSD1000	L-15	Meeting, conference and classrooms, restrooms, dressing rooms, libraries, interview rooms, testing areas, lunch and break rooms
Timers		
RT1	L-18	Closets, bathroom fans, exhaust fans, heat lamps, bedrooms
RT12	L-19	Garages, basements, laundry rooms, fans, motors, landscape lights
RT24	L-19	Exterior lights, landscape lighting, security lighting, holiday lighting
97015, 30, 60	L-20	Bathroom fans, heat lamps, guest rooms
97115, 30, 60	L-20	Bathroom fans, heat lamps, guest rooms where a hold function is desired
97352	L-20	Dual control for bathroom light and fan


legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Residential Vacancy Sensors
Passive Infrared (PIR)


TITLE 24 ENERGY SAVER

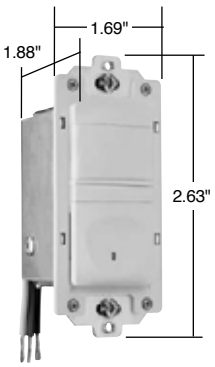

RW500BLACC4

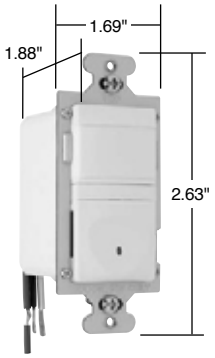

RWU600BLACC4



RW600BTC

Features

- California Title 24 compliant.
- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Manual-ON operation.
- Fixed 30-minute time delay, no adjustment necessary.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.² (56m²).
- cULus listed.
- 5-year warranty.


RW500B only
- Incandescent.

RWU600B only
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.

RW600BTC only
- Interchangeable face – Three colors in one box (Ivory, White, Light Almond).


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Single Pole Vacancy Sensors							
RW500BICC4	No neutral required, ideal for bedrooms and baths	120VAC 60 Hz	25-500W Incandescent	No	Yes	No	Ivory
RW500BWCC4				No	Yes	No	White
RW500BBKCC4				No	Yes	No	Black
RW500BLACC4				No	Yes	No	Lt. Almond
RWU600BICC4	Neutral required, ideal for bedrooms and baths	120VAC 60 Hz	0-600W All	No	Yes	No	Ivory
RWU600BWCC4				No	Yes	No	White
RWU600BBKCC4				No	Yes	No	Black
RWU600BLACC4				No	Yes	No	Lt. Almond
NEW **RW600BTC**	No neutral required, ideal for bedrooms and baths Comes with three interchangeable face colors.	120VAC 60 Hz	0-600W All	No	Yes	No	Ivory/ White/ Lt. Almond

Coverage






RW500B Wiring

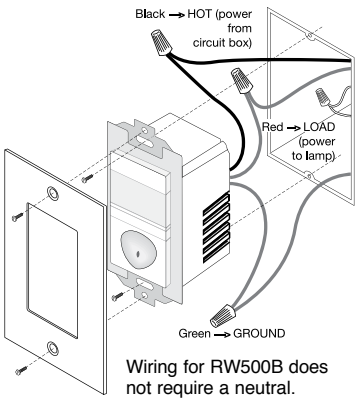


Wiring for RW500B does not require a neutral.

RWU600B Wiring

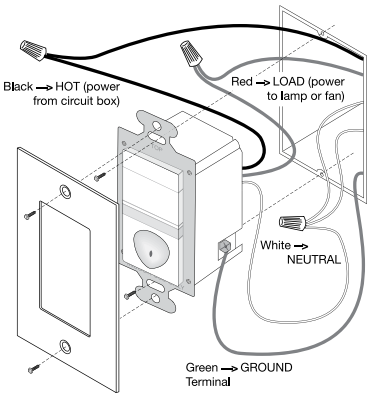

Wiring for RWU600B requires a neutral.

RW600B Wiring

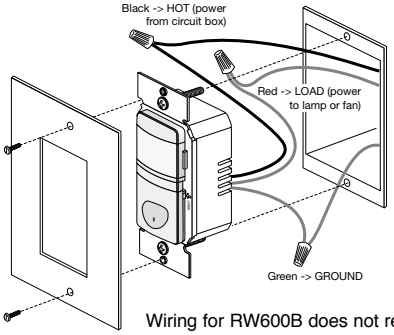

Wiring for RW600B does not require a neutral.

All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Features


- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Automatic-ON operation.
- Fixed five-minute time delay.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.² (56m²)
- cULus listed.
- 5-year warranty.
- Works with most common residential lighting types

RWU600U only

- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

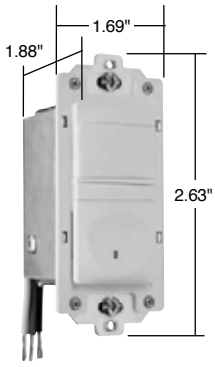


RW500ULACC4

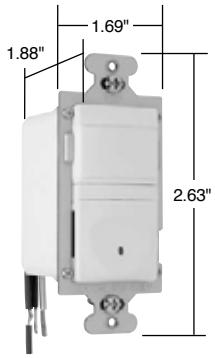

RWU600ULACC4


Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Single Pole Occupancy Sensors							
RW500UICC4	No neutral required, ideal for storage and utility rooms	120VAC 60 Hz	25-500W Incandescent	Yes	No	No	Ivory
RW500UWCC4				Yes	No	No	White
RW500UBKCC4				Yes	No	No	Black
RW500ULACC4				Yes	No	No	Lt. Almond
RWU600UICC4	Neutral required, controls most types of lighting, ideal for storage & utility rooms	120VAC 60 Hz	0-600W All	Yes	No	No	Ivory
RWU600UWCC4				Yes	No	No	White
RWU600UBKCC4				Yes	No	No	Black
RWU600ULACC4				Yes	No	No	Lt. Almond

Coverage






RW500U Wiring

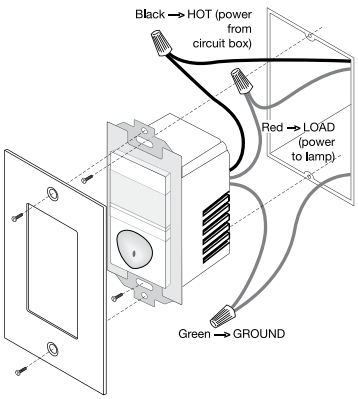

Wiring for RW500U does not require a neutral.

RWU600U Wiring

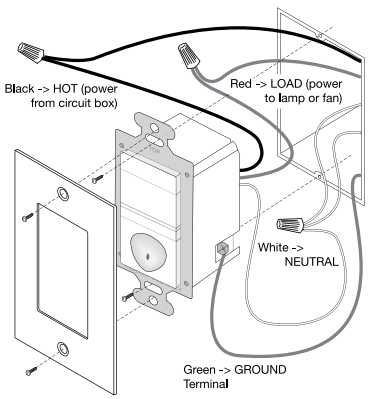

Wiring for RWU600U requires a neutral.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Residential Occupancy/ Vacancy Sensors

3-Way Passive Infrared (PIR)



RW3U600W shown with SWP26W

Applications


The RW3U600 has the flexibility to work in a variety of applications including hallways, stairways, bathrooms, living and dining rooms, and other areas with multiple entries. The RW3U600 vacancy sensor allows true multi-way operation with automatic ON/OFF control.

Features

- Occupancy-based control plus multi-way operation.
- Two or more RW3U600s connected together will allow enhanced coverage of the controlled space.
- Works with most common residential lighting types.
- Adjustable time delay of 15 seconds to 30 minutes.
- Light level sensing prevents automatic ON of lights when adequate daylight exists.
- Replaces three-way or four-way switches when used with other RW3U600s.
- Lighted switch for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable light level setting of 10 to 150 fc (100 to 1500 lux).
- Coverage: 180°, max. 600 ft.^{2} (56m^2).
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

RW3U603 only

- California Title 24 compliant.
- Time delay 15 seconds, 5, 15, 30 minutes.

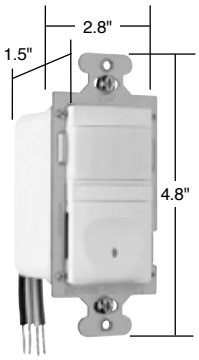


RW3U600W
RW3U603W

Dimensions for RW3U603W:
2.67" (L) x
1.73" (W) x 1.77" (D)

Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color	Light Level Sensing
Single Pole/3-Way Occupancy/Vacancy Sensors								
RW3U600I*	Light-level sensing for optimum operation – ideal for rooms with multiple entrances	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Ivory	Yes
RW3U600W*				Yes	Yes	Yes	White	Yes
RW3U600BK*				Yes	Yes	Yes	Black	Yes
RW3U600LA*				Yes	Yes	Yes	Lt. Almond	Yes
NEW **RW3U603I****	Ideal for rooms with multiple entrances	120VAC 60Hz	0-600W All	No	Yes	No	Ivory	No
NEW **RW3U603W****				No	Yes	No	White	No
NEW **RW3U603BK****				No	Yes	No	Black	No
NEW **RW3U603LA****				No	Yes	No	Lt. Almond	No


*RW3U600 requires an additional RW3U600 in multi-way circuits.
**RW3U603 can be used with either a momentary contact switch or an additional RW3U603 unit for multi-way applications. Momentary contact switches on Page A-22.

Coverage






Product Controls




RW3U600

RW3U600 Wiring for 3-Way Operation

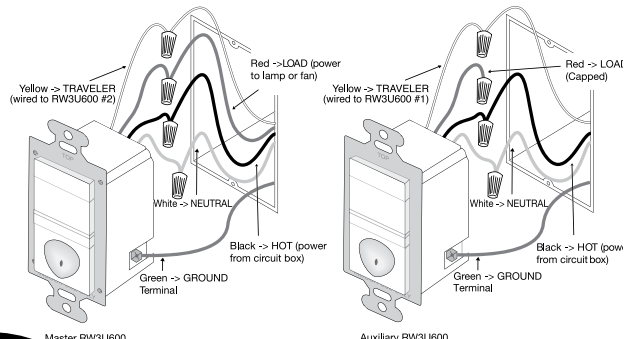

RW3U603 Wiring for 3-Way Operation

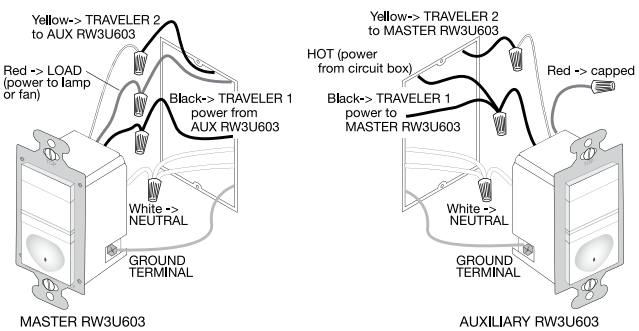

All devices listed on this page conform to NEMA WD-1 and WD-6.

Occupancy & Vacancy Sensors & Timers
Residential Occupancy/ Vacancy Sensors

Passive Infrared (PIR) with Dimmer


legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features


- California Title 24 compliant.
- Replaces standard single pole switch or incandescent dimmer.
- Low-profile styling with uniform color-matched lens and device.
- Lighted pushbutton for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable time delay from 15 seconds to 30 minutes.
- Soft start technology to prolong lamp life.
- Air gap isolation switch for safe relamping.
- If enabled, light level sensing prevents automatic-ON when adequate daylight exists.
- Adjustable light level setting from 10-150 fc (100-1500 lux) for daylight sensing.
- Operating conditions: 32°-104°F (0°-40°C), 95% RH, noncondensing.
- Coverage: 180°, max. 600 ft² (56 m²).
- cULus listed.
- 5-year warranty.

Catalog Number	Description	Voltage	Load	Auto ON	Manual ON	Selectable Auto/Man. ON	Color
Occupancy/Vacancy Sensors with Preset Dimmers							
RWDU500I	Neutral required, ideal			Yes	Yes	Yes	Ivory
RWDU500W	for living, dining and	120VAC	25-500	Yes	Yes	Yes	White
RWDU500BK	family rooms, master	60Hz	Incandescent	Yes	Yes	Yes	Black
RWDU500LA	bathrooms and bedrooms			Yes	Yes	Yes	Lt. Almond

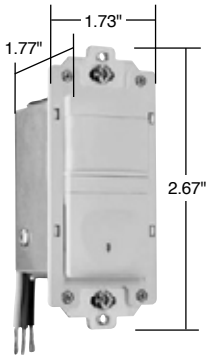


RWDU500W

Coverage





RWDU500 Wiring

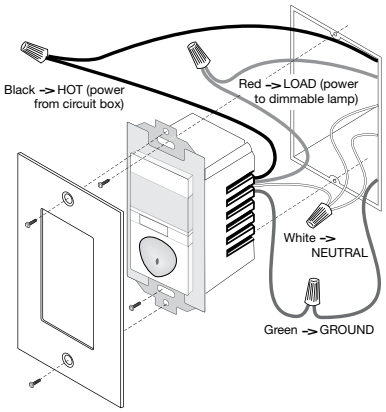


De-rating

When more that one dimmer is installed in a multi-gang box, it is necessary to reduce the maximum load on each dimmer.

- For an RWDU500 in either end position of a multi-gang box, reduce the maximum load by 50W.
- For an RWDU500 in a central position of a multi-gang box, reduce its maximum load by 100W. Mounting in a deep electrical box is recommended.

Product Controls



RWDU500


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy Sensors
Wall Box Passive Infrared (PIR)




PTWSP250W



PTS6STR3

PlugTail™ Wall Switch Sensors use PTS Single Pole PlugTail™ Connectors. See Page A-14.

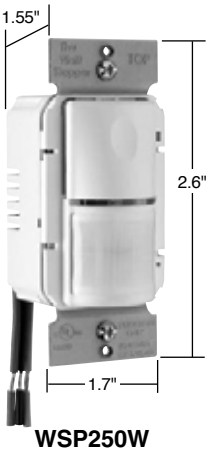

WSP250W

Features

- Detection Signature Analysis provides high immunity to RFI and EMI.
- Compact, decorator design replaces existing wall switch.
- Shallow back body (1")
- Integrated light level sensor works from 10 to 150 footcandles.
- Compatible with all electronic and magnetic ballasts, PL lamp ballasts, compact fluorescent.
- Adjustable time delay of 30 seconds to 30 minutes.
- Dual 120/277VAC operation.
- 30% to 60% energy savings.
- Positive detection indicator.
- No minimum load requirement.
- Adjustable sensitivity from 20% to 100%.
- Patented voltage drop protection.
- Patented Zero Crossing Circuitry.
- 180° coverage of up to 900 sq. ft.
- cULus listed.
- 5-year warranty.

PlugTail™ PTWSP250 Only

- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

WSP250 Only


- 6" flying leads


Catalog Number	Description	Voltage	Load	Color
NEW PlugTail™ Automatic Wall Switches – 3 Wire Technology				
PTWSP250I **PTWSP250W** **PTWSP250GRY** **PTWSP250LA**	PIR Occupancy Sensor	120/277VAC; 60 Hz	800W Max. at 120V 1200W Max. at 277V	Ivory White Gray Light Almond
NEW Automatic Wall Switches – 3 Wire Technology				
WSP250I **WSP250W** **WSP250GRY** **WSP250LA**	PIR Occupancy Sensor	120/277VAC; 60 Hz	800W Max. at 120V 1200W Max. at 277V	Ivory White Gray Light Almond

Planning a Layout


The WSP250's 2-level lens provides superior coverage at desktop level by allowing the sensor to detect vertical as well as horizontal motion. Coverage shown is for walking motion. Under optimum conditions with a high level of activity and with no barriers or obstacles, coverage can reach a maximum of 900 square feet. Under a typical, desktop level of activity, when mounted at 4 feet, coverage is 300 square feet.








WSP250




WSP250

Placement for PIR wall switch sensor




WSP250

Factory settings: 30 min. time delay, maximum light level and sensitivity



Single Level Lighting WSP250

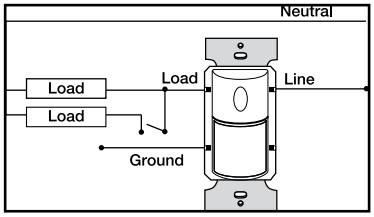

Manual Bi-level Lighting WSP250

Technical Specifications on Page S-139.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Features


- Adjusts time delays automatically based on actual usage patterns
- Assigns short delays (as low as 7 minutes) when the space is typically vacant, and longer delays (up to 30 minutes) for busier times
- Differentiates electrical noise from human motion
- Fixed mode – 5, 15, or 30 minutes.
- Walk-through mode – turns lights off 3 minutes after the room is initially occupied if no motion is detected after 30 seconds.
- Test mode – allows quick and easy adjustments.
- Sensitivity adjustment.
- Color-matched lenses and low profile for appealing design.
- Choice of auto-ON or manual-ON operation.
- Fast, easy installation/switch-out.
- Zero-crossing for long relay life.
- High sensitivity and dense coverage for exceptional performance.
- cULus listed.
- 5-year warranty.
- WDT200 offers bi-level control of two loads independently from the same box.
  - Built-in sensor holds secondary lights off until daylight levels drop
  - Each relay can be set for automatic or manual ON
  - Dual ON/OFF buttons can control each of the loads manually as well



WDT100W

Catalog Number	Description	Voltage	Load	Coverage	Color
NEW **Dual Technology Wall Switch Sensors**					
WDT100I **WDT100W** **WDT100BK** **WDT100GRY** **WDT100LA**	Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft.	Ivory White Black Gray Light Almond
WDT200I **WDT200W** **WDT200BK** **WDT200GRY** **WDT200LA**	Bi-Level Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft.	Ivory White Black Gray Light Almond

Coverage

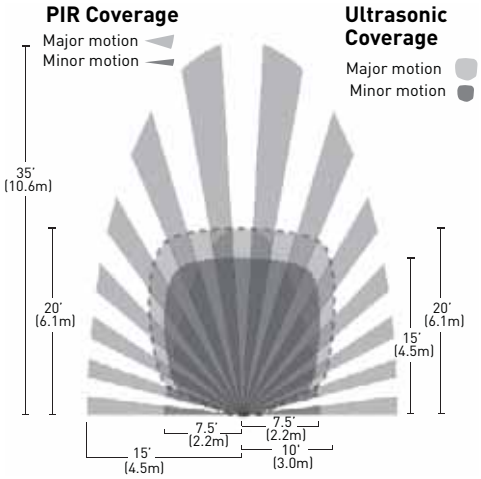


Technical Specifications on Page S-140.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy/ Vacancy Sensors
Wall Box Passive Infrared (PIR)




OS300SW


Features

- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Walk-through mode turns lights off 3 minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
Single-Pole Occupancy/Vacancy Sensors						
OS300SI	Self-adaptive design remembers ON/OFF cycles	120/230/277VAC; 50/60 Hz.	All	Yes	Yes	Ivory
OS300SW		@ 120VAC, 0-800 W ballast or tungsten, 1/6 hp.		Yes	Yes	White
OS300SGRY				Yes	Yes	Gray
OS300SLA		@ 230/277VAC, 0-1200 W ballast.		Yes	Yes	Lt. Almond


Coverage

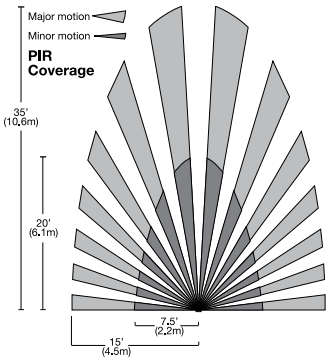



For best performance, Legrand/Pass & Seymour recommends using this sensor in spaces no larger than 15' x 20'.

Product Controls

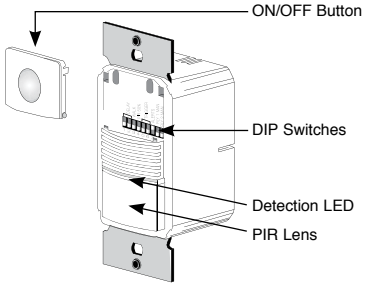

OS300S

DIP Switch Settings

DIP Switch #s:	1	2	3
Time Delay			
SmartSet/Test	↓	↓	↓ ◄
5 minutes	↓	↓	↑
10 minutes	↓	↑	↓
15 minutes	↓	↑	↑
20 minutes	↑	↓	↓
25 minutes	↑	↓	↑
30 minutes	↑	↑	↓
override	↑	↑	↑

DIP Switch #	5
ON Mode	
Auto On	↓ ◄
Manual On	↑


DIP Switch #	7
Audible Alerts	
Disabled	↓
Enabled	↑ ◄

DIP Switch #	6
Sensitivity	
High	↓ ◄
Low, 50%	↑

DIP Switch #	8
Visible Alerts	
Disabled	↓ ◄
Enabled	↑

Bypass occupancy & light level functions. Load is manually controlled with WS300 button.

DIP Switch #	4
Walk Through	
Disabled	↓ ◄
Enabled	↑



Technical Specifications on Page S-139.

◄ Factory Settings ↑=ON ↓=OFF

All devices listed on this page conform to NEMA WD-1 and WD-6.

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy/ Vacancy Sensors


Bi-Level Wall Box Passive Infrared (PIR)

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features


- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation, selectable for each relay.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Selectable walk-through mode turns lights off three minutes after the room is initially occupied if no motion is detected after the first 30 seconds.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.

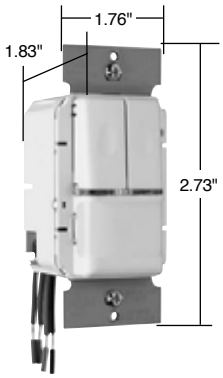


OSR300SW


Catalog Number	Description	Rating	Load	Occupant Warning Before OFF	Selectable Auto/Man. ON	Color
Single-Pole Dual-Relay Occupancy/Vacancy Sensors						
OSR300SI	Operates both circuits of a bi-level lighting system	120/230/277VAC; 50/60 Hz.	All	Yes	Yes	Ivory
OSR300SW		@ 120VAC, 0-800 W ballast or tungsten, 1/6 hp.		Yes	Yes	White
OSR300SGRY				Yes	Yes	Gray
OSR300SLA		@ 230/277VAC, 0-1200 W ballast.		Yes	Yes	Lt. Almond

Coverage






OSR300S Bi-Level Wiring




OSR300S Two Circuit Level Wiring




For best performance, Legrand/Pass & Seymour recommends using this sensor in spaces no larger than 15' x 20'.

Product Controls

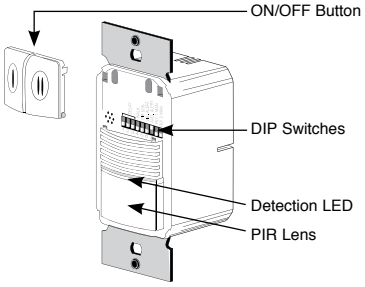

OSR300S

DIP Switch Settings

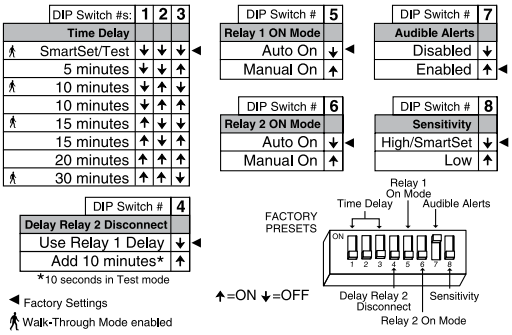


Technical Specifications on Page S-139.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy Sensors
Wall or Ceiling Mount Passive Infrared (PIR)

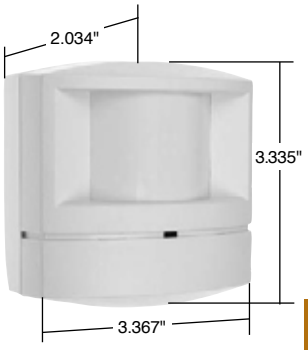

WA1001
HS1001


Features – WA1001 and HS1001


- Detection Signature Analysis provides high immunity to RFI and EMI.
- 2 coverage patterns to choose from.
- Wall mount or ceiling mount.
- Adjustable sensitivity settings.
- Digital time delay from 15 seconds to 30 minutes.
- Dual-element, temperature-compensated pyroelectric sensor.
- LED occupancy detection indicator.
- Compatible with 120VAC or 277VAC, 60 Hz lighting systems.
- Class 2 low-voltage device.
- Positive detection indicator.
- cULus listed.
- 5-year warranty.

Catalog Number	Description	Voltage	Current Draw	Coverage	Color
Wall/Ceiling Mount Sensors					
WA1001	Wide Angle PIR Occupancy Sensor	24VDC	8mA	Up to 1200 sq. ft.	White
HS1001	Long Range PIR Occupancy Sensor	24VDC	8mA	Up to 50 linear ft.	White


Reference Page L-16 for Power Packs.


Wide Angle
WA1001






Hallway
HS1001






Detection of motion toward the sensor begins at a max. of 50'. Reliable detection occurs at 35' to 40'.




For best results, the bracket should be used in every installation to allow for greatest flexibility of adjustment. Brackets are included with each unit.

Technical Specifications on Pages S-141 and S-142.

WA1001

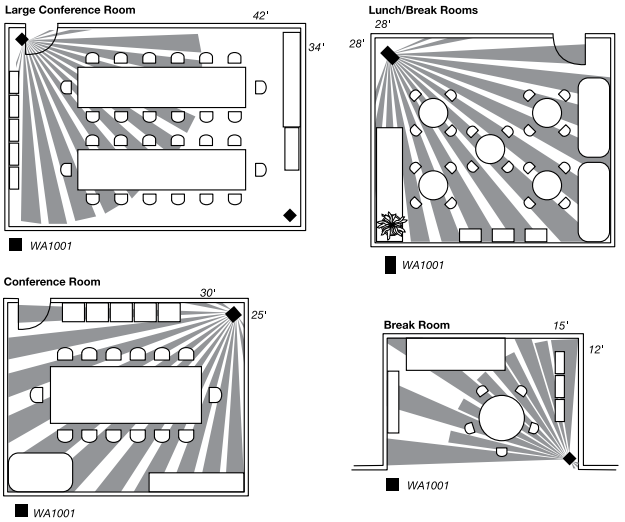


HS1001



The key areas to cover well in hallways are entrances and corners.

Wiring Diagram

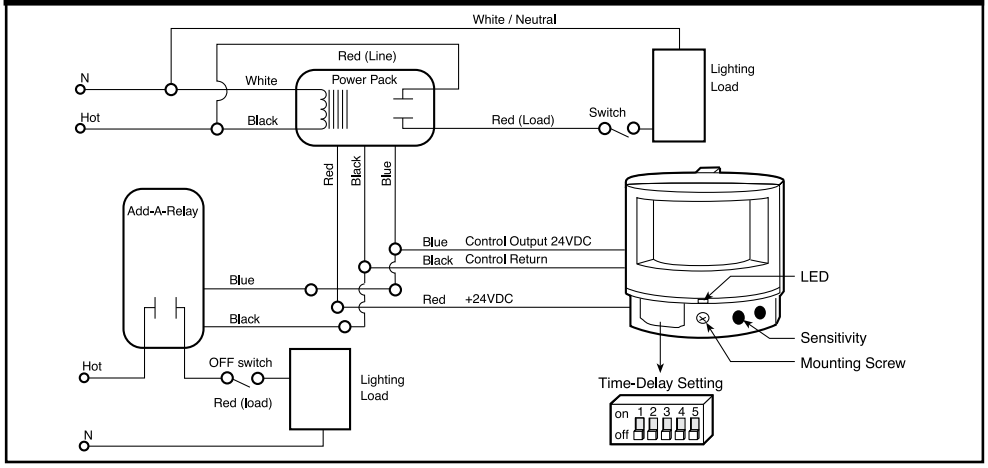

All devices listed on this page conform to NEMA WD-1 and WD-6.

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy Sensors
Ceiling Mount Passive Infrared (PIR)

legrand®
Pass & Seymour

Features

- ASIC technology reduces components and enhances reliability.
- Pulse count processing eliminates false offs without reducing sensitivity.
- Detection signature analysis eliminates false triggers and proves immunity to RFI and EMI.
- Low-profile design ensures a clean and uncluttered ceiling appearance.
- User-adjustable time delay from 15 seconds to 30 minutes by two minute increments.
- Sensitivity is programmed through a DIP switch and has four settings from minimum to maximum.
- Dual-element, temperature compensated pyro-electric sensor.
- Mounting options: ceiling tile or 3.0 inch round mudring.
- Units per power pack: up to 13.
- cULus listed.
- 5-year warranty.




CS500
CS1200

Catalog Number	Description	Rating	Coverage	Override and Output Disable	Color
Low-Profile Ceiling Mount Sensors					
CS500	PIR Occupancy Sensor	24VDC Input, requires Power Pack 11mA	360°, 500 sq. ft.	No	White
CS1200	PIR Occupancy Sensor		360°, 1200 sq. ft.	No	White

Reference Page L-16 for Power Packs.

CS500/CS1200 Wiring

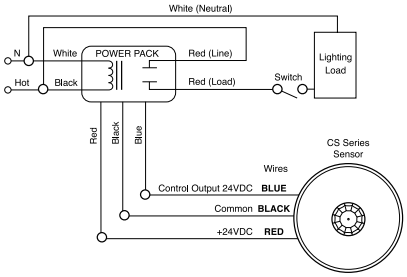


DIP Switch Settings

DIP Switch #	1	2	3	4	5	6
Time Delays						
15 seconds	●	●	●	●	●	●
2 minutes	-	-	●	●	●	●
4 minutes	-	●	-	●	●	●
6 minutes	-	-	-	●	●	●
8 minutes	-	●	●	-	●	●
10 minutes	-	-	●	-	●	●
12 minutes	-	●	-	-	●	●
14 minutes	-	-	-	-	●	●
16 minutes	-	●	●	●	-	●
18 minutes	-	-	●	●	-	●
▶ 20 minutes	-	●	-	●	-	●
22 minutes	-	-	-	●	-	●
24 minutes	-	●	●	-	-	●
26 minutes	-	-	●	-	-	●
28 minutes	-	●	-	-	-	●
30 minutes	-	-	-	-	-	●


DIP Switch #	7	8
Sensitivity		
Minimum	-	-
Medium Low	-	●
Medium High	●	-
▶ Maximum	●	●

● = ON - = OFF
▶ = Factory Presets


Mounting – CS1200




Coverage




Extended Range Lens (Standard)
CS1200






High Density Lens
CS500




Technical Specifications on Page S-143.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Commercial Occupancy Sensors
Ultrasonic Ceiling Mount



CSU600



CSU1100
CSU2200


Features

- Advanced signal processing circuitry helps to eliminate false ONs.
- Utilizes advanced, omni-directional (360°), Doppler technology for reliable occupancy detection.
- Angled transmitter and receiver pairs help optimize sensitivity while eliminating unwanted detection from ceiling air movement.
- Digital DIP switch time delay (15 seconds to 30 minutes).
- LED indicates occupancy detection.
- Reliable solid-state construction.
- Temperature and humidity resistant 32 kHz receivers.
- Mounts to ceiling tiles or box.
- Units per power pack: up to 4.
- cULus listed.
- 5-year warranty.


Catalog Number	Description	Rating	Coverage	Override and Output Disable	Color
Ultrasonic Ceiling Mount Sensors					
CSU600	Ultrasonic Occupancy Sensor	24VDC Input, requires Power Pack 27mA	360°, 500 sq. ft. One-sided	Yes	White
CSU1100	Ultrasonic Occupancy Sensor	24VDC Input, requires Power Pack 30mA	360°, 1100 sq. ft. Two-sided	Yes	White
CSU2200	Ultrasonic Occupancy Sensor	24VDC Input, requires Power Pack 30mA	360°, 2200 sq. ft. Two-sided	Yes	White

Reference Page L-16 for Power Packs.


CSU600/CSU1100/CSU2200 Wiring

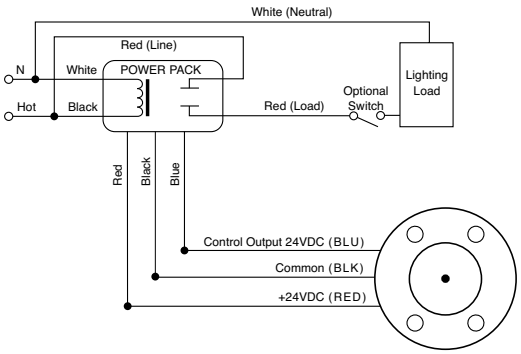

Coverage

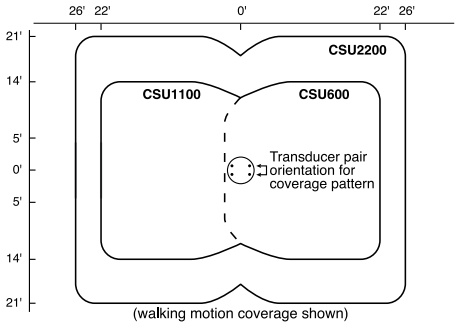

Mounting

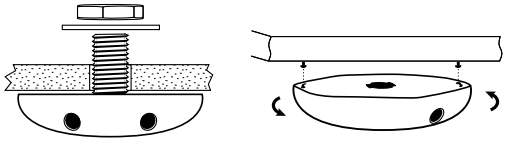

Attached to a vibration-free surface. Mount the sensors with the receivers facing the area of coverage. Note: Place 4' away from supply ducts, 6' from horizontal discharge ducts, and 6" from power packs.

DIP Switch Settings

● =ON – =OFF	DIP Switch #					
Time Delay	**1**	**2**	**3**	**4**	**5**	**6**
15 seconds	●	–	–	–	–	–
2 minutes	–	●	–	–	–	–
4 minutes	–	–	●	–	–	–
6 minutes	–	●	●	–	–	–
8 minutes	–	–	–	●	–	–
10 minutes	–	●	–	●	–	–
12 minutes	–	–	●	●	–	–
14 minutes	–	●	●	●	–	–
*16 minutes	–	–	–	–	●	–
18 minutes	–	●	–	–	●	–
20 minutes	–	–	●	–	●	–
22 minutes	–	●	●	–	●	–
24 minutes	–	–	–	●	●	–
26 minutes	–	●	–	●	●	–
28 minutes	–	–	●	●	●	–
30 minutes	–	●	●	●	●	–
Output Disable	–	–	–	–	–	–
Override						●

* = factory preset


Technical Specifications on Page S-144.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Features

- Advanced control logic based on RISC microcontroller provides:
  - Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Walk-through mode turns lights off three minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Simple, one-step setup.
- Ultrasonic diffusion technology spreads coverage to a wider area (patented).
- LEDs indicate occupancy detection.
- Four occupancy logic options give users the ability to customize control to meet application needs.
- Ultrasonic frequency of 40 kHz.
- Time delays: automatic, fixed (5, 10, 15, 20, or 30 minutes), walk-through, test-mode.
- Sensitivity adjustment: reduce sensitivity (for PIR sensitivity); ultrasonic sensitivity is variable with trimpot
- Multi-level, 360° Fresnel lens for superior occupancy detection.
- Mounting options: ceiling tile; 4 square junction box with double gang mudring.
- Units per power pack: up to 4.
- cULus listed.
- 5-year warranty.




CSD1000


Catalog Number	Description	Rating	Coverage	Override and Output Disable	Color
Low-Profile Ceiling Mount Sensors					
CSD1000	Dual Technology Occupancy Sensor	24VDC Input, requires Power Pack 35mA	360°, 1000 sq. ft. Two-sided	Yes	White

Reference Page L-16 for Power Packs.


CSD1000 Wiring

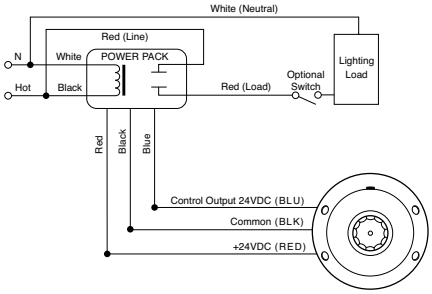


Coverage



Mounting





DIP Switch Settings

PIR Sensitivity	Switch # 1
Minimum 30%	—
Maximum 100%	• ◀

◀ = Factory Setting
• = ON
— = OFF

Occupancy Logic	Trigger	Initial Occupancy	Maintain Occupancy	Re-trigger	Switch # 2	3
	Standard	Both	Either	Either	—	— ◀
	Option 1	Either	Either	Either	—	•
	Option 2	PIR	Either	Either	•	—
	Option 3	Both	Both	Both	•	•

Time Delay	Switch # 4	5	6	7
15 sec	•	•	•	•
2 min	—	•	•	•
4 min	•	—	•	•
6 min	—	—	•	•
8 min	•	•	—	•
10 min	—	•	—	•
12 min	•	—	—	•
14 min	—	—	—	•
16 min	•	•	•	—
18 min	—	•	•	— ◀
20 min	•	—	•	—
22 min	—	—	•	—
24 min	•	•	—	—
26 min	—	•	—	—
28 min	•	—	—	—
30 min	—	—	—	—


Override	Switch # 8
On	•
Off	— ◀

Technical Specifications on Page S-145.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Power Packs & Add-A-Relay



PWP120277
AR120/277

A cost-effective way to power Legrand/Pass & Seymour® occupancy sensors.

Legrand/Pass & Seymour universal voltage power packs consist of a transformer and high-current relay in one small unit. In addition to a primary high input, power packs have a secondary output of 24VDC, 114mA which provides operating power to sensors. Upon sensing motion or insufficient light, sensors electrically close an internal circuit and send 24VDC back to the power packs or Add-A-Relays that control lighting systems. Unlike power packs, Add-A-Relay does not have transformer power supply, only an isolated relay.

Power packs can switch a maximum 20 Amps of fluorescent lighting. Both power packs and Add-A-Relay are available for 120 and 277 Volt systems.

Features

- Efficient switching power supply provides optimized current output based on number of sensors.
- Essential to ceiling mount sensor systems.
- Self-contained power supply relay system.
- UL 2043 plenum rated for cost-effective installation.
- UL-rated 94 V0 plastic enclosure.
- 1/2" snap-in nipple attaches to standard electrical enclosures through 1/2" knockouts.
- LED indicates status of relay or low-voltage overcurrent.
- Secondary voltage: 24VDC; Secondary output: 225mA.
- Easy-to-install.
- cULus listed.
- 5-year warranty.

Catalog Number	Description	Input Voltage	Load Ratings			Output
			Ballast (A)	Incan. (A)	Motor (HP)	
Power Packs & Add-A-Relay						
PWP120277	Universal Voltage Power Pack	120/230/277	20	20	1*	24VDC; 225mA**
AR120/277	Add-A-Relay	120/277	20	13	1	0†

Constructed with environmentally friendly materials and is RoHS-compliant.

*1HP rated at 120/250VAC.


**Output is 225mA with relay connected.

†Add-A-Relay has a current consumption of 36mA.


Installation

Power packs should be installed in accordance with state, local, and national electrical codes. They are designed to attach to electrical enclosures with 1/2 inch knockouts. In plenum ceilings, power packs should be installed in approved electrical enclosures. Most applications require UL listed, 18-22 AWG, 3-conductor, class 2 cable for low-voltage wiring. For plenum rated ceilings use UL listed plenum-approved cables.


J-Box Installation

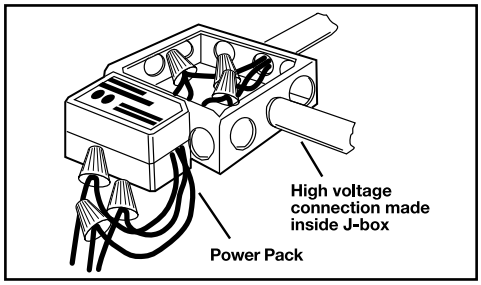


Power Pack Schematics

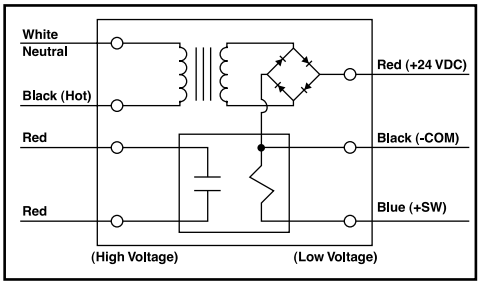

Ceiling Sensor with Power Pack

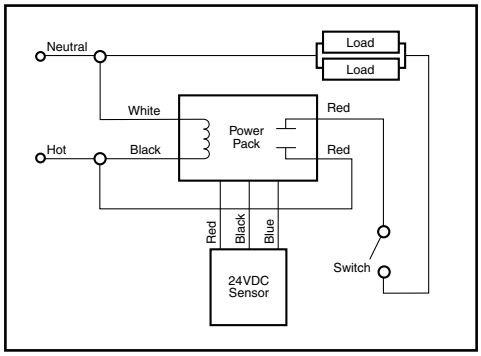

Sensor Schematic with Add-A-Relay

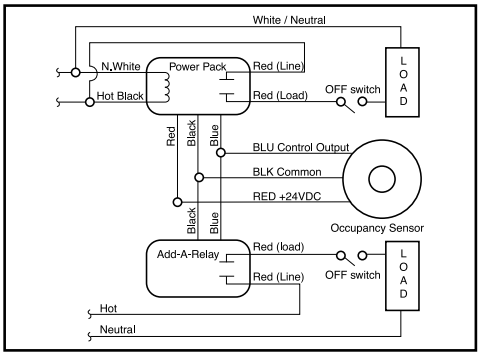

For additional Wiring Diagrams, see Pages S-18 and S-19.

Technical Specifications on Page S-146.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Examples of savings and payback

EXAMPLE 1

Large office using a WA1001 Passive Infrared Sensor

Six 88-watt, 3-lamp fixtures = 0.528 kW x $0.086/kWh* = $0.04541/hr
Savings = 35 hours per week
Total hours saved = 1,820 hrs/yr
Annual Savings = $82.65; 5 Year Savings = $413.23
Total estimated cost including power pack: (Product and Labor) = $140.00
Payback = 20.33 months
ROI = $82.65 ÷ $140.00 = 59.03%

EXAMPLE 2

Individual office using a CS500 PIR Ceiling Sensor

Three 88-watt, 3-lamp fixtures = 0.264 kW x $0.086/kWh* = $0.02270/hr
Savings = 50 hours per week
Total hours saved = 2,600 hrs/yr
Annual Savings = $59.02; 5 Year Savings = $295.10
Total estimated cost: (Product and Labor) = $54.00
Payback = 10.98 months
ROI = $59.02 ÷ $54.00 = 109.30%

EXAMPLE 3

Restroom using a CSU1100 Ultrasonic Occupancy Sensor

Four 88-watt, 3-lamp fixtures = 0.352 kW x $0.086/kWh* = $0.03027/hr
Savings = 75 hours per week
Total hours saved = 3,900 hrs/yr
Annual Savings = $118.05; 5 Year Savings = $590.27
Total estimated cost: (Product and Labor) = $160.00
Payback = 16.26 months
ROI = $118.05 ÷ $160.00 = 73.78%

*Based on 2004 US Government National average cost.

Multi-Sensor Installation

For applications requiring more than one sensor, **the load per power pack should not exceed 225mA**. Use the following table to calculate the maximum number of sensors per power pack.

WA1001	CS500/1200	HS1001	CSU600	CSU1100/2200	AR120/277	CSD1000
8mA	11mA	8mA	27mA	30mA	36mA	35mA

Examples:

2 x CSU1100 (30mA) = 60mA ✔
This is an acceptable load because it is less than 150mA.


4 x CSU1100 (30mA) + 1 x AR120/277(36mA) = 156mA ✗
This is **not** an acceptable load because it is greater than 150mA.

legrand®
Pass & Seymour

Occupancy & Vacancy Sensors & Timers
Timers



RT1LA
shown with
SWP26LA

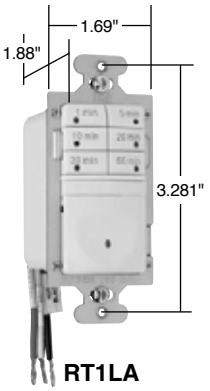


RT1LA

Features


- Seven-button preset time switch.
- Manual ON/OFF.
- Adjustable time delay: 1, 5, 10, 20, 30, 60 minutes.
- Lighted switch for visibility in darkened rooms.
- Controls most types of lighting.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Digital Timers					
RT1I	7-Button Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	No	Ivory
RT1W				No	White
RT1BK				No	Black
RT1LA				No	Light Almond

RT1 Wiring

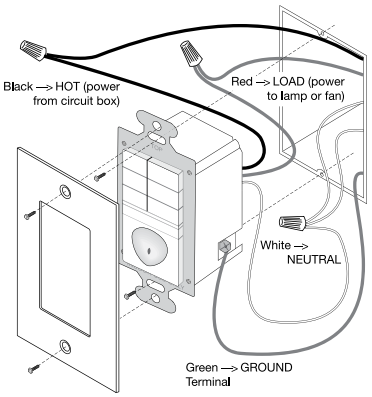

Product Controls



RT1

legrand®
Pass & Seymour


Features

- Programmable countdown time switch
- Manual ON/OFF.
- Digital countdown display.
- Adjustable time delay from 5-55 minutes (five-minute increments) to 1-12 hours (15-minute increments).
- Audible beep and visible light flash warnings before automatic-OFF.
- Lighted switch for visibility in darkened rooms.
- Works with most common lighting types.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp




RT12W shown with SWP26W

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Digital Timers					
RT12I	12-Hour Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	Yes	Ivory
RT12W				Yes	White
RT12BK				Yes	Black
RT12LA				Yes	Light Almond

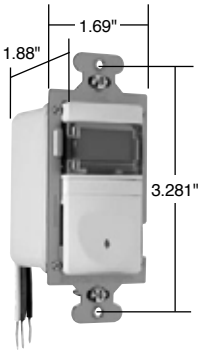


RT12LA

RT12 Wiring

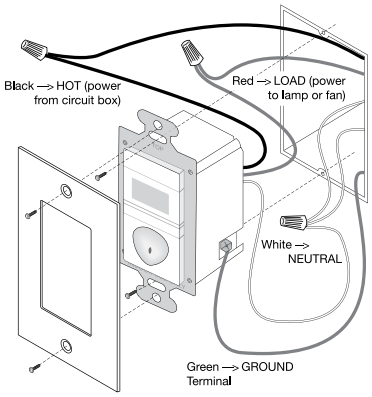

Product Controls



RT12

Features

- Manual or programmed ON/OFF switching.
- Real time clock with day/date calendar.
- Easy to read LED display.
- Programming buttons accessible without removing wall plate.
- Eight programs can be assigned to any day or combination of days of the week.
- Automatically calculates sunrise and sunset times based on latitude and longitude.
- Audible or visual occupant warning before OFF.
- Power failure memory.
- Zero crossing circuitry.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp




RT24W shown with SWP26W

Catalog Number	Description	Rating	Load	Time-Running-Out Warning	Color
Astronomic Programmable Timers					
RT24I	24-Hour Programmable Timer	0-800W @ 120V 0-1200W @ 277V 1/6 hp @ 120/277V	All	Yes	Ivory
RT24W				Yes	White
RT24BK				Yes	Black
RT24LA				Yes	Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Occupancy & Vacancy Sensors & Timers
Wall Box Timers
125, 125-T, 250 & 277VAC, 60 Hz

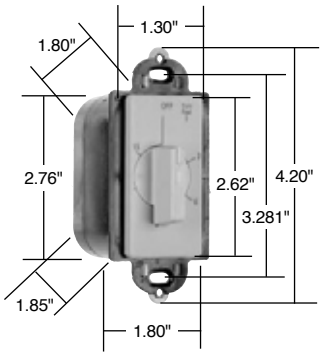

97015I

Catalog Number	Color
Replacement Knobs (without plate)	
PS55A1	White
PS55B1	Ivory
PS55G1	Light Almond

VAC	Hz	Amp	HP
Ratings			
125	60	20	1
125T	60		7
250	60	10	1
277	60	10	



97352I

Applications

- Lighting
- Exhaust fans
- Whirlpools and spas
- Saunas
- Heating and heat lamps
- Ventilating and air conditioning

Features

- Units with "Hold" feature may be turned counter-clockwise to hold the load on without timing function.
- Turning clockwise causes unit to time load off after desired time delay.
- Quiet operation.
- Time range from 5 minutes to 12 hours.
- Available with or without hold.
- Decorator styling.
- Easily installed.
- Large head screw terminals.
- Accurate to ± 5 percent.
- Motor rated.
- Energy saving.

Catalog Number	Description	Time Range	Color
Specification Grade Decorator Rotary Timers			
97015I **97015W** **97015LA**	Timeout, No Hold	15 Minutes	Ivory White Light Almond
97030I **97030W** **97030LA**	Timeout, No Hold	30 Minutes	Ivory White Light Almond
97060I **97060W**	Timeout, No Hold	60 Minutes	Ivory White
97115I **97115W**	Timeout, With Hold	15 Minutes	Ivory White
97160I **97160W**	Timeout, With Hold	60 Minutes	Ivory White

Features


- Eliminates the need for two switches.
- Fits standard toggle opening for easy ganging.
- Time range adjustable from 1-60 minutes.
- Easily installed.
- May control one or two loads simultaneously.
- Motor rated.
- Silent operation.
- Reliable solid-state construction.
- Energy saving.

Catalog Number	Description	Time Range	Rating	Color
Specification Grade Toggle Time Delay Switches Center Off				
97352I **97352W**	Double Pole, Double Throw	1-60 Minutes, Adjustable	500W, 1/3 HP, 120VAC, 60 Hz	Ivory White

Operation: Catalog Number 97352

- When toggle is up, one or two loads remain on.
- When toggle is down, load "A" is off, load "B" times-off at preset time. In the center position, both loads are off.

Wiring Diagram: Single Timed Load Application

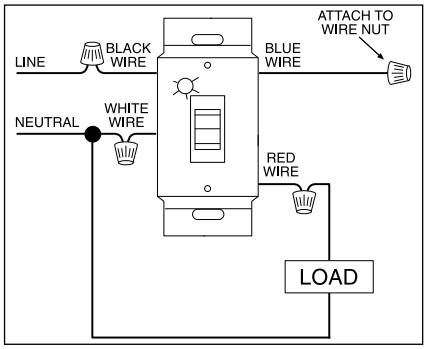

All devices listed on this page conform to NEMA WD-1 and WD-6.

Notes



DIMMERS & FAN SPEED CONTROLS

legrand®

Pass & Seymour

Dimmers & Fan Speed Controls

legrand®
Pass & Seymour

Today's home and business owners want optimum control of their electrical systems. P&S Dimmers & Fan Speed Controls provide that control — along with aesthetics, durability, trouble-free installation, and innovative technologies.

Benefits of Using Legrand/Pass & Seymour Dimming

Save Energy – Dimming reduces the amount of energy consumed by the lamps which reduces energy costs.

Add ambience – Change the lighting to set the mood or highlight the décor.

Add comfort – Use only the light you need for the task.

Add flexibility – Change the look of the room and then change it back. Quickly and easily.

Add convenience – Presets and scene controls make it easy to set up your home the way you like with accuracy and repeatability.

Increase safety and security – Never drive up to a dark house again.

Lower maintenance costs – Dimming increases the life of incandescent lamps.

Add value – A home with lighting controls is worth more.

Index

Device	Page Number
Product Selection Guide	M-2
Catalog Numbering System	M-3
Residential Dimmers & Fan Speed Controls	
RF Lighting Control System	M-4 – M-7
Scene Director	M-8, M-9, M-34
Leandro®	M-10, M-34
Harmony™ TradeMaster®	M-11, M-12, M-34
TradeMaster® Toggle	M-18, M-19, M-20, M-36
Rotary R TradeMaster® Series	M-21
Residential & Light Commercial Dimmers & Fan Speed Controls	
LS TradeMaster® Series	M-13 – M-15, M-35
DR TradeMaster® Series	M-16, M-34
Wide Slide TradeMaster® Series	M-17, M-36
Rotary TradeMaster® Series	M-22, M-23, M-37
Commercial Dimmers & Fan Speed Controls	
Titan™ Series	M-24 – M-31, M-38
Rotary Dimmers	M-32
Rotary Fan Speed Controls	M-33, M-39

Pass & Seymour
legrand

Dimmers & Fan Speed Controls
Product Selection Guide

TITLE 24 ENERGY SAVER

Energy concerns have created directives in some states for lighting controls in new residential construction and major renovations. In an effort to reduce electrical power consumption, California has mandated one of the most stringent energy codes in the country. California Title 24 requires high efficacy luminaires, vacancy sensors (Section L), or dimmers to be placed in certain areas of the home. The standard became effective on October 1, 2005. Other states are considering adopting similar mandates to answer their own energy concerns. Legrand/Pass & Seymour has an extensive selection of vacancy sensor and dimmer solutions to address this growing industry trend.



RF Lighting Control System

- Whole house and room scene controls allow homeowners to change their environment at the push of a button.
- Frequency-agile Radio Frequency (RF) wireless communications technology.
- Simple, intuitive programming without the use of a computer or controller.

PAGES M-4 – M-7



Scene Director Control

- Select any lighting scene at the touch of a button.
- Optional infrared remote enables control from anywhere in the room.
- Master can control up to 30 dimmers.
- Easy to program – and won't lose programming during power outage.

PAGES M-8, M-9



Leandro® Decorator Dimmers

- Multi-location dimming.
- Light levels fade elegantly up/down.
- Green LEDs indicate preset level; red LED makes dimmers easy to find in the dark.

PAGE M-10



Harmony™ Decorator Dimmers

- Matches P&S Decorator devices.
- Combines ON/OFF Decorator switch with separate slider for dimming control.
- No lost settings during power outages.

PAGE M-11, M-12



LS Series Decorator Slide Dimmers

- Smooth, ergonomic operation.
- Snap-in LED light modules make dimmers easy to find at night.
- Available in both preset and non-preset models.

PAGES M-13 – M-15



DR Series Decorator Rotary Dimmers

- Illuminated knob shows light level.
- Snap-in LED light modules make dimmers easy to find at night.
- Available for incandescent and low-voltage lighting.

PAGE M-16





Toggle Dimmers

- Convenient preset dimming control.
- Combines ON/OFF toggle with separate preset for dimming control.
- Matches appearance of toggle switches.

PAGE M-18, M-19

- Match appearance of toggle switches.
- No loss of settings during power outages.
- Illuminated versions available.

PAGE M-20



Rotary Dimmers

- Models for incandescent and low-voltage lights; preset and illuminated features available.
- Simple to operate.
- Available in both preset and non-preset models.

PAGE M-21

Dimmers & Fan Speed Controls
Catalog Numbering System

Pass & Seymour
legrand



All P&S Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

T LV 600 - *

Control Type
- D = Decorator
- LS = Long Slide
- SC = Scene Director
- T = Toggle
- R = Rotary
- DR = Decorator Rotary

Load Type
- Blank = Incandescent
- FB = Fluorescent Ballast
- IR = Infrared Remote
- LV = Magnetic Low-Voltage
- ELV = Electronic Low-Voltage
- MC = Master Controller
- DC = Dual Dimmer/De-Hummer Speed Control
- DV = Dimmer/Variable Speed Control
- DH = De-Hummer Fan Speed Control
- SC = Fan Speed Control

Load Size
- 300 = 300 Watt
- 600 = 600 Watt/VA
  603 = 600 Watt/VA, 3-Way
- 700 = 700 Watt
  703 = 700 Watt 3-Way
- 1000 = 1000 Watt/VA
  1003 = 1000 Watt/VA, 3-Way
- 1100 = 1100 Watt
  1103 = 1100 Watt 3-Way
- 1600 = 1600 Watt
  1603 = 1600 Watt 3-Way
- 2000 = 2000 Watt
  2003 = 2000 Watt 3-Way
- 3 = 3 Amps
- 5 = 5 Amps
- 7 = 7 Amps
- 8 = 8 Amps
- 10 = 10 Amps
- 15 = 1.5 Amps
- 16 = 1.6 Amps or 16 Amps
- 25 = 2.5 Amps

Options
- E = Electronic Preset
- L = Lighted
- M = Multilocation
- P = Preset

Color
- BK = Black
- (Blank) = Brown
- CL = Clear
- GRY = Gray
- I = Ivory
- LA = Light Almond
- LC = Lighted Clear
- W = White

Package
- Blank = Box
- V = VisionPak™
- TK = Triple Knob

Examples:
D600MLAV = Decorator Dimmer, Incandescent, 600W, Multilocation, Light Almond, in a VisionPak
LS600LA = Decorator Slide Dimmer, Incandescent, 600W, Light Almond, in a Box
SSSC5-WV = Short Slide, Fan Speed Control, 5 Amp, White, in a VisionPak

Many P&S Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising. Please see the Catalog Numbering System above or specific charts for ordering information.

See Pages M-4 – M-7 to order RF Lighting Control System products.


Pass & Seymour
legrand

Residential Dimmers & Fan Speed Controls
RF Lighting Control System



The RF Lighting Control System *allows homeowners to control lights, ceiling fans and small appliances from anywhere in the home, without the need for special wiring or expensive master controllers. The system can handle up to 127 rooms and 1,023 devices – making it the perfect lighting control system for any size home.*

TITLE 24 ENERGY SAVER

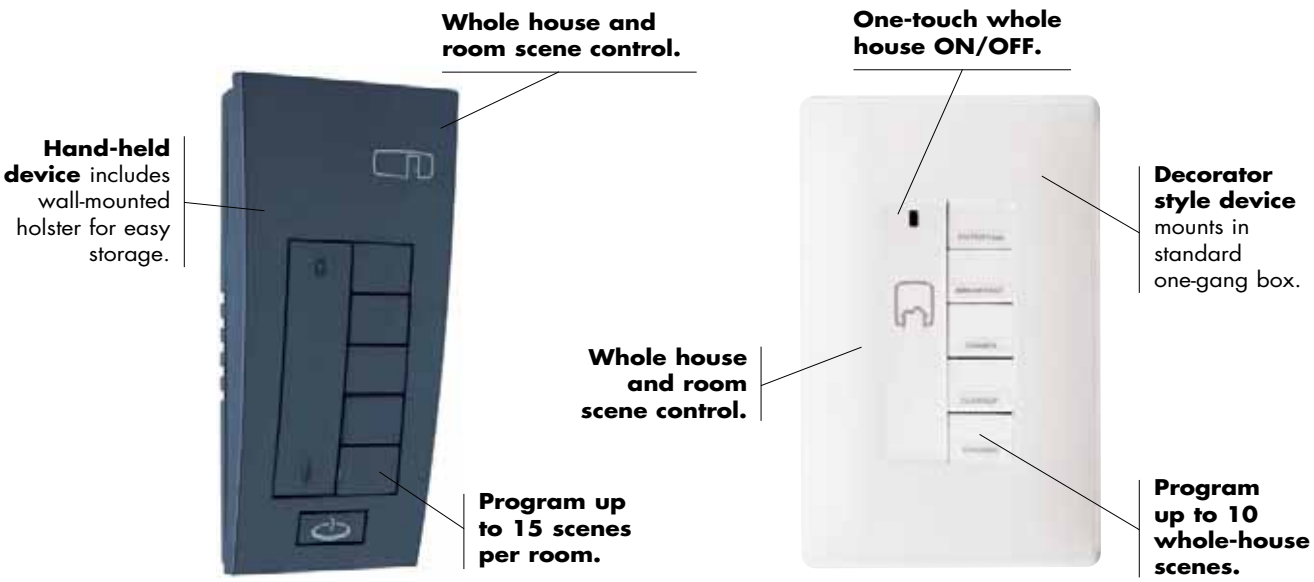

System Features & Benefits

- Whole house and room scene controls allow homeowners to change their environment at the push of a button.
- Frequency-agile Radio Frequency (RF) wireless communications technology.
- Simple, intuitive programming without the use of a computer or controller.
- Increase control with RS232 and IR to RF interfaces.
- Plug-in modules allow control of small appliances and table or floor lamps, giving homeowners the full control of not only their lights, but also their energy bills.

Residential Dimmers & Fan Speed Controls
RF Lighting Control System
Dimmers & Switches

legrand®
Pass & Seymour


TITLE 24 ENERGY SAVER

Catalog Number	Description	Ratings	Color
NEW In-Wall Universal Dimmers			
DRD4I DRD4W DRD4B DRD4A	The In-Wall Universal Dimmer operates most dimmable lighting types, including neon and compact fluorescent. Includes a CFL setting to alleviate flickering and premature bulb burn-out.	600W	Ivory White Black Light Almond
NEW In-Wall Incandescent Dimmers			
DRD2I DRD2W DRD2B DRD2A	Easily dim traditional incandescent bulbs, without the requirement of a neutral connection.	600W	Ivory White Black Light Almond
NEW In-Wall 3-Way Switches			
DRD8IV2 DRD8WV2 DRD8BV2 DRD8AV2	Provides convenient control from multiple access points when used in conjunction with any wireless switch or dimmer.	N/A	Ivory White Black Light Almond
NEW In-Wall 2000W Box Dimmers			
MR2000	The box dimmer operates as a remove mounted dimmer for operating large lighting loads, and works in conjunction with multi-location controllers to provide true multi-way lighting.	2000W	Black




DRD4A
DRD2A
DRD3AV2
DRD8AV2

Catalog Number	Description	Ratings	Color
NEW In-Wall Switches			
DRD3IV2 DRD3WV2 DRD3BV2 DRD3AV2	Perfect for controlling lights that don't need dimming, the In-Wall Switch can be included in scene programming for use with Room and Whole-House Scene Controllers.	800W	Ivory White Black Light Almond




MR2000

DRD2 Wiring Diagram

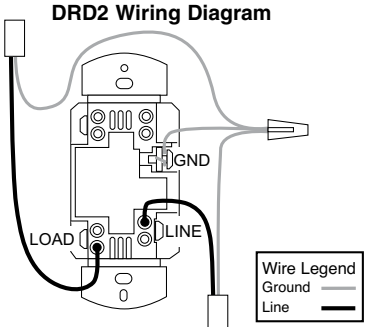


DRD3 & DRD4 Wiring Diagram

Mounting in deep electrical boxes is recommended.



For de-rating chart, see Page M-7.

MR2000 Mounting Diagram



Mount the MR2000 dimmer vertically and provide 6" clearance above and below the dimmer for airflow. Requires 100 BTW/ hour ventilation. Backbox (4" x 2-1/8") may be surface or recess mounted. Extension (1-1/2") must extend out from the wall.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
RF Lighting Control System
Fan Speed & Master Controls & Plug-In Modules


TITLE 24 ENERGY SAVER




DRD9W Shown with SWP26W



DRD6AV2



MRH6G




MRP6W


Catalog Number	Description	Ratings	Color
NEW In-Wall Fan Speed Controllers			
DRD9I **DRD9W** **DRD9B** **DRD9A**	This controller gives you four options for ceiling fan speed and includes a built-in de-hummer to reduce fan noise.	1.5 A	Ivory White Black Light Almond

Catalog Number	Description	Ratings	Color
NEW In-Wall Whole House Scene Controllers			
DRD5IV2 **DRD5WV2** **DRD5BV2** **DRD5AV2**	This product allows lighting control for the entire home from any location.	N/A	Ivory White Black Light Almond
NEW In-Wall Room Scene Controllers			
DRD6IV2 **DRD6WV2** **DRD6BV2** **DRD6AV2**	Program up to five room scenes with this in-wall controller.	N/A	Ivory White Black Light Almond
NEW Hand-Held Whole House Scene Controllers			
MRH5G	This remote whole house controller can be programmed for up to five house scenes. It also includes a panic button that when pushed, turns the lights on or flashes them in a pre-determined scene.	N/A	Black
NEW Hand-Held Room Scene Controllers			
MRH6G	The hand-held room controller enables five room and individual load control.	N/A	Black


DRD5/DRD6 Wiring Diagram

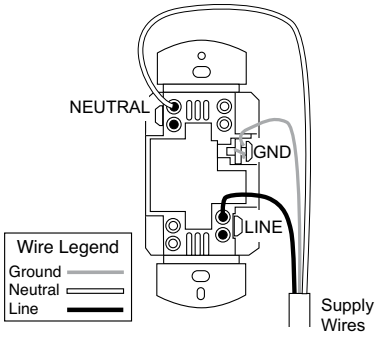

Mounting controls in deep electrical boxes is recommended.



DRD9 Wiring Diagram

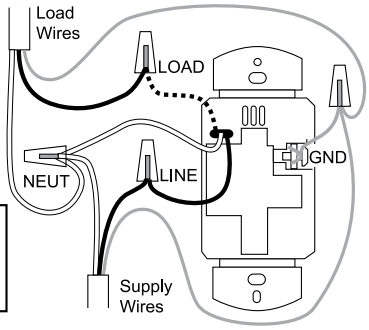

Catalog Number	Description	Ratings	Color
NEW Plug-In Lamp Module			
MRP6W	Control table and floor lamps up to 300W with this plug-in module.	300W	White
NEW Plug-In Small Appliance Module			
MRP7W	Control small appliances, including coffee machines, radios, TVs and more with this plug-in module.	800W	White

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential Dimmers & Fan Speed Controls
RF Lighting Control System Interfaces

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Catalog Number	Description
NEW RS232 to RF Interface	
MR232G	Incorporate RS232-compliant home theater systems, computers and other devices by using this interface.
NEW IR to RF Interface	
MRIR1	Use this interface to program universal remotes to control lighting as well as audio/video components.
NEW Room Scene Interface	
MRRC3G	The Room Scene Interface is used to connect the RFLC system with external devices at a room level. Common applications include interfacing with security systems and occupancy or vacancy sensors.
NEW House Scene Interface	
MRHC3G	The House Scene Interface is used to connect the RFLC system with external devices on a whole house level. Common applications include interfacing with security systems and occupancy or vacancy sensors.
NEW Repeater & Away Emulator	
MRR2G	Record the normal usage of lights throughout the home and play them back while homeowners are away with the Repeater & Away Emulator.
NEW Wireless Key Fob	
MKFOB	The Wireless Key Fob allows the lights to be turned on from a remote location, like the driveway. Visor Clip included.




MR232G



MRR2G



MKFOB

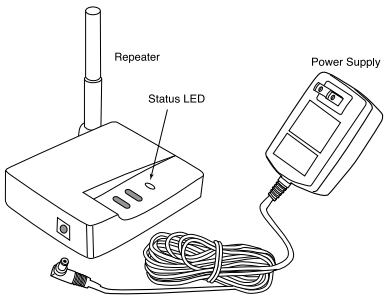

MRR2G Product Controls
The wireless repeater easily plugs into any standard outlet. It is best installed in a central location.

De-rate Dimmers as follows:			
	Single Dimmer	Maximum Capacity	
		Dimmer at End of a Multi-Gang	Dimmer in Middle of a Multi-Gang
Incandescent/Quartz Halogen	600W	500W	400W
Magnetic Low Voltage	500W	400W	300W
Electronic Low Voltage	500W	400W	300W
Cold Cathode/Neon	500W	400W	300W
Fluorescent: 2-Wire Compact Fluorescent	 500W 500W	 400W 400W	 300W 300W

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
Scene Director

TITLE 24 ENERGY SAVER



For everything people do at home, there's a combination of light sources and levels that will work best. P&S Scene Director Controls let homeowners capture these combinations (or scenes) — and recall them whenever they want at the touch of a button.



P&S Scene Director Master

No tools or plate removal necessary for programming with our exclusive, patent-pending system. Set light levels with product fully installed.

Easy to install, program, and operate for sophisticated scene control dimming.

Constant memory returns lights to previously selected level after power failure. No need to reset.

Controls up to 30 dimmers per Master, providing the ability to control even complex, multiroom scenes.

Available infrared remote (SCIR) provides mobile control flexibility.

Matching Fan Speed Control available.

Buttons glow when selected — glow levels are adjustable, too.

Raises or lowers all lights in any scene simultaneously.

One-touch selection for up to five lighting environments (scenes) — plus full Off.



SCMC5WV

Programmable fade rates enable users to easily select the speed of fade-up and fade-down.

Provides powerful control via conventional wall-box wiring. Wires like a 3-way switch. Communication among devices requires just one additional conductor.

P&S Scene Director Dimmer

Works in conjunction with a P&S Scene Director Master.

Red LED glows when dimmer is OFF.


Green LEDs indicate light level selected and preset level.

Can be operated individually.

Touch pad raises or lowers individual light levels without affecting preset.

Unobtrusive set button for simple programming of preset scenes.

Sleek, ergonomic P&S Decorator style matches other Decorator devices.

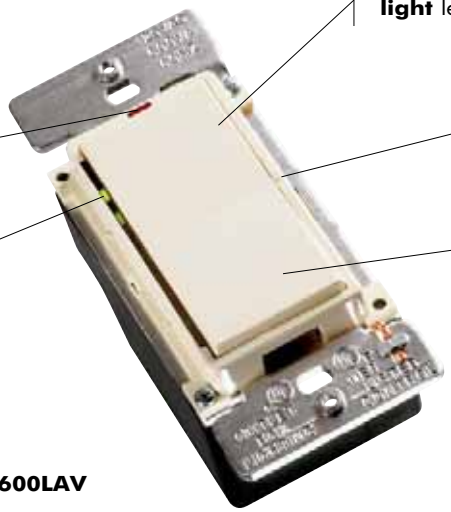

SC600LAV

Constant memory returns lights to previously selected level after power failure.


Residential Dimmers & Fan Speed Controls
Scene Director

legrand®
Pass & Seymour


Catalog Number	Description	Ratings	Color
600W Incandescent Scene Director Control Dimmers			
SC600IV SC600WV SC600LAV	Preset, Controls 1 Load in a Scene	120V, 600 Watt	Ivory White Light Almond
300VA Electronic Low-Voltage Scene Director Control Dimmers			
SCELV300IV SCELV300WV SCELV300LAV	Preset, Controls 1 Load in a Scene	120V, 300VA	Ivory White Light Almond
600VA Fluorescent Ballast Scene Director Control Dimmers*			
SCFB600IV SCFB600WV SCFB600LAV	Preset, Controls 1 Load in a Scene	120V, 600VA	Ivory White Light Almond
5 Scene Director Master Controllers			
SCMC5IV SCMC5WV SCMC5LAV	5-Button Preset Scene Controller	120V	Ivory White Light Almond
Remote Location Control			
SCRIV SCRWV SCRLAV	For Full Dimming or Fan Speed Control of 1 Load from Two or More Locations	120V	Ivory White Light Almond
Accessories			
SCIR SCMCK	Infrared Hand-Held Remote Preprinted Inserts for Master Controller		
1.5A De-Hummer Fan Speed Controllers**			
SCDH15IV SCDH15WV SCDH15LAV	Preset, Controls 1 Fan Load in a Scene	120V, 1.5A	Ivory White Light Almond

*Use with Advance Mark X® dimmable fluorescent ballasts.
** Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."
Note: All Dimmers on this page may be ganged without de-rating.


TITLE 24 ENERGY SAVER




SC600LAV
SCELV300LAV
SCFB600LAV




SCMC5WV



SCRLAV




SCIR



SCDH15LAV

Wiring Diagram

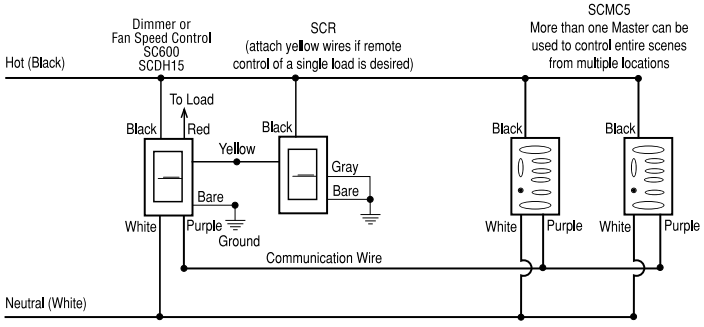


Add additional dimmers, fan speed controls, and remotes (up to 30) as needed to control more loads.
Use same wiring practices as above.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
Leandro®


TITLE 24 ENERGY SAVER



D600MLAV
DFB600MLAV
DLV600MLAV
DRMLAV



D1000MLAV



DDH15MLAV

Features

- Enables full dimming control from up to 30 locations using the matching remote dimmers.
- Constant memory returns lights to previous level after power failure.
- LED indicators keep you informed. Green LEDs indicate preset level and current light level. Red LED night light glows when load is OFF.
- Easy operation — Tap up once for preset, twice for full ON. Tap down once for full OFF. Hold paddle up to raise lights, down to lower.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Unobtrusive preset selection button helps prevent accidental setting changes.
- Elegant fade ON and OFF extends bulb life. Easy on the eyes, too.
- Installs easily using the same wiring as conventional 3-way switches.
- Change light level without affecting preset.

Catalog Number	Description	Ratings	Color
600W Incandescent Preset Dimmers†			
D600MIV **D600MWV** **D600MBKV** **D600MLAV**	Preset, Single Pole and 3-Way	120V 600 Watt	Ivory White Black Light Almond
1000W Incandescent Preset Dimmers†			
D1000MIV **D1000MWV** **D1000MLAV**	Preset, Single Pole and 3-Way	120V 1000 Watt	Ivory White Light Almond
600VA Low-Voltage Preset Dimmers*†			
DLV600MIV **DLV600MWV** **DLV600MLAV**	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
600VA Fluorescent Ballast Preset Dimmers†**			
DFB600MIV **DFB600MWV** **DFB600MLAV**	Preset, Single Pole and 3-Way	120V 600VA	Ivory White Light Almond
Remote Dimmers†			
DRMIV **DRMWV** **DRMBKV** **DRMLAV**	Full Dimming or Fan Speed Control from Two or More Locations	120V	Ivory White Black Light Almond
1.5A De-Hummer†† Fan Controls			
DDH15MIV **DDH15MWV** **DDH15MLAV**	Preset, Single Pole, 3-Speed	120V 1.5A	Ivory White Light Almond


* Use with MR16s with magnetic transformers, neon, cold cathode, general inductive loads.
** Use with Advance Mark X® dimmable fluorescent ballasts.
† All dimmers and fan controls can be dimmed from more than one location when used with DRM remotes. Uses standard 3-way wiring. See wiring diagram.
†† Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
600W/VA	No De-Rating Required	
1000W	800W	600W

All devices listed on this page conform to NEMA WD-1 and WD-6.
UL Listed and CSA Certified.


Wiring Diagrams

Single Pole



* Neutral required on DLV, DFB and DDH models.
(No common neutral on dimmed circuits.)

Full Dimming & Fan Speed Control from Two or More Locations

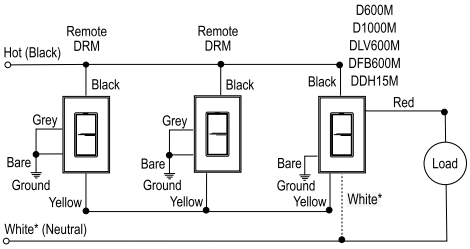

* Neutral required on DLV, DFB and DDH models.
(No common neutral on dimmed circuits.)
Can be used with up to 30 dimmers, fan speed controls, and remotes.

Residential Dimmers & Fan Speed Controls
Harmony™ TradeMaster® Dimmers

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
- Green LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate back wire terminals save time, space and money.

D703P, DLV703P

- No de-rating.
- No fins to break.

Interchangeable Face Versions


- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (WC).
- Interchangeable faces available in four colors (sold separately, see below).

Catalog Number	Description	Ratings	Color
Incandescent Single Pole/3-Way Dimmers*			
D703PI **D703PW** **D703P** **D703PBK** **D703PLA**	Incandescent Single Pole and 3-Way	120V, 700W	Ivory White Brown Black Light Almond
D1103PI **D1103PW** **D1103P** **D1103PBK** **D1103PLA**	Incandescent Single Pole and 3-Way	120V, 1100W	Ivory White Brown Black Light Almond
NEW **Interchangeable Face Incandescent Single Pole/3-Way Dimmers**			
D703PTC**	Incandescent Single Pole and 3-Way Three Interchangeable Face Colors	120V, 700W	Ivory/ White/ Light Almond
D703PWC	Incandescent Single Pole and 3-Way White Interchangeable Face Only	120V, 700W	White
D1103PTC**	Incandescent Single Pole and 3-Way Three Interchangeable Face Colors	120V, 1100W	Ivory/ White/ Light Almond
D1103PWC	Incandescent Single Pole and 3-Way White Interchangeable Face Only	120V, 1100W	White
NEW **Interchangeable Face Covers†**			
DKITI **DKIT** **DKITBK** **DKITLA**	Harmony™ Interchangeable Face, Ivory Harmony™ Interchangeable Face, Brown Harmony™ Interchangeable Face, Black Harmony™ Interchangeable Face, Light Almond		Ivory Brown Black Light Almond


*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: D703PLAV.
**Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: D703PTCCCV6.
†Available in VisionPak™ packaging, add "BPCCV6" to Catalog Number. Example: DKITIBPCCV6.

Catalog Number	Description	Ratings	Color
Magnetic Low-Voltage Single Pole/3-Way Dimmers			
DLV703PI **DLV703PW** **DLV703P** **DLV703PBK** **DLV703PLA**	Magnetic Low-Voltage Single Pole and 3-Way	120V, 700VA	Ivory White Brown Black Light Almond
DLV1103PI **DLV1103PW** **DLV1103P** **DLV1103PBK** **DLV1103PLA**	Magnetic Low-Voltage Single Pole and 3-Way	120V, 1100VA	Ivory White Brown Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.



D703PW



D1103PLA


DKITI **DKITBK**


DKIT **DKITLA**


For de-rating, see Page M-12.

legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls

Harmony™ TradeMaster® Dimmers & Fan Speed Controls

TITLE 24 ENERGY SAVER

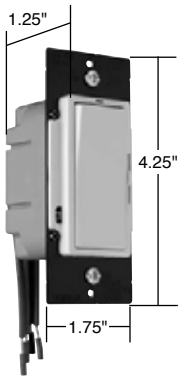

DDH16PLA

Features

- Convenient operation – combines ON/OFF Decorator switch with separate slider for dimming control.
- Green LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate backwire terminals save time, space and money.

DDH16P

- No de-rating.
- No fins to break.

Catalog Number	Description	Ratings	Color
Fluorescent Single Pole/3-Way Dimmers*			
DFB8PI **DFB8PW** **DFB8P** **DFB8PBK** **DFB8PLA**	Two Wire Fluorescent Single Pole and 3-Way	120V, 8A	Ivory White Brown Black Light Almond
De-Hummer Fan Speed Controls**			
DDH16PI **DDH16PW** **DDH16P** **DDH16PBK** **DDH16PLA**	De-Hummer Fan Speed Control	120V, 1.6A	Ivory White Brown Black Light Almond

* For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.

** Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for Harmony Dimmers

Catalog Number	Maximum Load	Multi-Gang De-Rating		Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang			2 Gang	3 Gang
D703P	700W	700W	700W	DLV1103P	1100VA	950VA	700VA
D1103P	1100W	1100W	800W	DFB8P	8A	8A	6.5A
DLV703P	700VA	700VA	650VA	DDH16	1.6A	1.6A	1.6A

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential & Light Commercial Dimmers & Fan Speed Controls
LS TradeMaster® Series Dimmers

legrand®
Pass & Seymour


TITLE 24 ENERGY SAVER

Features


- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page M-14 for information.

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
600W Incandescent Slide Dimmers*				
LS600I **LS600W** **LS600** **LS600BK** **LS600LA**		Non-Preset	120V, 600W max.	Ivory White Brown Black Light Almond
LS600PI **LS600PW** **LS600P** **LS600PBK** **LS600PLA**	**LS603PI** **LS603PW** **LS603P** **LS603PBK** **LS603PLA**	Preset	120V, 600W max.	Ivory White Brown Black Light Almond
1000W Incandescent Slide Dimmers*				
LS1000I **LS1000W** **LS1000** **LS1000BK** **LS1000LA**		Non-Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
LS1000PI **LS1000PW** **LS1000P** **LS1000PBK** **LS1000PLA**	**LS1003PI** **LS1003PW** **LS1003P** **LS1003PBK** **LS1003PLA**	Preset	120V, 1000W max.	Ivory White Brown Black Light Almond
600VA Magnetic Low-Voltage Slide Dimmers**				
LSLV600I **LSLV600W** **LSLV600** **LSLV600BK** **LSLV600LA**		Non-Preset	120V, 600VA max.	Ivory White Brown Black Light Almond
LSLV600PI **LSLV600PW** **LSLV600P** **LSLV600PBK** **LSLV600PLA**	**LSLV603PI** **LSLV603PW** **LSLV603P** **LSLV603PBK** **LSLV603PLA**	Preset	120V, 600VA max.	Ivory White Brown Black Light Almond


*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.
**Available in boxed packaging only.



LS600LA



LS600PLA



LS1000PLA

For wiring diagrams, see Page S-20.


Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
LS600, LS603	No De-Rating Required	
LS1000P, LS1003P	900W	750W
LS1000	850W	700W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential & Light Commercial Dimmers & Fan Speed Controls
LS TradeMaster® Series Dimmers

TITLE 24 ENERGY SAVER



LSDS300PW



LSDD300W



TM8LMCC

Catalog Number	Description	Ratings		Color
		Dimmer	Switch	
Single Pole/3-Way Preset Dimmers & Switches				
LSDS300PI **LSDS300PW** **LSDS300P** **LSDS300PBK** **LSDS300PLA**	Single Pole/3-Way Preset Dimmer and Independent Single Pole/ 3-Way Switch	120V 300W	7A general purpose resistive and ballast, 1/4 hp 900W tungsten	Ivory White Brown Black Light Almond
Dual Slide to OFF Single Pole Dimmers				
LSDD300I **LSDD300W** **LSDD300** **LSDD300BK** **LSDD300LA**	Dual Slide to OFF Single Pole Dimmers	120V 300W	—	Ivory White Brown Black Light Almond

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
De-Rating Chart			
LSDS300	300W	300W	300W
LSDD300	300W	300W	300W

For wiring diagrams, see Page S-20.

Features

- No tool needed, module snaps-in.
- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.

Catalog Number	Rating A. VAC	Color
Snap-In Light Module		
TM8LMCC	15 120/125	Clear

Catalog Number	Description	Color
Accessories for LS Series		
LRKIV **LRKWV** **LRKV** **LRKBKV** **LRKLAV**	Replacement Knobs for Decorator Dual Slides	Ivory White Brown Black Light Almond
LLRKIV **LLRKWV** **LLRKV** **LLRKBKV** **LLRKLAV**	Large Replacement Knobs for Decorator Single Slides	Ivory White Brown Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential & Light Commercial Dimmers & Fan Speed Controls
LS TradeMaster® Series Fan Speed Controls

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER


Features

- Tough impact-resistant thermoplastic housing.
- Power-failure memory.
- Superior heat management: no time wasting break off tabs.
- Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.
- Can be used with patented Snap-In Light Module (sold separately).


Catalog Number	Description	Ratings	Color
Decorator Slide Fan Speed Controls*			
LSSC5I **LSSC5W** **LSSC5** **LSSC5BK** **LSSC5LA**	Non-Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
LSSC5PI **LSSC5PW** **LSSC5P** **LSSC5PBK** **LSSC5PLA**	Preset, Single Pole, Adjustable Trim	5A	Ivory White Brown Black Light Almond
Decorator Slide De-Hummer Controls**			
LSDH16IV **LSDH16WV** **LSDH16V** **LSDH16BKV** **LSDH16LAV**	Non-Preset, 4-Speed Fan Control	1.6A	Ivory White Brown Black Light Almond
Dual Control Decorator Slides**			
LSDC16IV **LSDC16WV** **LSDC16V** **LSDC16BKV** **LSDC16LAV**	Non-Preset, 3-Speed De-Hummer Fan Control with Single Pole Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
LSDC163PIV **LSDC163PWV** **LSDC163PV** **LSDC163PBKV** **LSDC163PLAV**	Preset, Single Pole/3-Way 3-Speed De-Hummer Fan Control with Single Pole/3-Way Dimmer	1.6A/300W	Ivory White Brown Black Light Almond
LSDV25IV **LSDV25WV** **LSDV25V** **LSDV25BKV** **LSDV25LAV**	Non-Preset, Variable Speed Fan Control With Single Pole Dimmer	2.5A/300W	Ivory White Brown Black Light Almond

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LSSC5IV.
**Available in VisionPak™ only.
Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For wiring diagrams, see Page S-20.

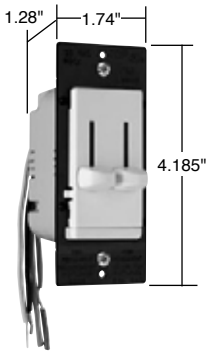

LSDC16LAV

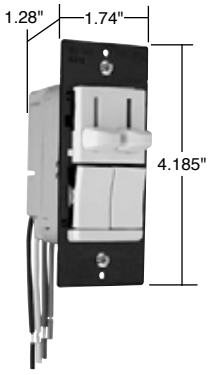


LSDC163PLAV

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential & Light Commercial Dimmers & Fan Speed Controls
Decorator Rotary DR TradeMaster® Series

TITLE 24 ENERGY SAVER



DR703PLAV



DR1103PWV


Illuminated knob indicates light level.

Features

- A new style that matches P&S Decorator Combination devices.
- Accepts Snap-In Light Module (sold separately) to convert decorator rotary devices into illuminated-type in moments; makes devices easy to find in the dark. See Page M-14.
- Screw-pressure-plate backwiring speeds installation and ensures solid, high-quality electrical connections. Also supports traditional, wire-loop side wiring.
- Heavy-gauge black anodized aluminum strap provides superior heat management and structural strength for mounting against wall surfaces.
- Slim design leaves more room in the box and makes installation faster and easier.
- Higher ratings of 700 and 1100 watts.
- No de-rating of 700 watt devices.
- Single pole and 3-way in same device.

Catalog Number	Description	Ratings	Color
Incandescent Preset Dimmers			
DR703PIV **DR703PWV** **DR703PV** **DR703PBKV** **DR703PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 700W	Ivory White Brown Black Light Almond
DR1103PIV **DR1103PWV** **DR1103PV** **DR1103PBKV** **DR1103PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100W	Ivory White Brown Black Light Almond
Magnetic Low-Voltage Dimmers			
DRLV703PIV **DRLV703PWV** **DRLV703PV** **DRLV703PBKV** **DRLV703PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 700VA	Ivory White Brown Black Light Almond
DRLV1103PIV **DRLV1103PWV** **DRLV1103PV** **DRLV1103PBKV** **DRLV1103PLAV**	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100VA	Ivory White Brown Black Light Almond
Continuously Variable Preset Fan Speed Controls			
DRSC53PIV **DRSC53PWV** **DRSC53PV** **DRSC53PBKV** **DRSC53PLAV**	Single Pole/3-Way Fan Speed Control	120V, 5A	Ivory White Brown Black Light Almond
3-Speed De-Hummer* Preset Fan Speed Controls			
DRDH163PIV **DRDH163PWV** **DRDH163PV** **DRDH163PBKV** **DRDH163PLAV**	Single Pole/3-Way Fan Speed Control with back-lit speed indication	120V, 1.6A	Ivory White Brown Black Light Almond

Available in VisionPak™ only.

* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

De-Rating Chart for DR Series

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
DR703	No De-Rating Required		
DR1103	1100W	900W	750W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential & Light Commercial Dimmers & Fan Speed Controls
Wide Slide TradeMaster® Series

legrand®
Pass & Seymour

Features


- Convenient operation – combines ON/OFF Decorator-style switch with separate slider for dimming control.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic P&S Decorator-style matches other Decorator devices.
- Higher ratings.
- Single pole and 3-way operation.
- Screw-pressure-plate back wire terminals save time, space and money.
- 700W maximum rated dimmers can be ganged without de-rating.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see below).

Catalog Number	Description	Rating	Color
NEW **Interchangeable Face Incandescent Dimmers**			
WS700TC*	Single Pole, Slide to OFF, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS700W	White Face Only	120V, 700W	White
WS703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS703PW	White Face Only	120V, 700W	White
WS1100TC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1100W	White Face Only	120V, 1100W	White
WS1103PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1103PW	White Face Only	120V, 1100W	White
NEW **Interchangeable Face Magnetic Low-Voltage Dimmers**			
WSLV700TC*	Single Pole, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV700W	White Face Only	120V, 700VA	White
WSLV703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV703PW	White Face Only	120V, 700VA	White
NEW **Interchangeable Face Fan Speed Controls**			
WSSC53PTC*	Preset, Variable Speed, 3 Face Colors	120V, 5A	Ivory/White/Lt. Almond
WSSC53PW	White Face Only	120V, 5A	White
NEW **Interchangeable Face Covers****			
WSKITI	Wide Slide Interchangeable Face, Ivory		Ivory
WSKIT	Wide Slide Interchangeable Face, White		Brown
WSKITBK	Wide Slide Interchangeable Face, Black		Black
WSKITLA	Wide Slide Interchangeable Face, Light Almond		Light Almond
WSKITPI	Present Wide Slide Interchangeable Face, Ivory		Ivory
WSKITP	Present Wide Slide Interchangeable Face, Brown		Brown
WSKITPBK	Present Wide Slide Interchangeable Face, Black		Black
WSKITPLA	Present Wide Slide Interchangeable Face, Light Almond		Light Almond

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: WS700TCCCV6.


**Available in VisionPak™ packaging, add "BPCC6" to Catalog Number. Example: WSKITIBPCC6.

TITLE 24 ENERGY SAVER



WS700TC
WSLV700TC
Shown with the Three Interchangeable Faces

All 1100W versions are 2.50" W



Preset Models

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
1000W 1000VA	800W 800VA	700W 700VA


Note: Each side removed reduces plate size by 3/8".

No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary, and dual styles with virtually no fan motor noise.

Catalog Number	Description	Ratings	Color
1.5A Max. No-Noise De-Hummer Specification Grade Fan Speed Controls – RFI Protected			
94084I* **94084W*** **94084GRY** **94084LA***	3-Speed, Single Pole	120V 1.5A max.	Ivory White Gray Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94084LAV.



94084

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
TradeMaster® Toggle Dimmers

TITLE 24 ENERGY SAVER

Matches appearance of standard P&S toggle switch.

More versatile than standard toggle dimmers. Provides easy ON/OFF. Separate preset allows convenient dimming control.

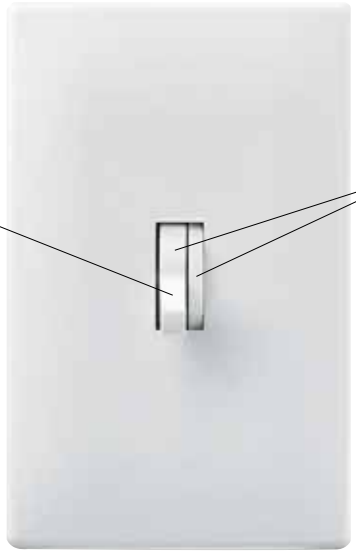


No de-rating required in multi-gang applications (700W).

Returns lights to previous level after power failure.

Uses conventional 3-way wiring when used in conjunction with a 3-way switch.

Screwless Toggle Wall Plates, see Page Q-6.

TD703PW
Shown with SWP1W



TD1103PW

700W versions are 1.75" W

Catalog Number	Description	Ratings	Color
Incandescent Single Pole/3-Way Dimmers			
TD703PI*	Preset, Single Pole/3-Way	120V, 700W	Ivory
TD703PW*			White
TD703P			Brown
TD703PBK			Black
TD703PLA*			Light Almond
TD1103PI*	Preset, Single Pole/3-Way	120V, 1100W	Ivory
TD1103PW*			White
TD1103P			Brown
TD1103PBK			Black
TD1103PLA*			Light Almond

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: TD703PICCV6.

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
1000W	800W	700W

Note: Each side removed reduces plate size by 3/8".

For wiring diagrams, see Page M-19.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


Residential Dimmers & Fan Speed Controls
TradeMaster® Toggle Dimmers & Fan Speed Controls

legrand®
Pass & Seymour

Catalog Number	Description	Ratings	Color
NEW Magnetic Low-Voltage Single Pole/3-Way Dimmers			
TDLV703PI TDLV703PW TDLV703P TDLV703PBK TDLV703PLA	Preset, Single Pole/3-Way	120V, 700VA	Ivory White Brown Black Light Almond
TDLV1103PI TDLV1103PW TDLV1103P TDLV1103PBK TDLV1103PLA	Preset, Single Pole/3-Way	120V, 1100VA	Ivory White Brown Black Light Almond
NEW Fluorescent Single Pole/3-Way Dimmers*			
TDFB83PI TDFB83PW TDFB83P TDFB83PBK TDFB83PLA	Two Wire Fluorescent Single Pole/3-Way	120V, 8A	Ivory White Brown Black Light Almond
NEW De-Hummer Fan Speed Controls**			
TDDH163PI TDDH163PW TDDH163P TDDH163PBK TDDH163PLA	De-Hummer Fan Speed Control	120V, 1.6A	Ivory White Brown Black Light Almond

*For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.
**Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

TITLE 24 ENERGY SAVER



TDLV1103PW


700VA versions are 1.75" W

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
1000VA	800VA	700VA


Note: Each side removed reduces plate size by 3/8".

Wiring Diagrams

Single Pole

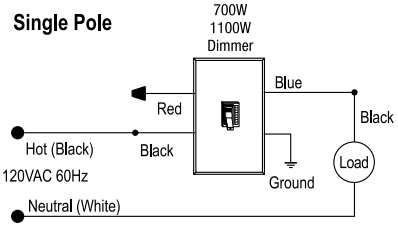

3-Way Control Application

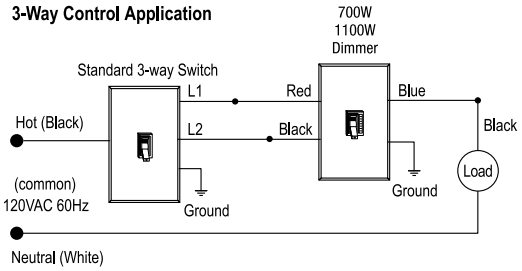


All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
TradeMaster® Toggles

TITLE 24 ENERGY SAVER



T600I
TSC5I

Features

- Tough impact-resistant thermoplastic housing.
- Power-failure memory.
- Superior heat management: no time wasting break off tabs.
- Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
600W Incandescent Toggle Dimmers				
T600I* T600W* T600* T600LA*	**T603I** T603W** T603** T603LA****	Non-Preset	120V 600W	Ivory White Brown Light Almond
600W Incandescent – Lighted Toggle Dimmers*				
T600LI T600LW T600LLA	**T603LI T603LW T603LLA**	Non-Preset	120V 600W	Ivory White Light Almond
1000W Incandescent Toggle Dimmers				
T1000I* T1000W* T1000* T1000LA*	**T1003I** T1003W** T1003** T1003LA****	Non-Preset	120V 1000W	Ivory White Brown Light Almond
1000W Incandescent – Lighted Toggle Dimmers**				
T1000LI T1000LW T1000LLA	**T1003LI T1003LW T1003LLA**	Non-Preset	120V 1000W	Ivory White Light Almond
600VA Low-Voltage Magnetic Toggle Dimmers*				
TLV600I TLV600W TLV600LA	**TLV603I TLV603W TLV603LA**	Non-Preset	120V 600VA	Ivory White Light Almond
1000VA Low-Voltage Magnetic Toggle Dimmers**				
TLV1000I TLV1000W TLV1000LA	**TLV1003I TLV1003W TLV1003LA**	Non-Preset	120V 1000VA	Ivory White Light Almond
Toggle Fan Speed Controls*				
TSC5I TSC5W TSC5LA	—	Non-Preset, Adjustable Trim	120V 5A	Ivory White Light Almond

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: T600LAV.
**Available in boxed packaging only.

Max. Load Rating	Gang Reduction	
	2 Dimmers	3+ Dimmers
De-Rating Chart		
600W	500W	400W
1000W	700W	650W

Max. Load Rating	Gang Reduction	
	2 Controls	3+ Controls
De-Rating Chart		
5A	4A	3A

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential Dimmers & Fan Speed Controls
Rotary R TradeMaster® Series

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features


- Slimmer design – the trimmest rotary dimmers, 1/4" less depth than the leading competitor's models.
- Easy-to-grip knob with soft, contemporary curves goes with any décor. Interchangeable with older-style knobs.
- Excellent RFI/EMI filtering performance – won't impact sensitive electronic devices.
- Pre-stripped leads speed termination.
- No de-rating of 600 watt models in multi-gang applications.
- Leaves more room in the box for faster, easier installation.
- Makes small adjustments in lighting levels easier.
- Illuminated models are easy to find in the dark.

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
600W Incandescent RFI Rotary Dimmers				
R600IV **R600WV** **R600LAV**		Non-Preset	120V 600W	Ivory White Light Almond
R600PIV **R600PWV** **R600PLAV**	**R603PIV** **R603PWV** **R603PLAV**	Preset	120V 600W	Ivory White Light Almond
1000W Incandescent RFI Rotary Dimmers				
R1000IV **R1000WV** **R1000LAV**		Non-Preset	120V 1000W	Ivory White Light Almond
R1000PIV **R1000PWV** **R1000PLAV**	**R1003PIV** **R1003PWV** **R1003PLAV**	Preset	120V 1000W	Ivory White Light Almond

Available in VisionPak™ only.



R600PWV

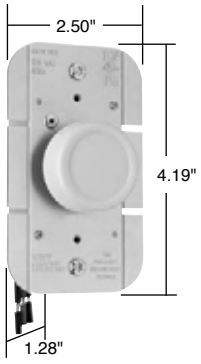

R1000WV

Catalog Number	Description	Color
Rotary Replacement Knobs		
RRKIV **RRKWV** **RRKLAV**	Plain Replacement Knob	Ivory White Light Almond
RRKCLGV **RRKIGV** **RRKWGV** **RRKLAGV**	Deluxe Replacement Knob	Clear Ivory White Light Almond

De-Rating Chart for R Series

Catalog Number	Maximum Load	Multi-Gang De-Rating	
		2 Gang	3 Gang
R600, R600P	600W	No De-Rating Required	
R1000	1000W	750W	700W
R1000P	1000W	900W	800W
R1003P	1000W	900W	800W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.


legrand®
Pass & Seymour

Residential Dimmers & Fan Speed Controls
Rotary TradeMaster® Series

TITLE 24 ENERGY SAVER

Features

- Full range rotary dimming.
- Low-voltage and fluorescent models have field adjustable trims that may be set to control minimum light level.
- Ground lead provided on all models.
- Voltage compensation circuitry in fluorescent and magnetic low-voltage model reduces lighting fluctuations.
- All models fit standard toggle wall plate.
- All dimmers on this page may be ganged without de-rating.
- RFI protected.




90621

Catalog Number	Description	Ratings	Color
600W Max. Incandescent Specification Grade Rotary Dimmers			
90621IV **90621WV**	Single Pole Low Profile, Dial On/Off	120V 600W max.	Ivory White

Available in VisionPak™ only.


Catalog Number	Description	Ratings	Color
Magnetic Low-Voltage Specification Grade Rotary Dimmers Single Pole			
95600I **95600W**	Preset, Push On/Off	120V 600VA max.	Ivory White

For use with magnetic transformer incandescent low-voltage lighting.



95600

Rotary Dimmer 3-Way Wiring Diagram

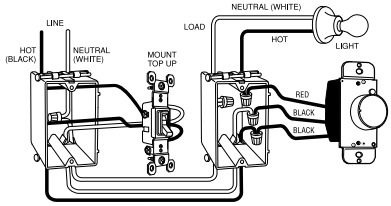

Max. Load Rating	Fins Removed	
	One Side	Two Side
De-Rating Chart		
600W	500W	400W
600VA	450VA	400VA
1000VA	800VA	700VA
1000W	800W	700W
1500W	1400W	1300W
2000W	1800W	1600W

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential Dimmers & Fan Speed Controls
Rotary TradeMaster® Fan Speed Controls


legrand®
Pass & Seymour

No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary and dual styles with virtually no fan motor noise.

Catalog Number	Description	Ratings	Color
1.5A Max. Specification Grade Rotary Fan Speed Controls – No-Noise De-Hummers, RFI Protected*			
94003I **94003W**	3-Speed, Low-Medium-High	120V 1.5A max.	Ivory White
94004CL **94004I** **94004W** **94004LA**	4-Speed, Low-High	120V 1.5A max.	Clear Ivory White Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94003LAV.

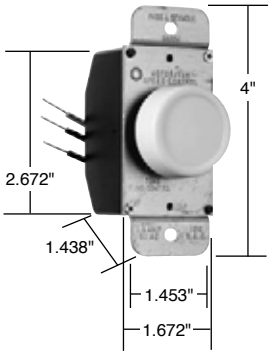

94004
94003


Dual Control Features

- Fits one gang box.
- Decorator styling.
- Controls both fan speed and light level.

Catalog Number	Description	Ratings	Color
1.5A/300W Max. Specification Grade Dual Controls – No-Noise De-Hummers*			
94315I **94315W** **94315LA**	3-Speed Fan Control and 2-Level Hi/Low Dimmer	120V 1.5A/300W max.	Ivory White Light Almond
94215I **94215W** **94215LA**	4-Speed Fan Control and 2-Level Hi/Low Dimmer	120V 1.5A/300W max.	Ivory White Light Almond

Requires 3 wire installation.

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94315LAV.




94215
94315
94331
542433

Catalog Number	Description	Ratings	Color
3A/300W Max. Specification Grade Dual Controls*			
94331I	Dial Speed Control and Dimmer	120V	Ivory

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94331IV.

Catalog Number	Description	Color
Accessories for Dual Controls		
109019V **109020V** **109018V**	Adapter Kit for Dual Fan/Light Controls	Ivory White Light Almond

Note: All controls on this page may be ganged without de-rating.

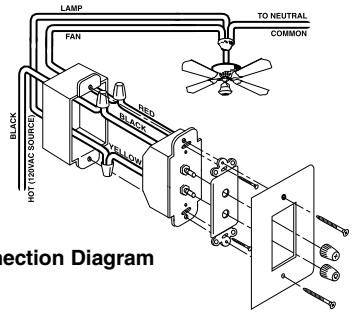

Dual Control Connection Diagram

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Commercial Dimmers & Fan Speed Controls
Titan™ Series

TITLE 24 ENERGY SAVER



A complete solution for easy, economical multi-gang installations.

The P&S Titan™ Series have key features designed to increase installer productivity. Each comes with all the screwless wall plate components necessary for single gang or multi-gang installations. No need to order any additional components such as long-lead time custom wall plates to finish the job. Complete the installation with everything right out of the box, increasing productivity by finishing up in one visit instead of several.

Included screwless wall plate components make it easy to assemble a custom multi-gang wall plate in any configuration — saving money and time.

Power-failure memory retains presets through power outages.

Widest choice of amperage ratings with minimal or no de-rating for faster job planning.

Preset models feature large ON/OFF button and single pole/three-way functionality.

High-reliability design with built-in surge and static protection plus oversize output devices to stand up to abuse.

Exclusive labeling system has a built-in label holder enabling instant circuit identification; looks clean and professional.

Included end-caps and spacers screw directly to heat sinks; center plate snaps easily on and off.



CD703PW

Enclosed slider helps prevent dust and dirt contamination.

Exclusive adjustable limit control in incandescent dimmers saves energy and extends bulb life — reduces maximum output by up to 10 percent.

Air-gap switch

Improved heat management enables superior load ratings.



CDADAPTORKITW



Adaptor kit enables matching installation of standard P&S Decorator Devices – outlets, switches, GFCIs and more.

Commercial Dimmers & Fan Speed Controls
Titan™ Series Incandescent Dimmers


legrand®
Pass & Seymour

Features


- Field configurable wall plate system.
- Labeling system.
- Adjustable top end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Incandescent				
CD700I CD700W CD700 CD700GRY CD700BK CD700LA	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD703PI CD703PW CD703P CD703PGRY CD703PBK CD703PLA	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD1100I CD1100W CD1100 CD1100GRY CD1100BK CD1100LA	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1103PI CD1103PW CD1103P CD1103PGRY CD1103PBK CD1103PLA	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1600I CD1600W CD1600 CD1600GRY CD1600BK CD1600LA	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD1603PI CD1603PW CD1603P CD1603PGRY CD1603PBK CD1603PLA	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD2000I CD2000W CD2000 CD2000GRY CD2000BK CD2000LA	Single Pole, Slide-to-OFF	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond
CD2003PI CD2003PW CD2003P CD2003PGRY CD2003PBK CD2003PLA	Single Pole/3-Way, Preset	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond


TITLE 24 ENERGY SAVER




CD703PW
Narrow



CD1100W
Narrow



CD1603PW
Wide



CD2003PW
Wide

For technical specifications, de-rating, and rough-in box charts, see Pages S-147 and S-148.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER


Commercial Dimmers & Fan Speed Controls
Titan™ Series Magnetic Low-Voltage Dimmers & Adaptor Kit

Features

- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system.
- Blank center plate included.



CDLV700W
Narrow



CDLV1103PW
Wide



CDADAPTORKITW

Adaptor kit enables matching installation of standard P&S Decorator Devices – outlets, switches, GFCIs and more.
See Page M-24.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Magnetic Low-Voltage				
CDLV700I **CDLV700W** **CDLV700** **CDLV700GRY** **CDLV700BK** **CDLV700LA**	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV703PI **CDLV703PW** **CDLV703P** **CDLV703PGRY** **CDLV703PBK** **CDLV703PLA**	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1100I **CDLV1100W** **CDLV1100** **CDLV1100GRY** **CDLV1100BK** **CDLV1100LA**	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1103PI **CDLV1103PW** **CDLV1103P** **CDLV1103PGRY** **CDLV1103PBK** **CDLV1103PLA**	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1600I **CDLV1600W** **CDLV1600** **CDLV1600GRY** **CDLV1600BK** **CDLV1600LA**	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CDLV1603PI **CDLV1603PW** **CDLV1603P** **CDLV1603PGRY** **CDLV1603PBK** **CDLV1603PLA**	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
Adaptor Kit				
CDADAPTORKITI **CDADAPTORKITW** **CDADAPTORKIT** **CDADAPTORKITGRY** **CDADAPTORKITBK** **CDADAPTORKITLA**	Decorator Device Adaptor Kit		Narrow	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, and rough-in box charts, see Pages S-147 and S-148.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


Commercial Dimmers & Fan Speed Controls
Titan™ Series Fluorescent 2 Wire Dimmers

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Blank center plate included.



CDFB5W
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CDFB5I **CDFB5W** **CDFB5** **CDFB5GRY** **CDFB5BK** **CDFB5LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB8I **CDFB8W** **CDFB8** **CDFB8GRY** **CDFB8BK** **CDFB8LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB10I **CDFB10W** **CDFB10** **CDFB10GRY** **CDFB10BK** **CDFB10LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB16I **CDFB16W** **CDFB16** **CDFB16GRY** **CDFB16BK** **CDFB16LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB7277I **CDFB7277W** **CDFB7277** **CDFB7277GRY** **CDFB7277BK** **CDFB7277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB10277I **CDFB10277W** **CDFB10277** **CDFB10277GRY** **CDFB10277BK** **CDFB10277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond


For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


legrand®
Pass & Seymour

Commercial Dimmers & Fan Speed Controls
Titan™ Series Fluorescent 2 Wire Dimmers

TITLE 24 ENERGY SAVER



CDFB53PW
Narrow



CDFB103PW
Wide

Features

- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CDFB53PI **CDFB53PW** **CDFB53P** **CDFB53PGRY** **CDFB53PBK** **CDFB53PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB83PI **CDFB83PW** **CDFB83P** **CDFB83PGRY** **CDFB83PBK** **CDFB83PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB103PI **CDFB103PW** **CDFB103P** **CDFB103PGRY** **CDFB103PBK** **CDFB103PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB163PI **CDFB163PW** **CDFB163P** **CDFB163PGRY** **CDFB163PBK** **CDFB163PLA**	2 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB73P277I **CDFB73P277W** **CDFB73P277** **CDFB73P277GRY** **CDFB73P277BK** **CDFB73P277LA**	2 Wire, Electronic, Single Pole/3-Way, Preset	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB103P277I **CDFB103P277W** **CDFB103P277** **CDFB103P277GRY** **CDFB103P277BK** **CDFB103P277LA**	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond

For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


Commercial Dimmers & Fan Speed Controls
Titan™ Series Fluorescent 3 Wire Dimmers

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- For use with 3 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Blank center plate included.



CD3FB163PW
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CD3FB16I **CD3FB16W** **CD3FB16** **CD3FB16GRY** **CD3FB16BK** **CD3FB16LA**	3 Wire Electronic, Single Pole, Slide-to-OFF	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB163PI **CD3FB163PW** **CD3FB163P** **CD3FB163PGRY** **CD3FB163PBK** **CD3FB163PLA**	3 Wire Electronic, Single Pole/3-Way, Preset	120V, 16A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB10277I **CD3FB10277W** **CD3FB10277** **CD3FB10277GRY** **CD3FB10277BK** **CD3FB10277LA**	3 Wire Electronic, Single Pole, Slide-to-OFF	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond
CD3FB103P277I **CD3FB103P277W** **CD3FB103P277** **CD3FB103P277GRY** **CD3FB103P277BK** **CD3FB103P277LA**	3 Wire Electronic, Single Pole/3-Way, Preset	277V, 10A	Narrow	Ivory White Brown Gray Black Light Almond


For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

legrand®
Pass & Seymour

Commercial Dimmers & Fan Speed Controls
Titan™ Series Fluorescent 4 Wire Dimmers

TITLE 24 ENERGY SAVER



CD4FB3PW
Narrow

Features

- For use with 0-10V, 4 wire, 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Must be used with power pack.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fluorescent				
CD4FBI **CD4FBW** **CD4FB** **CD4FBGRY** **CD4FBBK** **CD4FBLA**	Single Pole, Slide-to-OFF	24VDC	Narrow	Ivory White Brown Gray Black Light Almond
CD4FB3PI **CD4FB3PW** **CD4FB3P** **CD4FB3PGRY** **CD4FB3PBK** **CD4FB3PLA**	Single Pole/3-Way, Preset	24VDC	Narrow	Ivory White Brown Gray Black Light Almond
PWP120277	Power pack for switching load	24VDC	—	

Red available made to order.

For technical specifications, de-rating, rough-in box charts, and complete list of compatible ballasts, see Pages S-149 – S-151.

Power Pack technical specifications, see Page S-146.

All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.


Commercial Dimmers & Fan Speed Controls
Titan™ Series Fan Speed Controls

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Features

- Field configurable wall plate system.
- Labeling system.
- Shipped with protective film.
- Rugged construction.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Available in both continuously variable and de-hummer styles.
- Blank center plate included.




CDSC6W
Narrow

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fan Speed Controls				
CDSC6I **CDSC6W** **CDSC6** **CDSC6GRY** **CDSC6BK** **CDSC6LA**	Continuously Variable Speed Fan Speed Control	120V, 6A	Narrow	Ivory White Brown Gray Black Light Almond
CDSC12I **CDSC12W** **CDSC12** **CDSC12GRY** **CDSC12BK** **CDSC12LA**	Continuously Variable Speed Fan Speed Control	120V, 12A	Wide	Ivory White Brown Gray Black Light Almond
CDDH16I **CDDH16W** **CDDH16** **CDDH16GRY** **CDDH16BK** **CDDH16LA**	De-Hummer, 4 Speed Low/Low-Mid/High-Mid/High Fan Speed Control	120V, 1.6A	Narrow	Ivory White Brown Gray Black Light Almond


All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

legrand®
Pass & Seymour

Commercial Dimmers & Fan Speed Controls
Rotary Dimmers



90621



95600

Features

- Full range rotary dimming.
- Low-voltage and fluorescent models have field adjustable trims that may be set to control minimum light level.
- Ground lead provided on all models.
- New attractive knob design.
- Voltage compensation circuitry in fluorescent and magnetic low-voltage model reduces lighting fluctuations.
- All models fit standard toggle wall plate.
- All dimmers on this page may be ganged without de-rating.
- RFI protected.

Catalog Number	Description	Ratings	Color
Incandescent Specification Grade Rotary Dimmers — Single Pole			
90621IV **90621WV**	Low Profile, Dial ON/OFF	120V, 600W max.	Ivory White
Magnetic Low-Voltage Specification Grade Rotary Dimmers — Single Pole*			
95600I **95600W**	Preset, Push ON/OFF	120V, 600W max.	Ivory White


*For use with magnetic transformer incandescent low-voltage lighting.

Catalog Number		Description	Ratings	Color
Single Pole	Three-Way			
1000W Max. Incandescent Rotary Dimmers with Architectural Heat Sink				
91000I **91000W**	**91003I** **91003W**	Preset, Push ON/OFF	120V 1000W max.	Ivory White
91001I **91001W**		Dial, ON/OFF	120V 1000W max.	Ivory White
1500W Max. Incandescent Rotary Dimmers with Architectural Heat Sink				
91500I	**91503I** **91503W**	Preset, Push ON/OFF	120V 1500W max.	Ivory White
91501I **91501W**		Dial, ON/OFF	120V 1500W max.	Ivory White
2000W Max. Incandescent Rotary Dimmers with Architectural Heat Sink				
92001I **92001W**		Dial, ON/OFF	120V 2000W max.	Ivory White

*Fits in standard toggle wall plate opening.

Catalog Number	Description	Ratings	Color
1000VA Max. Magnetic Low-Voltage Specification Grade Single Pole Rotary Dimmer* with Architectural Heat Sink			
95100I	Dial, ON/OFF	120V, 1000VA max.	Ivory

* For use with magnetic transformer incandescent low-voltage lighting.



91500 91503
91501 92001

Catalog Number	Description	Color
Accessories for Rotary Heat Sink Dimmers & Fan Speed Controls		
DAPK1I **DAPK1W** **DAPK1**	1-Gang Wall Plate – Plate and Knob Kit	Ivory White Brown
DAPK2I **DAPK2W** **DAPK2**	2-Gang Wall Plate – Plate and Knob Kit	Ivory White Brown

For wiring diagrams, see Page S-20. For de-rating chart, see Page M-22.


All devices listed on this page conform to NEMA WD-1 and WD-6. cULus Listed.

Commercial Dimmers & Fan Speed Controls
Rotary Fan Speed Controls

legrand®
Pass & Seymour

Field Adjustable Trim
This feature allows the user to set the minimum speed level desired and helps prevent damage to motor due to stalling. Models without field adjustable trims feature factory settings for minimum anti-stall levels.

Full-On Bypass
When control is placed in the full-On position, speed control circuitry is bypassed by latching contacts. This feature allows for 100% motor output and extends speed control's life by eliminating heat build-up.




N 94301
P 94503
N 94601

Features
- Full range speed control.
- Utilizes standard toggle wall plates.
- 100% tested for symmetry for extended fan life.
- Ground lead provided.
- Ferrite bar coil choke for excellent RFI suppression.

Catalog Number	Description	Ratings	Color
3, 5 & 6A Max. Rotary Fan Speed Controls			
94301I* **94301WV**** **94301LA***	Dial (Non-RFI), May Be Ganged Without De-Rating	120V 3A max.	Ivory White Light Almond
94503I*	Preset, Push On/Off, Adjustable Trim, 3-Way May Be Ganged Without De-Rating	120V 5A max.	Ivory
94601I* **94601WV****	Dial, Adjustable Trim, May Be Ganged Without De-Rating	120V 6A max.	Ivory White

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94301LAV.
**Available in VisionPak™ only.



N 94121

P = Preset
N = Non-Preset

Features
- Full range variable low to high speed control.
- Easily ganged by removing scored heat sink fins.
- Heavy-duty toroid choke for RFI suppression.
- Black anodized heat sink for greater heat dispersion and enhanced appearance.
- 100% tested for symmetry for extended fan life.
- Ground lead provided.
- Ferrite bar coil choke for excellent RFI suppression.

Catalog Number	Description	Ratings	Color
8 & 12A Max. Rotary Fan Speed Controls with Architectural Heat Sink			
94801I	Dial, Adjustable Trim, 1 Gang Heat Sink	120V, 8A max.	Ivory
94121I	Dial, Adjustable Trim, 2 Gang Heat Sink	120V, 12A max.	Ivory


Catalog Number	Description	Color
Accessories for Rotary Dimmers & Fan Speed Controls		
RRKCLGV **RRKIGV** **RRKWGV**	Knob Replacement for Rotary Dimmers/Fan Controls	Clear/Gold Insert Ivory/Gold Insert White/Gold Insert
RRKIV **RRKLAV** **RRKWV**	Knob Replacement for Rotary Dimmers/Fan Controls	Ivory Light Almond White
Accessories for Rotary Heat Sink Dimmers & Fan Speed Controls		
DAPK1I **DAPK1W** **DAPK1**	1-Gang Wall Plate – Plate and Knob Kit for Rotary Heat Sink Devices	Ivory White Brown
DAPK2I **DAPK2W** **DAPK2**	2-Gang Wall Plate – Plate and Knob Kit for Rotary Heat Sink Devices	Ivory White Brown

Max. Load Rating	Gang Reduction	
	One Side	Two Side
De-Rating Chart		
5 Amp	4 Amp	3 Amp
8 Amp	7 Amp	6 Amp
12 Amp	11 Amp	10 Amp

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Residential Fan Speed Controls
Scene Director, Leandro®, Harmony™ TradeMaster® & Rotary DR TradeMaster® Series Fan Speed Controls




SCDH15LAV

Catalog Number	Description	Ratings	Color
Scene Director 1.5A De-Hummer* Fan Speed Controllers			
SCDH15IV **SCDH15WV** **SCDH15LAV**	Preset, Controls 1 Fan Load in a Scene	120V, 1.5A	Ivory White Light Almond

*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For additional Scene Director products including remotes, masters, and wiring diagrams, see Pages M-8 and M-9.




DDH15MLAV

Catalog Number	Description	Ratings	Color
Leandro® 1.5A De-Hummer* Fan Controls			
DDH15MIV **DDH15MWV** **DDH15MLAV**	Preset, Single Pole, 3-Speed	120V, 1.5A	Ivory White Light Almond

*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For additional Leandro® products including remotes, masters, and wiring diagrams, see Page M-10.

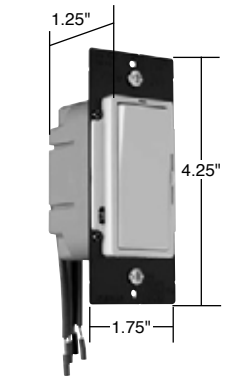


DDH16PLA

Catalog Number	Description	Ratings	Color
Harmony™ 1.6A De-Hummer* Fan Speed Controls			
DDH16PW **DDH16PI** **DDH16PLA** **DDH16P** **DDH16PBK**	De-Hummer Fan Speed Control	120V, 1.6A	White Ivory Light Almond Brown Black

*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For additional Harmony™ products and information, see Page M-11 and M-12.

Residential & Light Commercial Fan Speed Controls



DRSC53PWV

Catalog Number	Description	Ratings	Color
DR Series 5A Continuously Variable Preset Fan Speed Controls			
DRSC53PIV **DRSC53PWV** **DRSC53PV** **DRSC53PBKV** **DRSC53PLAV**	Single Pole/3-Way Fan Speed Control	120V, 5A	Ivory White Brown Black Light Almond
DR Series 1.6A 3-Speed De-Hummer* Preset Fan Speed Controls			
DRDH163PIV **DRDH163PWV** **DRDH163PV** **DRDH163PBKV** **DRDH163PLAV**	Single Pole/3-Way Fan Speed Control with back-lit speed indication	120V, 1.6A	Ivory White Brown Black Light Almond

*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For additional Decorator Rotary DR Series products and information, see Page M-16.


All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential & Light Commercial Fan Speed Controls
LS TradeMaster® Series Fan Speed Controls


legrand®
Pass & Seymour

Catalog Number	Description	Ratings	Color
Decorator Slide Fan Speed Controls*			
LSSC5I LSSC5W LSSC5 LSSC5BK LSSC5LA	Non-Preset, Single Pole, Adjustable Trim	120V 5A	Ivory White Brown Black Light Almond
LSSC5PI LSSC5PW LSSC5P LSSC5PBK LSSC5PLA	Preset, Single Pole, Adjustable Trim	120V 5A	Ivory White Brown Black Light Almond
Decorator Slide De-Hummer Controls**			
LSDH16IV LSDH16WV LSDH16V LSDH16BKV LSDH16LAV	Non-Preset, 4-Speed Fan Control	120V 1.6A	Ivory White Brown Black Light Almond
Dual Control Decorator Slides**			
LSDC16IV LSDC16WV LSDC16V LSDC16BKV LSDC16LAV	Non-Preset, 3-Speed De-Hummer Fan Control With Single Pole Dimmer	120V 1.6A/300W	Ivory White Brown Black Light Almond
LSDC163PIV LSDC163PWV LSDC163PV LSDC163PBKV LSDC163PLAV	Preset, 3-Speed De-Hummer Fan Control With Single Pole 3-Way Dimmer	120V 1.6A/300W	Ivory White Brown Black Light Almond
LSDV25IV LSDV25WV LSDV25V LSDV25BKV LSDV25LAV	Non-Preset, Variable Speed Fan Control With Single Pole Dimmer	120V 2.5A/300W	Ivory White Brown Black Light Almond

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LSSC5IV.
**Available in VisionPak™ only.
Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

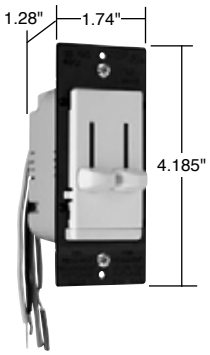

LSDC16LAV

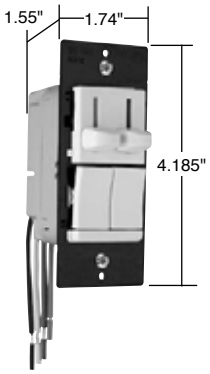

LSDC163PLAV

Catalog Number	Rating A. VAC	Color
Snap-In Light Module		
TM8LMCC	15 120/125	Clear


TM8LMCC


Catalog Number	Description	Color
Accessories for LS Series		
LRKIV LRKWV LRKV LRKBKV LRKLAV	Replacement Knobs for Decorator Dual Slides	Ivory White Brown Black Light Almond
LLRKIV LLRKWV LLRKV LLRKBKV LLRKLAV	Large Replacement Knobs for Decorator Single Slides	Ivory White Brown Black Light Almond

For additional LS Series products and information, see Pages M-13 – M-15.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Residential & Light Commercial Fan Speed Controls
Wide Slide TradeMaster® & TradeMaster® Toggle Fan Speed Controls




Preset Models

Catalog Number	Description	Ratings	Color
Wide Slide TradeMaster® Interchangeable Face Fan Speed Controls			
WSSC53PTC*	Preset, Variable Speed, 3 Face Colors	120V, 5A	Ivory/White/Lt. Almond
WSSC53PW	White Face Only	120V, 5A	White

No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary, and dual styles with virtually no fan motor noise.




94084

Catalog Number	Description	Ratings	Color
1.5A Max. No-Noise De-Hummer Specification Grade Wide Slide TradeMaster® Fan Speed Controls – RFI Protected			
94084I* **94084W*** **94084GRY** **94084LA***	3-Speed, Single Pole	120V 1.5A max.	Ivory White Gray Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94084LAV.

For additional Wide Slide TradeMaster® products and information, see Page M-17.



TSC5I

Catalog Number	Description	Ratings	Color
TradeMaster® Toggle De-Hummer* Fan Speed Controls			
TDDH163PI **TDDH163PW** **TDDH163P** **TDDH163PBK** **TDDH163PLA**	De-Hummer Fan Speed Control	120V, 1.6A	Ivory White Brown Black Light Almond

*Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

Catalog Number	Description	Ratings	Color
TradeMaster® Toggle Fan Speed Controls*			
TSC5I **TSC5W** **TSC5LA**	Non-Preset, Adjustable Trim	120V 5A	Ivory White Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: SS600LAV.

For additional TradeMaster® Toggle products and information, see Page M-18 and M-19.

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Residential Fan Speed Controls
Rotary TradeMaster® Fan Speed Controls


legrand®
Pass & Seymour

No-Noise De-Hummers

Since the development of variable fan speed controls, many fans have made an annoying humming noise when their speed was reduced. Through the use of specially designed capacitive circuitry, these units can control fans at 3 or 4-speed levels in slide, rotary and dual styles with virtually no fan motor noise.

Catalog Number	Description	Ratings	Color
1.5A Max. Specification Grade Rotary Fan Speed Controls – No-Noise De-Hummers, RFI Protected*			
94003I **94003W** **94003LA**	3-Speed, Low-Medium-High	120V 1.5A max.	Ivory White Light Almond
94004CL **94004I** **94004W** **94004LA**	4-Speed, Low-High	120V 1.5A max.	Clear Ivory White Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94003LAV.

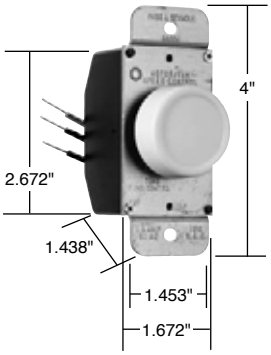

94004
94003


Dual Control Features

- Fits one gang box.
- Controls both fan speed and light level.
- Decorator styling.

Catalog Number	Description	Ratings	Color
1.5A/300W Max. Specification Grade Dual Controls – No-Noise De-Hummers*			
94315I **94315W** **94315LA**	3-Speed Fan Control and 2-Level Hi/Low Dimmer	120V 1.5A/300W max.	Ivory White Light Almond
94215I **94215W** **94215LA**	4-Speed Fan Control and 2-Level Hi/Low Dimmer	120V 1.5A/300W max.	Ivory White Light Almond

Requires 3 wire installation.

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94315LAV.




94215
94315
94331

Catalog Number	Description	Ratings	Color
3A/300W Max. Specification Grade Dual Controls*			
94331I	Dial Speed Control and Dimmer	120V	Ivory

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94331IV.

Catalog Number	Description	Color
Accessories for Dual Controls		
109019V **109020V** **109018V**	Adapter Kit for Dual Fan/Light Controls	Ivory White Light Almond

Note: All controls on this page may be ganged without de-rating.

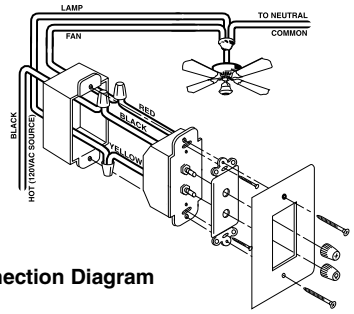


Dual Control Connection Diagram

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

legrand®
Pass & Seymour

Commercial Fan Speed Controls
Titan™ Series Fan Speed Controls



CDSC6W
Narrow

Features

- Field configurable wall plate system.
- Labeling system.
- Shipped with protective film.
- Rugged construction.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other Decorator opening devices under the Titan™ wall plate system. (See Page M-26.)
- Available in both continuously variable and de-hummer styles.
- Blank center plate included.

Catalog Number	Description	Ratings	Narrow or Wide	Color
Fan Speed Controls				
CDSC6I **CDSC6W** **CDSC6** **CDSC6GRY** **CDSC6BK** **CDSC6LA**	Continuously Variable Speed Fan Speed Control	120V, 6A	Narrow	Ivory White Brown Gray Black Light Almond
CDSC12I **CDSC12W** **CDSC12** **CDSC12GRY** **CDSC12BK** **CDSC12LA**	Continuously Variable Speed Fan Speed Control	120V, 12A	Wide	Ivory White Brown Gray Black Light Almond
CDDH16I **CDDH16W** **CDDH16** **CDDH16GRY** **CDDH16BK** **CDDH16LA**	De-Hummer*, 4 Speed Low/Low-Mid/High-Mid/High Fan Speed Control	120V, 1.6A	Narrow	Ivory White Brown Gray Black Light Almond

* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

For additional Titan™ Series products and information, see Pages M-24 – M-31.


All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.

Commercial Fan Speed Controls
Rotary Fan Speed Controls

legrand®
Pass & Seymour

Field Adjustable Trim
This feature allows the user to set the minimum speed level desired and helps prevent damage to motor due to stalling. Models without field adjustable trims feature factory settings for minimum anti-stall levels.

Full-On Bypass
When control is placed in the full-On position, speed control circuitry is bypassed by latching contacts. This feature allows for 100% motor output and extends speed control's life by eliminating heat build-up.




N 94301
P 94503
N 94601

Features

- Full range speed control.
- Utilizes standard toggle wall plates.
- 100% tested for symmetry for extended fan life.
- Ground lead provided.
- Ferrite bar coil choke for excellent RFI suppression.

Catalog Number	Description	Ratings	Color
3, 5 & 6A Max. Rotary Fan Speed Controls			
94301I* **94301WV**** **94301LA***	Dial (Non-RFI), May Be Ganged Without De-Rating	120V 3A max.	Ivory White Light Almond
94503I*	Preset, Push On/Off, Adjustable Trim, 3-Way May Be Ganged Without De-Rating	120V 5A max.	Ivory
94601I* **94601WV****	Dial, Adjustable Trim, May Be Ganged Without De-Rating	120V 6A max.	Ivory White

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 94301LAV.
**Available in VisionPak™ only.



N 94121

P = Preset
N = Non-Preset

Features

- Full range variable low to high speed control.
- Easily ganged by removing scored heat sink fins.
- Heavy-duty toroid choke for RFI suppression.
- Black anodized heat sink for greater heat dispersion and enhanced appearance.
- 100% tested for symmetry for extended fan life.
- Ground lead provided.
- Ferrite bar coil choke for excellent RFI suppression.

Catalog Number	Description	Ratings	Color
8 & 12A Max. Rotary Fan Speed Controls with Architectural Heat Sink			
94801I	Dial, Adjustable Trim, 1 Gang Heat Sink	120V, 8A max.	Ivory
94121I	Dial, Adjustable Trim, 2 Gang Heat Sink	120V, w12A max.	Ivory

Catalog Number	Description	Color
Accessories for Rotary Dimmers & Fan Speed Controls		
RRKCLGV **RRKIGV** **RRKWGV**	Knob Replacement for Rotary Dimmers/Fan Controls	Clear/Gold Insert Ivory/Gold Insert White/Gold Insert
RRKIV **RRKLAV** **RRKWV**	Knob Replacement for Rotary Dimmers/Fan Controls	Ivory Light Almond White
Accessories for Rotary Heat Sink Dimmers & Fan Speed Controls		
DAPK1I **DAPK1W** **DAPK1**	1-Gang Wall Plate – Plate and Knob Kit for Rotary Heat Sink Devices	Ivory White Brown
DAPK2I **DAPK2W** **DAPK2**	2-Gang Wall Plate – Plate and Knob Kit for Rotary Heat Sink Devices	Ivory White Brown

Max. Load Rating	Gang Reduction	
	One Side	Two Side
De-Rating Chart		
5 Amp	4 Amp	3 Amp
8 Amp	7 Amp	6 Amp
12 Amp	11 Amp	10 Amp

All devices listed on this page conform to NEMA WD-1 and WD-6. UL Listed and CSA Certified.



SLATER® PLASTIC BOXES

legrand®

Pass & Seymour


Slater® Plastic Boxes

legrand®
Pass & Seymour

Quick/Click® feature secures devices quickly and easily. Does not strip when over-torqued. See Page N-19 for details.

Big 52 cubic inch capacity.

Divider plate (LVDIV1, sold separately) used when installing line and low-voltage devices or multiple 277 volt devices in same box. See Page N-5 for details.

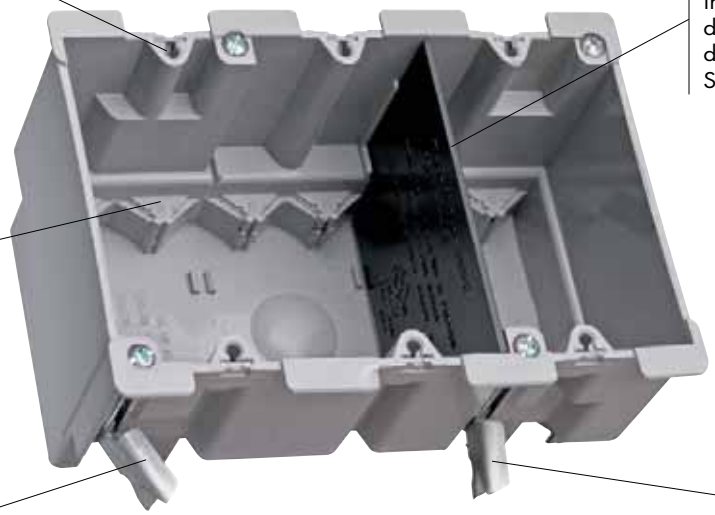

4 Auto/Clamps® on each end eliminate the need for separate cable clamps. See Page N-19 for details.

Easy installation, rectangular cutout.

Metal swing bracket for quick mounting in existing walls.

Swing bracket adjusts from 1¼" to ⅛".

S352W
3 Gang Old Work Box shown with Divider Plate, LVDIV1

Durable, impact-resistant thermoplastic boxes in a full range of sizes — complemented by innovative extras that cut installation time.

Index


Device	Page Number
Switch & Outlet Boxes	N-2, N-3
Old Work Boxes & Shallow Boxes	N-4
Low-Voltage Brackets	N-5
Wood & Steel Stud Bracket Boxes	N-6
Screw Mount Steel Stud Boxes	N-7
4" Square Boxes & Covers	N-8
4" Round Ceiling Boxes	N-9 – N-11
Round Ceiling Boxes	N-12
Tamper-Resistant Floor Box Assemblies	N-13, N-14, N-17
Tamper-Resistant Round Floor Box Assemblies	N-15, N-16
Round Floor Box Covers	N-16
Recessed TV Boxes	N-18
Applications & Product Features	N-19 – N-21

legrand®
Pass & Seymour

Slater® Plastic Boxes
Switch & Outlet Boxes
With Captive Mounting Nails on Each End with Quick/Click®


S118R


S122R


S235RAC



S235RACMH


S354RAC


S468RAC

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Switch & Outlet Boxes with Quick/Click®							
S118R	18.0	**Single gang.** 2 Quick/Entries® each end.	3¾	2¼	2²³⁄₃₂	9 No. 14 8 No. 12 7 No. 10	100
S235RAC	35.0	**Two gang.** 4 Auto/Clamps® each end.	3³¹⁄₃₂	3³¹⁄₃₂	3⅜	17 No. 14 15 No. 12 14 No. 10	50
S235RACMH	35.0	**Two gang.** 4 Auto/Clamps® each end. 3" depth for manufactured housing walls.	3¾	4¹⁄₁₆	3	17 No. 14 15 No. 12 14 No. 10	100
S354RAC	54.0	**Three gang.** 6 Auto/Clamps® each end.	3³¹⁄₃₂	5²⁵⁄₃₂	3	27 No. 14 24 No. 12 21 No. 10	50
S468RAC	68.0	**Four gang.** Rear stabilizing bar virtually eliminates inward movement. 6 Auto/Clamps® each end.	3¹³⁄₁₆	7¹³⁄₁₆	3	34 No. 14 30 No. 12 27 No. 10	25
Deep Switch & Outlet Boxes with Quick/Click®							
S122R	22.5	**Single gang deep.** 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	3⅜	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468RAC.)


EXT1


EXT2

Catalog Number	Cu. In. Vol.	Description	Qty. Per Carton
Wall Box Extension Rings			
EXT1	1.0	**Single gang.** 1/4" thick. Stackable.	10
EXT2	2 .0	**Two gang.** 1/4" thick. Stackable.	10

All devices listed on this page conform to NEMA OS2.

Slater® Plastic Boxes
Switch & Outlet Boxes
With Captive Mounting Nails on Each End

legrand®
Pass & Seymour

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Switch & Outlet Boxes with Threaded Mounting Holes							
P118R	18.0	**Single gang.** 2 Quick/Entries® each end.	3¾	2¼	2 23/32	9 No. 14 8 No. 12 7 No. 10	100
P118RN	18.0	**Single gang.** Reverse angled captive mounting nail. 2 Quick/Entries® each end. Used for manufactured housing.	3¾	2¼	2 23/32	9 No. 14 8 No. 12 7 No. 10	100
P122C	22.0	**Single gang.** With EZ Grip – a temporary hold feature.	3¾	2¼	4	11 No. 14 10 No. 12 9 No. 10	100
PH122R	22.0	**Single gang.** Horizontal. Captive mounting nail each side.	3¾	2¼	3⅞	11 No. 14 10 No. 12 9 No. 10	100
P235RAC	35.0	**Two gang.** 4 Auto/Clamps® each end.	3 31/32	3 31/32	3⅜	17 No. 14 15 No. 12 14 No. 10	100
P235RACMH	35.0	**Two gang.** 4 Auto/Clamps® each end. 3" depth for manufactured housing walls.	3 31/32	3 31/32	3	17 No. 14 15 No. 12 14 No. 10	100
P354RACMH	54.0	**Three gang.** 6 Auto/Clamps® each end. 3 1/16" depth for manufactured housing walls.	3 13/16	5 15/16	3 1/16	27 No. 14 24 No. 12 21 No. 10	50
Deep Switch & Outlet Boxes with Threaded Mounting Holes							
P122R	22.5	**Single gang deep.** 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	3⅜	11 No. 14 10 No. 12 9 No. 10	100
P122RN	22.5	**Single gang deep.** Reverse angled captive mounting nail. 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	3⅜	11 No. 14 10 No. 12 9 No. 10	100
P122N	22.5	**Single gang deep.** Vertical bracket mount.	3¾	2¼	3⅜	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.

UL Classified for 2 Hour Fire Resistance (Does not apply to P122N.)


P118R


P1-18-RN



P1-22-R


P122RN


P1-22-N


PH1-22-R


P1-22-C


P2-35-RAC


P2-35-RACMH


P354RACMH

All devices listed on this page conform to NEMA OS2.


legrand®
Pass & Seymour

Slater® Plastic Boxes
Old Work Boxes & Shallow Boxes


S118W


S122W


S232W


S352W


P108N


P108W

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Old Work Switch & Outlet Boxes with Quick/Click®							
S116W	16.0	**Single gang.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
S118W	18.0	**Single gang.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 2 Auto/Clamps® each end.	3¾	2¼	3 1/32	9 No. 14 8 No. 12 7 No. 10	100
S232W	32.0	**Two gang.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 4 Auto/Clamps® each end.	3¾	4 1/16	3 1/32	16 No. 14 14 No. 12 12 No. 10	50
S352W	52.0	**Three gang.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 6 Auto/Clamps® each end.	3¾	5⅞	3 1/32	26 No. 14 23 No. 12 20 No. 10	10
Deep Old Work Switch & Outlet Boxes with Quick/Click®							
S122W	22.0	**Single gang deep.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 2 Auto/Clamps® each end.	3¾	2 5/16	3½	–	50
Old Work Switch & Outlet Boxes with Threaded Mounting Holes							
P116W	16.0	**Single gang.** Swing-bracket for mounting adjusts from 1¼" down to ⅛". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
Shallow Switch & Outlet Boxes for use in limited depth applications							
P108W	8.0	**Single gang.** Old work flange box for retrofit applications.	3¾	2 5/16	1⅛	–	20
P108N	8.0	**Single gang.** With vertical side bracket for new construction applications.	3¾	2 5/16	1⅛	–	20

All boxes are UL listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S352W, P108W, and P108N.)

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Low-Voltage Brackets with Quick/Click® for class 2 low-voltage applications							
SDV2B	22.5	**Two gang. For dual-voltage.** Face mount box and bracket for new construction.	3¾	4	3¾	11 No. 14 10 No. 12 9 No. 10	12
SLV1R	–	**Single gang.** Nail on for new construction.	3¾	2¼	–	–	12
SLV1S	–	**Single gang.** Screw on for new construction.	3¾	2¼	–	–	12
SLV1B	–	**Single gang.** Face mount bracket for new construction.	3¾	2¼	–	–	12
SLV2B	–	**Two gang.** Face mount bracket for new construction.	3¾	4	–	–	12
SLV1W	–	**Single gang.** Swing bracket mount for old work.	3¾	2¼	–	–	12
SLV2W	–	**Two gang.** Swing bracket mount for old work.	3¾	4	–	–	12
SLV3W	–	**Three gang.** Swing bracket mount for old work.	3¾	6	–	–	12
Low-Voltage Brackets for class 2 low-voltage applications							
P100WD	8.0	**Single Gang. Gangable.** Swing bracket for mounting, adjusts from 1¼" down to ⅛", for old work, stand alone applications.	3¾	2	–	–	15
P100ND	8.0	**Single gang.** With vertical side bracket for new construction, with wire retaining fingers.	3¾	2⅜	1¼	–	15
PDV2B	22.5	**Two gang. For dual-voltage.** Face mount box and bracket for new construction.	3¾	4	3¾	11 No. 14 10 No. 12 9 No. 10	12
PLV1R	–	**Single gang.** Nail on for new construction.	3¾	2¼	–	–	12
PLV1S	–	**Single gang.** Screw on for new construction.	3¾	2¼	–	–	12
PLV1B	–	**Single gang.** Face mount bracket for new construction.	3¾	2¼	–	–	12
PLV2B	–	**Two gang.** Face mount bracket for new construction.	3¾	4	–	–	12
PLV1W	–	**Single gang.** Swing bracket mount for old work.	3¾	2¼	–	–	12
PLV2W	–	**Two gang.** Swing bracket mount for old work.	3¾	4	–	–	12
PLV3W	–	**Three gang.** Swing bracket mount for old work.	3¾	6	–	–	12
Divider Plate							
LVDIV1	-.5	Suitable for low-voltage or multiple 277V devices. For use with S235RAC, S235RACS, P235RAC, S235S50AC, S354RAC and S352W.	–	–	–	–	12

All boxes are UL listed.


SLV2B


SLV3W


PLV1W


PLVIR


LVDIV1

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
Wood & Steel Stud Bracket Boxes
With Offset Bracket for Wood and/or Steel Mounting



S118S50


S118B50


S122S50

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Wood & Steel Stud Bracket Boxes with Quick/Click®							
S118S50	18.0	**Single gang.** ⅜" offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with ⅜" to ⅝" wallboard.	3¾	2¼	2 23/32	9 No. 14 8 No. 12 7 No. 10	100
S118B50	18.0	**Single gang.** ½" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 2 Quick/Entries® each end. For use with ⅜" to ⅝" wallboard.	3¾	2¼	2¾	9 No. 14 8 No. 12 7 No. 10	100
S235S50AC	35.0	**Two gang.** ⅜" offset for wood and steel stud mounting. 4 Auto/Clamps® each end. For use with ⅜" to ⅝" wallboard.	3 31/32	3 31/32	3⅜	17 No. 14 15 No. 12 14 No. 10	50
S354S50AC	54.0	**Three gang.** ⅜" offset for wood and steel stud mounting. 6 Auto/Clamps® each end. For use with ⅜" to ⅝" wallboard.	3¾	5 25/32	3	27 No. 14 24 No. 12 21 No. 10	25
S468S50AC	68.0	**Four gang.** ⅜" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 6 Auto/Clamps® each end. For use with ⅜" to ⅝" wallboard.	3¾	7 13/16	3	34 No. 14 30 No. 12 27 No. 10	25
Deep Wood & Steel Stud Bracket Boxes with Quick/Click®							
S122S50	22.5	**Single gang deep.** ⅜" offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with ⅜" to ⅝" wallboard.	3¾	2¼	3⅜	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468S50AC.)


S235S50AC


S354S50AC

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Steel Stud Bracket Boxes with Quick/Click®							
S122B	22.0	**Single gang.** ½" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
SH122B	22.0	**Single gang.** Horizontal. ½" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3⅞	11 No. 14 10 No. 12 9 No. 10	100
Steel Stud Bracket Boxes							
P122B	22.0	**Single gang.** ½" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
PH122B	22.0	**Single gang.** Horizontal. ½" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3⅞	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance.


S468S50AC


P122B


PH122B

All devices listed on this page conform to NEMA OS2.


Slater® Plastic Boxes
Screw Mount Steel Stud Boxes
With Captive Combo Head Self Tapping Mounting Screws on Each End

legrand®
Pass & Seymour

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Screw Mount, Steel Stud Boxes with Quick/Click®							
S118RS	18.0	**Single gang.** 2 Quick/Entries® each end.	3¾	2 1/4	2 23/32	9 No. 14 8 No. 12 7 No. 10	100
S235RACS	35.0	**Two gang.** 4 Auto/Clamps® each end.	3 31/32	3 31/32	3⅜	17 No. 14 15 No. 12 14 No. 10	50
S235RACSMH	35.0	**Two gang.** 4 Auto/Clamps® each end. 3" depth for manufactured housing walls.	3¾	4 1/16	3	17 No. 14 15 No. 12 14 No. 10	100
S354RACS	54.0	**Three gang.** 6 Auto/Clamps® each end.	3 31/32	5 25/32	3	27 No. 14 24 No. 12 21 No. 10	50
S468RACS	68.0	**Four gang.** 6 Auto/Clamps® each end. Rear stabilizing bar virtually eliminates inward movement.	3 13/16	7 13/16	3	34 No. 14 30 No. 12 27 No. 10	25
Deep Screw Mount, Steel Stud Boxes with Quick/Click®							
S122RS	22.5	**Single gang deep.** 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2 1/4	3⅜	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468RACS.)
Note: 3¼" self-tapping, drill-point screws. Nails are 3¼".

Catalog Number	Description	Qty. Per Carton
Crimping Tool for Attaching Steel Stud Boxes		
CT1	**Crimping tool** for attaching boxes to steel studs. Comes equipped with long and short anvils to meet most installation requirements.	1

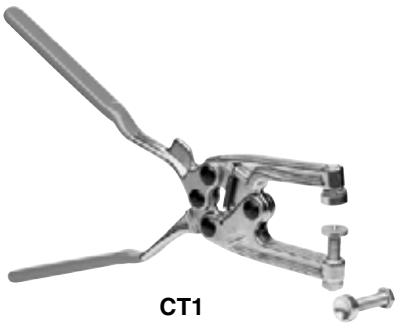
CT1


S118RS


S122RS


S235RACS


S235RACSMH


S354RACS


S468RACS

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
4" Square Boxes & Covers


4SBC


RC1


RC2


S4418BAC


P242SRD


P242RRD

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Covers for 4" Square Boxes							
4SBC	–	**4" square flat blank cover - gray**	4¼	4¼	N/A	–	50
4SBCW	–	**4" square flat blank cover - white**	4¼	4¼	N/A	–	50
RC1	3.2	**Single gang** device cover, raised ⅜"	4¼	4¼	⅜	–	100
RC2	5.3	**Two gang** device cover, raised ⅜"	4¼	4¼	⅜	–	100
4" Square Boxes with Threaded Mounting Holes							
S4418BAC	17.0	**Shallow 4" square.** Captive mounting nail each end. 2 Auto/Clamps® each end. 2 #8 mounting screws factory installed.	4¼	4¼	1¼	9 No. 14 8 No. 12 7 No. 10	50
S4421RAC	21.0	**4" square.** Captive mounting nail each end. 3 Auto/Clamps® each end, 2 on side opposite to nails. 2 #8 mounting screws factory installed.	4¼	4¼	1½	10 No. 14 9 No. 12 8 No. 10	100
S4421SAC	21.0	**4" square.** For wood and steel stud mounting. 3 Auto/Clamps each end, 2 on side opposite bracket. 2 #8 mounting screws factory installed.	4¼	4¼	1½	10 No. 14 9 No. 12 8 No. 10	50
S4435RAC	35.0	**4" square.** Captive mounting nail each end. 3 Auto/Clamps® each end, 2 on side adjacent to nails. 2 #8 mounting screws factory installed.	4¼	4¼	2⅜	17 No. 14 15 No. 12 14 No. 10	50
S4435SAC	35.0	**4" square.** For wood and steel stud mounting. 3 Auto/Clamps® each end, 2 on side opposite bracket. 2 #8 mounting screws factory installed.	4¼	4¼	2⅜	17 No. 14 15 No. 12 14 No. 10	50

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to 4SBC and 4SBCW.)


S4421RAC


S4421SAC


S4435RAC


S4435SAC

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) L	W	D	Wire Fill (AWG)	Qty. Per Carton
Range & Dryer Boxes							
P242SRD	42.0	1/2" offset for wood or steel stud mount with metal cable clamp. Captive mounting screw each end.	3¾	4	4	16 No. 10 14 No. 8 8 No. 6	12
P242RRD	42.0	1/2" offset for wood or steel stud mount with metal cable clamp. Captive mounting nail each end.	3¾	4	4	16 No. 10 14 No. 8 8 No. 6	12

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance (pending).

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour


Angled, rugged, metal mounting bracket safely and securely fastens fans or fixtures to the building structure.

Auto Clamp® cable clamps molded in — hold wire securely in box.

Dual mounting accepts fans or fixtures with 2.75" or 3.5" straps.

Fan mounts directly to bracket through box with #10-32 screws (provided).

Phillips-head screws (#10-32 x 3") mount the fan or fixture directly to the metal bracket.

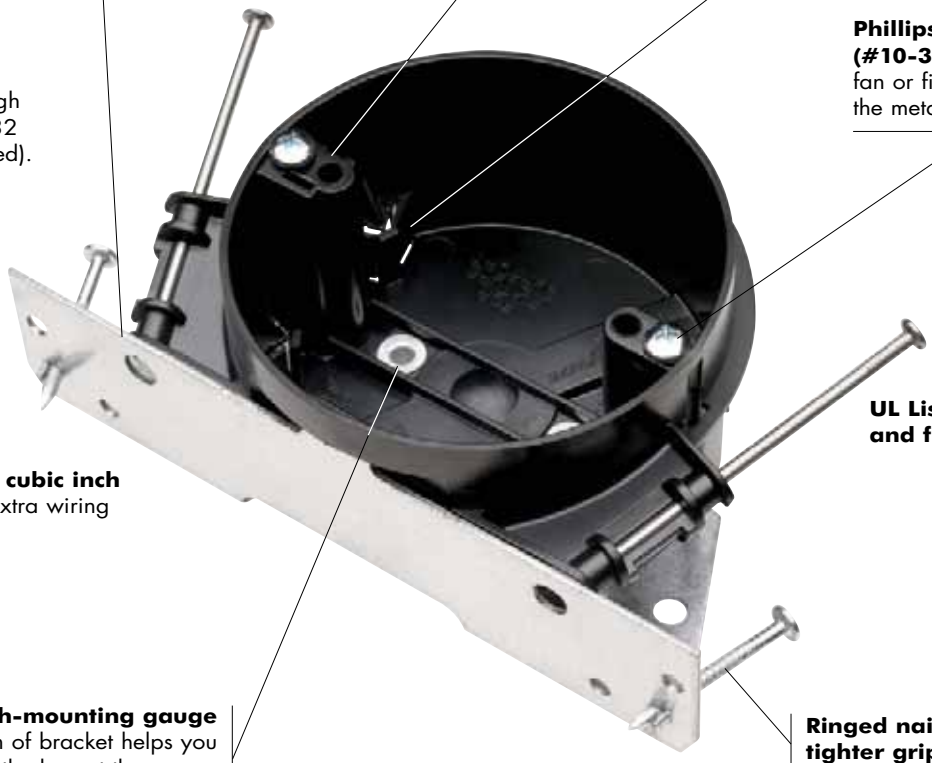

UL Listed for fan and fixture support.

Large, 20.25 cubic inch capacity for extra wiring space.

Depth-mounting gauge at bottom of bracket helps you align the box at the proper depth relative to the ceiling.

Ringed nails for tighter grip.

S120JFAN

Constructed of impact-resistant Noryl® thermoplastic, making it virtually unbreakable and non-conductive.

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
4" Round Ceiling Boxes
With Dual Threaded Mounting Holes

Easy installation. One #10 x 1¼" screw holds the box at rough in. Two factory-supplied #10 x 2" screws secure the fan or fixture through the box, directly to the joist.

UL Listed for fan and fixture support.

Mounts directly under a joist or on a joist cross member.



S116FAN

Impact-resistant Noryl® means no ground wiring as with metal boxes.

Screw lock holds screws in box until needed. No lost hardware and no broken spiral saw bits.

Catalog Number	Cu. In. Vol.	Description	Dimensions (in.) Dia.	Dimensions (in.) Depth	Wires (AWG)	Qty. Per Carton	UL Listed Max. Weight Rating Fan	UL Listed Max. Weight Rating Fixture
Fan Boxes – Fan & Fixture Rated								
S120JFAN	20.25	**Ceiling Fan Box – Premium Grade** with integral fan mounting bracket and 4 Auto/Clamps®.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	12	70 lbs.	150 lbs.
S120BFAN	20.25	**Ceiling Fan Box – Construction Grade** with 4 Auto/Clamps®.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	30	70 lbs.	70 lbs.
S120RFAN	20.25	**Ceiling Fan Box – Standard Grade** 4 Auto/Clamps® with 2 captive mounting nails.	4	2 3/16	10 No. 14	30	35 lbs.	50 lbs.
4" Round Direct Mount Ceiling Fan Boxes – Fan & Fixture Rated								
S116FAN	16	**Ceiling Fan Box –** with Direct Mount.	4	2¾	8 No. 14 7 No. 12 6 No. 10	24	70 lbs.	210 lbs.
S109FAN	9	**Ceiling Fan Box –** with Direct Mount. Suitable for single or double joist.	4	2¾	4 No. 14 4 No. 12 3 No. 10	24	70 lbs.	210 lbs.

All boxes are UL listed.
UL Classified for 2 Hour Fire Resistance.
Dual mounting accommodates both 2.75" and 3.5" fixtures.



S120JFAN



S120BFAN



S120RFAN



S109FAN



S116FAN

All devices listed on this page conform to NEMA OS2.

Slater® Plastic Boxes
4" Round Ceiling Boxes
With Dual Threaded Mounting Holes

legrand®
Pass & Seymour

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) Dia.	Dimensions (inches) Depth	Wires (AWG)	Qty. Per Carton	UL Listed Max. Weight Rating Fixture
Ceiling Boxes							
S120RAC	20.25	**4" round**. 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120RGAC	20.25	**4" round** with ground lug. 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120JAC	20.25	**4" round**. J-bracket with 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120JGAC	20.25	**4" round** with ground lug. J-bracket with 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120HAC	20.25	**4" round**. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120HGAC	20.25	**4" round** with ground lug. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120RACS	20.25	**4" round**. 2 captive mounting screws. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.


All boxes are UL listed.
UL Classified for 2 Hour Fire Resistance.
Dual mounting accommodates both 2.75" and 3.5" fixtures.


S120RAC


S120RGAC


S120JAC


S120HAC

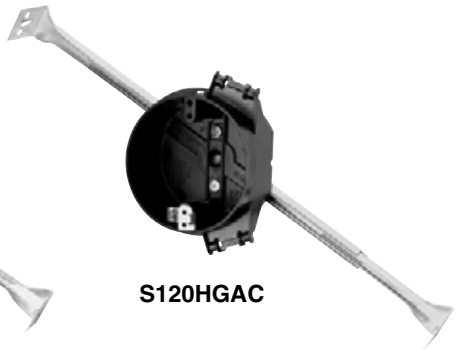
S120HGAC


S120RACS


S120JGAC

Catalog Number	Description	Qty. Per Carton
Covers for 4" Round Boxes		
4RBC	**4" round flat blank cover – gray**	50
4RBCW	**4" round flat blank cover – white**	50



4RBC

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
Round Ceiling Boxes


C118WAC



C118WGAC



C118RAC


C118RGAC

Catalog Number	Cu. In. Vol.	Description	Dimensions (inches) Dia.	Dimensions (inches) Depth	Wires (AWG)	Qty. Per Carton	UL Listed Max. Weight Rating Fixture
3¾" Round Old Work Ceiling Boxes							
C118WAC	18.0	**3¾" round**. Swing brackets for mounting adjust from 1¼" down to ⅛". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
C118WGAC	18.0	**3¾" round**. With grounding lug. Swing brackets for mounting adjust from 1¼" down to ⅛". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
3¾" Round Old Work Ceiling Boxes							
C118WACX	18.0	**3¾" round**. Same as C118WAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
C118WGACX	18.0	**3¾" round**. Same as C118WGAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
3¼" Round Ceiling Boxes							
C118RAC	18.0	**3¼" round**. 2 captive mounting nails. 4 Auto/Clamps. 7 No. 10	3¼	3 5/32	9 No. 14 8 No. 12	50	50 lbs.
C118RGAC	18.0	**3¼" round** with ground lug. 2 captive mounting nails. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No.10	50	50 lbs.
C118HAC	18.0	**3¼" round**. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.
C118HGAC	18.0	**3¼" round** with ground lug. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.

UL Classified for 2 Hour Fire Resistance.

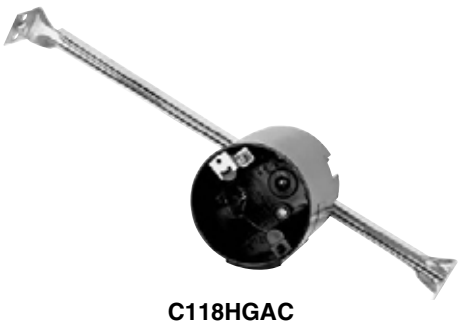
C118HGAC

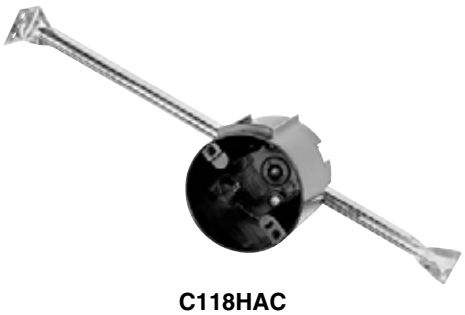
C118HAC

All devices listed on this page conform to NEMA OS2.

Slater® Plastic Boxes
Tamper-Resistant Floor Box Assemblies
For Wood Sub-Floors

legrand®
Pass & Seymour

Features – FB Series

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Meets UL514(c) and NEC 314.27(c).
- Scrub water compliant.
- With durable nickel or brass cover plates.
- Swing brackets mounting option eliminates drilling tile flooring for mounting screws.
- Wood sub-floors only.
- Wire Fill (AWG): 10 No. 14, 9 No. 12, 8 No. 10.



FB1TRSRB

Catalog Number	Cu. In. Vol.	Description	Cover Plate Finish	Dimensions (inches) L	W	D	Qty. Per Carton
Floor Box Assemblies — One Gang for Wood Sub-Floors							
FB1TRSRB **FB1TRSRN**	20.5	Single threaded screw plug. Includes 15A, 125V single tamper-resistant receptacle.	Brass Nickel	4¾	3¼	4	1
FB1TRDRB **FB1TRDRN**	20.5	#8 duplex opening, 2 threaded screw plugs. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Nickel	4¾	3¼	4	1

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.
In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
Tamper-Resistant Floor Box Assemblies
For Wood Sub-Floors

Rugged, die-cast cover plate with durable nickel or brass finish.

Scrub water compliant without caulking, supplied with foam gasket and O-ring-equipped plugs.

Large box flange rests on finished floor — no adjustments needed.

Swing-bracket mounting, great for tile floors — eliminates drilling for mounting screws.



FB2TRDRKS4N

Meets NEC Section 406.11 Tamper-Resistant requirements.

Meet UL514C and NEC314.27c requirements including scrub water for tile floors.

Dual-voltage models available. Includes 15 Amp, 125 Volt tamper-resistant duplex receptacle, low-voltage divider, Cat 5e jack, F-connector, and blanks.

Extra-deep design leaves plenty of wiring room.

Catalog Number	Cu. In. Vol.	Description	Cover Plate Finish	Dimensions (inches) L	W	D	Qty. Per Carton
Floor Box Assemblies — Two Gang for Wood Sub-Floors							
FB2TRDR2B **FB2TRDR2N**	42.5	**Dual-voltage.** Two #8 duplex openings, 4 threaded screw plugs. Includes 3232 tamper-resistant 15A, 125V duplex receptacle, Cat 5e jack, F-connector, 10 blanks & low-voltage divider.	Brass Nickel	4¾	6½	4	1
FB2TRDRKS4B **FB2TRDRKS4N**	42.5	Two #8 duplex openings, 4 threaded screw plugs. Includes two 3232 tamper-resistant 15A, 125V duplex receptacles.	Brass Nickel	4¾	6½	4	1

Wire File (AWG): 21 No. 14, 18 No. 12, 17 No. 10.

All devices listed on this page conform to NEMA OS2.

Slater® Plastic Boxes
Tamper-Resistant Round Floor Box Assemblies

For Wood or Concrete Sub-Floors

legrand®
Pass & Seymour

Features

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Brass or aluminum.
- Smooth, nearly flush installation.
- PS862 Series wood or concrete sub-floors only.
- Wire Fill (AWG): 11 No. 14, 9 No. 12, 8 No. 10.

Catalog Number	Cu. In. Vol.	Description	Cover Plate Finish	Dimensions (in.) Dia.	Dimensions (in.) D	Qty. Per Carton
Round Floor Box Assemblies for Hardwood or Tile Finished Floors						
PS862TRT **PS862TRTAL**	22.0	#8 duplex opening, 2 flip lids. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Aluminum	4¼	3¼	1
PS862TRTGFI **PS862TRTGFIAL**	22.0	#26 opening, flip lid. Includes 885 tamper-resistant 15A, 125V duplex Decorator receptacle.	Brass Aluminum	4¼	3¼	1
Round Floor Box Assemblies for Carpeted Finished Floors						
PS862TRC **PS862TRCAL**	22.0	#8 duplex opening, 2 flip lids. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Aluminum	5½	3¼	1
PS862TRTGFIC **PS862TRTGFICAL**	22.0	#26 opening, flip lid. Includes 885 tamper-resistant 15A, 125V duplex Decorator receptacle.	Brass Aluminum	5½	3¼	1



PS862TRT



PS862TRGFICAL

Catalog Number	Cu. In. Vol.	Description	Dimensions (in.) Dia.	Dimensions (in.) Depth	Wire Fill (AWG)	Qty. Per Carton
Round Floor Box for Hardwood, Tile or Carpeted Finish Floors						
PS862	22.0	Box only.	3¾	$2^{11}/_{16}$	11 No. 14 9 No. 12 8 No. 10	1
Concrete Kit						
PS862KIT	–	Mud Cap, Gasket. Two 3/4" male PVC conduit fittings.	–	–	–	5



PS862KIT

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Slater® Plastic Boxes
Tamper-Resistant Round Floor Box Assemblies & Covers
For Wood Sub-Floors


PS863TRC



PS863TRGFIC

Features

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Brass or aluminum.
- Dual-voltage.
- Smooth, nearly flush installation.
- PS863 series wood sub-floors only.
- Includes Cat 5e & F-Connector.
- Wire Fill (AWG): 11 No. 14, 10 No. 12, 9 No. 10.

Catalog Number	Cu. In. Vol.	Description	Cover Plate Finish	Dimensions (in.) Dia.	Dimensions (in.) D	Qty. Per Carton
Round Floor Box Assemblies						
PS863TRC **PS863TRCAL**	23.5	**Dual-voltage.** #8 duplex opening, 2 flip lids and 2 low-voltage openings. Includes 3232 tamper-resistant 15A, 125V duplex receptacle, Cat 5e jack and F-connector.	Brass Aluminum	5¾	3½	1
PS863TRGFIC **PS863TRGFICAL**	23.5	**Dual-voltage.** #26 opening, flip lid and 2 low-voltage openings. Includes 885 tamper-resistant 15A, 125V duplex Decorator receptacle, Cat 5e jack & F-connector.	Brass Aluminum	5¾	3½	1

Round Floor Box Covers
For Wood or Concrete Sub-Floors


PS895GFIC

Catalog Number	Description	Cover Plate Finish	Diameter	Qty. Per Carton
Round Floor Box Covers for Hardwood or Tile Finished Floors				
PS895T **PS895TAL**	#8 duplex opening, 2 flip lids. Cover only.	Brass Aluminum	4¼	8
PS895TGFI **PS895TGFIAL**	#26 Decorator opening, flip lid. Cover only.	Brass Aluminum	4¼	8
Round Floor Box Covers for Carpeted Finished Floors				
PS895C **PS895CAL**	#8 duplex opening, 2 flip lids. Cover only.	Brass Aluminum	5½	8
PS895GFIC **PS895GFICAL**	#26 Decorator opening, flip lid. Cover only.	Brass Aluminum	5½	8

All devices listed on this page conform to NEMA OS2.

Plastic Boxes


Tamper-Resistant Floor Box Assemblies

2 Pole, 3 Wire Grounding 15A, 125V

legrand®
Pass & Seymour


Features

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Hinged door is removable and easily replaceable.
- Durable construction, impact and scratch resistant PVC construction.
- Standard Decorator opening that accepts GFCI, TVSS, DataCom or other Decorator devices.
- Auto/Clamps® and knockouts on both sides of box.
- Meets UL514(c) scrub water exclusion test.
- Threaded device mounting holes.
- Simple mounting box, fits into a 4-3/4" hole and mounts with 3 screws included.
- Ready for low-voltage wiring, drill guides on underside of cover.
- UL and cUL Listed.
- Captive screws on TM1542 series – screws will not be lost – new.
- Made in USA.




TM1542BOX


Catalog Number	Description	Color	NEMA Config. No.
Floor Box			
TM1542BOX	38 cu. in., with knockouts and Auto/Clamps®, 3 screws for mounting to floor.	Gray	5-15R
Thermoplastic Covers			
TM1542TRW **TM1542TRBR** **TM1542TRGRY** **TM1542TRLA**	Includes 15A, 125V tamper-resistant Decorator receptacle, matching detachable and replaceable hinged door; threaded device-mounting holes; drill guides for low-voltage poke-through holes; accepts any Decorator device; mounts on carpeting, hardwood, linoleum, tile floors; 4 mounting/ leveling screws.	White Brown Paintable Gray Light Almond	5-15R 5-15R 5-15R 5-15R
Brass Covers			
TM1542TRFM	Low-profile cover requires minimum 3/8" hardwood floor thickness.	Brass	5-15R
TM1542TRCF	High-profile cover fits any floor finish – including carpeting, linoleum, tile, etc. Both covers include an 885 tamper-resistant 15A, 125V Decorator duplex receptacle and will accept any Decorator device. Covers include captive screws to prevent loss.	Brass	5-15R



TM1542TRLA*



TM1542TRFM




TM1542TRCF

*See available colors at right.

UL listed in accordance with 314.27(e).


Features

- Solid brass covered plate with matching flush fitting brass cap.
- 15A, 125V single receptacle made of durable thermoplastic.
- UL and FSUL listed.



1542TRFBA

Catalog Number	Rating A. V.	Description	Color	NEMA Config. No.
Floor Box Assembly**				
1542TRFBA	15 125	Tamper-resistant receptacle, brass plate, 1.01" recessed plug, gasket, O-ring, and metal 18 cu. in. box	Brown	5-15R
Display Receptacle*				
1542TRDR	15 125	Tamper-resistant receptacle, brass plate and 1.01" recessed plug	Brown	5-15R



1542TRDR

*UL listed in accordance with 314.27(e).
**Conforms to NEMA OS2.

All devices listed on this page conform to NEMA OS2.

legrand®
Pass & Seymour

Plastic Boxes
Recessed TV Boxes

Ideal for flat-screen TVs, home office, kitchen counter tops, and behind furniture to allow snug-to-wall placement.

Today's homeowners have more multimedia choices than ever — including flat panel, wall-mounted televisions. P&S Recessed TV Boxes offer a clean installation with the versatility to handle up to 12 multimedia connections, while providing surge protected power.

Their recessed design saves space and simplifies connections to cable or satellite boxes, DVRs, DVD players, surround-sound systems and more.

And they're available with or without surge protective receptacles to protect costly electronics from potentially damaging surges.



TV3WTVSSLA



TV1WW



TV1WTVSSBK

Features

- Clean, flush-mount appearance — snap-on end caps hide mounting screws.
- Flexible — position either line voltage or low-voltage in all three openings.
- Low-voltage connectors offer both terminated and pull-through capability.
- Plugs and multimedia connections stay recessed behind the wall surface.
- Molded-in template and rectangular cut-out.
- Accepts standard TP wall plates.
- Metal swing brackets ensure a solid mounting.
- Uses old-work-style boxes for line voltage.
- Accepts all P&S keystone low-voltage connectors, including Cat 5e and F-connectors (both supplied with Surge Protective kit), as well as RCA and audio binding posts.

Catalog Number	Description	Color
Recessed TV Boxes		
TV1WW **TV1WBK** **TV1WLA**	Single Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV1WTVSSW **TV1WTVSSBK** **TV1WTVSSLA**	Single Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond
TV3WW **TV3WBK** **TV3WLA**	Three Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV3WTVSSW **TV3WTVSSBK** **TV3WTVSSLA**	Three Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, & Wall Plates.	White Black Light Almond

Single gang dimensions: 7.25" L x 4.875" W x 2.25" D
Three gang dimensions: 8.5" L x 4.875" W x 2.25" D


All devices listed on this page conform to NEMA WD-1 and WD-6.

Slater® Plastic Boxes
Applications & Product Features

legrand®
Pass & Seymour

Application

Slater Plastic Boxes, the Contractor's Choice designed with unique labor-saving features, include a complete range of wall, ceiling, and old work boxes for commercial and residential construction applications.

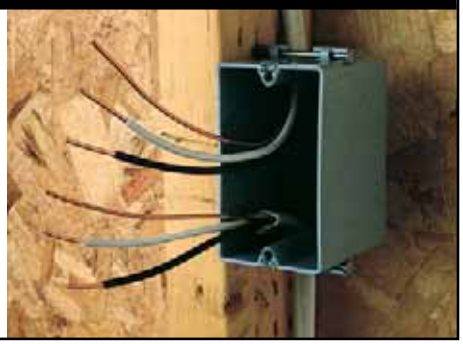

UL Classified

All Slater Plastic Boxes are Underwriters Laboratories Listed. Slater Plastic Boxes shown that are UL Classified for Fire Resistance meet the requirements of UL263 and have a two hour fire resistance rating. These boxes may be used in fire resistant walls and ceilings. Installation information for Slater Plastic Boxes Classified for Fire Resistance may be found in the UL Fire Resistance Directory under category CEYY for Legrand/Pass & Seymour.


Product Features

Exclusive Auto/Clamp®

Eliminates the need for separate cable clamps as well as the tools usually needed for installation.

Auto/Clamp® is available on all multigang boxes, old work boxes, 4" square boxes, and 3-1/4" and 4" round ceiling boxes. A major installation advantage with Auto/Clamp® is that the clamp is molded as an integral part of the box (there are no separate clamps and screws to install, adjust or tighten). Each cable opening contains an Auto/Clamp®, therefore, the non-metallic sheathed cable may be inserted where needed or where most convenient. Auto/Clamp® does not take up as much room as conventional clamps, allowing more room for wire and devices – another important feature.


To install the cable, insert stripped or unstripped non-metallic wire into the Auto/Clamp® opening and pull through to the desired length. The cable is automatically secured and the installation is complete. There are no other operations for the electrician to perform. Contractors can look forward to saving time and money with every Auto/Clamp® plastic box installation.



Note: no additional cubic inch volume deduction required.

Location Ribs


Location Ribs enable the installer to quickly and accurately maintain a 1/2" offset. Dual ribs also make it easy to keep the face of the box parallel to the stud. The ribs are .450" long to reduce the chance of the box protruding beyond the 1/2" sheetrock.They project .080" to span the rounded edges of wood studs but will not cause excessive canting of the box when used with thinner wallboard.



Quick/Entry®

Speeds installation by eliminating need for tools

Another time-saving idea is Quick/Entry®, a method that allows you to push stripped or unstripped non-metallic cable into a single gang plastic box without removing knock-outs. Jagged edges usually formed in other boxes are eliminated. Staple wire to stud within 8" of the box [per NEC 314.17(c)] to complete installation.




Quick/Click®


Fast, easy, and secure installations.

The unique, labor-saving Quick/Click® design secures the wiring device quickly and easily. Simply push in the mounting screws with a screwdriver and turn the screw one turn.

With Quick/Click® you cannot cross-thread or strip a device mounting screw.

Wall boxes are tested for a minimum 100 lb. total device pull-out resistance.





How Quick/Click® Works

The **spring steel** insert for quick mounting of switches and receptacles is a unique patented feature. (Refer to illustration.) Note how the spring acts as a locking ratchet and allows the screw to be pushed in and then tightened. The screw can only be released by unscrewing it in the conventional fashion.

legrand®
Pass & Seymour

Slater® Plastic Boxes
Applications & Product Features

Wood & Steel Stud Bracket Boxes

Application


Single, two, three, four gang and 4" square wood and steel stud boxes feature Quick/Click®, the labor-saving device that assures quick and dependable installation of switches and receptacles. These high-impact thermoplastic boxes can be mounted quickly to steel or aluminum studs using the CT-1 Crimping Tool. They can also be mounted to wooden studs with common nails or screws.

On the single, two, three and four gang steel stud boxes, a steel mounting bracket is provided for mounting to the structural stud. The non-mounting side of the two and four gang box has provisions for attachment to a short section of stud (phantom stud), as shown in the illustration below, to give additional rigidity to the installation. This assembly may also be used without the phantom stud as a positioning tab to automatically realign the box to the wallboard surface. The brackets are 3/8" offset to accommodate 3/8" to 5/8" thick wallboard.



Features

- Available in single, two, three, four gang and 4" square boxes. Two, three and four gang boxes and 4" square include exclusive Auto/Clamp® feature.
- Single gang include Quick/Entry® feature.
- Quick/Click® feature offers fast and dependable installation of devices (single, two, three and four gang).
- Unique offset tab assures proper alignment to wall face. Available with 3/8" offsets.
- Can be used for steel, aluminum, or wooden studs. Can be installed on steel studs with most standard crimping tools in addition to CT-1 Crimping Tool.
- Molded of high-impact thermoplastic.

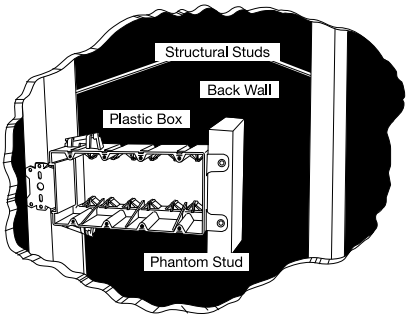

Screw Mount: Steel Stud Boxes


Application

Single, deep single, two, three, four gang, and 4" round ceiling boxes come with combination Hex/Phillips washer head screws. They are designed to save labor and speed installation in steel stud construction. These innovative boxes are an alternative to bracket boxes, and can also be used on wood studs. The specially designed drill point on the screw rapidly penetrates medium gauge steel studs to securely fasten the box. Locator ribs 0.450" long help align the box on the stud and insure correct mounting depth.



Features

- Available in single, single deep, two, three and four gang, and 4" round ceiling boxes.
- All multi-gang and ceiling boxes include exclusive Auto/Clamp® feature.
- Single gang include Quick/Entry® feature.
- Specially designed drill point rapidly penetrates medium gauge steel studs.
- Screws have combination Hex/Phillips washer heads.
- Quick/Click® feature on wall boxes offers fast and dependable installation of devices.
- Can be used for steel, aluminum, or wood studs.
- Molded of high-impact thermoplastic.
- Locator ribs ensure proper alignment on stud and proper offset depth.

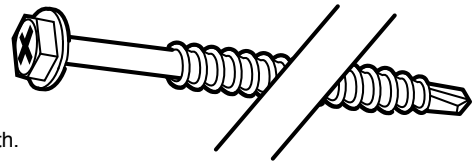


Slater® Plastic Boxes
Applications & Product Features

legrand®
Pass & Seymour

Old Work Boxes

Application

Old Work Boxes provide fast, easy installation of an electrical device in a finished (dry walled) area where no box existed before. Old Work Boxes include the Auto/Clamp® and Quick/Click® features for convenient, labor-saving installations.



Features


- Box designed so mounting strap of the device, **with plaster ears removed**, fits flush, allowing use of standard depth wall plate without unsightly gap between plate and wall surface.
- Swing out wing brackets permit installation of box in wall with 1-1/4" thick wallboard down to 1/8" thick paneling.
- New longer swing brackets have greater reach to clamp onto oversized cutouts.
- Made of high impact thermoplastic.
- Combination slotted/Phillips head swing bracket screws.
- Include exclusive Auto/Clamp® feature.
- Wall boxes include exclusive Quick/Click® feature.
- Available in ceiling box versions.

Box Volume Required


Total Conductor Fill Count	Cubic Inches Required For		
	#14 Wire	#12 Wire	#10 Wire
1	2.0	2.25	2.50
2	4.0	4.50	5.00
3	6.0	6.75	7.50
4	8.0	9.00	10.00
5	10.0	11.25	12.50
6	12.0	13.50	15.00
7	14.0	15.75	17.50
8	16.0	18.00	20.00
9	18.0	20.25	22.50
10	20.0	22.50	25.00
11	22.0	24.75	27.50
12	24.0	27.00	30.00
13	26.0	29.25	32.50
14	28.0	31.50	35.00
15	30.0	33.75	37.50
16	32.0	36.00	40.00
17	34.0	38.25	42.50
18	36.0	40.50	45.00
19	38.0	42.75	47.50
20	40.0	45.00	50.00

In addition to counting 1 conductor fill allowance for each conductor, 1 additional allowance must be counted for all cable clamps, and 1 additional allowance for all ground conductors. 2 additional fill allowances must be counted for each device strap. See NEC Section 314.16(b). The table above defines box volume required for resulting total conductor fill count, depending on AWG used.

Standard Mounting Dimensions for Boxes

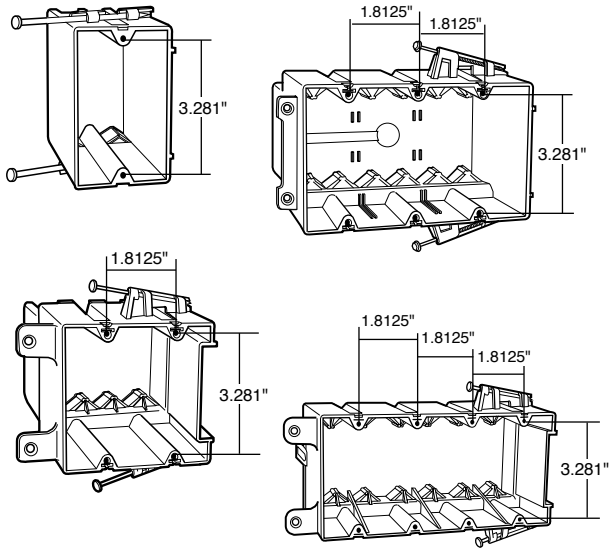

Standard Mounting Dimensions Round

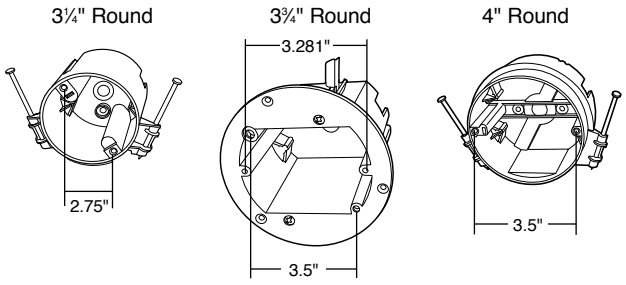




REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

legrand®

Pass & Seymour

Reiker Ceiling Fan & Fixture Support Products

legrand®
Pass & Seymour

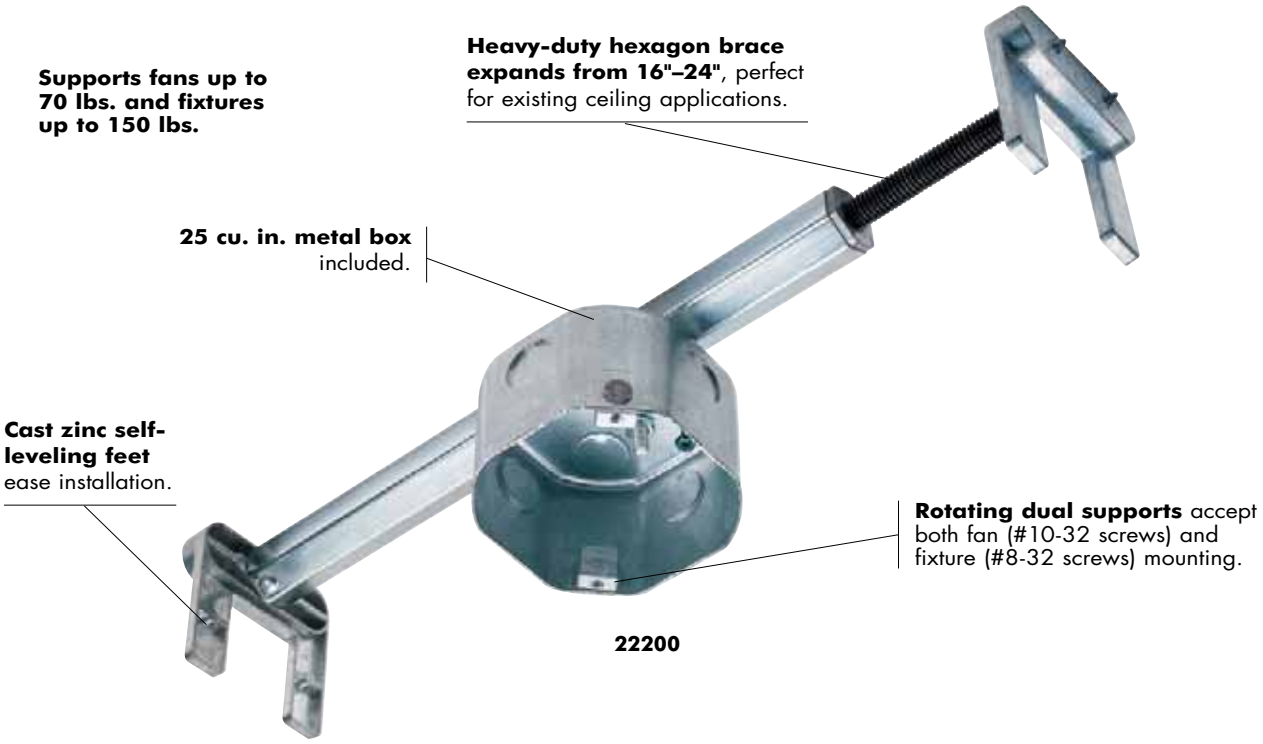

22200

Index

Device	Page Number
Retrofit Braces	O-2
New Construction Slides	O-3
Side, Direct & Shallow Boxes	O-4
Specialty Boxes & Concrete Fan Support Boxes	O-5
Specifications	O-6, O-7


legrand®
Pass & Seymour

Reiker Ceiling Fan & Fixture Support Products
Retrofit Braces

Features

- For spans from 16 to 24 inches.
- UL listed for fan and fixture support.
- Self-leveling feet.
- Maximum weight rating shown for 16" spans.
- Ground screw pre-installed.
- Boxes include top knockouts.

Catalog Number	Description	Volume Cu. In.	Box Depth	Quantity Per Carton	UL Listed Max. Weight Rating at 16" Span	
					Fan	Fixture
Retrofit Braces						
22200	Fan Brace – premium grade with deep box, rotating dual support for 16-24" spans	25 cu. in.	2.5"	12	70 lbs.	150 lbs.
33310	Fan Brace – standard grade with standard box, single #10 support for 16-24" spans	16 cu. in.	1.5"	12	70 lbs.	150 lbs.
33300	Fan Brace Only – use with standard octagon electrical box (33303), single #10 support for 16-24" spans	N/A	N/A	12	70 lbs.	150 lbs.
83300	Fan Brace — premium grade with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	12	70 lbs.	150 lbs.

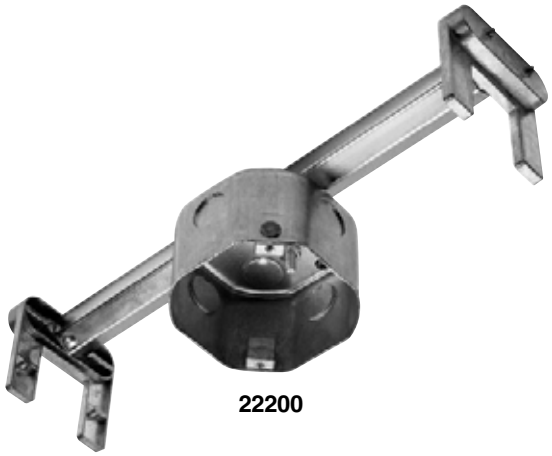


22200



33310



33300

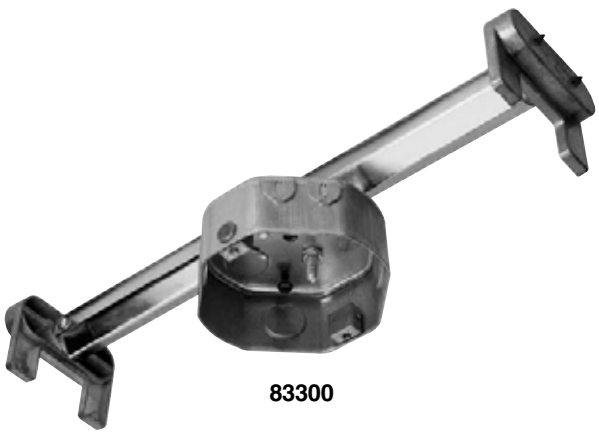

83300

All devices listed on this page conform to NEMA OS1.

Reiker Ceiling Fan & Fixture Support Products
New Construction Slides


legrand®
Pass & Seymour

Features

- For spans from 16 to 24 inches.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Maximum weight rating shown for 16" spans.
- Broadest line available, from shallow to deep boxes.
- Pre-assembled with ground screw installed.
- Boxes include top knockouts.

Catalog Number	Description	Volume Cu. In.	Box Depth	Quantity Per Carton	UL Listed Max. Weight Rating at 16" Span	
					Fan	Fixture
New Construction						
55501*	Slide Fan Support – heavy-duty slide with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	24	70 lbs.	110 lbs.
65521	Slide Fan Support – same heavy-duty slide as 55501, but with 2.0" deep box, to accommodate up to 1" firewall or soundproofed ceilings, with rotating dual support for 16-24" spans, bulk packed	21 cu. in.	2.0"	25	70 lbs.	110 lbs.
85502	Slide Fan Support – heavy-duty slide with deep box, rotating dual support for 16-24" spans	21 cu. in.	2.0"	24	70 lbs.	110 lbs.
77702	Slide Fan Support – heavy-duty slide with shallow box, rotating dual support for 16-24" spans	8 cu. in.	5/8"	24	70 lbs.	110 lbs.


*Available in 12 Pack. Use Catalog Number 5550112.

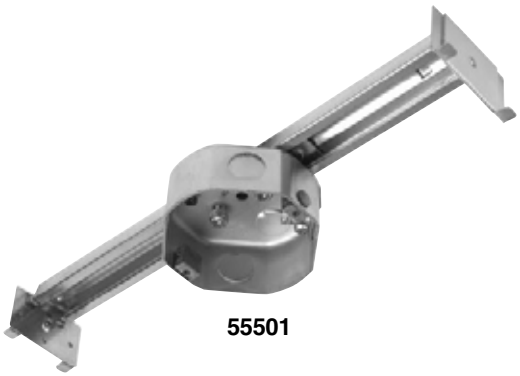


55501



65521

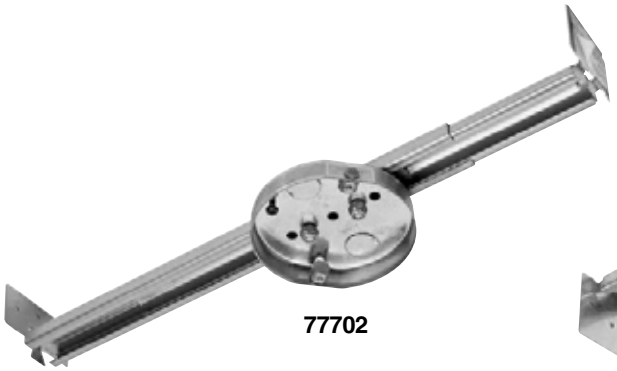

77702

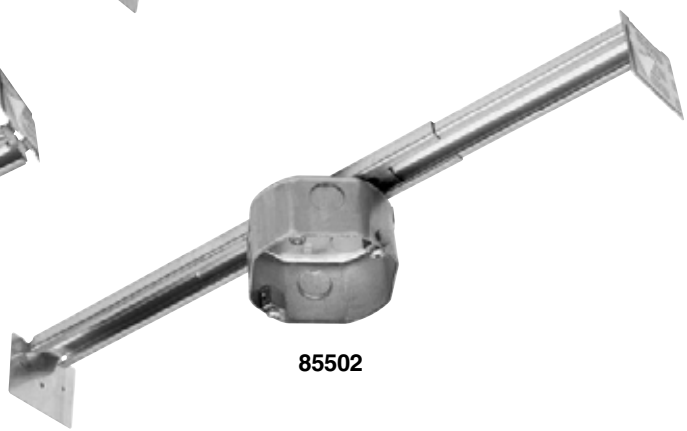


85502

All devices listed on this page conform to NEMA OS1.

legrand®
Pass & Seymour

Reiker Ceiling Fan & Fixture Support Products
Side, Direct & Shallow Boxes



55025



55505



77705

Features

- Direct mount to joist.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Broadest line available, from shallow to deep boxes.
- Ground screw pre-installed.
- Supplied with hardware.
- Boxes include top knockouts.

Catalog Number	Description	Volume Cu. In.	Box Depth	Quantity Per Carton	UL Listed Max. Weight Rating at 16" Span	
					Fan	Fixture
Side Mount Boxes						
55015	Side Mount Box – with rotating dual support	16 cu. in.	1.5"	24	70 lbs.	150 lbs.
55020*	Side Mount Deep Box – with rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
55025	Side Mount Deep Box – same as 55020 with 5 top knockouts and rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
Direct Mount Boxes						
33303	Standard Electrical Box – for use with 33300 Brace	16 cu. in.	1.5"	36	N/A	N/A
44400	Direct Mount Deep Box — with rotating dual support	25 cu. in.	2.5"	24	70 lbs.	150 lbs.
55505*	Direct Mount Box – with rotating dual support	16 cu. in.	1.5"	48	70 lbs.	150 lbs.
55528	Direct Mount Deep Box – with rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
Shallow Boxes						
77700*	Direct Mount Shallow Box — with rotating dual support	8 cu. in.	5/8"	24	70 lbs.	150 lbs.
77705	Direct Mount Shallow Box — with rotating dual support	6.5 cu. in.	1/2"	24	70 lbs.	150 lbs.

*Available in 12 Packs. Use Catalog Numbers 55020012, 55505012 and 77700012.

All devices listed on this page conform to NEMA OS1.

Reiker Ceiling Fan & Fixture Support Products

Specialty Boxes, Concrete Fan Support Box & Contractor Packs

legrand®
Pass & Seymour

Features

- Direct mount to joist.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Maximum weight ratings (slides and braces) shown for 16" spans.
- Broadest line available, from shallow to deep boxes.
- Ground screw pre-installed.
- Supplied with hardware.
- Boxes include top knockouts.



77706



15010



15040

Catalog Number	Description	Volume Cu. In.	Box Depth	Quantity Per Carton	UL Listed Max. Weight Rating at 16" Span	
					Fan	Fixture
Specialty Boxes						
77706	Shallow Box – with wings for thick/ firewall ceilings, rotating dual support	8 cu. in.	5/8"	24	70 lbs.	150 lbs.
15010*	Drop Ceiling Support – single #10 support for 24-36" spans, 38" drop	16 cu. in.	1.5"	6	70 lbs.	150 lbs.
Concrete Fan Support Box						
15040	Concrete Box – single #10 support	47.5 cu. in.	4.0"	12	35 lbs.	50 lbs.


*UL Listed Fan/Fixture at 24" Span.

Catalog Number	Description	Volume Cu. In.	Box Depth	Quantity Per Carton	Base Item	UL Listed Max. Weight Rating at 16" Span	
						Fan	Fixture
Bulk – Contractor Pack							
65501	Slide Fan Support – heavy-duty slide with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	25	55501	70 lbs.	110 lbs.
77708	Slide Fan Support – heavy-duty slide with shallow box, rotating dual support for 16-24" spans	8 cu. in.	5/8"	24	77702	70 lbs.	110 lbs.
55500	Direct Mount Box – with rotating dual support	16 cu. in.	1.5"	24	55505	70 lbs.	150 lbs.
65505	Direct Mount Box – with rotating dual support	16 cu. in.	1.5"	50	55505	70 lbs.	150 lbs.
67705	Direct Mount Shallow Box – with rotating dual support	6.5 cu. in.	1/2"	50	77705	70 lbs.	150 lbs.


All devices listed on this page conform to NEMA OS1.

legrand®
Pass & Seymour


Reiker Ceiling Fan & Fixture Support Products
Specifications




A



B



C



D

Retrofit Braces

Materials of Construction	
Hex Tube	16 Gauge Extruded Steel with Chrome Plating
Square Tube	16 Gauge Extruded Steel with Chrome Plating
Die Cast Feet	Die Cast Zinc
Plastic Feet	Injection Molded Plastic

Compliances
Compliant with UL514A
Compliant with NEC Section 422.18 and Section 314.27
Extension rating from 16 to 24 inches
Compliant with NEMA Standard OS1

Catalog Number	Description	Box Included			Weight Rating (lbs.)			
					16" Spans		>16-24" Spans	
		Type	Depth	Cu. In.	Fan	Fixture	Fan	Fixture
22200	Premium Brace with deep box	B	2.5	25	70	150	35	50
33300	Premium Brace only		None		70	150	35	50
33310	Standard Brace with standard box	A	1.5	16	70	150	35	50
83300	Premium Brace with standard box	A	1.5	16	70	150	35	50

New Construction Slides

Materials of Construction	
Slide Parts	16 Gauge Stamped Steel
Inner Slide	14 Gauge Stamped Steel

Compliances
Compliant with UL514A
Compliant with NEC Section 422.18 and Section 314.27
Extension rating from 16 to 24 inches
Compliant with NEMA Standard OS1


Catalog Number	Description	Box Included			Weight Rating (lbs.)			
					16" Spans		>16-24" Spans	
		Type	Depth	Cu. In.	Fan	Fixture	Fan	Fixture
55501	Heavy-Duty Slide w/standard box	A	1.5	16	70	110	35	50
65501	Heavy-Duty Slide w/standard box	A	1.5	16	70	110	35	50
65521	Heavy-Duty Slide w/deep box	D	2.0	21	70	110	35	50
77702	Heavy-Duty Slide with shallow box	C	0.625	8	70	110	35	50
77708	Heavy-Duty Slide with shallow box	C	0.625	8	70	110	35	50
85502	Heavy-Duty Slide with deep box	D	2.0	21	70	110	35	50

legrand®
Pass & Seymour


Side, Direct, Shallow & Specialty Boxes

Materials of Construction	
Box Steel	16 Gauge Stamped Steel

Compliances
Compliant with UL514A
Compliant with NEC Sections 422.18 and 314.27
Compliant with NEMA Standard OS1



Single #10 Support



Rotating Dual Support

Catalog Number	Description	Box Capacity	Weight Rating
33303	Electrical Box Only	16 cu. in.	N/A
44400	Direct Mount with Rotating Dual Support	25 cu. in.	Up to 70# Fan/150# Fixture
55015	Side Mount with Rotating Dual Support	16 cu. in.	Up to 70# Fan/150# Fixture
55020 **55025**	Side Mount with Rotating Dual Support	21 cu. in.	Up to 70# Fan/150# Fixture
55505	Direct Mount with Rotating Dual Support	16 cu. in.	Up to 70# Fan/150# Fixture
55528	Direct Mount with Rotating Dual Support	21 cu. in.	Up to 70# Fan/150# Fixture
77700	Direct Mount Shallow Box with Rotating Dual Support	8 cu. in.	Up to 70# Fan/150# Fixture
77705	Direct Mount Shallow Box with Rotating Dual Support	6.5 cu. in.	Up to 70# Fan/150# Fixture
77706	Direct Mount with U-Bracket for Firewalls with Rotating Dual Support	8 cu. in.	Up to 70# Fan/150# Fixture

Catalog Number	Wire Clamp Type
15010	Metal
15040	Plastic
22200	Plastic
33303	Metal
33310	Plastic
44400	Plastic
55015	Metal
55020	Plastic
55025	Plastic
55501	Metal
55505	Metal
55528	Plastic
65501	Metal
65521	Metal
77700	Plastic
77702	Plastic
77705	Plastic
77706	Plastic
83300	Plastic



WEATHERPROOF BOXES & COVERS

legrand®

Pass & Seymour

Weatherproof Boxes & Covers

legrand®
Pass & Seymour

Two sizes: 1.96" and 2.32" diameters to cover 15A/20A Straight Blade and 15A/20A/30A Turnlok® devices. Covers fit all competitive flanged inlets and outlets.

Tamper-proof hinge features permanent, locked-in pins for added security.

Unbreakable glass-filled polycarbonate construction withstands years of job site abuse and harsh environmental exposure. Stainless steel mounting screws resist corrosion.



Stainless steel mounting screws resist corrosion.

WPG1 and WPG2

Molded-in label area for pre-printed or handwritten labels identifying circuits, ratings, and other data.

Pre-attached gaskets for easy installation and tight seal to panel or weatherproof box — with no misaligned or collapsed gaskets.

Lockable "bullnose" for OSHA Lockout/Tagout compliance.

We offer a complete line of durable, easy-to-install, and environment-resistant weatherproof products — for first-rate performance in worst-case applications.

Index

Device	Page Number
While-In-Use Covers	2, P-3
Flush Mount While-In-Use Covers	P-4
Cast While-In-Use Covers	P-5
Cast Weatherproof Covers	P-6 – P-8
Thermoplastic Covers	P-9 – P-12
Heavy Cast Aluminum Covers	P-12, P-13
Weatherproof Stainless Steel Covers	P-14
Single Gang Boxes	P-16
Weatherproof Locking Inlet Kit for Generator Applications	P-16
Two Gang Boxes	P-17
Three Gang Boxes & Deep Boxes	P-18
Round Boxes & Weatherproof Kits	P-19
Cluster & Blank Covers	P-20
Lighting Accessories & Swimming Pool Junction Box	P-21
Vapor Proof Lighting	P-22
Gaskets & Accessories	P-23
NEC Compliance	P-24, P-25

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
While-In-Use Covers

The NEC Section 406.8(B)(1) requires that all 15 and 20 Amp, 125 and 250 Volt outdoor receptacles in wet locations have a cover that is weatherproof — even when a plug is inserted into the receptacle.


Paintable, textured finish hides scratches.

Exclusive cord flap gasket inhibits water splash from driving rain or sprinklers.

Patented trigger latch opens easily with one finger, yet is lockable to prevent tampering.

Sturdy polycarbonate construction resists impacts and harsh weather.

Patented corner hinge and cord opening allow vertical or horizontal installation.

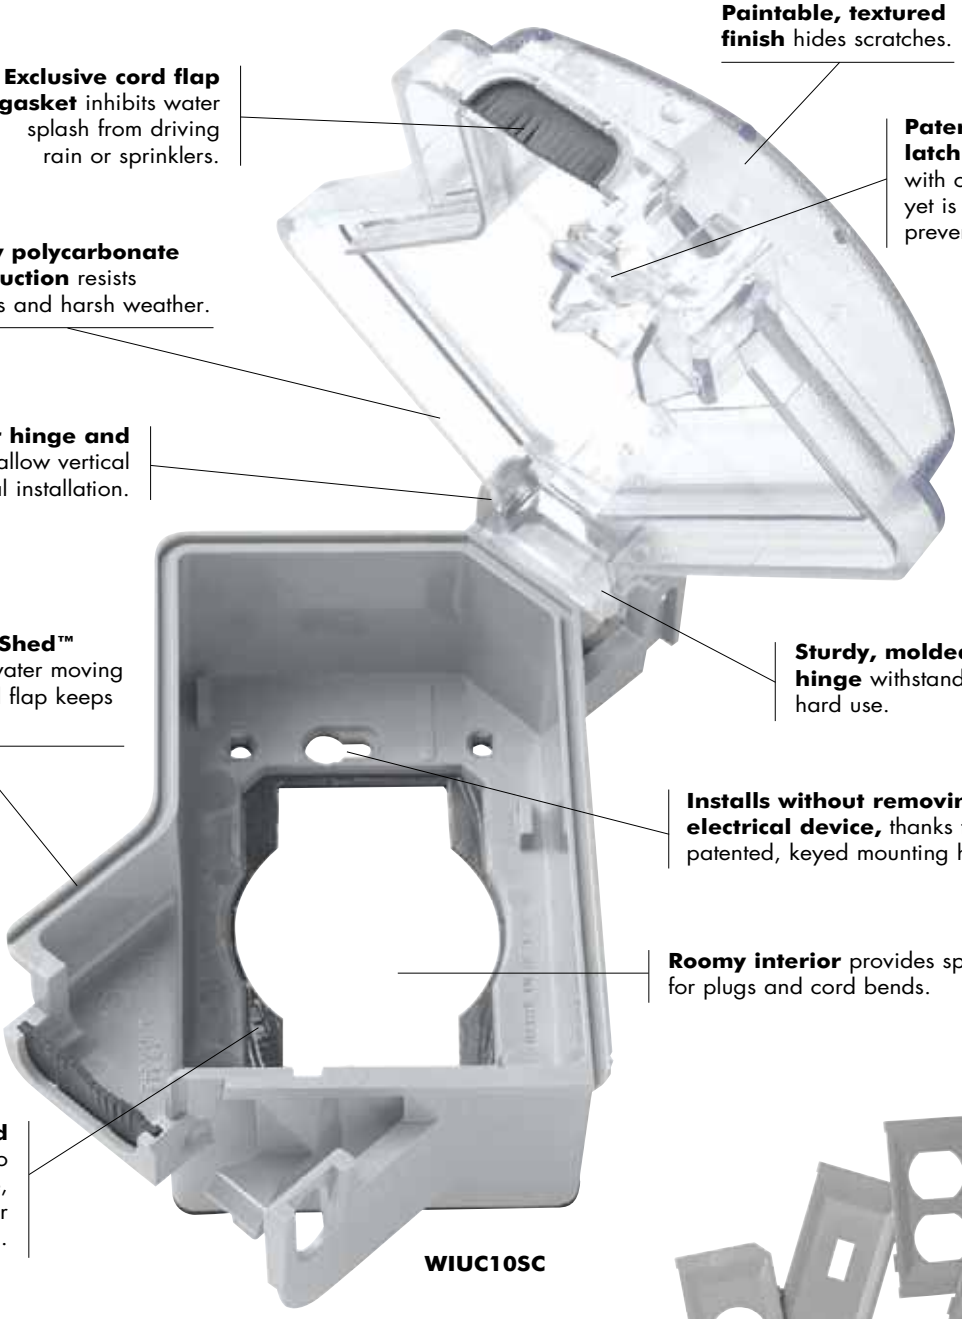

Exclusive WaterShed™ Channel keeps water moving outside while cord flap keeps the inside dry.

Sturdy, molded-in hinge withstands hard use.

Installs without removing electrical device, thanks to patented, keyed mounting holes.

Roomy interior provides space for plugs and cord bends.

Preapplied gasket easier to install, saves time, won't get lost or damaged.

WIUC10SC

Shallow profile models have 1" shorter top lid than prior models.







Snap-in device plates require no tools to install and won't fall out. See chart for plates provided with each catalog number.


legrand®
Pass & Seymour


Features

- Comply with NEC Section 406.8(B)(1) for wet location covers, and conform to NEMA 3R.
- Covers are self-closing as required by UL514C42.3.
- Covers mount vertically or horizontally.
- Body, cover, and plates made of polycarbonate.
- Gasket made of closed cell foam, neoprene blend regular density, UL Rated HBF.
- Mounting screws made of 302 stainless steel.
- Single receptacle plate available in 1.405" and 1.595" openings.
- Deep model available for 20A locking plugs.
- Shallow covers accommodate up to 14/3 AWG extension cords.
- New trigger latch opens easily with one finger.


Catalog Number	Bottom Color	Top Color	Device Plates Provided	Plate Width	Package Quantity	3rd Party Compliance
Single Gang						
WIUC10GL **WIUC10CL** **WIUC10WL**	Gray Clear White	Gray Clear White		2⅜"	12	•
Single Gang Shallow						
WIUC10SG **WIUC10SC** **WIUC10SW** **WIUC10SB**	Gray Gray White White	Gray Clear White Clear		2⅜"	14	•
Single Gang Deep						
WIUC10DGL **WIUC10DCL** **WIUC10DWL**	Gray Gray White	Gray Clear White		2⅜"	9	•
Two Gang						
WIUC20GL **WIUC20CL** **WIUC20WL**	Gray Gray White	Gray Clear White		2"	8	•
Extra Plate Kits						
WIU10PK **WIU10PKW**	Gray White		Single Gang Plate Kit 	2⅜"		•
WIU20PK **WIU20PKW**	Gray White		Two Gang Plate Kit 	2"		•

TWO GANG COVER







SINGLE GANG COVERS




SINGLE GANG



SINGLE GANG SHALLOW




SINGLE GANG DEEP




legrand®
Pass & Seymour

Weatherproof Boxes & Covers
Flush Mount While-In-Use Covers



WIUFC10S



WIUFC10W

Features

- One-piece box and cover design provides fast, easy installation.
- Box serves as a template for a rectangular wall cut-out.
- 28 cubic-inch box provides ample space for GFCIs; makes wiring easy.
- Accepts standard TP wall plates and devices for virtually any application.
- One catalog style installs easily in most exterior wall types.
- Mounting flange features large open areas, cross-hatching, and tapered edges to enhance stucco adherence and mounting.
- Corner hinge for either vertical or horizontal mounting without field modifications.
- Easy-opening, one-finger latch.
- Factory installed cord-opening gasket to keep water and insects out.
- Auto clamps and standard knock-outs simplify installation.
- No caulking or gasket assembly required.
- Replaceable cover and frame assembly does not require disruption of siding materials.

Catalog Number	Description	Color
Single Gang		
WIUFC10S	While-in-use cover and box assembly	Smoke
WIUFC10SQC	While-in-use cover and box assembly with Quick/Click®	Smoke
WIUFC10W	While-in-use cover and box assembly	White
WIUFC10WQC	While-in-use cover and box assembly with Quick/Click®	White

For description of Quick/Click® feature, see Page N-19.

Weatherproof Boxes & Covers
Cast While-In-Use Covers

legrand®
Pass & Seymour

Meets NEC Section 406.8(B)(1) suitable for wet locations.

Self-closing lids as required by UL514C42.3.

All components baked-on electrostatic, polyester, powder paint coated prior to assembly for superior corrosion resistance.

Heavy-duty die-cast zinc.

Exclusive cord flap gasket inhibits water splash from driving rain or sprinklers.



WIUCAST1

Patented trigger latch opens easily with one finger, yet is lockable to prevent tampering.

Stainless steel springs resist corrosion.


Patented corner hinge and cord opening allow vertical or horizontal installation.

Preapplied gasket easier to install, saves time, won't get lost or damaged.

Accepts a standard sized padlock.

Stainless steel screws, and three metal mounting plates are supplied.







WIUCAST1


Catalog Number	Color	Device Plates Provided	Package Quantity	3rd Party Compliance
Single Gang				
NEW **WIUCAST1**	Gray		12	•

legrand®
Pass & Seymour


Weatherproof Boxes & Covers
Cast Weatherproof Covers

Universal Cast Weatherproof Covers can serve six applications with a combination of inserts and one gang horizontal or vertical mounting.












CA1U2681G
Horizontal




CA1U2681G
Vertical



CA2U2681G





Horizontal
2 Self-Closing Lids





Vertical
1 Self-Closing Lid

Features

- Featuring one and two gang universal covers.
- Broad line of one gang covers for receptacles and power outlets.
- Heavy-duty die-cast zinc. Stainless steel springs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).

Catalog Number	Description	Color	3rd Party Compliance
Universal Cast Weatherproof Covers			
CA1U2681G 	One Gang Cover with Metal Device Plates for #26, #8 and #1 Openings (One Each)	Gray	•
CA2U2681G 	Two Gang Cover with Metal Device Plates for #26, #8 and #1 Openings (Two Each)	Gray	•


Catalog Number	Description	Color	3rd Party Compliance
One Gang			
 **CA7GV**	Single Receptacle Vertical – 1 Self-Closing Lid	Gray	
 **CA8GH** **CA8WH**	Duplex Receptacle Horizontal – 2 Self-Closing Lids	Gray White	•
 **CA8GJ**	Oversized Duplex Receptacle Horizontal – 2 Self-Closing Lids Dimensions: H - 4.52", L - 4.58"	Gray	•
 **CA8GVFS** **CA8WV**	Duplex Receptacle Vertical – 1 Self-Closing Lid 5 Screw Mounting	Gray White	
 **CA721G**	Power Outlet – 1.625 Diameter Vertical – 1 Self-Closing Lid	Gray	•
 **CA723G**	Power Outlet – 2.125 Diameter Vertical – 1 Self-Closing Lid	Gray	
 **CA8WVFS**	Duplex Receptacle Vertical – 1 Self-Closing Lid 4 Screw Mounting	White	•

legrand®
Pass & Seymour


Features

- Broad line of single gang covers for switches and GFCIs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Heavy-duty die-cast zinc.
- Stainless steel springs.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).


Catalog Number	Description	Color	3rd Party Compliance
One Gang			
 **CA26GH** **CA26WH**	Decorator or GFCI Horizontal – 1 Self-Closing Lid	Gray White	•
 **CA26GV** **CA26WV**	Decorator or GFCI Vertical – 1 Self-Closing Lid	Gray White	•
 **CA1G**	Vertical – 1 Self-Closing Lid with Inserts Accommodates Toggle Switch + 1.750 Power Outlet	Gray	•
 **CA1GS**	Toggle with 15A 120VAC Single Pole Toggle Switch (Cat. # 660) Included Vertical – 1 Self-Closing Lid	Gray	•
 **CA1GL**	Toggle Switch Cover – with Actuating Lever – Mounts Directly Over Switch	Gray	•
Self-Closing Cover – Motor Base – Horizontal			
 **3778**	Single with 15A 125V Recessed Flanged Inlet.	Gray	•




Horizontal
1 Self-Closing Lid



Vertical
1 Self-Closing Lid




CA1GL




3778

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
Cast Weatherproof Covers



Two Gang Cover



Two Gang Cover
4 Screw Mounting

Features

- Broad line of two gang covers for switches, receptacles, GFCIs, and power outlets.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Heavy-duty die-cast zinc.
- Stainless steel springs.
- All covers have 2 self-closing lids.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).

Catalog Number	Description	Color	3rd Party Compliance
Two Gang			
CA82G **CA82W**	2 Duplex Receptacles	Gray White	•
CA72G	2 Single Receptacles	Gray	•
CA78G	1 Single/1 Duplex 4 Screw Mounting	Gray	•
CA726G	1 Single/1 Decorator 4 Screw Mounting	Gray	•
CA262G	2 Decorator 4 Screw Mounting	Gray	•
CA268G	1 Decorator/1 Duplex 4 Screw Mounting	Gray	•
CA17G	1 Toggle/1 Single 4 Screw Mounting	Gray	•
CA18G	1 Toggle/1 Duplex 4 Screw Mounting	Gray	•
CA126GRY	1 Toggle/1 Decorator 4 Screw Mounting	Gray	•
CA2G **CA2W**	2 Toggles 4 Screw Mounting	Gray White	•
CA2GS	2 Toggles with 2 15A 120VAC Single Pole Toggle Switches (Cat. # 660) Included 4 Screw Mounting	Gray	•


Weatherproof Boxes & Covers
Thermoplastic Covers

legrand®
Pass & Seymour


Features

- Broad line of single gang covers for switches, receptacles, GFCIs and power outlets.
- Clear polycarbonate lid with reinforced thermoplastic base.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).


Catalog Number	Description	Gasket Thickness	3rd Party Compliance
Self-Closing Covers – Clear Polycarbonate Lid Vertical Two Screw Mounting – Padlockable			
3710 **3710WH**	Duplex RV use Gray Base/Clear Cover White Base/White Cover	3/8"	• •
3720 **3720WH**	Single Receptacle 1.40" Diameter or Toggle Switch (Toggle Switch Insert Included), Gray Base/Clear Cover White Base/White Cover	3/8"	• •
3723 **3723WH**	Decorator RV use Gray Base/Clear Cover White Base/White Cover	3/8"	• •
Self-Closing Covers – Clear Polycarbonate Lid Vertical Four Screw Mounting – Padlockable			
3710FS	Duplex Receptacle Gray Base	3/32"	• •
3720FS	Single Receptacle 1.40" Diameter or Toggle Switch (Toggle Switch Insert Included), Gray Base	3/32"	• •
3723FS	Decorator or GFCI Gray Base	3/32"	• •
3722FS	Power Outlet, 1.60" Diameter Gray Base	3/32"	• •
3724FS	Power Outlet, 1.73" Diameter Gray Base	3/32"	• •
3795	Power Outlet, 2.13" Diameter Gray Base	3/8"	• •
Self-Closing Covers – Clear Polycarbonate Lid Horizontal Two Screw Mounting			
3700	Duplex Receptacle Gray Base	3/32"	• •
3703	Decorator Gray Base	3/32"	• •
3703T	Decorator RV Use Gray Base	3/8"	• •
3703TCW	Decorator RV Use Colonial White Base	3/8"	• •
Self-Closing Covers – Clear Polycarbonate Lid Horizontal Four Screw Mounting			
3700FS	Duplex Receptacle Gray Base	3/32"	• •
3703FS	Decorator Receptacle Gray Base	3/32"	• •




3720FS




3723FS



3710




3700



3703

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
Thermoplastic Covers



3780 Series

Features

- Broadest line in the industry.
- All covers are self-closing with two flip lids.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).

Catalog Number	Description	Gasket Thickness	3rd Party Compliance UL	3rd Party Compliance CSA
Outdoor Assemblies and Special Covers For Mobile Homes, Manufactured and Modular Housing, and RV Use – Horizontal Installation with Two Self-Closing Flip Lids				
3780SCFBX	3232 Duplex Receptacle, Gasket and Flanged Box, Gray with Black Gasket	1/8"	•	
3780SCFBXCW	3232 Duplex Receptacle, Gasket and Flanged Box, Colonial White with Black Gasket	1/8"	•	
3780SCFBXWH	3232 Duplex Receptacle, Gasket and Flanged Box, White with Black Gasket	1/8"	•	
3780SCMH	3232 Duplex Receptacle & Gasket, Gray with Black Gasket	3/8"	•	
3780SCMHCW	3232 Duplex Receptacle & Gasket, Colonial White with Black Gasket	3/8"	•	
3780SCMHBG	3232 Duplex Receptacle & Gasket, Beige with Black Gasket	3/8"	•	
3780SCMHWH	3232 Duplex Receptacle & Gasket, White with Black Gasket	3/8"	•	
3780SCLV	3/8" Round Openings for 2 Coaxial Connections, Gray with Black Gasket	1/8"	•	•
3780SCLVBG	3/8" Round Openings for 2 Coaxial Connections, Beige with Black Gasket	1/8"	•	•
3780SCLVCW	3/8" Round Openings for 2 Coaxial Connections, Colonial White with Black Gasket	1/8"	•	•
3780SCLVWH	3/8" Round Openings for 2 Coaxial Connections, White with Black Gasket	1/8"	•	•



FBOX1

Catalog Number	Description	Color	3rd Party Compliance UL	3rd Party Compliance CSA
Flanged Boxes for Horizontal or Vertical Installation				
FBOX1	Flanged Box – 18.5 Cubic Inch Minimum Opening Size 2.5" x 4.1" Depth 3.0"	Gray	•	
FBOX1WH	Flanged Box – 18.5 Cubic Inch Minimum Opening Size 2.5" x 4.1" Depth 3.0"	White	•	


Weatherproof Boxes & Covers
Thermoplastic Covers

legrand®
Pass & Seymour


Features

- Broadest line in the industry.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).
- 3780 series have two flip lids.
- 3726 series have a single flip lid.

Catalog Number	Description	Gasket Thickness	3rd Party Compliance	
			UL	CSA
Horizontal Self-Closing Flip Lids				
3780SC	Duplex, Gray with Black Gasket	1/8"	•	•
3780SCCW	Duplex, Colonial White with Black Gasket	1/8"	•	•
3780SCWH	Duplex, White with Black Gasket	1/8"	•	•
3780SCBG	Duplex, Beige with Black Gasket	1/8"	•	•
3780SCCWT	Duplex, Colonial White with Black Gasket	3/8"	•	•
3726SC	Decorator or GFCI, Gray with Black Gasket	3/32"	•	•
3726SCBG	Decorator or GFCI, Beige with Black Gasket	3/32"	•	•
3726SCCW	Decorator or GFCI, Colonial White with Black Gasket	3/32"	•	•
3726SCWH	Decorator or GFCI, White with Black Gasket	3/32"	•	•
Horizontal Single Cover Self-Closing Flip-Lid				
3770SC	Single Receptacle 1.405" Diameter, Gray	3/32"	•	•
Vertical Single Cover Three Position Flip-Lid (Closed, Opened 90° or Opened 180°)				
3760	Single Receptacle 1.563" Diameter, Gray	3/32"	•	•
3763	Cover with 5251-I Single Receptacle, 15A-125V, Gray	3/32"	•	
Horizontal Reinforced Thermoplastic Two Position Flip-Lids, (Closed or Opened 90°)				
3780	Duplex, Gray with Black Gasket, 2 Flip Lids	1/8"	•	•



3780 Series




3726 Series




3760

legrand®
Pass & Seymour


Weatherproof Boxes & Covers
Thermoplastic/ Heavy Cast Aluminum Covers
Specification Grade



WPG1



7770



4600

Note: All locks keyed the same.

Industrial Grade Weatherproof Covers

Features

- Unbreakable glass-filled polycarbonate construction to withstand years of job site abuse and harsh environmental exposure. Stainless steel mounting screws also resist corrosion.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).
- Molded-in label area (2.8 sq. in.) for pre-printed or handwritten labels for identification of circuits, ratings, and other application data.
- WPG1 and WPG2 have lockable "bullnose" for OSHA locktag/tagout compliance.
- Covers fit all competitive inlets and outlets.
- Pre-attached gaskets for easy installation and tight seal to panel or weatherproof box – with no misaligned or collapsed gaskets.
- Tamper-proof hinge features permanent, locked-in pins for added security.

Catalog Number	Description	Color	3rd Party Compliance	
			UL	CSA
Thermoplastic Weatherproof Covers for Flanged Inlet/Outlet				
WPG1	1.96" Diameter Opening to Accommodate 15/20A Straight Blade, 15A Turnlok, 20403 Power Interrupter	Gray	•	•
WPG2	2.32" Diameter Opening to Accommodate 20A Turnlok, 30A Turnlok	Gray	•	•
Thermoplastic Weatherproof Cover for Single Receptacles				
7770	2.38" Diameter Opening to Accommodate 50A Turnlok (non-lockout)	Yellow	•	

Heavy Cast Aluminum Covers – Flush Enclosures

Features

- Adapter, frame, and cover are heavy cast aluminum.
- No. 8-32 screws hold assembly firmly in place.
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).
- Mortar keys provide positive holding means within wall.
- Neoprene gasket seals cover to frame. Moisture and dust cannot enter enclosure.
- Two keys provided for lock.
- Purchase enclosure and mounting plate separately
- Mounts on 4" or 4-11/16" box.

	Catalog Number	Description	Color	3rd Party Compliance	
				UL	CSA
Mortared-in Applications					
	**4600**	Enclosure Only, without Mounting Plate	Gray	•	•
	**46001P**	Mounting Plate for Toggle Switch	Gray	•	•
	**46007P**	Mounting Plate for Single Receptacle Diameter: 2.156"	Gray	•	•
	**46008P**	Mounting Plate for Duplex Receptacle	Gray	•	•
	**460026P**	Mounting Plate for Decorator/GFCI	Gray	•	•
	**4609**	Replacement Key for Enclosure		•	•

legrand®
Pass & Seymour


Features

- Extremely durable for hard-use institutional applications.
- Spring-loaded covers close automatically when plugs are removed.
- Die-cast copper-free aluminum construction.
- Stainless steel springs.
- Screws and spring covers are chrome-plated brass.
- Baked-on lacquer finish.
- Heavy rubber gaskets provide positive seal.
- All covers below are for 4 screw mounting only.
- Comply with NEC Section 406.8(A) and 406.8(B)(2).


Catalog Number	Description	Color	3rd Party Compliance
Heavy Cast Aluminum Covers – One Gang			
4510	Duplex Receptacle, 2 Doors Horizontal	Gray	• •
4511	Decorator/GFCI Horizontal	Gray	• •
4512	Decorator/GFCI Vertical	Gray	• •
7420	1 Gang Power Outlet 1.593" max. Diameter Vertical	Gray	• •
3393	1 Gang Power Outlet 1.750" max. Diameter Vertical	Gray	• •



4512
7420
3393



4510




4511

Features

- Heavy-duty die cast aluminum covers and plate.
- 3/32" gasket included.
- Stainless steel mounting screws.


Catalog Number	Description	Color	3rd Party Compliance
Multigang Covers – Outdoor			
3796	2 Gang Power Outlet (2.156" Diameter Opening)	Gray	• •
3797	2 Gang Power Outlet (2.656" Diameter Opening)	Gray	• •



3796
3797

legrand®
Pass & Seymour


Weatherproof Boxes & Covers
Weatherproof Stainless Steel Covers
Specification Grade



WP13

Features
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).
- Plate is Type 302 Stainless Steel for corrosion resistance.
- Ideal for hard-use and corrosive applications.
- Aesthetically pleasing.

Catalog Number	Description	3rd Party Compliance UL	3rd Party Compliance CSA
Stainless Steel Covers			
WP13	1 Gang Blank (Box Mounted) Gasketed	•	•
WP13FS	For 4 Screw Mounting	•	•
WP23	2 Gang Blank (Box Mounted) Gasketed	•	•




4515


Features
- Covers comply with NEC Section 406.8(A) and 406.8(B)(2).
- Plate is Type 302 Stainless Steel for corrosion resistance.
- Transparent silicone rubber mat seals plate and opening from contamination.
- Switch easily actuated through flexible silicone bubble.
- Silicone mat maintains pliability from -100° F to +250° F.
- Mat is resistant to grease, water, steam, detergents, aging, and ozone.

Catalog Number	Mat Catalog Number	Description	3rd Party Compliance UL	3rd Party Compliance CSA
Stainless Steel Covers				
4515	**4515GAS**	Round mat, mounts to Standard Switch Box	•	•
4515FS	**4515FSGAS**	Round mat, 4 Screw Box mounting	•	•
4516	**4516GAS***	Rectangular mat, mounts to Standard Switch Box (includes #348 strap for Despard switches)	•	•
4517		Rectangular mat, 4 Screw Box mounting	•	•


*For use with both 4516 and 4517.



4515FS



4516



4517

For Dustproof Stainless Steel Covers, see Page Q-28.

Cast Weatherproof Boxes & Covers

legrand®
Pass & Seymour

Product assembled after painting for complete corrosion resistance.

Stainless steel springs.

Baked-on electrostatic, polyester, powder paint, for superior scratch- and corrosion-resistant finish.

Covers available in 1 & 2 gang in a variety of configurations.



CA8GH

No rough edges.

Heavy die-cast aluminum.



Available in gray, white and bronze.

Available in standard and deep configurations.

WPB23


UL Listed, for wet and/or damp locations with appropriate cover.

Available in 1/2" and 3/4" hub sizes, from 3 to 6 hole configurations.

Boxes available in 1, 2 & 3 gang.

legrand®
Pass & Seymour








Weatherproof Boxes & Covers
Weatherproof Boxes



Single Gang Box

Features

- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard 4 screw mounting covers and single gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.


Catalog Number	Description	Color	3rd Party Compliance	
			UL	CSA
Single Gang Boxes				
 **WPB23** **WPB23W**	3 Hole 1/2", 18.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray White	•	•
 **WPB33** **WPB33W**	3 Hole 3/4", 18.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray White	•	•
 **WPB24** **WPB24W**	4 Hole 1/2", 18.0 Cu. In. (2 Holes One End, 1 Hole Other End,	Gray White	•	•
 **WPB34** **WPB34W**	4 Hole 3/4", 18.0 Cu. In. (2 Holes One End, 1 Hole Other End,	Gray White	•	•
 **WPB25** **WPB25W**	5 Hole 1/2", 17.0 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray White	•	•
 **WPB35**	5 Hole 3/4", 17.0 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
 **WPB26** **WPB26W**	5 Hole 1/2", 17.0 Cu. In. (1 Hole Each End, 1 Hole Each Side,	Gray White	•	•
 **WPB36**	5 Hole 3/4", 16.8 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•

Catalog Number	Description
Weatherproof Locking Inlet Kit for Generator Applications	
L1430FIKIT	Kit includes 30A Locking Gray Flanged Inlet L1430FI, Weatherproof Cover WPG2, and Weatherproof Box WPB33 with 3/4" knockout holes.

legrand®
Pass & Seymour

Features

- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard two gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.




Two Gang Box

Catalog Number	Description	Color	3rd Party Compliance	
			UL	CSA
Two Gang Boxes				
WPB232 **WPB232W**	2 Gang – 3 Hole 1/2", 30.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray White	•	•
WPB332	2 Gang – 3 Hole 3/4", 30.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray	•	•
WPB242	2 Gang – 4 Hole 1/2", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole in Back)	Gray	•	•
WPB342 **WPB342W**	2 Gang – 4 Hole 3/4", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End,	Gray White	•	•
WPB252	2 Gang – 5 Hole 1/2", 30.5 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB352	2 Gang – 5 Hole 3/4", 30.5 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB262	2 Gang – 5 Hole 1/2", 30.5 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB362	2 Gang – 5 Hole 3/4", 30.5 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB272	2 Gang – 6 Hole 1/2", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB276	2 Gang – 6 Hole 1/2", 30.5 Cu. In. (3 Holes One Side, 2 Holes Other Side, 1 Hole in Back)	Gray	•	•
WPB282	2 Gang – 7 Hole 1/2", 30.5 Cu. In. (2 Holes Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB382	2 Gang – 7 Hole 3/4", 30.5 Cu. In. (2 Holes Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB287	2 Gang – 7 Hole 1/2", 30.5 Cu. In. (3 Holes Each Side, 1 Hole in Back)	Gray	•	•
WPB387	2 Gang – 7 Hole 3/4", 30.5 Cu. In. (3 Holes in Each Side, 1 Hole in Back)	Gray	•	•

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
Weatherproof Boxes




Three Gang Box

Features

- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.

Catalog Number	Description	Color	3rd Party Compliance	
			UL	CSA
Three Gang Box				
 **WPB373**	3 Gang – 7 Hole 3/4", 59.8 Cu. In. (3 Holes Each Side, 1 Hole in Back)	Gray	•	•




1 Gang Deep Box

Features

- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 4 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard three-gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.

1 Gang Deep Boxes				
WPBD23 **WPBD23BR** **WPBD23W**	1 Gang Deep – 3 Hole 1/2", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray Bronze White	•	•
WPBD33	1 Gang Deep – 3 Hole 3/4", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPBD43	1 Gang Deep – 3 Hole 1", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray	•	•
2 Gang Deep Boxes				
WPBD252	2 Gang Deep – 5 Hole 1/2", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPBD352	2 Gang Deep – 5 Hole 3/4", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPBD452	2 Gang Deep – 5 Hole 1", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•



2 Gang Deep Box

Weatherproof Round Boxes & Weatherproof Kits

legrand®
Pass & Seymour

Features – 4" Round Die-Cast Aluminum Boxes

- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 4 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Heavy die-cast aluminum.

Catalog Number	Description	Color	3rd Party Compliance	
			UL	CSA
4" Round Die-Cast Aluminum Boxes				
 **WPRB25**	Round Cast Box – 5 Hole 1/2", 16.1 Cu. In., 4 Plugs Furnished	Gray	•	•
 **WPRB35** **WPRB35W**	Round Cast Box – 5 Hole 3/4" 16.1 Cu. In., 4 Plugs Furnished	Gray White	•	•



WPRB25

Features

- Easy-to-install, self-contained kits include everything needed for installation – gaskets, plugs, and hardware.
- Clam-shell packaging designed for hanging displays.



WPWIUKITC

Catalog Number	Color	Description	Components	3rd Party Compliance c UL us
Weatherproof Kits				
WPWIUKITC	Clear	Weatherproof While-in-Use Safety Outlet (GFCI) Kit includes GFCI, box, and While-In-Use cover	1595GRY, WPB23, WIUC10CL	•
WPWIUKITW	White		1595W, WPB23W, WIUC10WL	•
WPWIUKITSC	Clear	Weatherproof Shallow While-in-Use Safety Outlet (GFCI) Kit includes GFCI, box, and shallow While-In-Use cover	1595GRY, WPB23, WIUC10SC	•
WPWIUKITSW	White		1595W, WPB23W, WIUC10SW	•
WPGFIKIT	Gray	Weatherproof Safety Outlet (GFCI) Kit includes GFCI,	1595GRY, WPB23, CA26GH	•
WPGFIKITW	White		1595W, WPB23W, CA26WH	•
WPOUTKIT	Gray	Weatherproof Outlet Kit includes	3232I, WPB23, CA8GH	•
WPOUTKITW	White		3232W, WPB23W, CA8WH	•
WPFLDKIT	Gray	Weatherproof Dual Floodlight Kit includes box, cover, and	WPRB25, (2) PAR1, WPRB12	•
WPFLDKITW	White		WPRB25W, (2) PAR1W, WPRB12W	•



WPGFIKIT




WPOUTKIT




WPFLDKIT

legrand®
Pass & Seymour


Weatherproof Boxes & Covers
Cluster & Blank Covers



WPB11



WPRB1



WPRB13



WPB1

Features

- Wide range of rectangular and round covers.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Kits available combining fixtures, lamp covers, and accessories.

Catalog Number	Description	Color	3rd Party Compliance
Outdoor Lamp Cluster Covers for Single Gang Boxes			
WPB11 **WPB11W**	Rectangular Single Gang Cover 1 Hole 1/2"	Gray White	• •
WPB12 **WPB12W**	Rectangular Single Gang Cover 2 Hole 1/2", 1 Plug Furnished	Gray White	• •
WPB13 **WPB13W**	Rectangular Single Gang Cover 3 Hole 1/2", 2 Plugs Furnished	Gray White	• •
4" Round Outdoor Cluster Covers			
WPRB1 **WPRB1W**	Round Blank Cover with Gasket and Screws	Gray White	•
WPRB11 **WPRB11W**	Round Cover – 1 Hole 1/2" with Gasket and Screws	Gray White	• •
WPRB12 **WPRB12W**	Round Cover – 2 Hole 1/2" with Gasket and Screws 1 Plug Furnished	Gray White	• •
WPRB13 **WPRB13W**	Round Cover – 3 Hole 1/2" with Gasket and Screws 2 Plugs Furnished	Gray White	• •

Features

- Designed for both interior and exterior applications.
- Universal aluminum mounting plates.
- Gray, bronze and white models have baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.

Catalog Number	Description	Color	3rd Party Compliance
Blank Covers			
WPB1 **WPB1G** **WPB1W**	1 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum Gray White	• •
WPB2 **WPB2G** **WPB2W**	2 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum Gray White	• •
WPB3	3 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum	• •

Weatherproof Boxes & Covers
Lighting Accessories & Swimming Pool Junction Box

legrand®
Pass & Seymour

Features

- Medium base heat resistant.
- Fits 1/2" threaded outlet.
- Seal gasket included.
- Adjustable through 180°.
- Complete range of lamp covers in gray and white.
- Corrosion-resistant finish.



PAR1

Catalog Number	Description	Color	3rd Party Compliance
Die-Cast Outdoor Lampholder			
PAR1	Outdoor Lampholder	Gray	•
PAR1W	Outdoor Lampholder	White	•




WPLKIT2

Outdoor Lampholder Kits			
WPLKIT1	Kit includes (1) WPRB13 and (2) PAR1 Lampholders	Gray	•
WPLKIT2	Kit includes (1) WPRB13W and (2) PAR1W Lampholders	White	•
WPLKIT3	Kit includes (1) WPB13 and (2) PAR1 Lampholders	Gray	•
WPLKIT4	Kit includes (1) WPB13W and (2) PAR1W Lampholders	White	•



GARD3BK

Outdoor Garden Lamps & Accessories				
GARD3GR	3 Tier Garden Lamp	Green	•	•
GARD3BK	3 Tier Garden Lamp	Black	•	•

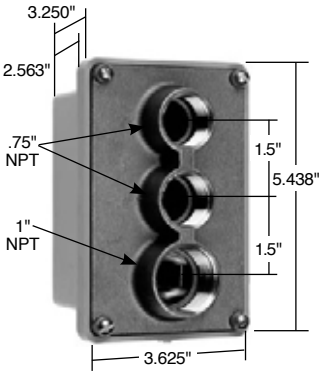

WPBJ22

Catalog Number	Description	Color	3rd Party Compliance	
Swimming Pool Junction Box				
WPBJ22	22 cu. in. Thermoplastic Base, Brass Cover. Meets NEC® Article 680. Two 3/4" Hubs, one 1" Hub. Four Ground Posts, Gasket, and Mounting Screws Included.	Gray	•	•

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
Vapor Proof Lighting



VPP100G
VPP200G



VPC100G
VPC200G

Features

- Cast metal guards for greater impact resistance.
- Easy-to-install with time saving features.
- Lights include round cast box, lampholder, glass globe, guard, and hardware.
- High-quality castings eliminate sharp edges.
- Dual rubber gaskets provide complete vapor proof seal.
- 4 plugs furnished with wall and ceiling mounts.

Catalog Number	Description	Color	3rd Party Compliance (UL)
100 Watt			
VPW100G	Wall Mount, 5 Hole 1/2"	Gray	•
VPP100G	Pendant Mount, 1/2" NPT Top Hub	Gray	•
VPC100G	Ceiling Mount, 5 Hole 1/2"	Gray	•
200 Watt			
VPW200G	Wall Mount, 5 Hole 1/2"	Gray	•
VPP200G	Pendant Mount, 1/2" NPT Top Hub	Gray	•
VPC200G	Ceiling Mount, 5 Hole 1/2"	Gray	•
Globes			
VPG100	Clear Globe – 100 Watt	Clear	
VPG200	Clear Globe – 200 Watt	Clear	
Cast Guard			
VG100	Cast Guard – 100 Watt	Gray	
VG200	Cast Guard – 200 Watt	Gray	



VPW100G
VPW200G




VPG100
VPG200



VG100
VG200

legrand®
Pass & Seymour

Catalog Number	Description	Color	3rd Party Compliance (UL)
Gaskets			
GASKET2	1/8" Thick, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	•
GASKET38 GASKET38W	3/8" Thick, Weatherproof, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black White	
GASKET3726	3/32" Thick, Weatherproof, 1 Gang, Decorator Multiuse Gasket, Closed Cell Polyethylene	Gray	•
GASKET3780	3/32" Thick, Weatherproof, 1 Gang, Duplex Multiuse Gasket, Closed Cell Polyethylene	Gray	•
WPGAS100	1/8" Thick, Weatherproof, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	
WPGAS101	1/8" Thick, Weatherproof, 2 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	
WPGASR101	1/8" Thick, Weatherproof, Round, Multiuse Gasket, Closed Cell Polyethylene	Black	

Catalog Number	Description	Color	3rd Party Compliance (cULus, CSA)
Accessories			
 WPEX1	1 Gang Extension Ring, 9.5 Cu. In. 2.75" x 4.5" x 1"	Gray	•
 WPEX2	2 Gang Extension Ring, 16.3 Cu. In. 4.5" x 4.5" x 1"	Gray	•
 WPEX3	Round Device Box Extension 4-1/2" Hubs	Gray	•
 WPEX4	1 Gang Extension Ring with 4-1/2" Hubs, 2-1/2" Plugs Supplied, 9.5 Cu. In.	Gray	•
 WPEX5	1 Gang Flanged Extension Ring with 4-1/2" Hubs, 2-1/2" Plugs Supplied, 9.5 Cu. In.	Gray	•
 WPEX6	1 Gang Extension Ring with 4-3/4" Hubs, 2-3/4" Plugs Supplied, 9.5 Cu. In.	Gray	•
 WPBP50 WPBP50CC WPBP50WCC	Closure Plug – 1/2"	Metallic, Qty. 100 Gray, Qty. 3 White, Qty. 3	• • •
 WPBP75 WPBP75CC WPBP75WCC	Closure Plug – 3/4"	Metallic, Qty. 100 Gray, Qty. 3 White, Qty. 3	• • •
 WPBP100CC	Closure Plug – 1"	Metallic, Qty. 100	•
 WPBL100	Aluminum Lugs (2) and Self-Tapping Screws	Gray	



GASKET38


GASKET3726


GASKET3780


WPGAS100


WPGAS101


WPGASR101


WPEX1


WPEX2


WPEX3

legrand®
Pass & Seymour

Weatherproof Boxes & Covers
NEC® Compliance

Choose the cover according to the location in which it is to be used.

Outdoor Wet Locations
NEC 406.8(B)(1)

Wet locations are defined as those subjected to saturation with water or other liquids, such as vehicle washing areas, unprotected locations exposed to weather, or in installations under ground or in concrete slabs or masonry in direct contact with the earth.

NEC Article 406.8(B)(1) requires that all 15 and 20 amp, 125 & 250 volt receptacles installed in wet locations must have an enclosure that is weatherproof, whether or not a plug is inserted. These receptacles must use a while-in-use cover, such as those shown below:

WIUC10GL	**WIUC10SC**	**WIUC10DCL**	**WIUC20WL**	**WIUFC10W**
WIUC10CL	**WIUC10SW**	**WIUC10DWL**	**WIUCAST1**	**WIUFC10WQC**
WIUC10WL	**WIUC10SB**	**WIUC20GL**	**WIUFC10S**	
WIUC10SG	**WIUC10DGL**	**WIUC20CL**	**WIUFC10SQC**	

Other Wet Locations
NEC 406.8(B)(2)

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

CA1G	**CA78G**	**WPOUTKITW**	**3723FS**	**3780SCMH**
CA1GL	**CA8GH**	**WPWIUKITC**	**3723WH**	**3780SCMHBG**
CA1GS	**CA8GJ**	**WPWIUKITSC**	**3724FS**	**3780SCMHCW**
CA126GRY	**CA8GVFS**	**WPWIUKITSW**	**3726SC**	**3780SCMHWH**
CA17G	**CA8WH**	**WPWIUKITW**	**3726SCBG**	**3780SCWH**
CA18G	**CA8WV**	**3393**	**3726SCCW**	**3795**
CA2G	**CA8WVFS**	**3700**	**3726SCWH**	**3796**
CA2GS	**CA82G**	**3700FS**	**3770SC**	**3797**
CA2W	**CA82W**	**3703**	**3778**	**4510**
CA26GH	**WP13**	**3703FS**	**3780SC**	**4511**
CA26GV	**WP13FS**	**3703T**	**3780SCBG**	**4512**
CA26WH	**WP23**	**3703TCW**	**3780SCCW**	**4515**
CA26WV	**WPBJ22**	**3710**	**3780SCCWT**	**4515FS**
CA262G	**WPFLDKIT**	**3710FS**	**3780SCFBX**	**4516**
CA268G	**WPFLDKITW**	**3710WH**	**3780SCFBXCW**	**4517**
CA7GV	**WPGFIKIT**	**3720**	**3780SCFBXWH**	**4600**
CA72G	**WPGFIKITW**	**3720FS**	**3780SCLV**	**7420**
CA721G	**WPG1**	**3720WH**	**3780SCLVBG**	**7700**
CA723G	**WPG2**	**3722FS**	**3780SCLVCW**	
CA726G	**WPOUTKIT**	**3723**	**3780SCLVWH**	

legrand®
Pass & Seymour

Damp Locations
NEC 406.8(A)

Damp locations are defined as those protected from weather and not subject to saturation with water or other liquids, but subject to moderate degrees of moisture. Examples of such locations include partially protected locations under canopies, marquees, and roofed open porches not subjected to a beating rain or water runoff, as well as interior locations such as some basements, barns, and cold-storage warehouses.

NEC Article 406.8(A) requires that receptacles installed in damp locations must have an enclosure that is weatherproof when the receptacle is covered (attachment plug is not inserted and receptacle cover is closed).

An installation suitable for wet locations shall also be considered suitable for damp locations. Therefore, all catalog numbers shown above are also suitable for use in damp locations. The covers below are suitable for damp locations only, because the lid can be propped in the full open position.


3760 **3763** **3780**

Weather-Resistant Receptacles in Damp and Wet Locations
NEC 406.8(A) and 406.8(B)

An additional requirement has been added which states that a listed weather-resistant receptacle must be used where 15- and 20-amp, 125- and 250-volt straight blade receptacle configurations are installed in damp or wet locations. The goal of the change is to ensure that receptacles of sufficiently robust design are employed under these conditions. Listed weather-resistant receptacles have improved resistance to sunlight exposure, corrosion and impact.

Switches in Damp or Wet Locations
NEC 404.4

Surface-mounted switches and circuit breakers in damp or wet locations are required to be enclosed in a weatherproof enclosure and flush-mounted switches and circuit breakers in damp or wet locations to be provided with weatherproof covers. This change recognizes that exposure to adverse weather conditions requires comparable protection for switches and receptacles used in damp or wet locations.

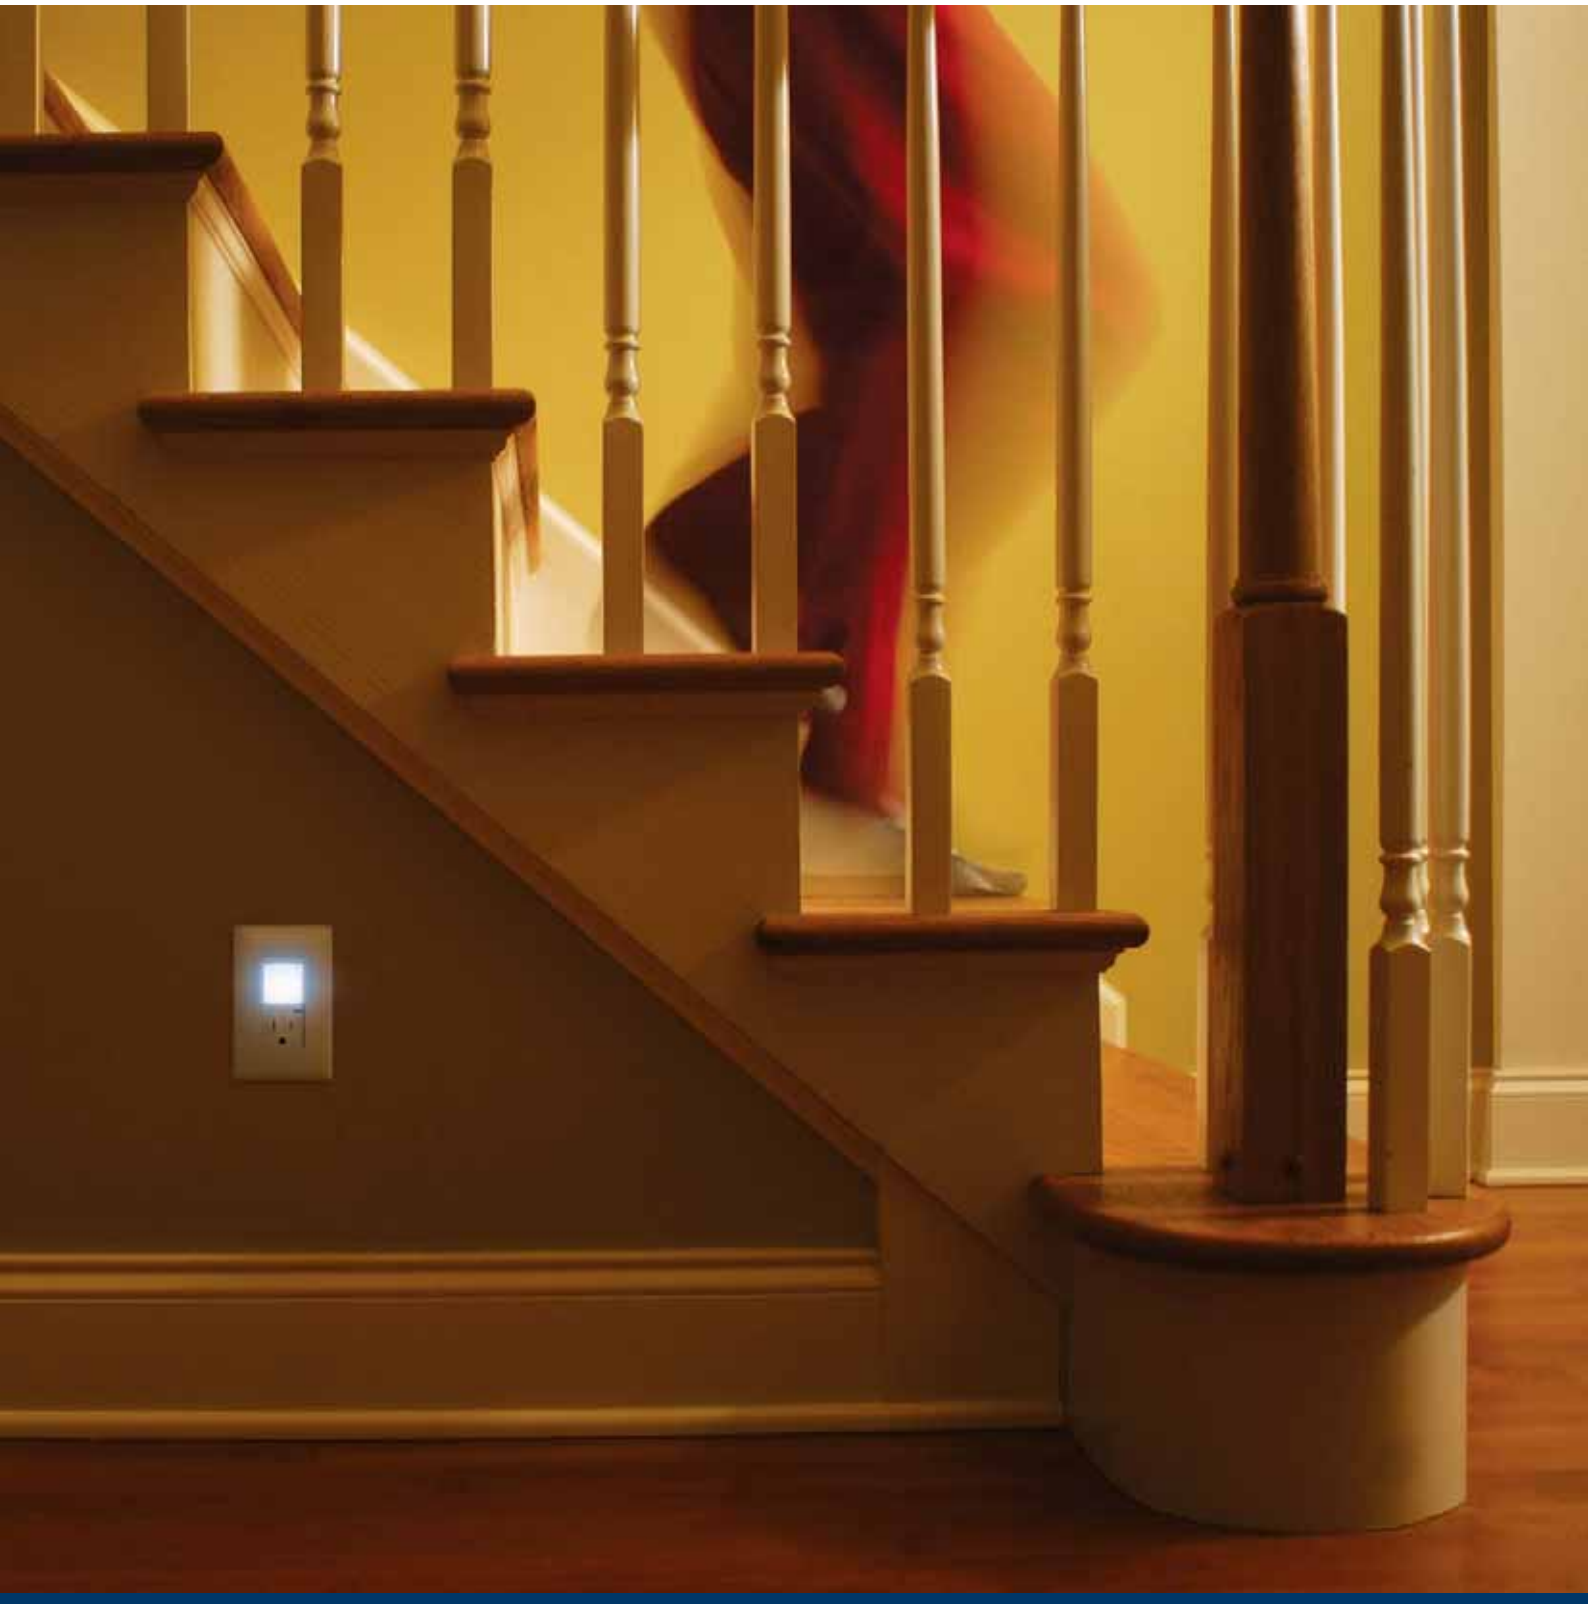

WALL PLATES & SPECIALTIES

legrand®

Pass & Seymour

Wall Plates & Specialties

legrand®
Pass & Seymour



Molded of rugged .065" thick polycarbonate.

An extra 1/8" width and height than standard size wall plates for more tolerance in covering ragged sheet rock openings.

Seamless, sleek, super smooth construction provides no dirt-catching channel around plate's perimeter.

Oversized opening to accommodate all NEMA 26 decorator-style openings.

SWP26W

Automatic alignment pins ensure that devices are properly positioned so that wall plates fit perfectly.

Two-piece plastic subplate bridges recessed boxes and uneven sheet rock. Fixes floating installations.

Style	Page Number
Specifications & Dimensions	Q-2 – Q-4
Screwless Wall Plates	Q-5, Q-6
Studio Wall Plates	Q-7
Toggle Switch Openings	Q-8
Duplex Receptacle Openings & Decorator Openings	Q-9
Decorator Openings	Q-10
Blank Plates	Q-11, Q-12
Single Receptacle Openings & Power Outlet Openings	Q-13, Q-14
Combination Openings	Q-15 – Q-18
Despard® Openings	Q-19
Two Gang with Center Opening & Locking Switch Plates	Q-20
Louver & Biplex/Triplex Openings	Q-21
Junior-Jumbo & Jumbo Toggle, Duplex, Single Receptacle, Decorator, Blank & Combination Openings	Q-22 – Q-24
Sectional Wall Plates	Q-25
Tandem & Handy Box Plates	Q-26
Narrow Metal	Q-27
Dustproof Stainless Steel Covers	Q-28
Communication Devices & Plates	Q-29 – Q-34
Mounting Straps, Yokes & Jewels	Q-35
Decorator Hallway Lights & Combination Devices	Q-36
Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles	Q-37
PlugTail™ Nightlight/GFCI Receptacles	Q-38
Incandescent Lampholders, Neon Pilot Lights & Panelites	Q-39
Screws & Screwdrivers	Q-40
Engraved & Pad Printed	Q-41, Q-42
Custom Metal Wall Plates	Q-43 – Q-45
Custom Panel Plates	Q-46, Q-47
Style Selector Guide	Q-48 – Q-60


Devices & Wall Plates Color Selection Chart available on Pages A-29, B-78 and Q-61.

legrand®
Pass & Seymour

Wall Plates
Specifications



Thermoset
SP Series



Nylon
TP Series



Studio
Polycarbonate
WP Series



Screwless
Polycarbonate
SWP Series

Application

Legrand/Pass & Seymour's broad line of Standard Size Plastic and Metal Wall Plates features the most complete range of types, sizes, colors, and finishes available. Choose from more than 1,900 standard plates in non-combustible thermoset plastic material, self-extinguishing nylon material, screwless polycarbonate material, or attractively finished metal, for residential, commercial, institutional, and industrial applications. All plastic wall plates color match to Legrand/Pass & Seymour devices.

Thermoset Plastic Wall Plates

- Molded of non-combustible mar-proof material.
- Available in "SP" series in Standard, Junior-Jumbo, and Jumbo sizes.
- Seven standard colors available – Ivory, White, Brown, Gray, Black, Red, and Light Almond.
- Individually wrapped with color-matching screws.
- Resistant to discoloration, grease, oil, solvent and moisture.
- Nominal thickness, .070"

TradeMaster® Thermoplastic Wall Plates

- Molded of rugged, practically indestructible self-extinguishing nylon. ("TP" series only.)
- Available in "TP" series, extra 3/16" width and height than Standard size plates; and "TPJ" series, extra 3/16" width and height than Junior-Jumbo size plates.
- Available in Ivory, White, Brown, Gray, Black, Blue, Orange, Red, and Light Almond.
- Preferred for hospital, industrial, institutional, and other high-abuse applications.
- Nominal thickness, .070"

Studio Polycarbonate Wall Plates

- Wall plate and back plate made of polycarbonate Lexan 241R opaque.
- Wall plate thickness: 0.210
  Back plate thickness: 0.28

Screwless Polycarbonate Wall Plates

- Molded of .065" thick polycarbonate, matte finish.
- 2-piece plastic subplate made of polycarbonate.
- Extra 1/8" width and height than Standard size plates.
- Available in Ivory, White, Brown, Gray, Black, and Light Almond; and five metallic and three wood finishes.

Metal Wall Plates

- Constructed of corrosion-resistant stainless steel, brass, aluminum, chrome, brushed bronze or galvanized steel.
- Standard, Jumbo, and Tandem size plates available, as well as special Panel size plates up to 5-gangs high and 10-gangs wide.
- Packaged in protective film, with finish-matching screws.
- Variety of special plated finishes. Paintable to match plastic plates.
- Can be silk-screened or engraved, and custom punched with over 300 opening styles.

Materials

- Type 302 Stainless Steel, non-magnetic, .032" nominal thickness, brushed finish. This alloy contains 18% chromium and 8% nickel for superior resistance to corrosion. Recommended for use in food processing plants, dairies, chemical plants, and other industrial, institutional, and commercial applications where corrosive atmospheres exist.
- Type 430 Stainless Steel, magnetic, .032" nominal thickness, brushed finish. Less corrosion-resistant than Type 302, but ideal for general service in high abuse applications in industrial plants, commercial, and institutional buildings.
- Chrome, Brushed and Polished Brass, .040" thick. 70% copper, 30% zinc alloy gives warm, appealing finish to modern decor as well as retrofit applications. Lacquered to prevent corrosion.
- Aluminum, .040" thick. Lustrous satin finish. Lacquered to prevent corrosion.
- Galvanized Steel. Used only for Handy Box Plates.
- Brushed Bronze, .040" thick. 90% copper, 10% zinc. Lacquered to prevent corrosion.



302
Stainless Steel



Polished Brass



Brushed Brass



Aluminum

Wall Plates
Dimensions


legrand®
Pass & Seymour

Standard Size Wall Plates

- Standard size wall plates for all applications.
- Best fit for surface mount boxes.
- Available in plastic and metal only.

Dimensions

1 gang	2.75" x 4.5"	**4 gang**	8.125" x 4.5"	**7 gang**	13.62" x 4.5"
2 gang	4.56" x 4.5"	**5 gang**	10" x 4.5"	**8 gang**	15.44" x 4.5"
3 gang	6.375" x 4.5"	**6 gang**	11.812" x 4.5"		




STANDARD

TradeMaster® Wall Plates

- Extra 3/16" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle, and decorator single gang plates.

Dimensions

1 gang	2.9375" x 4.6875"	**3 gang**	6.563" x 4.6875"	**5 gang**	10.188" x 4.6875"
2 gang	4.75" x 4.6875"	**4 gang**	8.375" x 4.6875"	**6 gang**	12" x 4.6875"




TRADEMASTER STANDARD


Studio Polycarbonate Wall Plates

- Wall plate and back plate made of polycarbonate Lexan 241R opaque.
- Wall plate thickness: 0.210
  Back plate thickness: 0.28

Wall Plate Dimensions				Back Plate Dimensions			
1 gang	2.988" x 4.901"	**3 gang**	6.613" x 4.901"	**1 gang**	3.158" x 4.97"	**3 gang**	6.783" x 4.97"
2 gang	4.80" x 4.901"	**4 gang**	8.425" x 4.901"	**2 gang**	4.97" x 4.97"	**4 gang**	8.595" x 4.97"



STUDIO




SCREWLESS

Screwless Polycarbonate Wall Plates

- Available in decorator, toggle, and duplex openings.
- Extra 1/8" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Molded of .065" thick polycarbonate.
- 2-piece plastic subplate made of polycarbonate.
- Available in five metallic and three wood finishes; and six standard colors.

Wall Plate Dimensions				Subplate Dimensions			
1 gang	3.10" x 4.87"	**3 gang**	6.724" x 4.87"	**1 gang**	2.85" x 4.62"	**3 gang**	6.474" x 4.62"
2 gang	4.912" x 4.87"	**4 gang**	8.536" x 4.87"	**2 gang**	4.662" x 4.62"	**4 gang**	8.286" x 4.62"




JUNIOR-JUMBO

Junior-Jumbo Wall Plates

- Extra 3/8" width and height than Standard size wall plates.
- Additional coverage for sheet rock gaps.
- Available in plastic and metal only.

Dimensions

1 gang	3.125" x 4.87"	**2 gang**	4.93" x 4.87"	**3 gang**	6.75" x 4.87"	**4 gang**	8.56" x 4.87"



TRADEMASTER JUMBO

TradeMaster Jumbo Wall Plates

- Extra 3/16" width and height than Junior-Jumbo size wall plates.
- Provide additional coverage for sheet rock gaps, matching the appearance of the TradeMaster Plates.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle, and decorator single gang plates.

Dimensions


1 gang	3.3125" x 5.0625"	**3 gang**	6.9375" x 5.0625"
2 gang	5.125" x 5.0625"	**4 gang**	8.75" x 5.0625"

Jumbo Wall Plates

- Extra 3/4" width and height than Standard size wall plates.
- Largest size wall plates to cover larger wall damage.
- Available in plastic and metal only.

Dimensions


1 gang	3.5" x 5.25"	**2 gang**	5.31" x 5.25"	**3 gang**	7.12" x 5.25"	**4 gang**	8.93" x 5.25"



JUMBO

legrand®
Pass & Seymour

Wall Plates
Dimensions




CENTER PANEL END PANEL

Sectional Wall Plates


- End and center panels with each of five most-used configurations make it possible to improvise custom wall plates on the job. Panels lock securely together on installation. Blank sections furnished with mounting strap.

Wall Plate Mountings


Illustrated are the five standard methods of plate mounting. There are many other non-standard methods which depend upon the special device used. Exact mounting hole specifications for every device appear in the Selector Guide.

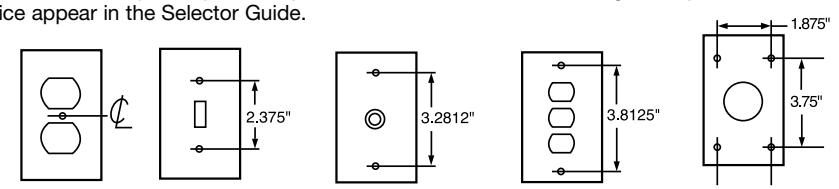


Center Strap Box Decorator and Interchangeable FS (4 Screw)



SP Plates




TP Plates




WP Plates SWP Plates

Wall Plate Sizes


Standard Size
Available in plastic and metal




Junior-Jumbo




Jumbo




TradeMaster® Size
Available in nylon only



TradeMaster Jumbo
Available in nylon only




Tandem Wall Plates



Metal only. Plate mounting dimensions are non-standard. Refer to Page Q-26 for details and devices that can be used.

For Studio (WP) Wall Plate & Back Plate dimensions refer to Page Q-3.

Screwless Wall Plate Plastic Subplate



For Screwless (SWP) Wall Plate dimensions refer to Page Q-3.

Wall Plates
Decorative Finish Screwless Wall Plates
Polycarbonate


legrand®
Pass & Seymour




One Gang
Brushed Nickel





Two Gang
Brushed Copper

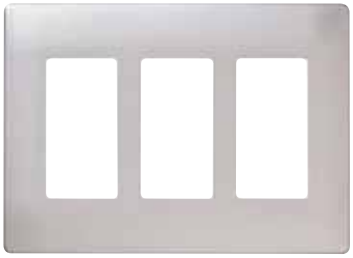

Three Gang
Stainless Steel

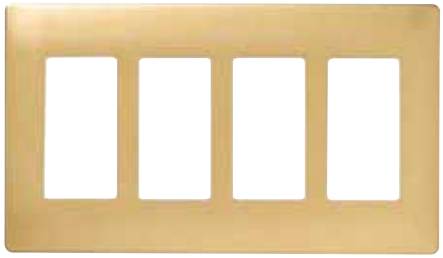

Four Gang
Brass


Description	Color	Decorator Openings
Screwless Decorator Openings Plastic Subplate included		
One Gang 	Brushed Nickel	**SWP26BN**
	Brushed Copper	**SWP26BC**
	Stainless Steel	**SWP26SS**
	Brass	**SWP26BR**
	Brushed Bronze	**SWP26BB**
	Maple	**SWP26MA**
	Mahogany	**SWP26MH**
	Walnut	**SWP26WA**
Two Gang 	Brushed Nickel	**SWP262BN**
	Brushed Copper	**SWP262BC**
	Stainless Steel	**SWP262SS**
	Brass	**SWP262BR**
	Brushed Bronze	**SWP262BB**
	Maple	**SWP262MA**
	Mahogany	**SWP262MH**
	Walnut	**SWP262WA**
Three Gang 	Brushed Nickel	**SWP263BN**
	Brushed Copper	**SWP263BC**
	Stainless Steel	**SWP263SS**
	Brass	**SWP263BR**
	Brushed Bronze	**SWP263BB**
	Maple	**SWP263MA**
	Mahogany	**SWP263MH**
	Walnut	**SWP263WA**
Four Gang 	Brushed Nickel	**SWP264BN**
	Brushed Copper	**SWP264BC**
	Stainless Steel	**SWP264SS**
	Brass	**SWP264BR**
	Brushed Bronze	**SWP264BB**
	Maple	**SWP264MA**
	Mahogany	**SWP264MH**
	Walnut	**SWP264WA**




One Gang
Brushed Bronze



Two Gang
Maple

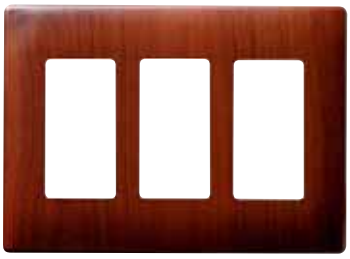

Three Gang
Mahogany

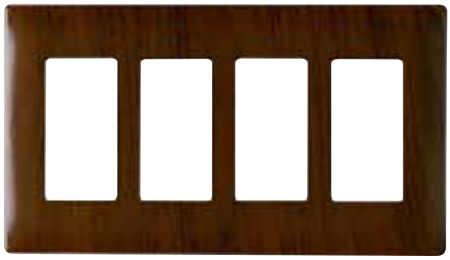

Four Gang
Walnut

For Screwless Wall Plate, and Plastic Subplate dimensions, see Page Q-6.


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour


Wall Plates
Screwless Wall Plates
Polycarbonate



One Gang




Two Gang

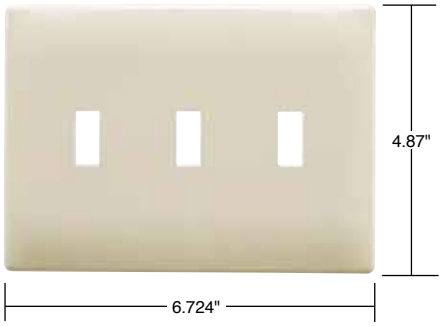

Three Gang

Number of Gangs	Color	Decorator Openings	NEW Toggle Switch Openings	NEW Duplex Receptacle Openings
Screwless Wall Plates Plastic Subplate included				
One Gang	Ivory	SWP26I	SWP1I	SWP8I
	White	SWP26W	SWP1W	SWP8W
	Brown	SWP26	SWP1	SWP8
	Gray	SWP26GRY	SWP1GRY	SWP8GRY
	Black	SWP26BK	SWP1BK	SWP8BK
	Light Almond	SWP26LA	SWP1LA	SWP8LA
Two Gang	Ivory	SWP262I	SWP2I	SWP82I
	White	SWP262W	SWP2W	SWP82W
	Brown	SWP262	SWP2	SWP82
	Gray	SWP262GRY	SWP2GRY	SWP82GRY
	Black	SWP262BK	SWP2BK	SWP82BK
	Light Almond	SWP262LA	SWP2LA	SWP82LA
Three Gang	Ivory	SWP263I	SWP3I	
	White	SWP263W	SWP3W	
	Brown	SWP263	SWP3	
	Gray	SWP263GRY	SWP3GRY	
	Black	SWP263BK	SWP3BK	
	Light Almond	SWP263LA	SWP3LA	
Four Gang	Ivory	SWP264I	SWP4I	
	White	SWP264W	SWP4W	
	Brown	SWP264	SWP4	
	Gray	SWP264GRY	SWP4GRY	
	Black	SWP264BK	SWP4BK	
	Light Almond	SWP264LA	SWP4LA	

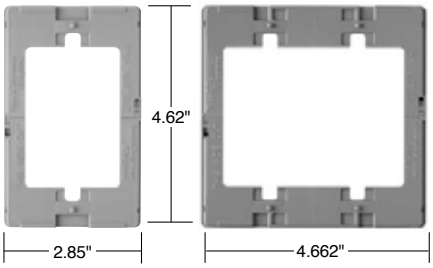

One Gang Plastic Subplate
Two Gang Plastic Subplate

Description	Height	Width
Screwless Wall Plate Dimensions		
One Gang	4.87"	3.10"
Two Gang	4.87"	4.912"
Three Gang	4.87"	6.724"
Four Gang	4.87"	8.536"


Description	Height	Width
Screwless Plastic Subplate Dimensions		
One Gang	4.62"	2.85"
Two Gang	4.62"	4.662"
Three Gang	4.62"	6.474"
Four Gang	4.62"	8.286"


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Studio Wall Plates
Polycarbonate

legrand®
Pass & Seymour

Revolutionize the look of technology in the home with Studio Wall Plates.
Available in one, two, three, and four gang sizes – and in 17 contemporary color options, these decorator-style wall plates feature a design and form-factor never before available to homeowners. The design, a sculptural flow of curves with titanium edging and a screwless finish, offers a new way to integrate home system products with personal style and taste throughout the entire home.


WP5002GB


WP5002CM


WP5002BD

Color	One Gang	Two Gang	Three Gang	Four Gang
NEW **Basic Color – Screwless Decorator Opening** Back Plate included				
White	WP5001WH	WP5002WH	WP5003WH	WP5004WH
Light Almond	WP5001LA	WP5002LA	WP5003LA	WP5004LA
Titanium	WP5001TI	WP5002TI	WP5003TI	WP5004TI
Gloss Black	WP5001GB	WP5002GB	WP5003GB	WP5004GB
NEW **Neutrals – Screwless Decorator Opening** Back Plate included				
Cement	WP5001CM	WP5002CM	WP5003CM	WP5004CM
Khaki	WP5001KK	WP5002KK	WP5003KK	WP5004KK
Sand	WP5001SD	WP5002SD	WP5003SD	WP5004SD
Taupe	WP5001TP	WP5002TP	WP5003TP	WP5004TP
NEW **Hues – Screwless Decorator Opening** Back Plate included				
Aloe	WP5001AE	WP5002AE	WP5003AE	WP5004AE
Bordeaux	WP5001BD	WP5002BD	WP5003BD	WP5004BD
Cameo Pink	WP5001CP	WP5002CP	WP5003CP	WP5004CP
Citrus	WP5001CR	WP5002CR	WP5003CR	WP5004CR
Cozumel	WP5001CZ	WP5002CZ	WP5003CZ	WP5004CZ
Cyan	WP5001CY	WP5002CY	WP5003CY	WP5004CY
Moss	WP5001MS	WP5002MS	WP5003MS	WP5004MS
Nirvana	WP5001NV	WP5002NV	WP5003NV	WP5004NV
Spanish Red	WP5001SP	WP5002SP	WP5003SP	WP5004SP

Description	Height	Width
Studio Wall Plate Dimensions		
One Gang	4.901"	2.988"
Two Gang	4.901"	4.80"
Three Gang	4.901"	6.613"
Four Gang	4.901"	8.425"

Description	Height	Width
Studio Back Plate Dimensions		
One Gang	4.97"	3.158"
Two Gang	4.97"	4.97"
Three Gang	4.97"	6.783"
Four Gang	4.97"	8.595"


WP5002WH


WP5002LA


WP5002TI



WP5002KK



WP5002SD


WP5002TP


WP5002AE


WP5002CP


WP5002CR


WP5002CZ


WP5002CY


WP5002MS








WP5002NV


WP5002SP

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour






Wall Plates
Toggle Switch Openings
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Toggle Switch Openings					
One Gang 	Ivory	TP1I	SP1I	Aluminum	SA1
	White	TP1W	SP1W	Brass	SB1
	Brown	TP1	SP1	Polished Brass	SB1PB
	Gray	TP1GRY	SP1GRY	430S/S	SL1
	Black	TP1BK		302S/S	SS1
	Red	TP1RED		Brushed Bronze	SB1BZ
	Light Almond	TP1LA	SP1LA	Chrome	SB1CH
Two Gang 	Ivory	TP2I	SP2I	Aluminum	SA2
	White	TP2W	SP2W	Brass	SB2
	Brown	TP2	SP2	Polished Brass	SB2PB
	Gray	TP2GRY	SP2GRY	430S/S	SL2
	Black	TP2BK		302S/S	SS2
	Red	TP2RED		Brushed Bronze	SB2BZ
	Light Almond	TP2LA	SP2LA	Chrome	SB2CH
Three Gang 	Ivory	TP3I	SP3I	Aluminum	SA3
	White	TP3W	SP3W	Brass	SB3
	Brown	TP3	SP3	Polished Brass	SB3PB
	Gray	TP3GRY	SP3GRY	430S/S	SL3
	Black	TP3BK		302S/S	SS3
	Red	TP3RED		Brushed Bronze	SB3BZ
	Light Almond	TP3LA	SP3LA	Chrome	SB3CH
Four Gang 	Ivory	TP4I	SP4I	Aluminum	SA4
	White	TP4W	SP4W	Brass	SB4
	Brown	TP4	SP4	Polished Brass	SB4PB
	Gray	TP4GRY	SP4GRY	430S/S	SL4
	Black	TP4BK		302S/S	SS4
	Red	TP4RED			
	Light Almond	TP4LA	SP4LA		
Five Gang 	Ivory	TP5I	SP5I		
	White	TP5W	SP5W	Brass	SB5
	Brown	TP5	SP5	Polished Brass	SB5PB
	Gray	TP5GRY	SP5GRY		
	Black	TP5BK		302S/S	SS5
	Light Almond	TP5LA	SP5LA		
Six Gang 	Ivory	TP6I	SP6I		
	White	TP6W	SP6W	Polished Brass	SB6PB
	Brown	TP6			
	Gray	TP6GRY	SP6GRY	302S/S	SS6
	Black	TP6BK			
	Light Almond	TP6LA	SP6LA		
Seven Gang 				302S/S	SS601
				302S/S Painted Ivory	SS601I
				302S/S Painted White	SS601W
Eight Gang 				302S/S	SS602
				302S/S Painted Ivory	SS602I
				302S/S Painted White	SS602W

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Duplex Receptacle & Decorator Openings
Standard Size Plastic & Metal







legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Duplex Receptacle Openings					
One Gang 	Ivory	TP8I	SP8I		
	White	TP8W	SP8W	Aluminum	SA8
	Brown	TP8	SP8	Brass	SB8
	Gray	TP8GRY	SP8GRY	Polished Brass	SB8PB
	Black	TP8BK		430S/S	SL8
	Red	TP8RED		302S/S	SS8
	Light Almond	TP8LA	SP8LA	Brushed Bronze	SB8BZ
	Blue	TP8BL		Chrome	SB8CH
	Orange	TP8OR			
Two Gang 	Ivory	TP82I	SP82I		
	White	TP82W	SP82W	Aluminum	SA82
	Brown	TP82	SP82	Brass	SB82
	Gray	TP82GRY	SP82GRY	Polished Brass	SB82PB
	Black	TP82BK		430S/S	SL82
	Red	TP82RED		302S/S	SS82
	Light Almond	TP82LA	SP82LA	Brushed Bronze	SB82BZ
	Orange	TP82OR		Chrome	SB82CH
Three Gang 	Ivory		SP83I		
	White		SP83W	Brass	SB83
	Brown		SP83	Polished Brass	SB83PB
	Gray		SP83GRY		
	Light Almond		SP83LA	302S/S	SS83
Four Gang 	Ivory		SP84I		
	White		SP84W	Polished Brass	SB84PB
	Brown		SP84		
	Gray		SP84GRY	302S/S	SS84
Five Gang 				302S/S	SS85
Six Gang 				302S/S	SS86
Decorator Openings					
One Gang 	Ivory	TP26I	SP26I		
	White	TP26W	SP26W	Aluminum	SA26
	Brown	TP26	SP26	Brass	SB26
	Gray	TP26GRY	SP26GRY	Polished Brass	SB26PB
	Black	TP26BK	SP26BK	430S/S	SL26
	Red	TP26RED		302S/S	SS26
	Light Almond	TP26LA	SP26LA	Brushed Bronze	SB26BZ
	Blue	TP26BL		Chrome	SB26CH
	Orange	TP26OR			

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour







Wall Plates
Decorator Openings
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Decorator Openings					
Two Gang 	Ivory	**TP262I**	**SP262I**		
	White	**TP262W**	**SP262W**	Aluminum	**SA262**
	Brown	**TP262**	**SP262**	Brass	**SB262**
	Gray	**TP262GRY**	**SP262GRY**	Polished Brass	**SB262PB**
	Black	**TP262BK**	**SP262BK**	430S/S	**SL262**
	Red	**TP262RED**		302S/S	**SS262**
	Light Almond	**TP262LA**	**SP262LA**		
	Blue	**TP262BL**			
	Orange	**TP262OR**			
Three Gang 	Ivory	**TP263I**	**SP263I**		
	White	**TP263W**	**SP263W**	Brass	**SB263**
	Brown	**TP263**		Polished Brass	**SB263PB**
	Gray	**TP263GRY**	**SP263GRY**		
	Black	**TP263BK**	**SP263BK**	302S/S	**SS263**
	Red	**TP263RED**			
	Light Almond	**TP263LA**	**SP263LA**		
Four Gang 	Ivory	**TP264I**	**SP264I**		
	White	**TP264W**	**SP264W**	Brass	**SB264**
	Brown	**TP264**	**SP264**	Polished Brass	**SB264PB**
	Gray	**TP264GRY**	**SP264GRY**		
	Black	**TP264BK**	**SP264BK**	302S/S	**SS264**
	Red	**TP264RED**			
	Light Almond	**TP264LA**	**SP264LA**		
Five Gang 	Ivory	**TP265I**	**SP265I**		
	White	**TP265W**	**SP265W**		
	Brown	**TP265**		302S/S	**SS265**
	Gray	**TP265GRY**	**SP265GRY**		
	Black	**TP265BK**	**SP265BK**		
	Red		**SP265RED**		
	Light Almond	**TP265LA**	**SP265LA**		
Six Gang 	Ivory	**TP266I**	**SP266I**		
	White	**TP266W**	**SP266W**		
	Brown	**TP266**	**SP266**	302S/S	**SS266**
	Gray	**TP266GRY**	**SP266GRY**		
	Black	**TP266BK**	**SP266BK**		
	Light Almond	**TP266LA**	**SP266LA**		
Seven Gang 				302S/S	**SS267**
				302S/S Painted Ivory	**SS267I**
				302S/S Painted White	**SS267W**
Eight Gang 				302S/S	**SS268**
				302S/S Painted Ivory	**SS268I**
				302S/S Painted White	**SS268W**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Blank Plates – Box Mounted
Standard Size Plastic & Metal





legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Blank Plates – Box Mounted					
One Gang Blank – Box Mtd. 	Ivory White Brown Gray Black Red Light Almond	**TP13I** **TP13W** **TP13** **TP13GRY** **TP13BK** **TP13RED** **TP13LA**	**SP13I** **SP13W** **SP13** **SP13GRY** **SP13LA**	Aluminum Brass Polished Brass 430S/S 302S/S 302S/S (1/2" Screws) Brushed Bronze Chrome	**SA13** **SB13** **SB13PB** **SL13** **SS13** **SS13.5** **SB13BZ** **SB13CH**
Two Gang Blank – Box Mtd. 	Ivory White Brown Gray Black Light Almond	**TP23I** **TP23W** **TP23** **TP23GRY** **TP23BK** **TP23LA**	**SP23I** **SP23W** **SP23** **SP23GRY** **SP23LA**	Aluminum Brass Polished Brass 430S/S 302S/S 302S/S (1/2" Screws) Brushed Bronze Chrome	**SA23** **SB23** **SB23PB** **SL23** **SS23** **SS23.5** **SB23BZ** **SB23CH**
Three Gang Blank – Box Mtd. 	Ivory White Brown Gray Light Almond		**SP33I** **SP33W** **SP33** **SP33GRY** **SP33LA**	Polished Brass 302S/S 302S/S (1/2" Screws)	**SB33PB** **SS33** **SS33.5**
Four Gang Blank – Box Mtd. 	Ivory White Brown Gray		**SP43I** **SP43W** **SP43** **SP43GRY**	302S/S	**SS43**
Five Gang Blank – Box Mtd. 				302S/S	**SS53**
Six Gang Blank – Box Mtd. 				302S/S	**SS63**
Seven Gang Blank – Box Mtd. 				302S/S	**SS6013**
Eight Gang Blank – Box Mtd. 				302S/S	**SS6023**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour


Wall Plates
Blank Plates – Strap Mounted
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Blank Plates – Strap Mounted with Adjustment Yoke					
One Gang Blank – Strap Mtd. 	Ivory	**TP14I**	**SP14I**		
	White	**TP14W**	**SP14W**	Aluminum	**SA14**
	Brown	**TP14**	**SP14**	Brass	**SB14**
	Gray	**TP14GRY**	**SP14GRY**	430S/S	**SL14**
	Black	**TP14BK**	**SP14BK**	302S/S	**SS14**
	Red		**SP14RED**	302S/S (1/2" Screws)	**SS14.5**
	Light Almond	**TP14LA**	**SP14LA**		
Two Gang Blank – Strap Mtd. 	Ivory	**TP24I**	**SP24I**		
	White	**TP24W**	**SP24W**	Aluminum	**SA24**
	Brown	**TP24**	**SP24**	Brass	**SB24**
	Gray	**TP24GRY**	**SP24GRY**	430S/S	**SL24**
	Black	**TP24BK**	**SP24BK**	302S/S	**SS24**
	Red		**SP24RED**	302S/S (1/2" Screws)	**SS24.5**
	Light Almond	**TP24LA**	**SP24LA**		
Three Gang Blank – Strap Mtd. 	Ivory		**SP34I**		
	White		**SP34W**		
	Brown		**SP34**	302S/S	**SS34**
	Gray		**SP34GRY**		
Four Gang Blank – Strap Mtd. 	Ivory		**SP44I**		
	White		**SP44W**		
	Brown		**SP44**	302S/S	**SS44**
	Gray		**SP44GRY**		

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Single Receptacle & Power Outlet Openings
Standard Size Plastic & Metal

legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Single Receptacle Openings					
One Gang 	Ivory	TP7I	SP7I		
	White	TP7W	SP7W	Aluminum	SA7
	Brown	TP7	SP7	Brass	SB7
	Gray	TP7GRY	SP7GRY	Polished Brass	SB7PB
	Black	TP7BK		430S/S	SL7
	Red	TP7RED		302S/S	SS7
	Light Almond	TP7LA	SP7LA		
Two Gang 	Ivory		SP72I		
	White		SP72W		
	Brown		SP72	302S/S	SS72
Three Gang 				302S/S	SS73
				302S/S Painted Ivory	SS73I
				302S/S Painted White	SS73W
				302S/S Painted Gray	SS73GRY
Power Outlet Receptacle Openings – One Gang					
 1.5938" hole for 1.5625" dia. device – 2 mtg. holes	Ivory	TP720I	SP720I		
	White	TP720W	SP720W		
	Brown	TP720	SP720	302S/S	SS720
	Gray	TP720GRY	SP720GRY		
	Light Almond	TP720LA	SP720LA		
 1.625" hole for 1.5938" dia. device – 2 mtg. holes				302S/S	SS721
 1.75" hole for 1.7186" dia. device-2 mtg. holes				302S/S	SS725
 2.125" hole for 2.094" dia. device – 2 mtg. holes				302S/S	SS723
 2.156" hole for 2.125" dia. device – 2 mtg. holes	Ivory	TP724I	384I		
	White	TP724W			
	Brown	TP724	384	Chrome	S384C
	Gray	TP724GRY		302S/S	SS724
	Black	TP724BK			
	Light Almond	TP724LA			

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour




Wall Plates
Power Outlet Receptacle Openings
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Power Outlet Receptacle Openings – Two Gang					
 2.4688" hole for 2.375" dia. device – 4 mtg. holes				Chrome 302S/S	**S3863C** **SS701**
 2.1563" hole for 2.125" dia. device – 2 mtg. holes				302S/S	**SS702**
 2.1563" hole for 2.125" dia. device – 4 mtg. holes	Ivory Ivory White Brown Brown Gray Black Light Almond	**TP703I** **TP703W** **TP703** **TP703GRY** **TP703BK** **TP703LA**	**SP703I** **3862I** **SP703** **3862**	Chrome 302S/S	**S3862C** **SS703**
 2.2813" hole for 2.125" dia. device – 4 mtg. holes				Aluminum 302S/S	**SA716** **SS716**
 2.1563" hole for 2.125" dia. device – 4 mtg. holes				302S/S	**SS705**
 1.5938" hole for 1.5625" dia. device – 2 mtg. holes				302S/S	**SS710**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Combination Openings
Standard Size Plastic & Metal

legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Toggle Switch & Duplex Receptacle Openings					
Two Gang 1 Toggle, 1 Duplex 	Ivory White Brown Gray Black Red Light Almond	**TP18I** **TP18W** **TP18** **TP18GRY** **TP18BK** **TP18RED** **TP18LA**	**SP18I** **SP18W** **SP18** **SP18GRY** **SP18LA**	 Brass Polished Brass 302S/S 	 **SB18** **SB18PB** **SS18**
Three Gang 2 Toggles, 1 Duplex 	Ivory White Brown Gray Black Red Light Almond	**TP28I** **TP28W** **TP28** **TP28GRY** **TP28BK** **TP28RED** **TP28LA**	**SP28I** **SP28W** **SP28** **SP28GRY** **SP28LA**	 Brass Polished Brass 302S/S 	 **SB28** **SB28PB** **SS28**
Four Gang 3 Toggles, 1 Duplex 	Ivory White Brown Gray Light Almond		**SP38I** **SP38W** **SP38** **SP38GRY** **SP38LA**	Polished Brass 302S/S 	**SB38PB** **SS38**
Five Gang 4 Toggles, 1 Duplex 				302S/S 302S/S Painted Ivory 302S/S Painted White	**SS48** **SS48I** **SS48W**
Toggle Switch & Decorator Openings					
Two Gang 1 Toggle, 1 Decorator 	Ivory White Brown Gray Black Light Almond	**TP126I** **TP126W** **TP126** **TP126GRY** **TP126BK** **TP126LA**	**SP126I** **SP126W** **SP126** **SP126GRY** **SP126BK** **SP126LA**	 Aluminum Brass Polished Brass 302S/S	 **SA126** **SB126** **SB126PB** **SS126**
Three Gang 2 Toggles, 1 Decorator 	Ivory White Brown Gray Light Almond Black	**TP226I** **TP226W** **TP226** **TP226GRY** **TP226LA** **TP226BK**	**SP226I** **SP226W** **SP226** **SP226GRY** **SP226LA**	 302S/S	 **SS226**
Three Gang 1 Toggle, 2 Decorator 	Ivory White Brown Gray Black Light Almond		**SP1262I** **SP1262W** **SP1262** **SP1262GRY** **SP1262BK** **SP1262LA**	 302S/S	 **SS1262**
Four Gang 3 Toggles, 1 Decorator 	Ivory White Brown Gray Light Almond		**SP326I** **SP326W** **SP326** **SP326GRY** **SP326LA**	 302S/S	 **SS326**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour



Wall Plates
Combination Openings
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Toggle Switch & Decorator Openings (cont.)					
Four Gang 2 Toggles, 2 Decorator 	Ivory White Brown Light Almond		**SP2262I** **SP2262W** **SP2262** **SP2262LA**		
Toggle Switch & Blank Strap Mounted Openings					
Two Gang 1 Toggle, 1 Blank 				302S/S	**SS114**
Three Gang 2 Toggles, 1 Blank 				302S/S	**SS214**
Four Gang 3 Toggles, 1 Blank 				302S/S	**SS314**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Combination Openings
Standard Size Plastic & Metal


legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Two Gang Combination Openings					
Two Gang 1 Toggle,1 Single 	Ivory White Brown Gray		**SP17I** **SP17W** **SP17** **SP17GRY**	302S/S	**SS17**
Two Gang Single/Duplex 	Ivory White Brown Gray		**SP78I** **SP78W** **SP78** **SP78GRY**	Aluminum 302S/S	**SA78** **SS78**
Two Gang Duplex/Decorator 	Ivory White Brown Gray Black Red Light Almond	**TP826I** **TP826W** **TP826** **TP826GRY** **TP826BK** **TP826RED** **TP826LA**	**SP826I** **SP826W** **SP826** **SP826GRY** **SP826LA**	Polished Brass 302S/S	**SB826PB** **SS826**
Two Gang Telephone/Toggle 	Ivory White Brown		**SP112I** **SP112W** **SP112**		
Two Gang Telephone/Duplex 	Ivory White Brown Gray		**SP128I** **SP128W** **SP128** **SP128GRY**	302S/S	**SS128**
Two Gang Telephone/Blank (Strap Mtd) 	Ivory White		**SP1214I** **SP1214W**	302S/S	**SS1214**
Two Gang Telephone/Decorator 	White Brown		**SP1226W** **SP1226**	302S/S	**SS1226**
Two Gang Blank (Box Mtd)/Duplex 	Ivory White Brown Gray Black Red Light Almond	**TP138I** **TP138W** **TP138** **TP138GRY** **TP138BK** **TP138RED** **TP138LA**	**SP138I** **SP138W** **SP138** **SP138GRY**	302S/S	**SS138**
Two Gang Toggle/Blank (Box Mtd) 	Ivory White Brown Gray Black Light Almond	**TP113I** **TP113W** **TP113** **TP113GRY** **TP113BK** **TP113LA**		302S/S	**SS113**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Wall Plates
Combination Openings
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Two Gang Combination Openings (cont.)					
Two Gang Blank (Strap Mtd)/Duplex 	Ivory White Brown Gray		**SP148I** **SP148W** **SP148** **SP148GRY**	302S/S	**SS148**
Two Gang Blank (Strap Mtd)/Single 	Ivory White		**SP147I** **SP147W**	302S/S	**SS147**
Two Gang Blank (Strap Mtd)/Decorator 	Ivory White Brown Gray Light Almond		**SP1426I** **SP1426W** **SP1426** **SP1426GRY** **SP1426LA**	302S/S	**SS1426**
Three & Four Gang Combination Openings					
Three Gang Toggle/Duplex/Duplex 	Ivory White Brown Gray Light Almond		**SP182I** **SP182W** **SP182** **SP182GRY** **SP182LA**	Polished Brass 302S/S	**SB182PB** **SS182**
Three Gang Duplex/Blank (Strap Mtd)/Duplex 				302S/S	**SS8148**
Three Gang Blank (Strap Mtd)/Toggle/Blank (Strap Mtd) 				302S/S	**SS14114**
Three Gang Blank (Strap Mtd)/Duplex/Blank (Strap Mtd) 				302S/S	**SS14814**
Four Gang 2 Toggles, 2 Duplex 				302S/S	**SS282**




These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Despard® Openings

Standard Size Plastic & Metal

Despard Interchangeable Plate Supplied with Mounting Straps

legrand®
Pass & Seymour


Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
One Horizontal Opening Per Gang					
One Gang 	Ivory White Brown		**K1I** **K1W** **K1**	302S/S	**SSK1**
Two Gang 				302S/S	**SSK12**
Three Gang 				302S/S	**SSK13**
Two Horizontal Openings Per Gang					
One Gang 	Ivory White Brown		**K2I** **K2W** **K2**	302S/S	**SSK2**
Two Gang 				302S/S	**SSK22**
Three Horizontal Openings Per Gang					
One Gang 	Ivory White Brown		**K3I** **K3W** **K3**	302S/S	**SSK3**
Two Gang 				302S/S	**SSK32**
Three Gang 				302S/S	**SSK33**
One Vertical Opening Per Gang					
One Gang 	Ivory White Brown		**K4I** **K4W** **K4**		

See Page R-11 for Devices.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Wall Plates
Two Gang with Center Opening
Standard Size Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Two Gang with Center Opening					
Toggle Switch 				302S/S	**SS740**
Blank-Box Mount 				302S/S	**SS743**
Decorator 				302S/S	**SS746**
Single Receptacle 				302S/S	**SS747**
Duplex Receptacle 				302S/S	**SS748**

KL Series Locking Switch Plates					
One Gang  .906 diameter Reference Page A-3 for device				302S/S	**SS717**
Two Gang  .906 diameter Reference Page A-3 for device				302S/S	**SS727**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Louver & Biplex/Triplex Openings
Standard Size Metal





legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Louver Plates					
One Gang Horizontal 				Brass 302S/S 302S/S Painted Ivory 302S/S Painted White 302S/S Painted Light Almond	**SB760** **SS760** **SS760I** **SS760W** **SS760LA**
One Gang Vertical 				Brass 302S/S 302S/S Painted Ivory 302S/S Painted White 302S/S Painted Brown 302S/S Painted Gray 302S/S Painted Light Almond	**SB771** **SS771** **SS771I** **SS771W** **SS771X** **SS771GRY** **SS771LA**
Two Gang Vertical 				302S/S	**SS772**
Biplex/Triplex Receptacle					
One Gang 1 Biplex/Triplex 				302S/S	**SS9**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour







Wall Plates
Toggle Switch, Duplex & Single Receptacle Openings
Junior-Jumbo & Jumbo Plastic & Metal

Description	Color	Nylon	Thermoset		Metal		
		TradeMaster® Jumbo	Junior-Jumbo	Jumbo		Junior-Jumbo	Jumbo
		Smooth	Smooth	Smooth	Material	Smooth	Smooth
Toggle Switch Openings							
One Gang 	Ivory	TPJ1I	SPJ1I	SPO1I			
	White	TPJ1W	SPJ1W	SPO1W	Brass	SBJ1	SBO1
	Brown	TPJ1	SPJ1	SPO1	302S/S	SSJ1	SSO1
	Gray	TPJ1GRY					
	Light Almond	TPJ1LA	SPJ1LA				
Two Gang 	Ivory	TPJ2I	SPJ2I	SPO2I			
	White	TPJ2W	SPJ2W	SPO2W	Brass	SBJ2	
	Brown	TPJ2	SPJ2	SPO2	302S/S	SSJ2	SSO2
	Gray	TPJ2GRY					
	Light Almond	TPJ2LA	SPJ2LA				
Three Gang 	Ivory	TPJ3I	SPJ3I				
	White	TPJ3W	SPJ3W		302S/S	SSJ3	SSO3
	Brown	TPJ3	SPJ3				
	Gray	TPJ3GRY					
	Light Almond	TPJ3LA	SPJ3LA				
Four Gang 	Ivory	TPJ4I	SPJ4I				
	White	TPJ4W	SPJ4W		302S/S		SSO4
	Brown	TPJ4	SPJ4				
	Gray	TPJ4GRY					
	Light Almond	TPJ4LA	SPJ4LA				
Duplex Receptacle Openings							
One Gang 	Ivory	TPJ8I	SPJ8I	SPO8I			
	White	TPJ8W	SPJ8W	SPO8W	Brass	SBJ8	SBO8
	Brown	TPJ8	SPJ8	SPO8	302S/S	SSJ8	SSO8
	Gray	TPJ8GRY					
	Light Almond	TPJ8LA	SPJ8LA	SPO8LA			
Two Gang 	Ivory	TPJ82I	SPJ82I	SPO82I			
	White	TPJ82W	SPJ82W	SPO82W	302S/S	SSJ82	SSO82
	Brown	TPJ82	SPJ82	SPO82			
	Gray	TPJ82GRY	SPJ82GRY				
	Light Almond	TPJ82LA	SPJ82LA				
Three Gang 					302S/S		SSO83
Single Receptacle Openings							
One Gang 	Ivory	TPJ7I	SPJ7I				
	White	TPJ7W	SPJ7W		302S/S	SSJ7	SSO7
	Brown	TPJ7	SPJ7				
	Gray	TPJ7GRY					
	Light Almond	TPJ7LA	SPJ7LA				

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Decorator Openings & Blank Plates
Junior-Jumbo & Jumbo Plastic & Metal


legrand®
Pass & Seymour

Description	Color	Nylon TradeMaster® Jumbo Smooth	Thermoset Junior-Jumbo Smooth	Thermoset Jumbo Smooth	Metal Material	Metal Junior-Jumbo Smooth	Metal Jumbo Smooth
Decorator Openings							
One Gang 	Ivory	TPJ26I	SPJ26I	SPO26I			
	White	TPJ26W	SPJ26W	SPO26W	Brass	SBJ26	SBO26
	Brown	TPJ26	SPJ26	SPO26	302S/S	SSJ26	SSO26
	Gray	TPJ26GRY					
	Red	TPJ26RED					
	Light Almond	TPJ26LA	SPJ26LA	SPO26LA			
Two Gang 	Ivory	TPJ262I	SPJ262I	SPO262I			
	White	TPJ262W	SPJ262W	SPO262W	302S/S	SSJ262	SSO262
	Brown	TPJ262	SPJ262	SPO262			
	Gray	TPJ262GRY					
	Light Almond	TPJ262LA	SPJ262LA				
Three Gang 	Ivory	TPJ263I	SPJ263I				
	White	TPJ263W	SPJ263W		302S/S	SSJ263	
	Brown	TPJ263	SPJ263				
	Gray	TPJ263GRY					
	Light Almond	TPJ263LA	SPJ263LA				
Four Gang 	Ivory	TPJ264I	SPJ264I				
	White	TPJ264W	SPJ264W				
	Brown	TPJ264	SPJ264				
	Gray	TPJ264GRY					
	Light Almond	TPJ264LA	SPJ264LA				
Blank Plates – Box & Strap Mounted							
One Gang Blank – Box Mtd. 	Ivory	TPJ13I	SPJ13I	SPO13I			
	White	TPJ13W	SPJ13W	SPO13W	302S/S	SSJ13	SSO13
	Brown	TPJ13	SPJ13	SPO13			
	Gray	TPJ13GRY					
	Light Almond	TPJ13LA	SPJ13LA				
Two Gang Blank – Box Mtd. 	Ivory			SPO23I			
	White			SPO23W	302S/S		SSO23
	Brown			SPO23			
Three Gang Blank – Box Mtd. 					302S/S		SSO33
One Gang Blank – Strap Mtd. 					302S/S		SSO14
Two Gang Blank – Strap Mtd. 					302S/S		SSO24
Three Gang Blank – Strap Mtd. 					302S/S		SSO34

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.






legrand®
Pass & Seymour

Wall Plates
Combination Openings
Junior-Jumbo & Jumbo Plastic & Metal






Description	Color	Nylon	Thermoset		Metal		
		TradeMaster® Jumbo	Junior-Jumbo	Jumbo		Junior-Jumbo	Jumbo
		Smooth	Smooth	Smooth	Material	Smooth	Smooth
Two Gang Combination Openings							
Two Gang Toggle/Duplex 	Ivory White Brown Gray Light Almond	**TPJ18I** **TPJ18W** **TPJ18** **TPJ18GRY** **TPJ18LA**	**SPJ18I** **SPJ18W** **SPJ18** **SPJ18LA**	**SPO18I** **SPO18W** **SPO18**	302S/S	**SSJ18**	**SSO18**
Two Gang Toggle/Decorator 	Ivory White Brown Gray Light Almond	**TPJ126I** **TPJ126W** **TPJ126** **TPJ126GRY** **TPJ126LA**	**SPJ126I** **SPJ126W** **SPJ126** **SPJ126LA**		302S/S	**SSJ126**	**SSO126**
Two Gang Toggle/Blank (Strap Mtd) Supplied with 340 Yoke 					302S/S		**SSO114**
Two Gang Toggle/Blank (Box Mtd) 	Ivory White Brown Gray Light Almond	**TPJ113I** **TPJ113W** **TPJ113** **TPJ113GRY** **TPJ113LA**	**SPJ113I** **SPJ113W** **SPJ113**	**SPO113I** **SPO113**			
Two Gang Blank (Box Mtd)/Duplex 	Ivory White Brown		**SPJ138I** **SPJ138W** **SPJ138**	**SPO138I** **SPO138**	302S/S		**SSO138**
Two Gang Duplex/Decorator 	Ivory White Brown Gray Light Almond	**TPJ826I** **TPJ826W** **TPJ826** **TPJ826GRY** **TPJ826LA**	**SPJ826I** **SPJ826W** **SPJ826LA**				
Two Gang Blank/Decorator  ** strap mounted * box mounted	Ivory White Brown		**SPJ1426I**** **SPJ1426W**** **SPJ1426****	**SPO1326I*** **SPO1326W*** **SPO1326***			
Three Gang 2 Toggles/Duplex 					302S/S		**SSO28**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Thermoplastic

Description	Semi-Jumbo	
	Color	Smooth Nylon
Sectional Wall Plates – End Sections		
Toggle Switch 	Ivory White Light Almond	**PJSE1I** **PJSE1W** **PJSE1LA**
Duplex Receptacle 	Ivory White Light Almond	**PJSE8I** **PJSE8W** **PJSE8LA**
Single Receptacle 	Ivory White Light Almond	**PJSE7I** **PJSE7W** **PJSE7LA**
Blank, Strap Mounted supplied with #340 Yoke 	Ivory White Light Almond	**PJSE14I** **PJSE14W** **PJSE14LA**
Decorator 	Ivory White Light Almond	**PJSE26I** **PJSE26W** **PJSE26LA**


Thermoplastic

Description	Semi-Jumbo	
	Color	Smooth Nylon
Sectional Wall Plates – Center Sections		
Toggle Switch 	Ivory White Light Almond	**PJSC1I** **PJSC1W** **PJSC1LA**
Duplex Receptacle 	Ivory White Light Almond	**PJSC8I** **PJSC8W** **PJSC8LA**
Single Receptacle 	Ivory White Light Almond	**PJSC7I** **PJSC7W** **PJSC7LA**
Blank, Strap Mounted supplied with #340 Yoke 	Ivory White Light Almond	**PJSC14I** **PJSC14W** **PJSC14LA**
Decorator 	Ivory White Light Almond	**PJSC26I** **PJSC26W** **PJSC26LA**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Wall Plates
Tandem & Handy Box Plates

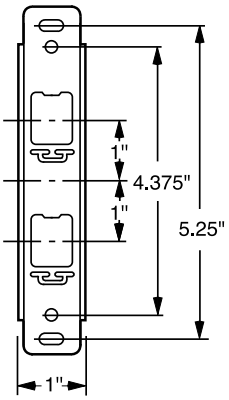

342 Strap

Features

- Tandem wall plates are ideal for curtain wall and movable partitions or wherever limited wiring exists.
- Note: Write factory for availability of other tandem sizes, materials, and openings.

Description	Material	Catalog Number
Tandem Wall Plates		
1-3/4" W x 6-1/8" H 2 Vertical Devices Supplied with #342 Strap 	302S/S	**SSTK424**

Features

- Handy Box Plates give a finished appearance and style to surface mounted boxes.
- Available in the five most-used openings, they have a bright corrosion-resistant zinc-plated finish.
- Plate conceals rough edge of box.









Description	Material	Catalog Number
Galvanized Steel Handy Box Plates		
One Gang Toggle Switch 	Plated	**SH1**
One Gang Single Receptacle 	Plated	**SH7**
One Gang Duplex Receptacle 	Plated	**SH8**
One Gang Blank (Box Mounted) 	Plated	**SH13**
One Gang Decorator/GFCI 	Plated	**SH26**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Narrow Metal

Made to Order – Consult factory for price and availability

legrand®
Pass & Seymour

Made to Order Wall Plates			 1-3/8"	 1-1/2"	 1-11/16"	 1-3/4"	 2"	 2-1/2"
	Description	**Material**	**Catalog Numbers**					
	**Toggle Switch**	Aluminum 302S/S	**SAN11** **SSN11**			**SAN14** **SSN14**	 **SSN15**	
	**Telephone Outlet** 13/32" Hole – Box Mounted	302S/S						**SSN117**
	**Telephone Outlet** 13/32" Hole – Strap Mounted	302S/S	**SSN121**					
	**Blank** Strap Mounted, 1 #340 Yoke	Aluminum 302S/S		 **SSN142**		**SAN144** **SSN144**		
	**Duplex Receptacle**	Aluminum 302S/S					**SAN85** **SSN85**	
	**1 Despard® Interchangeable** Horizontal Opening Supplied With #348 Mounting Strap	Aluminum 302S/S				**SANK14** **SSNK14**		
	**2 Despard Interchangeable** Horizontal Openings Supplied With #348 Mounting Strap	Aluminum 302S/S				**SANK24** **SSNK24**		
	**3 Despard Interchangeable** Horizontal Openings Supplied With #348 Mounting Strap	302S/S				**SSNK34**		
	**1 Despard Interchangeable** Vertical Opening Supplied With #347 Mounting Strap	Aluminum 302S/S	**SANK41** **SSNK41**		**SANK43** **SSNK43**	**SANK44** **SSNK44**		
	**1 Despard Interchangeable** Vertical Opening Device Mounted Use with #347 Strap	Aluminum 302S/S	**SANK51** **SSNK51**		**SANK53** **SSNK53**	**SANK54** **SSNK54**		

Note: All narrow plates are 4-1/2" high.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.


legrand®
Pass & Seymour

Wall Plates
Dustproof Stainless Steel Covers
Specification Grade


Stainless Steel Covers are dustproof only and do not meet NEC 406.8(A) or (B).

Features


- Exclusive – Spec-grade stainless steel dust covers.
- Aesthetically pleasing.
- Ideal for hard-use and corrosive applications.




WP1
WP7



WP2




WP8
WP26




WP26L

Catalog Number	Description	3rd Party Compliance UL	3rd Party Compliance CSA
Dustproof Stainless Steel Covers			
WP1	1 Toggle Switch 1 Small Cover, Vertical 1 Gang Plate Available for Four Screw Mount – add suffix -FS	•	•
WP2	2 Toggle Switches 2 Small Covers, Vertical 2 Gang Plate	•	•
WP7	1 Single Receptacle 1 Small Cover, Vertical 1 Gang Plate Available for Four Screw Mount – add suffix -FS	•	•
WP8	1 Duplex Receptacle 1 Long Cover, Vertical 1 Gang Plate	•	•
WPH8	1 Duplex Receptacle 1 Long Cover, Horizontal 1 Gang Plate	•	•
WPD8	1 Duplex Receptacle 2 Small Covers, Horizontal 1 Gang Plate	•	•
WP26	1 Decorator/GFCI 1 Long Cover, Vertical 1 Gang Plate	•	•
WPH26	1 Decorator/GFCI 1 Long Cover, Horizontal 1 Gang Plate	•	•
Dustproof Locking Stainless Steel Covers			
WPH1L	Toggle Opening Horizontal	•	•
WPH7L	Single Receptacle Opening Horizontal	•	•
WPH8L	Duplex Receptacle Opening Horizontal	•	•
WP26L	Decorator/GFCI Vertical	•	•

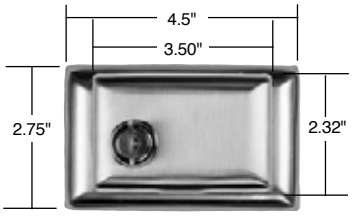

WPH1L, WPH7L



WPH8, WPH26

Catalog Number WP255K. Replacement key for all Dustproof Locking Covers. (Two keys furnished with each unit.)

Note: All locks keyed the same.


For Weatherproof Stainless Steel Covers, see Page P-14.

legrand®
Pass & Seymour


Features

- RJ11 modular jack.
- Mar-resistant wall plate.
- Wall plate dimension is Standard size.
- Fits standard size single gang electrical box.
- Meets FCC Part 68 requirements.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Single Gang Opening Modular Telephone Jack with Wall Plate			
TPTE1I	Ivory	4 Conductor	
TPTE1W	White	4 Conductor	
TPTE1	Brown	4 Conductor	
TPTE1GRY	Gray	4 Conductor	
TPTE1BK	Black	4 Conductor	
TPTE1LA	Light Almond	4 Conductor	
Single Gang, Two Modular RJ11 Telephone Jacks with Wall Plate			
TPTE2I	Ivory	4 Conductor	
TPTE2W	White	4 Conductor	
TPTE2	Brown	4 Conductor	
TPTE2BK	Black	4 Conductor	
TPTE2LA	Light Almond	4 Conductor	



TPTE1




TPTE2

Features

- Decorator-style rectangular design.
- RJ11 modular jack.
- Fits standard single gang electrical box.
- May be used in multigang applications.
- Face constructed of high-impact thermoplastic.
- Brass terminals with nickel-plated steel screws and washers.
- Meets FCC Part 68 requirements.


Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Decorator Modular Jack Single Gang, 1 Opening Modular Jack			
26TE14I	Ivory	4 Conductor	•
26TE14W	White	4 Conductor	•
26TE14LA	Light Almond	4 Conductor	•
26TE16I	Ivory	6 Conductor	•
26TE16W	White	6 Conductor	•



26TE14
26TE16

legrand®
Pass & Seymour

Wall Plates
Communication Devices
Telephone Wiring Devices




26TE24

Features

- One piece molded plate Decorator outline.
- Two RJ11 modular jacks.
- Fits standard single gang electrical box.
- Face constructed of high-impact thermoplastic.
- Brass terminals with nickel-plated steel screws and washers.
- Wall plate dimension is standard size.
- Meets FCC Part 68 requirements.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Decorator Duplex Modular Jack with Smooth Plate Single Gang, 2 Openings			
26TE24I	Ivory	4 Conductor	•
26TE24W	White	4 Conductor	•
26TE24LA	Light Almond	4 Conductor	•
26TE26I	Ivory	6 Conductor	•
26TE26W	White	6 Conductor	•




WMTE14

Features

- RJ-11 modular jack.
- High-impact thermoplastic face plate and back body.
- Nickel-plated steel screw terminals.
- Zinc-plated mounting lugs.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Modular Wall Mount Telephone Jack for Hanging Phones			
WMTE14I	Ivory	4 Conductor	•
WMTE14W	White	4 Conductor	•
WMTE14LA	Light Almond	4 Conductor	•



SMTE14

Features

- Nickel-plated steel screws and washers.
- Brass terminals.
- Comes with mounting screws and adhesive pad.
- Snap-on cover and base constructed of high-impact thermoplastic.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Surface Mount Modular RJ-11 Telephone Jack			
SMTE14I	Ivory	4 Conductor	•


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Wall Plates
Communication Devices
Telephone & CATV Wiring Devices


legrand®
Pass & Seymour

Features
- Mar-resistant wall plate.
- Fits standard size single gang electrical box.
- Wall plate dimension is Standard size.
- Nickel-plated steel.
- Connector is threaded at each end.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
"F" Type with One Coaxial Connector & Wall Plate, Single Gang			
TPCATVI	Ivory	F-type COAX Connector	•
TPCATVW	White	F-type COAX Connector	•
TPCATV	Brown	F-type COAX Connector	•
TPCATVBK	Black	F-type COAX Connector	•
TPCATVLA	Light Almond	F-type COAX Connector	•
"F" Type with Two Coaxial Connectors & Wall Plate, Single Gang			
TPCATV2I	Ivory	2 F-type COAX Connectors	•
TPCATV2W	White	2 F-type COAX Connectors	•
TPCATV2	Brown	2 F-type COAX Connectors	•
TPCATV2BK	Black	2 F-type COAX Connectors	•
TPCATV2LA	Light Almond	2 F-type COAX Connectors	•




TPCATV



TPCATV2

Features
- Decorator outline.
- Face constructed of high-impact thermoplastic.
- Zinc-plated steel strap.
- Nickel-plated "F" type connector.
- Threaded on each end.


Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Decorator "F" Type Coaxial Connector Single Gang with 1 COAX Connector			
26CATVI	Ivory	F-type COAX Connector	•
26CATVW	White	F-type COAX Connector	•
26CATVLA	Light Almond	F-type COAX Connector	•




26CATV

Features
- Decorator outline.
- RJ11 modular jack.
- Face constructed of high-impact thermoplastic.
- Zinc-plated steel strap.
- Nickel-plated "F" type connector.
- Threaded on each end.

Catalog Number	Color	Configuration	3rd Party Compliance UL1863
Combination Coaxial Connector & Telephone Jack			
TPTELTVI	Ivory	F-type COAX Connector with 4 Conductor RJ-11 jack	•
TPTELTVW	White		•
TPTELTV	Brown		•
TPTELTVBK	Black		•
TPTELTVLA	Light Almond		•
26TELTVICC10	Ivory	Same as TPTELTV with one-piece molded plate Decorator outline.	•
26TELTVWCC10	White		•
26TELTVLACC10	Light Almond		•



TPTELTV



26TELTVCC10

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Wall Plates
Communication Plates
Standard Size Plastic & Metal

Description	Color	Nylon TradeMaster® Plates	Thermoset Smooth	Metal Material	Metal Smooth
Telephone or Cable Outlet 13/32" Hole, Box Mounted					
 **One Gang** 1 Outlet (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory	**TP11I**	**SP11I**	Brass	**SB11**
	White	**TP11W**	**SP11W**	302S/S	**SS11**
	Brown	**TP11**	**SP11**		
	Gray	**TP11GRY**			
	Black	**TP11BK**			
	Red	**TP11RED**			
	Light Almond	**TP11LA**			
 **Two Gang** 2 Outlets	Ivory		**SP21I**		
	White		**SP21W**		
	Gray		**SP21GRY**	302S/S	**SS21**
Telephone or Cable Outlet 13/32" Hole, Strap Mounted, With Adjustment Yoke					
 **One Gang** 1 Outlet 1 #340 Yoke (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory	**TP12I**	**SP12I**	Brass	**SB12**
	White	**TP12W**	**SP12W**		
	Brown	**TP12**	**SP12**	430S/S	**SL12**
	Gray	**TP12GRY**		302S/S	**SS12**
	Black	**TP12BK**	**SP12BK**		
	Red		**SP12RED**		
	Light Almond	**TP12LA**	**SP12LA**		
 **Two Gang** 2 Outlets				302S/S	**SS22**
				302S/S Painted Ivory	**SS22I**
				302S/S Painted White	**SS22W**
				302S/S Painted Gray	**SS22GRY**
Telephone or Cable Outlet 5/8" Hole, Strap Mounted					
 **One Gang** 1 Outlet 1 #340 Yoke (Metal plates have removable 5/8" I.D. grommet in 7/8" hole.)				302S/S	**SS730**
Telephone or Cable Outlet 13/32" Hole With Knockout, Strap Mounted					
 **One Gang** 1 Outlet 1 #340 Yoke	Ivory		**SP732I**		
	Brown		**SP732**		
	Gray		**SP732GRY**		
Telephone or Cable Outlet 5/8" ID, Box Mounted					
 **One Gang** 1 Outlet	Ivory	**TP60I**	**SP60I**		
	White	**TP60W**	**SP60W**		
	Light Almond	**TP60LA**	**SP60LA**		
Telephone or Cable Outlet 11/4" Hole, Strap Mounted					
 **One Gang** 1 Outlet Supplied With #340 Yoke				302S/S	**SS736**

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour




Description	Metal	
	Material	Smooth
Horizontal-Split Wall Plates for Television or Cable Lead-In*		
 **One Gang** 1 Outlet Box Mounted. Removable 13/32" I.D. grommet in 1/2" hole.	302S/S	**SS751**
 **One Gang** 1 Outlet Supplied With #340 Yoke Strap Mounted. Removable 13/32" I.D. grommet in 17/32" hole.	302S/S	**SS752**
 **One Gang** 1 Outlet Box Mounted. Removable 5/8" I.D. grommet in 7/8" hole.	302S/S	**SS753**
 **One Gang** 1 Outlet Supplied With #340 Yoke Strap Mounted. Removable 5/8" I.D. grommet in 7/8" hole.	302S/S	**SS754**
 **Two Gang** 1 Centered Outlet (Also Furnished for Strap Mounting Cat. # **SS786** with 2 #340 Yokes. Box Mounted. Removable 13/32" I.D. grommet in 17/32" hole.)	302S/S**	**SS785**
 **Two Gang** 1 Centered Outlet (Also Furnished for Strap Mounting Cat. # **SS788** with 2 #340 Yokes. Box Mounted. Removable 5/8" I.D. grommet in 7/8" hole.)	302S/S**	**SS787**

* For telephone, security systems, FM and cable TV antennas or wherever cable interconnections are required.
** Strap Mounted with 2 #340 Yokes.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

legrand®
Pass & Seymour

Wall Plates
Communication Plates

Description	Color	Thermoset Smooth	Metal Material	Metal Smooth
Two Gang with Centered Openings**				
 **1 Centered Outlet** Box Mounted			302S/S	**SS741**
 **1 Centered Outlet** Strap Mounted Supplied with #340 Yoke			302S/S	**SS742**
Computer Jack Plates for RS-232 Connectors**				
 **One Gang** One Jack Opening			302S/S	**SS791**
 **One Gang** Two Jack Opening			302S/S	**SS792**
Standard Combination Two Gang*				
 **Two Gang** Telephone/Duplex	Ivory White Brown Gray	**SP128I** **SP128W** **SP128** **SP128GRY**	302S/S	**SS128**
 **Two Gang** Telephone/Blank (Strap Mtd)	Ivory White	**SP1214I** **SP1214W**	302S/S	**SS1214**
 **Two Gang** Telephone/Decorator	White Brown	**SP1226W** **SP1226**	302S/S	**SS1226**
 **Two Gang** Telephone/Toggle	Ivory White Brown	**SP112I** **SP112W** **SP112**		




*Has 13/32" and 5/8" double knockout.

Description	Thermoset Junior-Jumbo Color	Thermoset Junior-Jumbo Smooth	Metal Jumbo Material	Metal Jumbo Smooth
Telephone/Cable Outlet**				
 **One Gang** 1 Outlet (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory White Light Almond	**SPJ11I** **SPJ11W** **SPJ11LA**	302S/S	**SSO11**
Telephone/Cable Outlet**				
 **One Gang** 1 Outlet Supplied with #340 Yoke			302S/S	**SSO12**

**These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

Mounting Straps, Yokes & Jewels

legrand®
Pass & Seymour

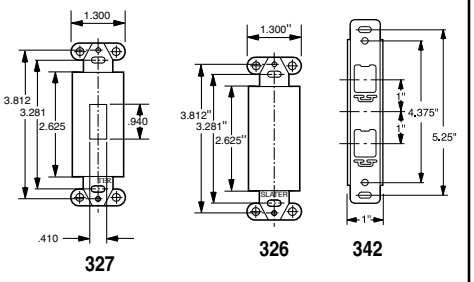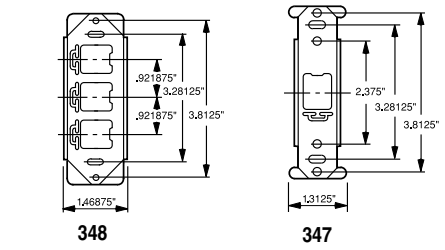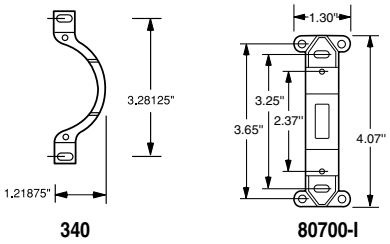Description	Finish	Color	Catalog Number	Dimensions
Mounting Straps & Yokes				
Mounting strap for dimmer insert. Box mounted. Change from decorator to toggle opening.	Painted Steel	Ivory White Brown Light Almond	**327I** **327W** **327** **327LA**	
Mounting strap for blank insert. Box mounted. Changes decorator opening to blank.	Painted Steel	Ivory White Brown Light Almond	**326I** **326W** **326** **326LA**	
Tandem mounting strap with two vertical openings. Plate screw hole spacing 4-3/8".	Bright Zinc		**342**	
Mounting strap with three horizontal openings. Plate screw hole spacing 3-13/16". Box mounted.	Bright Zinc		**348**	
Mounting strap with single vertical opening. Plate screw hole spacing 3-13/16". Box mounted.	Bright Zinc		**347**	
Adjustment yoke for strap mounted telephone and blank wall plates. Slots 3-9/32" C to C. Plate screw holes 2-3/8" C to C. Box mounted.	Bright Zinc		**340**	
Mounting strap for blank insert. Changes toggle opening to blank, box mounted.	Thermoset	Ivory White Light Almond	**80700I** **80700W** **80700LA**	


Description	Jewel Color	Catalog Number	Jewels		Jewels Shown with Wall Plates
			Front View	Side View	
Plastic Jewels – For Toggle Switch Openings (Style #1)					
Rectangular acrylic plastic warning light jewel for toggle switch plates with holding ring. Red Jewel Standard.	Red Green White	**406RED** **406GN** **406W**			
Plastic Jewels – For Single Receptacle Openings (Style #7)					
Round acrylic plastic warning light jewel for single receptacle plates with holding ring. Red Jewel Standard.	Red Green White	**405RED** **405GN** **405W**			

UL Listed.


legrand®
Pass & Seymour

Specialties


Decorator Hallway Lights & Combination Devices




TMHWLCC



TMHWLECC



TM8HWLWCC



PS8HWLLA

Features

- Impact-resistant face and body.
- GE Lexan™ high impact-resistant lens.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Ground screw position under the end of the strap minimizes the risk of contact.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Sensor automatically turns light ON in the dark.
- Increased light output for better illumination.
- Light sensor for enhanced sensitivity.

Tamper-Resistant Combination Version:

- UL tested shutter mechanism for protection against improper object insertion per UL478.
- Specially designed for increased protection of children in their homes.
- Superior protection than traditional outlet "caps" or "protection plates."

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	3rd Party Compliance UL1598
TradeMaster® Decorator Full Hallway Light with Light Sensor				
TMHWLCC	— 120	0.1328	Clear	•
Enhanced Decorator Full Hallway Light with Light Sensor				
TMHWLECC	— 120	1.079	Clear	•
Enhanced Decorator Full Hallway Light without Light Sensor				
TMHWLENSCC	— 120	1.113	Clear	•
Full Hallway Decorator Light for use with P&S Metal Louver Plates**				
TMHWLLOUVCC	— 120	0.0843	Clear	•

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See page S-56 for more information.
**For Louver Plates, see Page Q-21.

Catalog Number	Rating A. VAC	Light Output In 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance UL498
TradeMaster® Decorator Hallway Light & Single Receptacle					
TM8HWLICC	15 120/125	0.1442	Ivory	5-15R	•
TM8HWLWCC	15 120/125	0.1442	White	5-15R	•
TM8HWLBKCC	15 120/125	0.1442	Black	5-15R	•
TM8HWLCC	15 120/125	0.1442	Brown	5-15R	•
TM8HWLLACC	15 120/125	0.1442	Light Almond	5-15R	•
Specification Grade Enhanced Decorator Hallway Light & Single Receptacle					
PS8HWLI	20 120/125	0.2561	Ivory	5-20R	•
PS8HWLW	20 120/125	0.2561	White	5-20R	•
PS8HWLLA	20 120/125	0.2561	Light Almond	5-20R	•
TradeMaster® Enhanced Decorator Hallway Light & Tamper-Resistant Single Receptacle					
TM8HWLTRICC	15 125	0.2561	Ivory	5-15R	•
TM8HWLTRWCC	15 125	0.2561	White	5-15R	•
TM8HWLTRBKCC	15 125	0.2561	Black	5-15R	•
TM8HWLTRCC	15 125	0.2561	Brown	5-15R	•
TM8HWLTRLACC	15 125	0.2561	Light Almond	5-15R	•

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD. See page S-56 for more information.

For complete line of Decorator Combination Devices, see Pages D-9 – D-12, D-20, D-24, D-33, and D-39.

Decorator Combination Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Features


- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Two receptacles.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

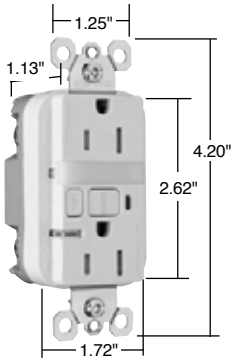

1595NTLTRWCC4

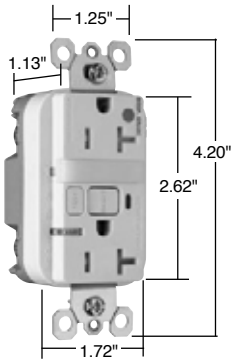

2095HGNTLTRW

Catalog Number	Rating A.	VAC	Light Output in 1' FCD*	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595NTLTRICC4	15	125	0.180	Ivory	5-15R	•	•	•
1595NTLTRWCC4	15	125	0.180	White	5-15R	•	•	•
1595NTLTRBKCC4	15	125	0.180	Black	5-15R	•	•	•
1595NTLTRLACC4	15	125	0.180	Light Almond	5-15R	•	•	•
1595NTLTRBNCC4	15	125	0.180	Brushed Nickel	5-15R	•	•	•
1595NTLTRTICC4	15	125	0.180	Titanium	5-15R	•	•	•
Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095NTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095NTLTRW	20	125	0.180	White	5-20R	•	•	•
2095NTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095NTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•
Hospital Grade Combination Tamper-Resistant 15 Amp Nightlight/GFCI								
1595HGNTLTRI	15	125	0.180	Ivory	5-15R	•	•	•
1595HGNTLTRW	15	125	0.180	White	5-15R	•	•	•
1595HGNTLTR	15	125	0.180	Brown	5-15R	•	•	•
1595HGNTLTRGRY	15	125	0.180	Gray	5-15R	•	•	•
1595HGNTLTRRED	15	125	0.180	Red	5-15R	•	•	•
1595HGNTLTRLA	15	125	0.180	Light Almond	5-15R	•	•	•
Hospital Grade Combination Tamper-Resistant 20 Amp Nightlight/GFCI								
2095HGNTLTRI	20	125	0.180	Ivory	5-20R	•	•	•
2095HGNTLTRW	20	125	0.180	White	5-20R	•	•	•
2095HGNTLTRGRY	20	125	0.180	Gray	5-20R	•	•	•
2095HGNTLTRRED	20	125	0.180	Red	5-20R	•	•	•
2095HGNTLTRLA	20	125	0.180	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page S-56 for more information.


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Specialties

PlugTail™ Specification & Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

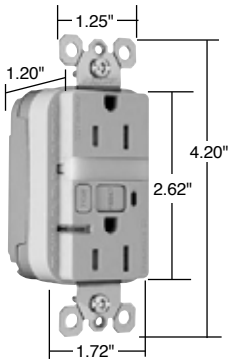

PT1595NTLTRI

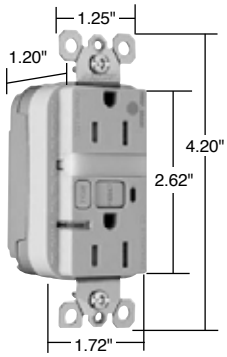

PT1595HGNTLTRI



PTRA6STR


Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Sealed nightlight with high impact-resistant Lexan® lens prevents tampering.
- Nightlight uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- Photocell turns nightlight ON in dark, OFF in daylight.
- Faster, more reliable installation.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3 wire PlugTail Connectors creating a non-feed-thru application for facility owners. At rough-in just install the same right angle connector for GFCI and receptacle openings.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Zinc-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance: UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
NEW Specification Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595NTLTRI	15	125	Ivory	5-15R	•	•	•
NEW Specification Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095NTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095NTLTRW	20	125	White	5-20R	•	•	•
NEW Hospital Grade Tamper-Resistant 15 Amp Combination Nightlight/GFCI							
PT1595HGNTLTRI	15	125	Ivory	5-15R	•	•	•
PT1595HGNTLTRW	15	125	White	5-15R	•	•	•
PT1595HGNTLTRRED	15	125	Red	5-15R	•	•	•
NEW Hospital Grade Tamper-Resistant 20 Amp Combination Nightlight/GFCI							
PT2095HGNTLTRI	20	125	Ivory	5-20R	•	•	•
PT2095HGNTLTRW	20	125	White	5-20R	•	•	•
PT2095HGNTLTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R NEMA 5-20R

For PlugTail Connector catalog numbers, see Page C-13 or C-14.

All devices listed on this page conform to NEMA WD-1 and WD-6.

Incandescent Lampholders, Neon Pilot Lights & Panelites

legrand®
Pass & Seymour

Description	Catalog Number

Incandescent Lampholders



Designed to give adequate light when installed behind a louvre plate or indicator jewel. Mounts in standard wall box. Plate mounting is 2-3/8" and 3-13/16". UL listed for 120 VAC circuits. Plate not included.

Standard lampholder, 4 Watt **2152**

Extra long life: Integral series resistor in base reduces light output by about 40%, but increases lamp life more than ten times. Plate not included.

Extra long life, 4 Watt. **2156**




Application

Lampholders and louver plates are an ideal combination for providing bright, shielded light in hallways and pathways. They increase safety in corridors, theater aisles, porches, stairways, etc. A wide choice of plates gives unlimited possibilities for designing the perfect night light installation. Available in brushed brass, custom-painted stainless steel and stainless steel.

For the complete listing of Louver Plates, see Page Q-21 .

Description	Catalog Number

Energy Efficient Gasket



Gangable gasket, use for toggle, duplex, GFCI or blank. **GASKET1**

Description	Catalog Number

Neon Pilot Lights



Long life neon bulb emits indicating light through transparent lens to show power is on. May be installed at the load, at switching posts or at remote locations. We suggest the wall plate be engraved to explain indication. Fits standard wall box and takes standard toggle switch plate opening. Plate mounting is 2-3/8". UL listed 120/277 VAC.

With green lens **2151GN**
With red lens **2151RED**
With white lens **2151W**

Panelites


Panelites are attractive wall plates that light the message "IN USE" to protect darkrooms, private meeting areas, etc. Also available with a clear face for user to apply his own message. Furnished complete ready to wire. Panelites may be installed in a feed-through wall box, with the Panelite on one wall and a pilot light on the other. Panelite also may be installed in a standard wall box with the control switch in any desired location. With 4 Watt Incandescent bulb. Ivory plate.



2219PL



2220PL



2200PL





IN USE, for Horizontal mounting . **2219PL**
IN USE, for Vertical mounting. . . . **2220PL**
With clear unprinted face **2200PL**



UL Listed and CSA Certified.


All devices listed on this page conform to NEMA WD-1 and WD-6.


legrand®
Pass & Seymour

Specialties
Screws & Screwdrivers

Description	Color or Finish	Catalog Number
Standard & Interchangeable Wall Plate Screws		
Oval Head Milled Slot 5/16" long, 6 x 32 Thread  Standard size for Decorator Wall Plates.	Ivory White Brown Gray Light Almond Stainless	**509I** **509W** **509** **509GRY** **509LA** **509S**
Oval Head Milled Slot 1/2" long, 6 x 32 Thread  Standard size for Duplex Receptacles and Toggle Switch Wall Plates.	Ivory White Brown Brass Stainless	**510I** **510W** **510** **510BR** **510S**
Oval Head Milled Slot 3/4" long, 6 x 32 Thread 	Ivory White Brown Light Almond Stainless	**511I** **511W** **511** **511LA** **511S**
Oval Head Milled Slot 1" long, 6 x 32 Thread  Standard size for Blank Box Mounted Wall Plates.	Ivory White Brown Light Almond Stainless	**512I** **512W** **512** **512LA** **512S**
Oval Head Milled Slot 1-1/2" long, 6 x 32 Thread 	Ivory White Brown Light Almond Stainless	**513I** **513W** **513** **513LA** **513S**


Description	Finish	Catalog Number
Tamper-Proof Spanner Head Screws		
Spanner Oval Head 1/2" long, 6 x 32 Thread 	430S/S	**531S**
Spanner Oval Head 1" long, 6 x 32 Thread 	430S/S	**532S**









Description	Catalog Number
Screwdriver for Spanner Head or Key Slot Screws	
Screwdriver for Spanner Head Screw 	**533D**

Description	Finish	Catalog Number
Nylon Screws for Standard and Interchangeable Wall Plates		
Oval Head Standard Slot 1/2" long, 6 x 32 Thread 	Ivory	**528I**

Notes:
- Specify screws by catalog number to designate type of screw, thread, length, color or finish required.
- Screws are available by the box only.
- Order by number of boxes…not by the quantity of screws.
- Each box contains 100 screws.
- Metal screws are available with special finishes and can be painted.









legrand®
Pass & Seymour

Engraved (1/8" Characters)					
	Description	**Plate Color**	**Fill Color**	**Nylon TradeMaster®**	**Metal Smooth**
Emergency					
	1 Gang Duplex	302 S/S	Black		**SS8EE**
	1 Gang Duplex	302 S/S Painted Red	Black		**SS8ERED**

Pad Printed (1/8" Characters)					
	Description	**Plate Color**	**Fill Color**	**Nylon TradeMaster**	**Metal Smooth**
Isolated Ground					
	1 Gang Duplex	Orange	Black	**TP8IG**	
	1 Gang Duplex	302 S/S	Black		**SS8IG**
	2 Gang Duplex	302 S/S	Black		**SS82IG**
	1 Gang Single	Orange	Black	**TP7IG**	
	1 Gang Decorator	Orange	Black	**TP26IG**	
	1 Gang Decorator	302 S/S	Black		**SS26IG**
Emergency					
	1 Gang Duplex	Ivory	Red	**TP8EI**	
	1 Gang Duplex	White	Red	**TP8EW**	
	1 Gang Duplex	Red	Black	**TP8ERED**	
	1 Gang Duplex	302S/S	Black		**SS8ES**
	2 Gang Duplex	Red	Black	**TP82ERED**	
	1 Gang Toggle	Red	Black	**TP1ERED**	
	2 Gang Toggle	Red	Black	**TP2ERED**	

legrand®
Pass & Seymour

Wall Plates
Engraved & Pad Printed

Pad Printed (1/8" Characters)					
	Description	**Plate Color**	**Fill Color**	**Nylon TradeMaster®**	**Metal Smooth**
Emergency					
	1 Gang Decorator	Red	Black	**TP26ERED**	
	1 Gang Duplex	Red	Black	**TP8EMPOWER**	
Gas Burner ON/OFF Emergency Switch					
	1 Gang Toggle	302 S/S Painted Red	Black		**SS1GBRED**
Oil Burner ON/OFF Emergency Switch					
	1 Gang Toggle	302 S/S Painted Red	Black		**SS1OBRED**
GFCI Protected					
	1 Gang Duplex 1 Gang Duplex	Ivory White	Black Black	**TP8GFI** **TP8GFW**	
Computer Only					
	1 Gang Duplex 1 Gang Duplex	Ivory Orange	Black Black	**TP8CI** **TP8CO**	
	Single Receptacle Single Receptacle	Ivory Orange	Black Black	**TP7CI** **TP7CO**	
	1 Gang Decorator 1 Gang Decorator 1 Gang Decorator	Ivory Blue Orange	Black Black Black	**TP26CI** **TP26CBL** **TP26CO**	

legrand®
Pass & Seymour

Ordering Instructions:

1. Using the following charts, fill in the spaces provided to select the proper material, number of gangs, desired finish and color.

Review Your Requirements:	For Example:	Write Your Selection:	Space #
Material Prefix Code (Chart A below) *For Jr. Jumbo Size add "J" after prefix, if Jumbo Size, add "O" after Prefix*	**SBO**		**1**
Total Number of Gangs Ordered	**4**		**2**
Paint Finish Suffix (Chart B – Page Q-44)	**BLU**		**4**
Metal Finish Suffix (Chart C – Page Q-44)	**BC**		**5**

Material	Prefix Code
Chart A: Material Selection	
Aluminum*	SA
Brushed Brass	SB
302 Stainless Steel	SS

*Standard size only.

2. Review the Plate Opening Styles on pages Q-48 – Q-60. Following the sequence of your installation (left to right), label each box below with the appropriate Opening Style Number for each gang.

Gang: 1	2	3	4	5	6	7	8	9	10

3. Create the Complete Order Part Number by filling in items from previous steps in spaces below.

Space #1-Material Prefix Code (from step 1)
Space #2-Total Number of Gangs (from step 1)
Space #3-Style Numbers In Order (from step 2)
Space #4-Metal Finish Suffix (from step 1)
Space #5-Paint Finish Suffix (from step 1)

Catalog #_____ G_____ Style _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Space #	1	2	3	3	3	3	3	3	3	3	3	3	4	5

Maximum Gangs for Custom Metal Wall Plates			
Metal Plate	**Standard**	**Jr. Jumbo**	**Jumbo**
Stainless (302)	20	3	20
Aluminum	8	N/A	N/A
Brushed Brass	8	3	20

For help with configuring a Custom Metal Wall Plate, go to www.legrand.us/passandseymour and select Downloads/Product Selection Guides/Custom Wall Plates.

legrand®
Pass & Seymour

Wall Plates
Custom Metal Wall Plates
Special Configurations


These charts are for Custom Metal Wall Plates ONLY.
For Devices & Wall Plates Color Selection Charts, see Pages A-29, B-78 and Q-61.

Chart B: Paint Finish Selection

Paint Color	Orange	Green	Gray	Yellow	
Paint Suffix	ORG	GRN	GRY	YEL	
Paint Color	Glossy Black	Brown	White	Primer	Red
Paint Suffix	GBK	BRO	WHT	PRI	RED
Paint Color	Pink	Flat Black	Ivory	Light Almond	Blue
Paint Suffix	PNK	FBK	IVY	LTA	MBL

Only available on Stainless Steel and Aluminum Plate Material. Colors may vary slightly.
All Paint Finishes are gloss, except primer and flat black.

Chart C: Metal Finish Selection







Metal Finish	Polished Brass US #3	Bright Chromium US #26	Brushed Copper	Brushed Bronze US #10	Brushed Brass Standard Finish
Finish Suffix	PB*	CH	BC	BZ	BB

*Order with Brass Plate Material Prefix Only.

For additional colors consult factory.

legrand®
Pass & Seymour

Custom Engraving & Pad Printing

Most plates in this catalog can be engraved or pad printed. However, engraving plated finish metal plates is not recommended, since exposed edges could oxidize over time. Refer to current price sheet to select the better process that suits your needs.

Position


Marking may appear anywhere on the flat surface of smooth plates.
On Decorator plates, markings are restricted to the top and bottom flat panels.
If space permits, up to three lines can be pad printed on a plate provided the lettering fits within a 50mm circle.



Letter Height

Unless specified otherwise, designers will select size and position of letters or markings for maximum legibility. Characters per inch:

3/8" - 2-1/2 1/4" - 4 3/16" - 6 1/8" - 9 1/16" - 14



Letter Font

Pad printing is available in any True Type font in colors listed below, on 1 gang and 2 gang plates. Bitmap images can also be printed.

Laser engraving is available in any True Type font only in black (not color-filled) including bitmap images.
Engraving with color fill is available only in block letter font. While mixing of laser and color-filled engraving is allowed, it is not recommended since the font types will not match.

Color

Color-filled engraving can be filled with red, orange, black, blue, or white paint.


Standard colors for pad printing are red, black, blue, green, orange or white, as shown below.

Red Black Blue Green Orange White

Ordering Instructions

Specify clearly the following information when you order.

1. Catalog number of plate(s).
2. To be engraved or pad printed.
3. Letters, numbers, characters required.
4. Position and size.
5. Color of filler, or pad printing.
6. Special layout information, if applicable.



Position
Height of Mark
Color of Filler

Plate Style
by Catalog Number
Including
Color/Finish

legrand®
Pass & Seymour

Wall Plates
Custom Panel Plates
Ordering Instructions

Blank panel plates (PP-series) up to 5-gangs high and 10-gangs wide are made from Type 302 Stainless Steel. Up to 50 openings from the style selector guide can be custom punched to your specifications. For uniformity of design throughout the building, panel plates have the same distinctive styling as all other plates, plastic and metal.

Ordering Instructions

For this example, use the 4 gang high by 2 gang wide panel plate illustrated in Figure 2.

1. Start the catalog number with the material prefix: "SS" for Type 302 Stainless. This is a 302 Stainless plate, so the first letters of its catalog number will be "SS."
2. Determine the catalog number for a panel plate 4 gangs high and 2 gangs wide from the table on page Q-47. It is PP-4-2. Your 302 Stainless Steel catalog number is SSPP-4-2.
3. Construct a chart upon which you can indicate the opening style number for each of the 8 gangs, starting from the top left. Leave space to show any words or symbols that will be engraved. Write the catalog number SSPP-4-2 at the top of the chart. See Figure 1.
4. Refer to the Style Selector Guide and find the style numbers for each of the desired openings. Write these numbers in their appropriate position on your chart.
5. Indicate what, if any, engraving is required for each gang. Show in parentheses if engraving is to be above or below the opening.
6. Send the chart with your order to the factory. You have provided all required information. Refer to current price sheet for pricing details.

Additional Information


- Where no opening or mounting holes are required, specify Style #149.
- Louvered openings can be placed only on the top row of a panel plate.
- For painted or special metal finishes, refer to price sheet for price adds per gang.
- For special openings not in Selector Guide, provide detailed drawing.

Example

SSPP-4-2

ROW #1:		
Style Nos.	1	1
Engraving:	ALTAR (Above)	CHOIR (Above)
ROW #2:		
Style Nos.	9	9
Engraving:	(None)	(None)
ROW #3:		
Style Nos.	12	12
Engraving:	(None)	TEL (Above)
ROW #4:		
Style Nos.	16	16
Engraving:	(None)	120V. (Above)

Figure 1

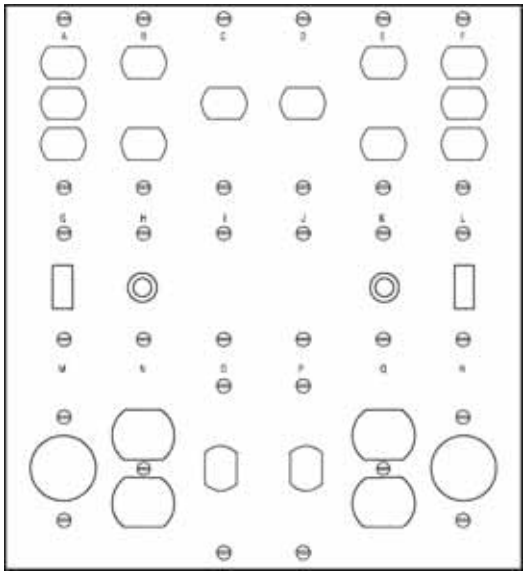

Custom Panel Plate

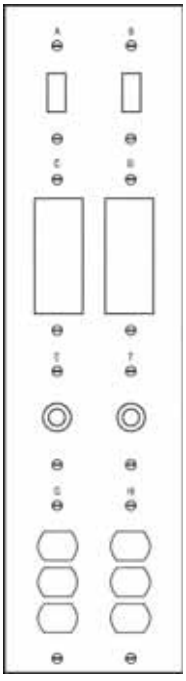


Figure 2


legrand®
Pass & Seymour

Wall Box Dimensions

Panel Plates are limited to fit the box configuration shown.

Caution: Not all boxes are identical in overall dimensions, but are built to exact standards on device mounting holes. When boxes are connected together, they should be shimmed to ensure that the bottom hole to bottom hole dimension between two vertically adjacent boxes is 4-1/8" as errors are cumulative. Critical dimensions circled.

If additional mounting holes are required in the corners, indicate location and spacing.

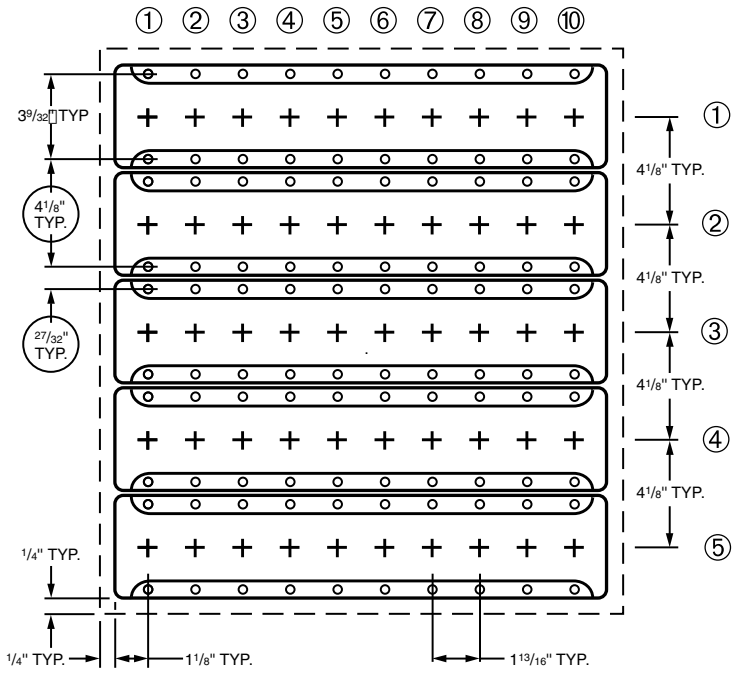

302 Stainless Steel


Plate Height	Catalog Number	Gangs Wide	Plate Width
Two Gangs High 8-3/4"	**PP21**	One	2-3/4"
	PP22	Two	4-9/16"
	PP23	Three	6-3/8"
	PP24	Four	8-3/16"
	PP25	Five	10"
	PP26	Six	11-13/16"
	PP27	Seven	13-5/8"
	PP28	Eight	15-7/16"
	PP29	Nine	17-1/4"
	PP210	Ten	19-1/16"
Three Gangs High 12-7/8"	**PP31**	One	2-3/4"
	PP32	Two	4-9/16"
	PP33	Three	6-3/8"
	PP34	Four	8-3/16"
	PP35	Five	10"
	PP36	Six	11-13/16"
	PP37	Seven	13-5/8"
	PP38	Eight	15-7/16"
	PP39	Nine	17-1/4"
	PP310	Ten	19-1/16"

Plate Height	Catalog Number	Gangs Wide	Plate Width
Four Gangs High 17"	**PP41**	One	2-3/4"
	PP42	Two	4-9/16"
	PP43	Three	6-3/8"
	PP44	Four	8-3/16"
	PP45	Five	10"
	PP46	Six	11-13/16"
	PP47	Seven	13-5/8"
	PP48	Eight	15-7/16"
	PP49	Nine	17-1/4"
	PP410	Ten	19-1/16"
Five Gangs High 21-1/8"	**PP51**	One	2-3/4"
	PP52	Two	4-9/16"
	PP53	Three	6-3/8"
	PP54	Four	8-3/16"
	PP55	Five	10"
	PP56	Six	11-13/16"
	PP57	Seven	13-5/8"
	PP58	Eight	15-7/16"
	PP59	Nine	17-1/4"
	PP510	Ten	19-1/16"

legrand®
Pass & Seymour


Wall Plates
Style Selector Guide
Custom Metal Wall Plates

STYLE 1




TOGGLE SWITCH
#1 Standard Plate page Q-8


STYLE 2




STYLE 3




STYLE 4



STYLE 5




STYLE 7




SINGLE OUTLET
#7 Standard Plate page Q-13

STYLE 8




DUPLEX OUTLET
#8 Standard Plate page Q-9

STYLE 9




BIPLEX/TRIPLEX
#9 Standard Plate page Q-21

STYLE 10




PUSH BUTTON

STYLE 11




TELEPHONE, BOX MTD.
#11 Standard Plate page Q-32

STYLE 12




TELEPHONE, STRAP MTD.
with #340 Yoke
#12 Standard Plate page Q-32

STYLE 13




BLANK, BOX MTD.
#13 Standard Plate page Q-11

STYLE 14




BLANK, STRAP MTD.
with #340 Yoke
#14 Standard Plate page Q-12

STYLE 16




SINGLE OUTLET
FOR 1600 SERIES

STYLE 17



SINGLE RECEPTACLE
FOR 1600 SERIES
CENTERED 2 GANG

STYLE 18




TOGGLE SWITCH
CENTERED 2 GANG
#740 Standard Plate page Q-20

All wall plate dimensions shown above are in inches.


legrand®
Pass & Seymour

STYLE 19




SINGLE OUTLET
CENTERED 2 GANG
#747 Standard Plate page Q-20

STYLE 20




DUPLEX OUTLET
CENTERED 2 GANG
#748 Standard Plate page Q-20

STYLE 21




BIPLEX/TRIPLEX
CENTERED 2 GANG

STYLE 22




DECORATOR/GFCI
CENTERED 2 GANG
#746 Standard Plate page Q-20

STYLE 23




BLANK, BOX MTD.
#23 Standard Plate page Q-11

STYLE 24




BLANK, STRAP MTD.
with 2 #340 Yokes
#24 Standard Plate page Q-12

STYLE 25




TELEPHONE JACK OUTLET
NOTE: Special Plate Mounting

STYLE 26




DECORATOR/GFCI
#26 Standard Plate page Q-9

STYLE 27




ONE DESPARD® INTERCHANGEABLE
with #348 Strap
Standard Plate page Q-19
STYLE 27A — BOX MTD.

STYLE 28




TWO DESPARD® INTERCHANGEABLE
with #348 Straps
Standard Plate page Q-19
STYLE 29 — BOX MTD.

STYLE 30




THREE DESPARD® INTERCHANGEABLE
with #348 Straps
Standard Plate page Q-19
STYLE 31 — BOX MTD.

STYLE 32




ONE VERTICAL DESPARD® INTERCHANGEABLE
with #347 Strap
Standard Plate page Q-19


STYLE 33




STYLE 36



STYLE 37



STYLE 38




All wall plate dimensions shown above are in inches.


legrand®
Pass & Seymour

Wall Plates
Style Selector Guide
Custom Metal Wall Plates


STYLE 40




STYLE 41




STYLE 42

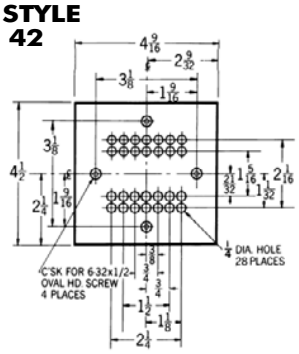


STYLE 43




STYLE 44




STYLE 45




STYLE 46



STYLE 47




STYLE 48




NOTE: Engraving Extra at Standard Price per Character

STYLE 49




STYLE 49A — Vertical Opening
STYLE 50 — 2 Openings 1 Gang
STYLE 51— 3 Openings 1 Gang
STYLE 52 — 4 Openings 1 Gang

STYLE 55




with #340 Yoke
STYLE 56 — BOX MTD.

STYLE 57




with #340 Yoke
STYLE 58 — BOX MTD.

STYLE 59




with #340 Yoke
STYLE 60 — BOX MTD.
STYLE 61— DESP. INTCH. MTD.

STYLE 62




STYLE 63— BOX MTD.

STYLE 64



STYLE 65 — BOX MTD.


STYLE 66



STYLE 67— BOX MTD.


All wall plate dimensions shown above are in inches.

STYLE 68




STYLE 69 — BOX MTD.
STYLE 70— DESP. INTCH. MTD.

STYLE 71




STYLE 72— BOX MTD.

STYLE 73




STYLE 74 — BOX MTD.

STYLE 75




Clearance for 1 1/4" Device
STYLE 76 — BOX MTD.

STYLE 77




STYLE 78 — BOX MTD.
STYLE 79 — DESP. INTCH. MTD.

STYLE 80




STYLE 81 —BOX MTD.
STYLE 82 — DESP. INTCH. MTD.

STYLE 83




STYLE 84 — BOX MTD.
STYLE 85 — DESP. INTCH. MTD.

STYLE 86




STYLE 87 — BOX MTD.
STYLE 88 — DESP. INTCH. MTD.

STYLE 89




STYLE 90 — BOX MTD.

STYLE 91




POWER OUTLET
#720 Standard Plate page Q-13

STYLE 92




STYLE 93 — DESP. INTCH. MTD.

STYLE 94




STYLE 95 — BOX MTD.
STYLE 96 — DESP. INTCH. MTD.

STYLE 97




STYLE 98




POWER OUTLET
#723 Standard Plate page Q-13

STYLE 99



STYLE 100




with 2 # 340 Yokes
STYLE 101 — BOX MTD.

All wall plate dimensions shown above are in inches.

legrand®
Pass & Seymour


Wall Plates
Style Selector Guide
Custom Metal Wall Plates

STYLE 102




STYLE 103 — BOX MTD.

STYLE 104




STYLE 105 — BOX MTD.

STYLE 106




STYLE 107 — BOX MTD.

STYLE 110




STYLE 112




STYLE 113 — BOX MTD.
STYLE 114 — DESP. INTCH. MTD.

STYLE 115




STYLE 116




STYLE 117 — BOX MTD.
STYLE 118 — DESP. INTCH. MTD.


STYLE 119




STYLE 121



STYLE 122

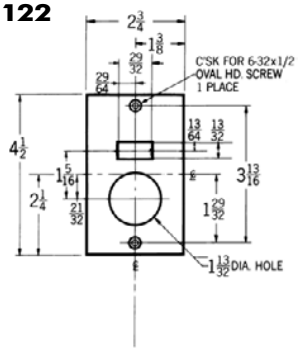


STYLE 123




with #340 Yoke

STYLE 124




STYLE 125 — 2 HOLES
STYLE 126 — 3 HOLES


STYLE 131



STYLE 132




STYLE 134



POWER OUTLET
#701 Standard Plate page Q-14


STYLE 135



STYLE 135A. — DESP. INTCH. MTD.
#771 Standard Plate page Q-21


All wall plate dimensions shown above are in inches.

STYLE 136




RAZOR BLADES
with #340 Yoke

STYLE 137




RAZOR BLADES, BOX MTD.
STYLE 137B — HORIZONTAL
RAZOR BLADE, BOX MTD.

STYLE 138




STYLE 139 — BOX MTD.
STYLE 140 — DESP. INTCH. MTD.


STYLE 141




STYLE 142



STYLE 143

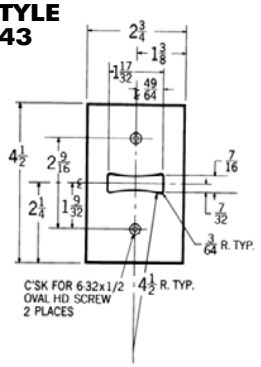


STYLE 144




STYLE 145 — 3 OPENINGS
STYLE 146 — 4 OPENINGS
STYLE 147 — MASTER CONTROL

STYLE 149




STYLE 150




DESP. INTCH. MTD.

STYLE 152




TELEPHONE OUTLET CENTERED
2 GANG, with #340 Yoke
STYLE 151 — BOX MTD.
#741, 742 Standard Plate page Q-34

STYLE 155




POWER OUTLET
#702 Standard Plate page Q-14

STYLE 156




POWER OUTLET
#703 Standard Plate page Q-14

STYLE 160




STYLE 162




STYLE 176 — STRAP MTD.
with #340 Yoke
#743 Standard Plate page Q-20

STYLE 163



POWER OUTLET
#721 Standard Plate page Q-13

STYLE 165




POWER OUTLET
#724 Standard Plate page Q-13

All wall plate dimensions shown above are in inches.


legrand®
Pass & Seymour

Wall Plates
Style Selector Guide
Custom Metal Wall Plates

STYLE 166




STYLE 169




LOUVRE
#760 Standard Plate page Q-21

STYLE 171




POWER OUTLET
#710 Standard Plate page Q-14

STYLE 172




3 GANG PLATE

STYLE 177




STYLE 178
Touch Plate 50-2, 2 Openings
STYLE 179
Touch Plate 50-3, 3 Openings Box Mtd.


STYLE 180




STYLE 181




STYLE 182




STYLE 183




STYLE 185




STYLE 187



STYLE 188

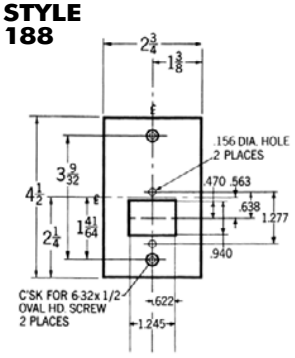


STYLE 189




STYLE 190 — BOX MTD.

STYLE 191




STYLE 192 — BOX MTD.
STYLE 193 — DESP. INTCH. MTD.

STYLE 194



POWER OUTLET
#725 Standard Plate page Q-13
STYLE 195 — BOX MTD.
STYLE 196 — DESP. INTCH. MTD.


STYLE 199




All wall plate dimensions shown above are in inches.

legrand®
Pass & Seymour

STYLE 200




STYLE 206




with #340 Yoke
STYLE 207 — BOX MTD.

STYLE 210




STYLE 211




4-S Box Mtd. Plate available in any Standard 1 Gang Opening (Style 8 Shown)

STYLE 213




STYLE 214




with #340 Yoke

STYLE 215




STYLE 215A — 1 HOLE CENTERED


STYLE 216

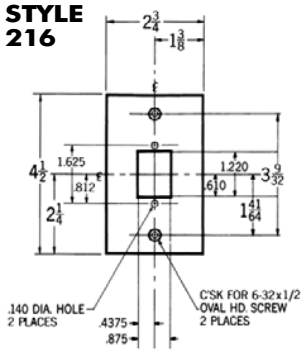


STYLE 217




STYLE 218




STYLE 219




STYLE 220




STYLE 221




STYLE 222



STYLE 223



STYLE 224




All wall plate dimensions shown above are in inches.


legrand®
Pass & Seymour

Wall Plates
Style Selector Guide
Custom Metal Wall Plates


STYLE 225




STYLE 226




STYLE 227




STYLE 228




STYLE 229




STYLE 230



STYLE 232




STYLE 233




STYLE 233A — EXTRA CIRCLE OF HOLES (31 HOLES)


STYLE 235



STYLE 236




STYLE 237




with #340 Yoke
STYLE 238 — BOX MTD.


STYLE 239




STYLE 240




STYLE 241



STYLE 242



STYLE 243




All wall plate dimensions shown above are in inches.


Wall Plates
Style Selector Guide
Custom Metal Wall Plates

legrand®
Pass & Seymour


STYLE 244




STYLE 245




STYLE 246




STYLE 247



STYLE 248




STYLE 252




with Hospital Cord Eyelet


STYLE 257




STYLE 258




STYLE 259




STYLE 260



STYLE 261




STYLE 262




STYLE 262A
HORIZONTAL OPENING, BOX MTD.


STYLE 267



STYLE 269




STYLE 270



F.S. BOX MTD.

STYLE 271




All wall plate dimensions shown above are in inches.


legrand®
Pass & Seymour

Wall Plates
Style Selector Guide
Custom Metal Wall Plates


STYLE 272




STYLE 273



STYLE 274




STYLE 275




#736 Standard Plate page Q-32


STYLE 276




STYLE 279




STYLE 281




STYLE 282




STYLE 283



STYLE 284




STYLE 285




JUMBO 2 GANG PLATE


STYLE 286




STYLE 287




STYLE 288



STYLE 289




STYLE 291




All wall plate dimensions shown above are in inches.

legrand®
Pass & Seymour

STYLE 292




STYLE 293




POWER OUTLET
for 30, 50, 60A. Receptacle
#716 Standard Plate page Q-14

STYLE 295




FOR RS-232 COMPUTER JACK
#791 Standard Plate page Q-34

STYLE 295A




FOR RS-232 COMPUTER JACKS
#792 Standard Plate page Q-34


STYLE 296




STYLE 296A




STYLE 297




STYLE 298




STYLE 299




STYLE 300



STYLE 301




STYLE 302




SS-717 for PS20AC1KL Switch


STYLE 303




STYLE 305



STYLE 306













STYLE 307



All wall plate dimensions shown above are in inches.

legrand®
Pass & Seymour

Wall Plates
Style Selector Guide
Custom Metal Wall Plates


STYLE 308  TELEPHONE JACK	**STYLE 309**  TELEPHONE JACK	**STYLE 310**  AMP ELECTRONIC CONNECTOR	**STYLE 311**  COAXIAL ELECTRONIC CONNECTOR
STYLE 312  COAXIAL ELECTRONIC CONNECTOR	**STYLE 313**  COAXIAL ELECTRONIC CONNECTOR	**STYLE 314**  LAN PORT	**STYLE 315** 
STYLE 315A  	**STYLE 315B**  		

All wall plate dimensions shown above are in inches.


Devices & Wall Plates
Color Selection Chart

legrand®
Pass & Seymour

Devices & Plastic Wall Plate Colors

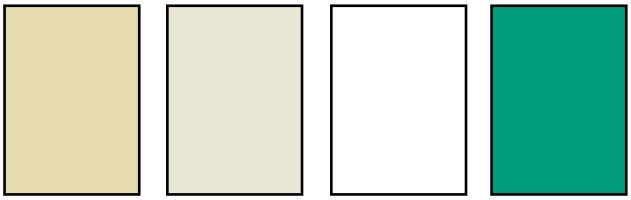


Ivory | Light Almond | White | Green

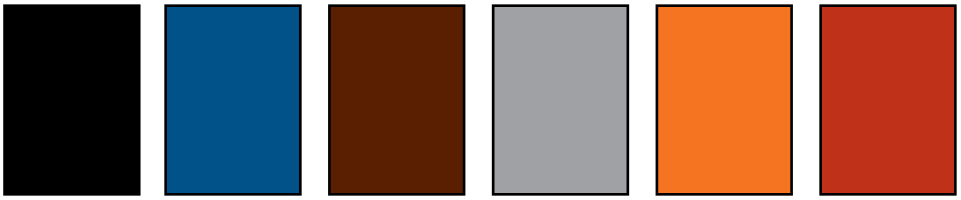

Black | Blue | Brown | Gray | Orange | Red


See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

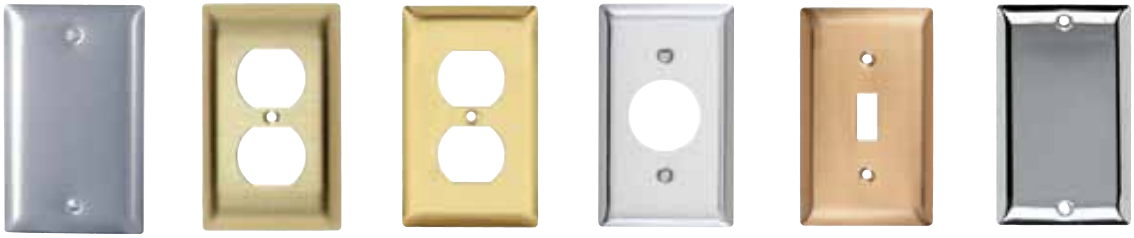


Metal Finish Aluminum | Brass (Brushed) | Polished Brass | Stainless Steel | Brushed Bronze | Chrome

Custom Metal Wall Plates Paint Finish Colors

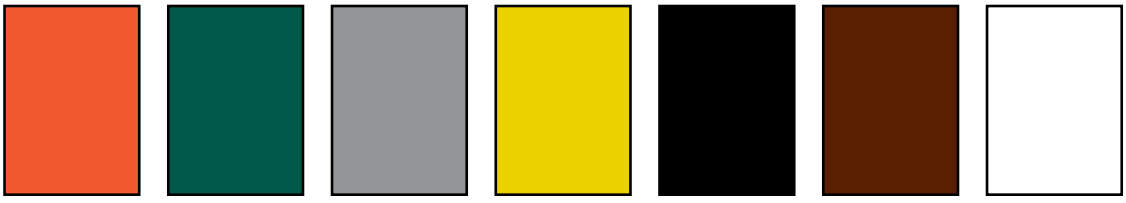

Paint Color Orange | Green | Gray | Yellow | Glossy Black | Brown | White

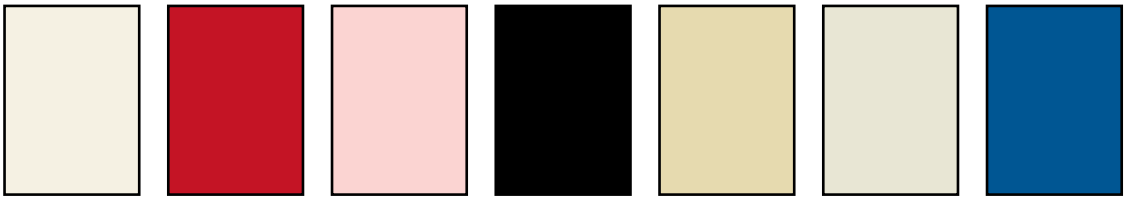

Paint Color Primer | Red | Pink | Flat Black | Ivory | Light Almond | Blue

To order custom metal wall plates, see Pages Q-43 – Q-45.

For additional colors consult factory.



ELECTRICAL ACCESSORIES

legrand®

Pass & Seymour

Electrical Accessories

legrand®
Pass & Seymour



Looking for the classic porcelain lampholder? A hard-to-find household adapter? Or a wide range of replacement appliance switches? You'll find them in our accessory line — along with quality materials, durability, and time-tested designs.









Index

Device	Page Number
Appliance Switches	R-2
Fluorescent Lampholders	R-3
Incandescent Lampholders	R-4 – R-6
Household Devices	R-6 – R-9
Fluorescent Starters & Wall Plate Inserts	R-10
Special Purpose Devices – Despard®	R-11, R-12
Low-Voltage Switching Components	R-13 – R-15
Network Wiring Connectivity	
Keystone Products, Wall Plates & Frames	R-16
Activate™ Products	R-17
Frames & Wall Plates	R-18
Patch Panels, 66 Block & Patch Cords	R-19

legrand®
Pass & Seymour

Electrical Accessories
Appliance Switches










Appliance Switches

	Catalog Number	Rating	Description	Color	UL	CSA	cULus
	423	6A 125V 3A 250V 3A 125VT	In-line cord switch, light-duty.	Brown	•	•	
	410WCC25			White			•
	5410CC10	10A 125V 5A 250V	Heavy-duty, feed-thru cord switch, single pole, ON-OFF sequence, markings near toggle.	Black	•	•	
	574T	3A 125V 1A 125VT 1A 250V	Rotary, single pole, non-removable black phenolic stem, 2 black leads. (18 AWG) 6.5" long, ON-OFF sequence.	Black	•		
	575	3A 250V 1A 250V	Push button canopy switch, single pole, Bakelite plunger, ON-OFF sequence, RU Listed.	Brown	•		
	653	6A 125VT 3A 250V	Rotary, single pole, two circuit, four position, heavy-duty, black, blue, red leads, 1st ON, 2nd ON, both ON, OFF sequence. RU Listed.		•		
	90577	6A 125V 3A 250V	Rotary, single pole, 2 position ON-OFF sequence.				
	738	8A 125V	Toggle, single throw, ON-OFF sequence, 2 black leads. (18 AWG) 6.5" long, RU Listed.			•	
	168950	3A 125V-L 6A 125V 3A 250V 1/4 HP @ 125/120V	Pull chain, two circuit, four position, 1st ON, 2nd ON, both ON, OFF sequence, RU Listed.		•	•	
	220	6A 125V 3A 250V	Heavy-duty single pole canopy pull switch. 2 black leads (18 AWG) 6.5" long, RU Listed.		•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Fluorescent Lampholders




Catalog Number	Rating	Description	Color	UL	CSA	
3901W	660W 600V	Medium bi-pin, screw terminals.	White	•	•	
3911W	660W 600V	Medium bi-pin, pressure lock terminals, includes starter base.	White	•	•	
464	660W 600V	Pedestal type, recessed, contact, plunger, with floor terminal screw cover (for 800 & 1500MA T-12 lamps).	White	•	•	
465	660W 600V	Pedestal type, recessed, fixed, quick wire terminals (for 800 & 1500MA T-12 lamps).	White	•	•	
466	660W 1000V	Pedestal type, recessed, plunger, quick wire terminals (for all sizes of lamps T-12, T-8, and T-6).	White	•		
467	660W 600V	Pedestal type, recessed, fixed, quick wire terminals (for all sizes of lamps T-12, T-8, and T-6).	White	•		
623	660W 600V	Snap-in, high output with plunger.	White	•	•	
2536	660W 1000V	Slimline, for single pin lamps, shallow base, slide plunger, push in terminal.	White	•	•	
2537	660W 600V	Slimline, for single pin lamps, shallow base, slide fixed, 2 push in terminals.	White	•	•	
13053UN	660W 660V	Slide-on, short, for medium bi-pin lamps with captive nut, 4 quick wire terminals.	White	•		
13057UN	660W 600V	Slide-on, for medium bi-pin with captive nut, 4 quick wire terminals.	White	•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.





legrand®
Pass & Seymour

Electrical Accessories
Incandescent Lampholders

Medium Base Lampholders

	Catalog Number	Rating	Description	Color	UL	CSA
 276WH	272	660W 250V	Medium base, porcelain, one piece keyless, 2 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•
	272WH6	660W 250V	Same with 6" leads.	White	•	•
	274	660W 250V	Medium base, porcelain, one piece keyless, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes.	White	•	•
	276WH	660W 250V	Medium base, phenolic, one-piece keyless, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•
	276WH6	660W 250V	Same with 6" leads.	White	•	•
 280WH	282	250W 250V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•
	284	250W 250V	Medium base, porcelain, pullchain, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•
	280WH	250W 250V	Medium base, phenolic, pullchain, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•
	280WH6	250W 250V	Same with 6" leads.	White	•	•
 288	29816C2	250W 250V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, 6" leads, fits 3-1/4" and 4" boxes with cage neck.	White	•	•
	288	250W 125V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, 15A 125V grounding receptacle, fits 3-1/4" and 4" boxes, with cage neck.	White	•	•

Metal Shell Lampholders

 7070PG 7090PG	7070PG	250W 250V	Medium base, metal shell, removable turn knob, electrolier, 2 lamp controls, 3 terminals, 1st ON, 2nd ON, both ON, OFF sequence.		•	•
	7070M		Interior only for 7070-PG.		•	
	7090PG	250W 250V	Medium base, metal shell, removable turn knob, electrolier, 3-way LO-MED-HIGH.		•	
	7090M		Interior only for 7090-PG.		•	
	7090MH		Interior only with hickey for 7090-PG.		•	
	6098PG	660W 250V	Medium base, push through, metal shell, electrolier, single circuit.		•	•
	7080M		Interior only for 6098-PG.			•
	1008316	250W 250V	Medium base, metal shell, removable turn knob, single circuit, electrolier, 1/8" IPS tapped bushing with set screw.		•	
	10083M		Interior only for 10083-16.		•	
	19980PG	660W 250V	Medium base, metal shell, pull chain, electrolier, single circuit, 1/8" IPS bushing with set screw.		•	•
	8002M		Interior only for 19980.		•	









All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Metal Shell Lampholders

Catalog Number	Rating	Description	Color	UL	CSA	cULus	
975ABDCC10	660W 250V	Medium base, metal shell, keyless.		•	•		

Medium Base Lampholders

8101	660W 250V	Medium base, porcelain, keyless, single circuit, 2 piece ring with leads. 1-3/8" to 1-1/2" hole.	White	•			
201	660W 600V	Medium base, rubber, keyless, for temporary lighting, 2 wire leads 6" long.	Black	•		•	
31528	660W 250V	Medium base, porcelain, screw terminals, keyless, single circuit, fixture pan with 1/8" IPS hickey.	White	•	•		
3352F	660W 250V	Medium base, porcelain, keyless, screw terminals, short base.	White	•	•		
8052CC10	660W 250V	Medium base, porcelain, bracket mount.		•	•		
9814	250W 250V	Medium base, porcelain, 2-piece pull chain, ring type, screw terminals, gasket furnished.	White				
9880	660W 250V	Medium base, porcelain, surface mount type, 2-piece.	White	•	•		
10045	660W 250V	Medium base, porcelain, keyless, single circuit with screw terminals, aluminum screw shell with set.	White	•	•		
10085	660W 250V	Medium base, porcelain, keyless, single circuit with 2-18 AWG leads 6" long.	White	•	•		
19062	660W 250V	Medium base, porcelain, pony cleat type, terminal screws.	White	•	•		
S752WCC10	660W 250V	Medium base, cleat sockets, front wire.	White			•	
61	660W 125V	Medium base, outlet to lampholder, 2 Pole, 2 Wire.	Brown				

All devices listed on this page conform to NEMA WD-1 and WD-6.




legrand®
Pass & Seymour

Electrical Accessories
Incandescent Lampholders & Household Devices


Medium Base Lampholders

	Catalog Number	Rating	Description	Color	UL	CSA	cULus
	**4017CC10**	660W 250V	Medium base, single-to-twin.		•	•	
	**4063CC10**	250W 250V	Medium base, turn knob, 3 way.		•	•	



Mogul Base Lampholders

	**8601**	750W 250V	Mogul base, porcelain, removable turn knob, 2 circuits, hickey tapped 1/4" IPS x 7/8" high.	White	•		
	**8678**	1500W 600V	Mogul base, porcelain, keyless, single circuit, 1/4" IPS 13/16" hexagon x 9/16" high with screw set.	White	•	•	
	**8694**	1500W 600V	Mogul base, porcelain, screw terminals, keyless, single pole with bushings, 4KV pulse rated.	White	•		


Pony Cleat Type Lampholders

	**10020**	75W 125V	Pony cleat type, plastic, miniature base.	White			
	10028	75W 125V	Pony cleat type, plastic, candelabra base.	White			



Candelabra Base Lampholders

	**4155**	660W 250V	Candle socket, bottom turn knob, one piece, phenolic body.	Black	•		
	**10027**	75W 125V	Candelabra base, keyless, screw terminals, solid hickey, overall height 1-1/2", paperboard sleeve.		•		

Temporary Lighting Devices

	**267**	75W 125V	Keyless, candelabra base, detachable wire hook, two piece pin type, for temporary use.	Brown	•		
	43308	660W 250V	Medium base, phenolic, pin type hook supplied, for temporary use.	Black	•		







Socket Extensions/Clusters

	**2005**	660W 250V	Socket extensions, medium-to-medium, one piece porcelain, 1.25" extension.	White	•	•	
	2006	660W 250V	Socket extensions, medium-to-medium, one piece phenolic, 1.1875" extension.	White	•	•	
	**341DU4**	660W 250V	Medium base, multi-lampholder cluster, 3 lights 1/8" IPS male (top & bottom), 2 wire leads (18 AWG) 6.5" long.	Black			
	**4015D4F**	660W 250V	Medium base, multi-lampholder cluster, 2 lights 1/8" IPS male (top & bottom).	Black			

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Plugs & Connectors


Catalog Number	Rating	Description	Color	UL	CSA	
101	15A 125V	Clamptite plug, light-duty, 2 Pole, 2 Wire.	Black	•		
101W			White	•		
84BKCC20	15A 125V	Angle plug, light-duty, 2 Pole, 2 Wire.	Black	•	•	
111MC	15A 125V	Rubber plug, with vinyl cord clamp, 2 Pole, 2 Wire.	Black	•		
111GMC	15A 125V	Rubber plug, with vinyl cord clamp inner assembly, 2 Pole, 3 Wire, (mates with 114GMC).	Black	•		
114GMC	15A 125V	Rubber connector, with vinyl cord clamp, 2 Pole, 3 Wire, (mates with 111GMC).	Black	•		
123P	10A 125V 3A 125V	Easy wire plug, 10A 125V use with 18-2 SPT-1 Cord, 3A 125V use with 20-2XT Cord, non-polarized.	Brown	•		
123PI			Ivory	•		
123PW			White	•		
48643	15A 125V	Plug, vinyl, short flat, 2 Pole, 2 Wire.	Brown	•		
83CC4	30A 125V	Angle travel trailer plug, 2 Pole, 3 Wire.	Black	•	•	
SA155BKCC10	15A 125V	Straight blade connector, polarized, 2 Pole, 2 Wire.	Black	•	•	
SA155CC10			Brown	•	•	
SA155WCC10			White	•	•	
SA440BKCC10	15A 125V	Straight blade plug, 2 Pole, 2 Wire.	Black	•	•	
SA440CC10			Brown	•	•	
SA440WCC10			White	•	•	
SA540BKCC10	15A 125V	Straight blade plug, polarized, 2 Pole, 2 Wire.	Black	•	•	
SA540CC10			Brown	•	•	
SA540WCC10			White	•	•	
SA840BKCC10	15A 125V	Straight blade plug, with cord clip, 2 Pole, 2 Wire.	Black	•	•	
SA840CC10			Brown	•	•	
SA840WCC10			White	•	•	
SA399BKCC10	15A 125V	Straight blade plug, 2 Pole, 3 Wire.	Black	•	•	
SA399GRYCC10			Gray	•	•	
SA399OCC10			Orange	•	•	
SA399WCC10			White	•	•	
SA993BKCC10	15A 125V	Straight blade connector, 2 Pole, 3 Wire.	Black	•	•	
SA993GRYCC10			Gray	•	•	
SA993OCC10			Orange	•	•	
SA993WCC10			White	•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.








legrand®
Pass & Seymour

Electrical Accessories
Household Devices

Quick Clamp Plugs & Connectors

Catalog Number	Rating	Description	Color	UL	CSA	
123PQC	10A with 18AWG SPT-1 & 2 Cord, 13A with 16AWG SPT-1 Cord	2 wire Quick Clamp plug	Brown	•		 123PQC 123C3W
123PQCW			White	•		
123C3W		2 wire tri-tap Quick Clamp connector	White	•		



Adapters

125	15A 125V 660W	Lampholder to outlet, medium base.	White	•		
1403	660W 125V	Medium base lampholder/outlet adapter, keyless lampholder with 2 outlets, 2 Pole, 2 Wire.	Black	•		 3.1"
1406	250W 125V	Medium base lampholder/outlet adapter, pull chain lampholder with 2 outlets, 2 Pole, 2 Wire.	Black	•		
1406I			Ivory	•		
128	15A 250V 660W	Single lampholder-to-twin lampholder, medium base.	Brown	•		
8681	660W 250V	Mogul to medium socket adapter, 1 piece. 1.66" Dia. x 2.0" Deep	White	•	•	
313CC10	75W 125V	Socket reducer, medium to candelabra, keyless.	Black	•	•	
1264	15, 20A 125V	Travel trailer adapter, 2 Pole, 3 Wire.				
210G	15A 125V	Adapter, parallel blades, molded rubber, polarized, 3 Wire grounding.	Gray	•		 1.75"
1482ICC10	15A 125V	Cube tap, single to triple outlet, 2 Pole, 3 Wire.	Ivory	•	•	
68	15A 125V	Cube tape, phenolic, single to triple, 2 Pole, 2 Wire.	Brown			
68I			Ivory			
63	15A 125V	Plug-in adapter, single to triple, polarized, 2 Pole, 2 Wire.	Brown	•	•	 3.00" 1.06"
63I			Ivory	•	•	
69I	15A 125V	Plug-in adapter, single to triple, swivel, polarized, 2 Pole, 2 Wire.	Ivory	•	•	 3.00" 1.08"
69W			White	•	•	



All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Adapters

Catalog Number	Rating	Description	Color	UL	CSA	
697	15A 125V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	Brown	•		
697I			Ivory	•		
697RI	15A 125V	Plug-in outlet adapter, single to triple, rubber, 2 Pole, 3 Wire.	Ivory	•		
697W	15A 125V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	White	•		
699CC25	15A 120V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	Brown	•	•	
699GRCC25			Green	•	•	
226PAI	15A 125V	Plug-in adapter, two to six, polarized, 2 Pole, 3 Wire.	Ivory	•	•	
226PAW			White	•	•	

Miscellaneous Devices


941904	150W 120V	Dawn to dusk dimmer, automatic light sensor fits into standard lamp socket. Indoor or outdoor use.	Gray	•	•	
13741	15A 125V	Snap-in receptacle, 3 Wire grounding outlet with 6" leads, No. 14AWG 105°C plastic.	Black	•	•	
746ICC10	15A 125V	Surface outlet, 2 Pole, 2 Wire.	Ivory	•	•	
779CC5	15A 120/277V	Cover-mounted switch.		•	•	
735CC10	10A 125V 5A 250V	Surface mount switch	Black	•	•	
735ICC10			Ivory	•	•	
5SC		Outlet safety caps.	Clear	•		

All devices listed on this page conform to NEMA WD-1 and WD-6.





legrand®
Pass & Seymour

Electrical Accessories
Fluorescent Starters & Wall Plate Inserts

Fluorescent Starters

	Catalog Number	Description	UL	CSA
 FS2 FS4 FS5 FS25	FS2	Glow switch starter without reset, 2 pins 14, 15 & 20W.	•	•
	FS4	Glow switch starter without reset, 2 pins 13, 30 & 40W.	•	•
	FS5	Glow switch starter without reset, 2 pins 4, 6 & 8W.	•	•
	FS25	Glow switch starter without reset, 2 pins 22W Circline 25W Std.	•	•


Wall Plate Inserts

Dimensions	Catalog Number	Description	Finish	Color
	325I 325W 325 325BK 325LA 325GRY	Mounting strap for blank insert. Box mounted. Changes decorator opening to blank.	Polycarbonate Plastic	Ivory White Brown Black Light Almond Grey
	326I 326W 326 326LA	Mounting strap for blank insert. Box mounted. Changes decorator opening to blank.	Painted Steel	Ivory White Brown Light Almond
	327I 327W 327 327LA	Mounting strap for dimmer insert. Box mounted. Change from decorator to toggle opening.	Painted Steel	Ivory White Brown Light Almond
	80700I 80700W 80700LA	Mounting strap for blank insert. Box mounted. Changes toggle opening to blank.	Thermoset Plastic	Ivory White Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Catalog Number		Color	Rating		3rd Party Compliance
Single Pole	Three-Way		A.	V.	UL20
Toggle Switches Screw Terminals					
ACD1I	**ACD3I**	Ivory	15	120/277	•
ACD1W	**ACD3W**	White	15	120/277	•
ACD1	**ACD3**	Brown	15	120/277	•
ACD201I	**ACD203I**	Ivory	20	120/277	•
ACD201	**ACD203**	Brown	20	120/277	•

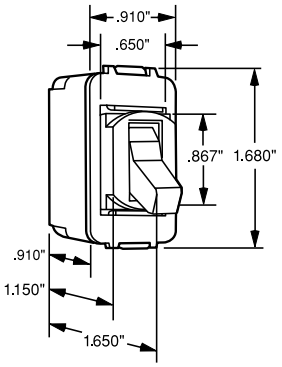


ACD1

HP Conversion Table


15 Amp	1/2 Horsepower at 120V	2 Horsepower at 240V
20 Amp	1 Horsepower at 120V	2 Horsepower at 240V

Catalog Number	Color	Rating A.	V.	Description	3rd Party Compliance UL498
Receptacles Three Wire Grounding					
1432	Ivory	15	125		•
1532	White	15	125	Must be installed in end opening of strap	•
1332	Brown	15	125		•
1433	Ivory	15	125	with Ground Lead	•
1333	Brown	15	125		•



1432

Catalog Number			Rating			3rd Party Compliance
Ivory	Brown	White	W.	V.	Description	UL542
Neon Pilot Lights						
1475	**1375**	**1575**	1/25	125	Flush Red Neon Pilot	•
	1375220		1/8	220	Light with Screw Terminals	•
1475277			1/6	277		•



1475

Catalog Number	Color	Rating A.	V.	Description	3rd Party Compliance UL542
Flush Pilot Lights with Mounting Straps					
1376	Brown	6	125	Single, for Single Vertical Opening Plate	•
1377	Brown	6	125	Combination, for Switch or Outlet Plate	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour


Electrical Accessories
Special Purpose Devices – Despard®

Catalog Number	Description	Screw Spacing	Finish
Mounting Straps			
342	Tandem mounting strap with two vertical openings. Plate screw hole spacing 4-3/8".	4-3/8"	Bright Zinc
347	Mounting strap with single vertical opening. Plate screw hole spacing 3-13/16". Box mounted.	3-13/16"	Bright Zinc
348	Mounting strap with three horizontal openings. Plate screw hole spacing 3-13/16". Box mounted.	3-13/16"	Bright Zinc
1354	Appliance Strap.	1-31/32"	


The correct style of mounting strap is furnished with each Despard wall plate, but straps may be ordered separately.

Consult Page Q-35 for additional mounting straps.


Dimensions

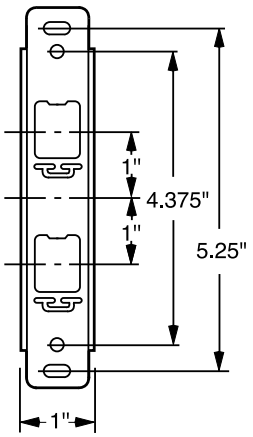

342




347



348

Installation & Removal

To assemble Despard devices in strap, insert tab on strap into the slot in the device; a twist of a screwdriver in the slots on the opposite side of the strap turns a slim strip of metal into the mounting slot on that side of the device to lock the device securely in place. To remove the device, reverse the procedure.

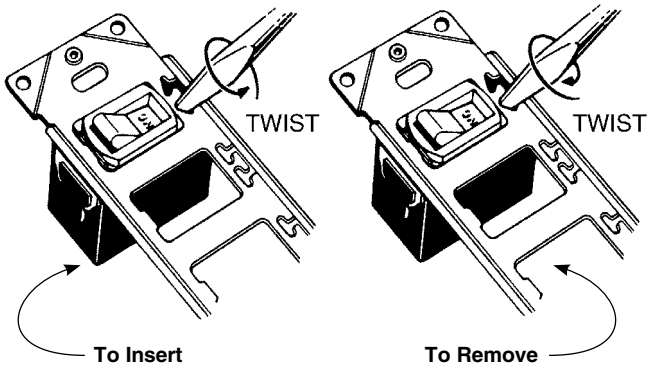

All devices listed on this page conform to NEMA WD-1 and WD-6.

Low-Voltage Switching Components

legrand®
Pass & Seymour

Application


Legrand/Pass & Seymour's Low-Voltage Remote Control Products consist of reliable, field-tested switching circuitry that provide central or local control of lighting loads throughout a building. These are best applied in institutions, schools, commercial buildings, warehouses and other installations where the ON-OFF switching of lighting is widely dispersed throughout the structures.

Important:


Low-Voltage Switching Components are specifically designed for switching incandescent and fluorescent lighting (non-HID) loads.

Low-Voltage Switching Components are not to be used with any components supplied by other manufacturers. Misapplication or improper use may void product warranties.

Basic Wiring Diagram

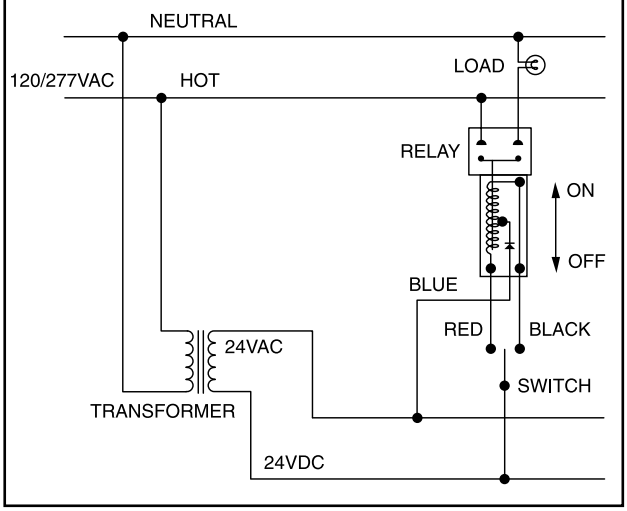

The ABCs of Low-Voltage Wiring and Components

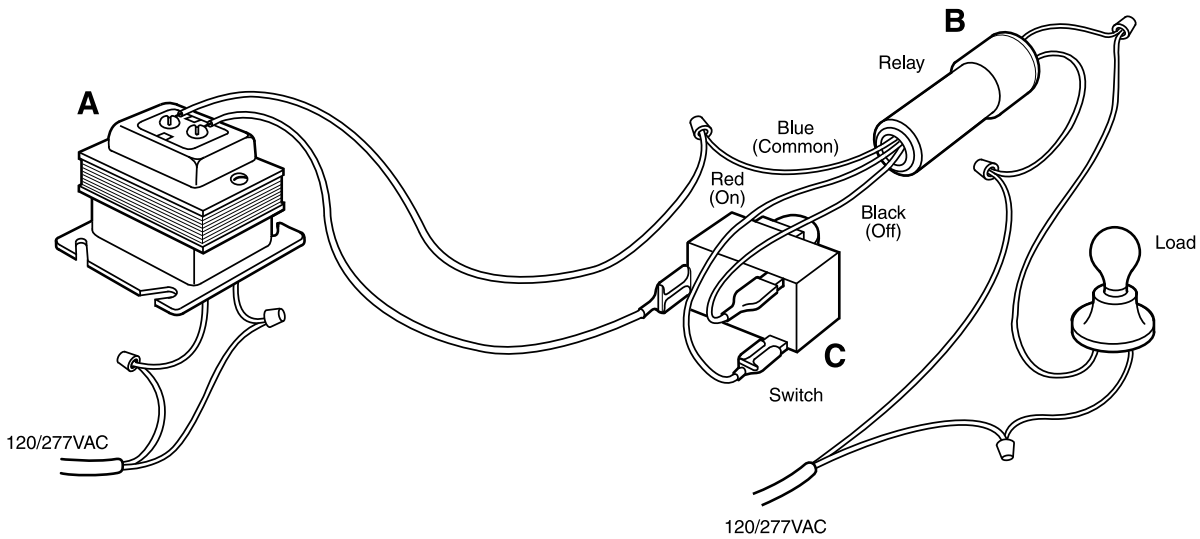

The low-voltage system differs from conventional switch wiring by actuating relays through the use of momentary contact switches. This type of switching utilizes a transformer to provide safe low-voltage current to control line voltage circuits. The wiring of lights and other electrical loads is installed in the conventional manner.

The above illustration simplifies a low-voltage circuit with its basic components:

A. Transformer – Converts line voltage to low-voltage. All low-voltage components operate using 24 volts furnished by the step-down transformer. Secondary output is 3-12A.

B. Relay – The magnetic relay switches line voltage. A momentary 24 volt pulse energizes the "ON" or "OFF" coils to make or break line voltage contacts.

C. Switches – Switches are momentary contact type used to energize either the "ON" or "OFF" coils of a relay. Momentary contact switches are normally open, single pole, double throw.

legrand®
Pass & Seymour

Electrical Accessories
Low-Voltage Switching Components


Features

- Mount in standard 1/2" KO through noise suppressing nylon ring.
- Maximum ambient temp: 140°F (60°C).
- Insulated flame retardant nylon shell.
- Prestripped 5-1/2" (140mm) #22 AWG leads for easy wiring.
- Split coil design energizes ON coil to close line contacts, and OFF coil to open contacts.
- Can be mounted in any position.
- Operates on momentary impulse.
- Draws .520 mA.

Catalog Number	Rating A.	Rating V.	3rd Party Compliance: UL Listed	3rd Party Compliance: CSA Listed
Magnetic Latching Relay, 24V/24VDC Control				
1070B	20 20	120/277V 347V	•	•

CSA listed for 347V.

1070B

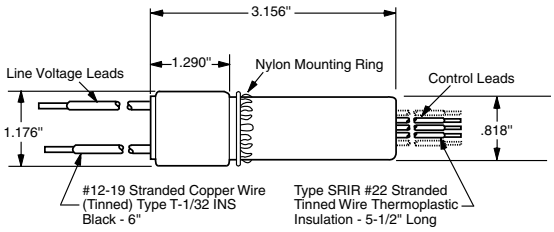


Features


- Available in Despard® interchangeable and heavy-duty toggle versions.
- Side wired screw terminals.
- Heavy-duty toggles recommended where low-voltage switches must match conventional switches.

Catalog Number	Color	Rating A.	Rating V.	Description
Momentary Contact Switches				
1091I	Ivory	3	24 AC/DC	Despard Interchangeable
1091W	White	3	24 AC/DC	Despard Interchangeable
1091	Brown	3	24 AC/DC	Despard Interchangeable
1091GRY	Gray	3	24 AC/DC	Despard Interchangeable
1091KGRY	Gray	3	24 AC/DC	Despard Interchangeable, Key-Locking
1050K				Key only for Despard Locking Switch
1081I	Ivory	3	24 AC/DC	Heavy-Duty Toggle
1081W	White	3	24 AC/DC	Heavy-Duty Toggle
1081	Brown	3	24 AC/DC	Heavy-Duty Toggle
1081GRY	Gray	3	24 AC/DC	Heavy-Duty Toggle
1081LA	Light Almond	3	24 AC/DC	Heavy-Duty Toggle
1081RED	Red	3	24 AC/DC	Heavy-Duty Toggle
1081KGRY	Gray	3	24 AC/DC	Heavy-Duty Key-Locking
500K				Key only for Heavy-Duty Locking Switch

Note: When installing low-voltage control wiring, wires should not be bundled or run in parallel with line voltage wires.

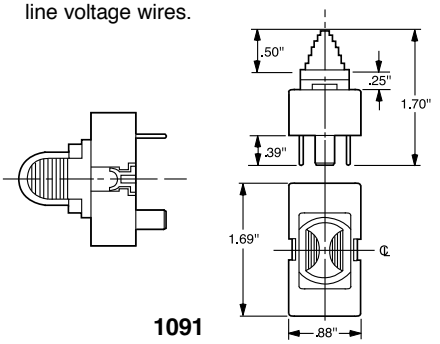

1091

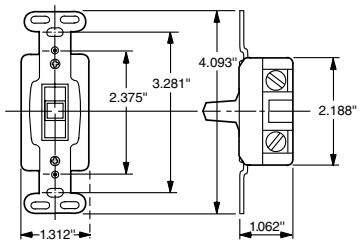

1081


All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Features

- 100% HIPOT tested primary and secondary.
- Base fits 4 Screw box.
- Built-in overload protection.

Catalog Number	VA Rating	Primary Volts	Secondary Volts	Secondary Output
Transformers				
1038	75 VA	120V	24V	3.12A
1039	75 VA	277V	24V	3.12A

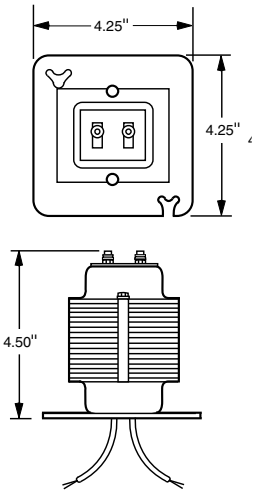

1038

A 75VA transformer can drive a maximum of 7 relays simultaneously. However, the length of a wire run as well as the size of the wire itself have an effect on a transformer's output capability.

The following tables will be useful in selecting the proper wire size and length of wire runs.

75VA transformer (1038 or 1039) switch leg-length of run in feet (2 wires):

No. of Relays in Parallel	#12 Wire	#14 Wire	#16 Wire	#18 Wire	#20 Wire	#22 Wire
1	3000'	2000'	1200'	750'	500'	300'
2	1500'	1000'	600'	375'	250'	150'
3	1000'	650'	400'	250'	160'	100'
4	750'	500'	300'	180'	125'	75'
5	600'	400'	240'	150'	100'	60'
6	500'	330'	200'	125'	80'	50'
7	420'	280'	170'	100'	70'	40'

Notes:

Relays in Parallel – Relays so wired will **all** be activated by **any** switch in the circuit. If more than one transformer is used, the load should be divided between transformers.

All devices listed on this page conform to NEMA WD-1 and WD-6.

legrand®
Pass & Seymour

Electrical Accessories – Network Wiring Connectivity
Keystone Products, Wall Plates & Frames

Keystone Products

Enhanced Keystone product offering includes jacks and adapters that feature quick, snap-in mounting that saves installation time. A flexible modular design allows for fast, easy configuration. Use with TradeMaster® Keystone Wall Plates.



KS58LA

Keystone Jacks

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
KS68AB_	Keystone RJ45 Category 6, T568A/B Universal Wiring	BK, BL, G, I, LA, OR, RED, W, Y
KS58AB_	Keystone RJ45 Category 5e, T568A/B Universal Wiring	BK, BL, G, I, LA, OR, RED, W, Y
KS6U_	Keystone RJ25C 6P/6C Category 3, USOC Wiring	I, LA, W
KS88_	Keystone RJ45 Category 5e, Female to Female Connector	I, LA, W



KSFFLA



KS2BPW

Keystone Multimedia & Fiber Adapters

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
KSFF_	Keystone Standard F Connector	I, LA, W
KSFFST_	Keystone Self-Terminating F Connector	I, LA, W
KSBNC_	Keystone BNC Connector	I, LA, W
KS2BP_	Pair of Keystone Binding Posts, Red/Positive, Black/Negative	I, LA, W
KSSV_	Keystone S-Video, 110 Termination	I, LA, W
KSRCAB_	Keystone RCA (Black Insulator) Bulkhead	I, LA, W
KSRCAR_	Keystone RCA (Red Insulator) Bulkhead	I, LA, W
KSRCAY_	Keystone RCA (Yellow Insulator) Bulkhead	I, LA, W
KSRCAF_	Keystone RCA (Red Insulator) to F Connector	I, LA, W
KSSC_	Keystone SC Multimode, Phosphor Bronze Sleeve	I, LA, W
KSST_	Keystone ST Multimode, Phosphor Bronze Sleeve	I, LA, W
KSBL10_	Keystone Blank Inserts (Includes 10 Blanks)	BK, I, LA, W

Replace _ in Catalog Number with Keystone Color Code to designate color.



KSBL10W

Color Codes for Keystone Products

BK**	BL**	G**	I	LA	OR**	RED**	W	Y**
Black	Blue	Green	Ivory	Light Almond	Orange	Red	White	Yellow

**Each sold as a package of 10.

KTPD1W



KTPDL1W

TradeMaster® Keystone Wall Plates & Decorator Frames

Virtually unbreakable TradeMaster® Keystone Wall Plates provide better coverage with an extra 3/16" width and height than standard wall plates to reduce time-consuming drywall rework. Available with label windows to help make identification easy.



KS226W **KS426W**

Without Label Windows	With Label Windows	DESCRIPTION	AVAILABLE COLORS
KTPD1_	**KTPDL1_**	1-Port Keystone Wall Plate	I, LA, W
KTPD2_	**KTPDL2_**	2-Port Keystone Wall Plate	I, LA, W
KTPD3_	**KTPDL3_**	3-Port Keystone Wall Plate	I, LA, W
KTPD4_	**KTPDL4_**	4-Port Keystone Wall Plate	I, LA, W
KTPD6_	**KTPDL6_**	6-Port Keystone Wall Plate	I, LA, W
KS226_		2-Port Keystone Decorator Frame	I, LA, W
KS326_		3-Port Keystone Decorator Frame	I, LA, W
KS426_		4-Port Keystone Decorator Frame	I, LA, W

Replace _ in Catalog Number to designate color.

legrand®
Pass & Seymour

Activate™ Products

Choose any combination of our Activate™ high performance modular inserts and wall plates for complete multimedia capability at any point of use. Cut installation time, thanks to this front-load, snap-in design.

Activate™ Category 6 & 5e Jack Inserts

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
2A145CC6_	Single Port RJ45 Category 6, T568A/B Universal Wiring	LA†, BK, G
2A245CC6_	Dual Port RJ45 Category 6, T568A/B Universal Wiring	LA†, BK, G, GY, WH
2A145C5EU_	Single Port RJ45 Category 5e, T568A/B Universal Wiring	LA†, BK, G, GY, WH
2A245C5EU_	Dual Port RJ45 Category 5e, T568A/B Universal Wiring	LA†, BK, G, GY, WH

Each sold as a package of 10.



2A245CC6



2A245C5EU

Activate™ Blank Inserts

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
2ABL_	Blank Insert	LA†, BK, G, GY, WH

Each sold as a package of 10.

Activate™ Wall Plates & Modular Furniture Bezel

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
ACSFP_	Single Gang	LA†, WH
ACSAP_	Single Gang Angled	LA†, WH
ACSWRP_	Single Gang WallReady™	LA†, WH
ACMFB_	Modular Furniture Bezel	LA†, BK, G

Replace _ in Catalog Number with Activate™ Color Code to designate color.
† No color code designates Light Almond.

Color Codes for Activate™ Products

†	BK	G	GY	WH
Light Almond	Black	Gray	Light Gray	White



ACSFP

Activate™ Icon Tabs

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
PSDT_	Data Icon Tabs	BK Black, BL Blue, BR Brown, G Green, GRY Gray, I Ivory, LA Light Almond, OR Orange, P Purple, RED Red, Y Yellow
PSVT_	Voice Icon Tabs	

Each sold as a package of 100.
Replace _ in Catalog Number with Icon Tab Color Code to designate color.



legrand®
Pass & Seymour

Electrical Accessories – Network Wiring Connectivity
Frames & Wall Plates



C5EFLA

Multimedia & Decorator Frames

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
C5EF_	Category 5e Jack and F Connector	I, LA, W
C25E2F_	2 Category 5e Jacks and 2 F Connectors	I, LA, W
SF326_	3-Port Decorator Frame	I, LA, W

Each sold as a package of 10.
Replace _ in Catalog Number to designate color.

TPD1LA

TPD9LA

TradeMaster® Datacom Wall Plates

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
TPD1_	1-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD2_	2-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD3_	3-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD4_	4-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD6_	6-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD9_	9-Port TradeMaster Datacom Wall Plate, Double Gang	GRY, I, LA, W
WMPPSS	Wall Mount Phone Plate	Stainless Steel

Replace _ in Catalog Number to designate color.

legrand®
Pass & Seymour

Patch Panels

High-performance panels meet the TIA/EIA-568-B.2 standard for connecting hardware, including Addendum 1 for Cat 6 component performance.

Category 6

CATALOG NUMBER	DESCRIPTION	DIMENSIONS	RACK UNITS
24845CC6	24-Port T568A/B Universal Wiring	19" x 1.75"	1
48845CC6	48-Port T568A/B Universal Wiring	19" x 3.50"	2

Category 5e

CATALOG NUMBER	DESCRIPTION	DIMENSIONS	RACK UNITS
24845C5E	24-Port T568A/B Universal Wiring	19" x 1.75"	1
48845C5E	48-Port T568A/B Universal Wiring	19" x 3.50"	2

Dimensions shown are W x H.
One Rack Unit = 1.75" H.



48845CC6

Category 5e Modular IDC Wall-Mount Jack Panels with Stand-Off Legs

CATALOG NUMBER	DESCRIPTION	DIMENSIONS
JP12845C5E	12-Port T568A/ Universal Wiring	10.69" x 3.46" x 3.08"
JP24845C5E	24-Port T568A/ Universal Wiring	10.69" x 3.46" x 3.08"
JP36845C5E	36-Port T568A/ Universal Wiring	10.69" x 6.94" x 3.08"



JP24845C5E

Category 5e Wall-Mount Patch Panel with 89D Bracket

CATALOG NUMBER	DESCRIPTION	DIMENSIONS
12845C5E89	12-Port T568A/B Universal Wiring	2.25" x 10" x 1.625"

Dimensions shown are W x H x D.




12845C5E89

66 Block

Provides flexibility in network interface connections. Used primarily for cross-connections, 66 blocks provide easy connections between customer voice or data networks and telecommunications equipment.

66 Block & Bracket

CATALOG NUMBER	DESCRIPTION
PS665089V	50-Pair 66 Block, Unwired & Mounting Bracket

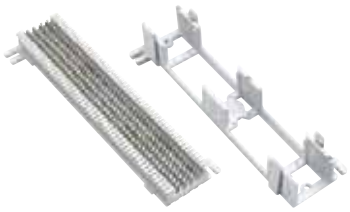

PS665089V*

*Block and bracket pictured separately, product sold together as one catalog number.

Patch Cords

Stranded-wire, twisted-pair construction provides the flexibility to make Cross-connections easy.

CATALOG NUMBER	DESCRIPTION	AVAILABLE LENGTHS
PCC6_	Category 6, Gray	3', 5', 7', 10', 15'
PSPC5B_	Category 5e Booted, White	3', 5', 7', 10', 15'

Add desired length to end of Catalog Number to order, example PCC610.



PSPC5B7 **PSPC5B5**

legrand®
Pass & Seymour

Technical Specifications

Category	Description	Page Number
Associations, Organizations & Standards		S-3, S-4
Cam-Type Devices	Series 15 In-Line Connectors	S-117
	Series 16 In-Line Connectors	S-116
	Series 18 In-Line Connectors	S-118
Configuration & Clocking Systems		S-119
Dimmers	High Wattage Rotary Dimmers	S-155, S-156
	Incandescent Rotary Dimmers	S-154
	Magnetic Low-Voltage Rotary Dimmers	S-157, S-158
	Titan™ Series Fluorescent 2, 3 & 4 Wire	S-149 – S-151
	Titan™ Series Incandescent & Magnetic Low-Voltage	S-147, S-148
	Wide Slide Dimmers	S-152, S-153
GFCI Receptacles	Hospital Grade GFCI Receptacles	S-60
	Hospital Grade Illuminated GFCI Receptacles	S-62
	Hospital Grade Tamper-Resistant GFCI Receptacles	S-58
	Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles	S-64
	Illuminated GFCI Receptacles	S-61
	NAFTA-Compliant & RoHS-Compliant GFCI Receptacles	S-73
	NAFTA-Compliant Hospital Grade GFCI Receptacles	S-74
	NAFTA-Compliant PlugTail™ GFCI Receptacles	S-75
	NAFTA-Compliant PlugTail™ Hospital Grade GFCI Receptacles	S-76
	PlugTail™ Hospital Grade GFCI Receptacles	S-68
	PlugTail™ Hospital Grade Tamper-Resistant GFCI Receptacles	S-70
	PlugTail™ Hospital Grade TR Nightlight/GFCI Receptacles	S-72
	PlugTail™ Specification Grade GFCI Receptacles	S-67
	PlugTail™ Specification Grade Tamper-Resistant GFCI Receptacles	S-69
	PlugTail™ Specification Grade TR Nightlight/GFCI Receptacles	S-71
	Tamper-Resistant GFCI Receptacles	S-57
	Tamper-Resistant Nightlight/GFCI Receptacles	S-63
	TradeMaster® & Specification Grade GFCI Receptacles	S-59
	Weather-Resistant DuraShield™ GFCI Receptacles	S-66
	Weather-Resistant GFCI Receptacles	S-65
Hallway Lights	Light Output Measurements	S-56
Horsepower Ratings for NEMA		S-10
International Standards		S-164 – S-168
IP Codes & Their Meanings		S-9
NEMA Configurations	Straight Blade Devices & Turnlok® Devices	S-6, S-7
Network Wiring	Universal & Six-Pin Wiring Guides & UTP Cabling Installation	S-160
	UTP Outlet Wiring Configurations	S-159
Occupancy Sensors	Dual-Technology Ceiling Sensor	S-145
	Dual-Technology Wall Switch	S-140
	Occupancy Sensors	S-138
	Passive Infrared Sensors	S-141 – S-143
	Passive Infrared Wall Switch	S-139
	Power Pack & Add-A-Relay	S-146
	Ultrasonic Ceiling Sensors	S-144

Technical Specifications

legrand®
Pass & Seymour

Category	Description	Page Number
Pin & Sleeve/Mechanical Interlock	Watertight Pin & Sleeve Non-Fusible Mechanical Interlock	S-136, S-137
Pin & Sleeve/Splashproof	Splashproof Pin & Sleeve Connectors	S-132, S-133
	Splashproof Pin & Sleeve Inlets	S-134, S-135
	Splashproof Pin & Sleeve Plugs	S-130, S-131
	Splashproof Pin & Sleeve Receptacles	S-128, S-129
Pin & Sleeve/Watertight	Watertight Pin & Sleeve Connectors	S-124, S-125
	Watertight Pin & Sleeve Inlets	S-126, S-127
	Watertight Pin & Sleeve Plugs	S-122, S-123
	Watertight Pin & Sleeve Receptacles	S-120, S-121
Receptacles	Commercial Specification Grade Receptacles	S-45
	Construction Specification Grade Receptacles	S-44
	Extra Heavy-Duty Hospital Grade MRI Receptacles	S-35
	Extra Heavy-Duty Hospital Grade Receptacles	S-34
	Hard Use Specification Grade Receptacles	S-43
	Heavy-Duty Hospital Grade Compact Design Receptacles	S-39
	Heavy-Duty Hospital Grade Receptacles	S-38
	Heavy-Duty Specification Grade Receptacles	S-37
	Heavy-Duty Tamper-Resistant Decorator Receptacles	S-53
	Heavy-Duty Tamper-Resistant Decorator Single Receptacles	S-54
	Industrial Extra Heavy-Duty Specification Grade Receptacles	S-36
	PlugTail™ Decorator Receptacles	S-52
	PlugTail™ Extra Heavy-Duty Hospital Grade Illuminated Receptacles	S-33
	PlugTail™ Extra Heavy-Duty Hospital Grade Receptacles	S-32
	PlugTail™ Extra Heavy-Duty Specification Grade Receptacles	S-31
	PlugTail™ Specification Grade Receptacles	S-40
	PlugTail™ Specification Grade Receptacles Split Circuit	S-42
	PlugTail™ Tamper-Resistant Specification & Hospital Grade Receptacles	S-41
	Specification Grade Combination Receptacles	S-55
	Tamper-Resistant Commercial Grade Receptacles	S-48
	Tamper-Resistant Construction Grade Single Receptacles	S-49
	Tamper-Resistant Hard Use Receptacles	S-47
	Tamper-Resistant Specification & Hospital Grade Receptacles	S-46
	Weather-Resistant Commercial Grade Receptacles	S-51
	Weather-Resistant Heavy-Duty Receptacles	S-50
Straight Blade Plugs & Connectors	Clamp-Lock™ Plugs & Connectors	S-100
	Ground Continuity Monitoring (GCM) Connectors	S-97
	Ground Continuity Monitoring (GCM) Plugs	S-96
	MaxGrip® M³ Connectors	S-99
	MaxGrip® M³ Plugs	S-98
	Straight Blade Connectors	S-95
	Straight Blade Plugs	S-94
Switches	Commercial Specification Grade Switches	S-25
	Hard-Use Specification Grade Switches	S-24
	Industrial Extra Heavy-Duty Specification Grade Switches	S-22, S-23
	Manual Controller Switches	S-26, S-27

legrand®
Pass & Seymour

Technical Specifications

Category	Description	Page Number
Switches (con't.)	PlugTail™ Specification Grade Decorator Switches	S-28
	PlugTail™ Specification Grade Switches	S-21
	Specification Grade Combination & Contact Switches	S-30
	Specification Grade Decorator Switches	S-29
Symbols		S-5
Turnlok® Plugs, Connectors, Inlets & Outlets	15, 20 & 30A Heavy-Duty Ground Continuity Monitoring (GCM) Connectors	S-110
	15, 20 & 30A Heavy-Duty Ground Continuity Monitoring (GCM) Plugs	S-109
	15A Turnlok® EHU Plugs & Connectors	S-104
	15A Turnlok® Flanged Inlets & Outlets	S-111
	15A Turnlok® Receptacles	S-101
	20A Turnlok® Connectors	S-106
	20A Turnlok® Flanged Inlets	S-112
	20A Turnlok® Flanged Outlets	S-113
	20A Turnlok® Plugs	S-105
	20A Turnlok® Receptacles	S-102
	30A Turnlok® Connectors	S-108
	30A Turnlok® Flanged Inlets	S-114
	30A Turnlok® Flanged Outlets	S-115
	30A Turnlok® Plugs	S-107
	30A Turnlok® Receptacles	S-103
Surge Protective	Extra Heavy-Duty Tamper-Resistant Hospital Grade Receptacles	S-91
	Extra Heavy-Duty Tamper-Resistant Receptacles	S-89
	Hospital Grade Isolated Ground Receptacles	S-78
	Hospital Grade Receptacles	S-77
	PlugTail™ Extra Heavy-Duty Receptacles	S-83
	PlugTail™ Hospital Grade Extra Heavy-Duty Receptacles	S-86
	PlugTail™ Hospital Grade Isolated Ground Receptacles	S-87
	PlugTail™ Hospital Grade Tamper-Resistant Receptacles	S-88
	PlugTail™ Isolated Ground Receptacles	S-84
	PlugTail™ Tamper-Resistant Receptacles	S-85
	Receptacles	S-81
	Specification Grade Extra Heavy-Duty Receptacles	S-79
	Specification Grade Isolated Ground Receptacles	S-80
	Surge Protection Panels	S-93
	Tamper-Resistant Hospital Grade Isolated Ground Receptacles	S-92
	Tamper-Resistant Isolated Ground Receptacles	S-90
	Tamper-Resistant Receptacles	S-82
UL Changes, Conversions & Wire Spec Chart		S-8
Wall Plates	Dimensions	S-163
	Specifications	S-161, S-162
Wiring Diagrams		S-11 – S-20

Devices & Wall Plates Color Selection Chart available on Pages A-29, B-78 and Q-61.

Associations, Organizations, & Standards

For convenience, the following listings define common acronyms for a variety of organizations.

Standards Development Organization

Organizations primarily involved in the development and/or promulgation of standards.

NFPA	National Fire Protection Agency
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc.
ANSI	American National Standards Institute
CANENA	Consejo de Armonizacion de Normas Electrotecnicas de Naciones America (Council for Harmonization of Electrotechnical Standardization of the Nations of the Americas)
SAE	Society of Automotive Engineers
ISA	Instrument Society of America
SME	Society of Manufacturing Engineers
ISO	International Standards Organization

Codes & Standards

Installation codes and product safety, performance on interchangeability standards.

NEC	National Electrical Code
NOM	Normas Oficiales de Mexicanas (Official Mexican Standard)
NMX	Normas Mexicanas
CEC	Canadian Electrical Code

Industry Associations

Associations of companies or individuals for the purpose of standardization, trade and professional development, etc.

NMDA	National Marine Distributor Association
NEMA	National Electrical Manufacturers Association
ABYC	American Boat and Yacht Council
EIA/TIA	Electronics Industry Association/Telecommunications Industry Association
NAED	National Association of Electrical Distributors
NAW	National Association of Wholesalers
BICSI	Building Industry Consulting Services International
IBI	Intelligent Building Institute
EPRI	Electric Power Research Institute
NEMRA	National Electrical Manufacturers Representatives Association
IAEI	International Association of Electrical Inspectors
IFMA	International Facilities Management Association
BOMA	Building Owner Management Association
SEMI	Semi-Conductor Equipment and Material International
CEMRA	Canadian Electrical Manufacturers Representative Association
NMRA	National Marine Representative Association
EFI	Electro-Federation Incorporated
NECA	National Electrical Contractors Association
IECA	Independent Electrical Contractors Association
ECOC	Electrical Contractors of Canada
CANAME	Camara Nacional de Manufacturas Electricas
HLCA	Home Lighting Control Alliance
USGBC	U.S. Green Building Council

legrand®
Pass & Seymour

Technical Specifications
Associations, Organizations, & Standards

Certification Agencies

Primarily involved in certification of products or manufacturers to standards developed by the certification agency or by others.

UL	Underwriters' Laboratories, Inc.
cUL	Tested to Canadian Safety Standards by Underwriters' Laboratories, Inc.
cULus	Tested to U.S. and Canadian Safety Standards by Underwriters' Laboratories, Inc.
CSA	Canadian Standards Association
ANCE	National Association of Normalization and Certification of the Electrical Sector, (Mexico)
TUV	TUV Rheinland of N.A., Inc.
VDE	Verband Deutscher Elektrotechniker
BSI	British Standards Institute
FM	Factory Mutual
NRTL	Nationally Recognized Testing Laboratories

Government Agencies

OSHA	Occupational Safety and Health Administration
FCC	Federal Communications Commission
DSSC	Defense Supply Center, Columbus
IAPA	Independent Accident and Protection Association (Canada)
LEED	Leadership in Energy and Environmental Design

Copies of standards referred to on the preceding pages may be purchased from the following:

Underwriters' Laboratories, Inc. (UL)

1285 Walt Whitman Road
Melville, NY 11747

333 Pfingston Road
Northbrook, IL 60062

1655 Scott Boulevard
Santa Clara, CA 95050

12 Laboratory Drive
Research Triangle Park, NC 27709

2600 N.W. Lake Road
Camas, WA 98607

The Canadian Standards Association (CSA)

Standards Division
178 Rexdale Boulevard
Rexdale, Ontario
Canada M9W 1R3

The American National Standards Institute (ANSI)

1430 Broadway
New York, NY 10018

National Electrical Manufacturers Association (NEMA)

2101 L Street, NW, Suite 300
Washington, DC 20037

National Fire Protection Association (NFPA)

Batterymarch Park
Quincy, MA 02269

The International Electrotechnical Commission (IEC)

Copies of IEC standards may be obtained from the American National Standards Institute (ANSI) at the above address.

American Boat and Yacht Council, Inc. (ABYC)

P.O. Box 806
Amityville, NY 11701

Asociacion Nacional de Normalizacion y Certificacion del Sector Electrico A.C. (NOM-ANCE)

Insurgentes Sur 664, 3ER Piso
Col. Del Valle
03100 Mexico D.F.
Phone: 011-525-227-1110
Fax: 011-525-227-1177

Occupational Safety and Health Administration

200 Constitution Avenue N.W.
Room 3647
Washington, DC 20210

legrand®
Pass & Seymour

General Outlets

- Outlet
- (B) Blanked Outlet
- (D) Drop Cord
- (E) Electrical Outlet: for use only when circle used alone might be confused with columns, plumbing symbols, etc.
- (F) Fan Outlet
- (J) Junction Box
- (L) Lamp Holder
- (L) PS Lamp Holder with Pull Switch
- (S) Pull Switch
- (V) Outlet for Vapor Discharge Lamp
- (X) Exit Light Outlet
- (C) Clock Outlet (Specify Voltage)

Convenience Outlets

- Duplex Convenience Outlet
- [3] Convenience Outlet other than Duplex
  1 = Single, 3 = Triplex, etc.
- WP Weatherproof Convenience Outlet
- R Range Outlet
- S Switch and Convenience Outlet
- R Radio and Convenience Outlet
- Special Purpose Outlet
- Floor Outlet

Switch Outlets

S	Single Pole Switch
S_2	Double Pole Switch
S_3	Three Way Switch
S_4	Four Way Switch
S_D	Automatic Door Switch
S_E	Electrolier Switch
S_K	Key Operated Switch
S_P	Switch and Pilot Lamp
S_{CB}	Circuit Breaker
S_{WCB}	Weatherproof Circuit Breaker
S_{MC}	Momentary Contact Switch
S_{RC}	Remote Control Switch
S_{WP}	Weatherproof Switch
S_F	Fused Switch
S_{WF}	Weatherproof Fused Switch

Special Outlets

a.b.c.etc
a.b.c.etc
S a.b.c.etc

Any Standard Symbol as given above with the addition of a lower case subscript letter may be used to designate some special variation of Standard Equipment of particular interest in a specific set of Architectural Plans. When used they must be listed in the Key of Symbols on each drawing and if necessary further described in the specifications.

Panels, Circuits & Miscellaneous

- Lighting Panel
- Power Panel
- Branch Circuit: Concealed in Ceiling or Wall
- Branch Circuit: Concealed in Floor
- Branch Circuit: Exposed
- Home Run to Panel Board. Indicate number of Circuits by number of arrows.
  Note: Any circuit without further designation indicates a two-wire circuit. For a greater number of wires indicate as follows: /// (3 wires), //// (4 wires), etc.
- Feeders: **Note:** Use heavy lines and designate by number corresponding to listing in Feeder Schedule.
- Underfloor Duct and Junction Box. Triple System.
  Note: For double or single systems eliminate one or two lines. This symbol is equally adaptable to auxiliary system layouts.
- (G) Generator
- (M) Motor
- (I) Instrument
- (T) Power Transformer. (Or draw to scale.)
- Controller
- Isolating Switch

Auxiliary Systems

- Push Button
- Buzzer
- Bell
- Annunciator
- Outside Telephone
- Interconnecting Telephone
- Telephone Switchboard
- (T) Bell Ringing Transformer
- (D) Electric Door Opener
- (F) Fire Alarm Bell
- (F) Fire Alarm Station
- City Fire Alarm Station
- (FA) Fire Alarm Central Station
- (FS) Automatic Fire Alarm Device
- (W) Watchman's Station
- (W) Watchman's Central Station
- (H) Horn
- (N) Nurse's Signal Plug
- (M) Maid's Signal Plug
- (R) Radio Outlet
- (SC) Signal Central Station
- Interconnection Box
- Battery
- Auxiliary System Circuits
  Note: Any line without further designation indicates System. For a greater number of wires designate with numerals in manner similar to 12-No. 18 W-3/4" C., or designate by number corresponding to listing in Schedule.
- a.b.c. Special Auxiliary Outlets
  Subscript letters refer to notes on plans or detailed description in specifications.

legrand®
Pass & Seymour

Technical Specifications
NEMA Configurations – Straight Blade Devices

Straight Blade Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding										
1 — 125V	1-15R									
2 — 250V				2-20P						
2 Pole, 3 Wire Grounding										
5 — 125V	5-15R	5-15P	5-20R	5-20P	5-30R	5-30P		5-50P		
6 — 250V	6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
7 — 277VAC	7-15R	7-15P	7-20R	7-20P		7-30P		7-50P		
3 Pole, 3 Wire Non-Grounding										
10 — 125/250V			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 Pole, 4 Wire Grounding										
14 — 125/250V			14-20R	14-20P	14-30R	14-30P	14-50R	14-50P		14-60P
15 — 3ø250V				15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P
4 Pole, 4 Wire Non-Grounding										
18 — 3øY 120/208V			18-20R	18-20P					18-60R	18-60P

Open Slots
Indicate receptacle configurations (female).




Closed Slots
Indicate plug blade configurations (male).



Labels and Their Meanings

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

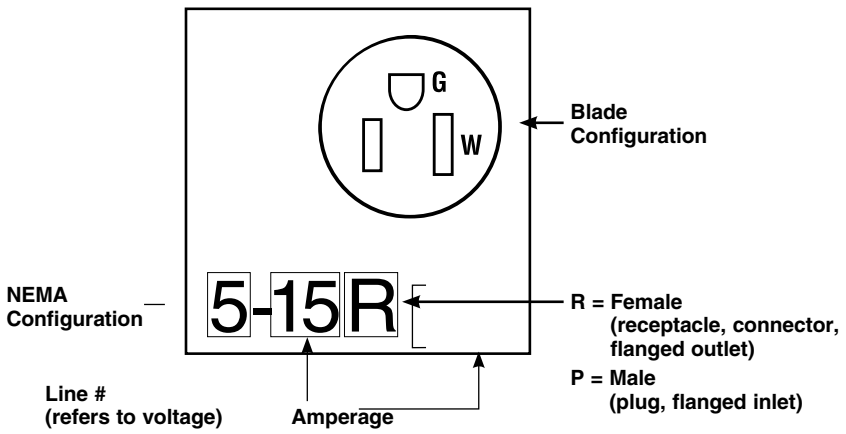

NEMA Configurations – Turnlok® Devices

legrand®
Pass & Seymour

Locking Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding						
L1 125V	L1-15R	L1-15P				
L2 250V			L2-20R	L2-20P		
2 Pole, 3 Wire Grounding						
L5 125V	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	L5-30P
L6 250V	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	L6-30P
L7 277VAC	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	L7-30P
L24 347VAC			L24-20R	L24-20P		
L8 480VAC			L8-20R	L8-20P	L8-30R	L8-30P
L9 600VAC			L9-20R	L9-20P	L9-30R	L9-30P
3 Pole, 3 Wire Non-Grounding						
L10 125/250V			L10-20R	L10-20P	L10-30R	L10-30P
L11 3ø250V			L11-20R	L11-20P	L11-30R	L11-30P
L12 3ø480V			L12-20R	L12-20P	L12-30R	L12-30P
L13 3ø600V					L13-30R	L13-30P
3 Pole, 4 Wire Grounding						
L14 125/250V			L14-20R	L14-20P	L14-30R	L14-30P
L15 3ø250V			L15-20R	L15-20P	L15-30R	L15-30P
L16 3ø480V			L16-20R	L16-20P	L16-30R	L16-30P
L17 3ø600V					L17-30R	L17-30P
4 Pole, 4 Wire Non-Grounding						
L18 3øY 120/208V			L18-20R	L18-20P	L18-30R	L18-30P
L19 3øY 277/480V			L19-20R	L19-20P	L19-30R	L19-30P
L20 3øY 347/600V			L20-20R	L20-20P	L20-30R	L20-30P
4 Pole, 5 Wire Grounding						
L21 3øY 120/208V			L21-20R	L21-20P	L21-30R	L21-30P
L22 3øY 277/480V			L22-20R	L22-20P	L22-30R	L22-30P
L23 3øY 347/600V			L23-20R	L23-20P	L23-30R	L23-30P

Midget – Locking

	15 AMPERE	
	RECEPTACLE	PLUG
2 Pole, 2 Wire Non-Grounding		
ML1 125V	ML-1R	ML-1P
2 Pole, 3 Wire Grounding		
ML2 125V	ML-2R	ML-2P
3 Pole, 3 Wire Non-Grounding		
ML3 125/250V	ML-3R	ML-3P

Labels & Their Meaning

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).



Closed Slots
Indicate plug blade configurations (male).



legrand®
Pass & Seymour

Technical Specifications
UL Changes, Conversion & Wire Spec Chart

UL Rating Changes

On July 1, 1983, UL cancelled listing of 3 non-NEMA dual-rated configurations and assigned new voltage ratings to them. There is no change in the slot/blade configurations and the catalog numbers for each series are now UL listed under their new voltage ratings. Affected configurations are:

1. 30A, 3 Pole, 3 Wire
not grounding Turnlok®
No. 3330 Series




***Old Rating**
30A, 250V




New Rating
30A,125/250V

2. 20A, 4 Pole, 4 Wire
not grounding Turnlok
No. 7410 Series




***Old Rating**
20A, 250V
10A, 600V




New Rating
20A, 120/208V 3øY

3. 30A , 4 Pole, 4 Wire
not grounding Turnlok
No. 3430 Series



***Old Rating**
30A, 600V
30A, 250V



New Rating
30A, 120/208V 3øY

Conversion Chart

Fractions to Decimals to Millimeters

Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm
1/64	0.0156	0.3969	17/64	0.2656	6.7469	33/64	0.5156	13.0969	49/64	0.7656	19.4469
1/32	0.0312	0.7938	9/32	0.2812	7.1438	17/32	0.5312	13.4938	25/32	0.7812	19.8437
3/64	0.0468	1.1906	19/64	0.2968	7.5406	35/64	0.5468	13.8906	51/64	0.7968	20.2406
1/16	0.0625	1.5875	5/16	0.3125	7.9375	9/16	0.5625	14.2875	13/16	0.8125	20.6375
5/64	0.0781	1.9844	21/64	0.3281	8.3344	37/64	0.5781	14.6844	53/64	0.8281	21.0344
3/32	0.0937	2.3812	11/32	0.3437	8.7312	19/32	0.5937	15.0812	27/32	0.8437	21.4312
7/64	0.1093	2.7781	23/64	0.3593	9.1281	39/64	0.6093	15.4781	55/64	0.8593	21.8281
1/8	0.1250	3.1750	3/8	0.3750	9.5250	5/8	0.6250	15.8750	7/8	0.8750	22.2250
9/64	0.1406	3.5719	25/64	0.3906	9.9219	41/64	0.6406	16.2719	57/64	0.8906	22.6219
5/32	0.1562	3.9688	13/32	0.4062	10.3188	21/32	0.6562	16.6688	29/32	0.9062	23.0188
11/64	0.1718	4.3656	27/64	0.4218	10.7156	43/64	0.6718	17.0656	59/64	0.9218	23.4156
3/16	0.1875	4.7625	7/16	0.4375	11.1125	11/16	0.6875	17.4625	15/16	0.9375	23.8125
13/64	0.2031	5.1594	29/64	0.4531	11.5094	45/64	0.7031	17.8594	61/ 64	0.9531	24.2094
7/32	0.2187	5.5562	15/32	0.4687	11.9062	23/32	0.7187	18.2562	31/32	0.9687	24.6062
15/64	0.2343	5.9531	31/64	0.4843	12.3031	47/64	0.7343	18.6531	63/64	0.9843	25.0031
1/4	0.2500	6.3500	1/2	0.5000	12.7000	3/4	0.7500	19.0500	1	1.0000	25.4000

Wire Specifications

Diameter Ranges of Jacketed Cord in Accordance with Standard “UL62”

Type*	AWG Size	2 Cond.	3 Cond.
SV,SVO,SVT,SVTO	18	.220-.255"	.230-.265"
	17	.235-.270"	.250-.285"

Type*	AWG Size	2 Cond.	3 Cond.	4 Cond.
SJ,SJO,SJT,SJTO	18	.280-.315"	.300-.335"	.325-.365"
	17	.290-.325"	.310-.345"	.340-.380"
	16	.305-.340"	.325-.360"	.350-.395"
	15	.315-.350"	.335-.375"	.370-.415"
	14	.335-.375"	.360-.395"	.390-.435"
	12	.405-.455"	.425-.475"	.465-.520"
	10	.540-.605"	.565-.635"	.625-.700"

Type*	AWG Size	2 Cond.	3 Cond.	4 Cond.	5 Cond.
S,SO,ST,STO	18	.340-.385"	.360-.400"	.385-.430"	.460-.510"
	17	.350-.390"	.370-.415"	.400-.445"	.465-.520"
	16	.365-.410"	.385-.430"	.410-.460"	.490-.550"
	15	.475-.530"	.500-.560"	.540-.610"	.615-.690"
	14	.495-.550"	.520-.575"	.560-.620"	.630-.705"
	12	.565-.625"	.590-.655"	.640-.710"	.700-.770"
	10	.615-.685"	.650-.720"	.700-.775"	.760-.840"
	8	.780-.880"	.830-.930"	.925-1.050"	1.000-1.150"
	6	.920-1.050"	.970-1.100"	1.050-1.200"	1.180-1.330"
	4	1.060-1.210"	1.130-1.280"	1.250-1.450"	
	2	1.210-1.400"	1.300-1.500"	1.450-1.650"	

*Actual sizes will vary by cord manufacturers.

legrand®
Pass & Seymour

IP Suitability Rating

IP Suitability Ratings are an international system for classifying the degree of protection provided by enclosures of electrical equipment. The higher the number, the greater the degree of protection; they apply ONLY to properly installed equipment. The numerals stand for the following:

1. First Number: Degree of protection for persons against access to hazardous parts inside the enclosure and/or against solid bodies.
2. Second Number: Degree of protection of equipment inside enclosures against damage from the ingress of water.

Example: IP44=Ingress Protection; Solid bodies >=1.0mm; Splashing

$$\underset{\text{Suitability}}{\frac{IP44}{}}$$

Meaning for the Protection of Equipment		
Code Letters	First Number	Second Number
Ingress Protection	Against Ingress of Solid Bodies	Against Ingress of Water with Harmful Effects
IP	0 - Non-protected 1 – >=50 mm diameter 2 – >=12.5 mm diameter 3 – >=2.5 mm diameter 4 – >=1.0 mm 5 – Dust-protected 6 – Dust-tight	0 – Non-protected 1 – Vertically dripping 2 – Dripping (15° Tilted) 3 – Spraying 4 – Splashing 5 – Jetting 6 – Power jetting 7 – Temporary immersion 8 – Continuous immersion

Note: >= denotes greater than or equal to. Dimensions in Inches (mm)


legrand®
Pass & Seymour

Technical Specifications
Horsepower Ratings for NEMA
Configuration Receptacles & Plugs Only

Ampere Rating	AC Voltage Rating	Phases	Poles	Horsepower Rating	NEMA Designation
15	125	1	2	1/2	1-15, L1-15, 5-15, L5-15
	250	1	2	1-1/2#	6-15, L6-15
	277	1	2	2	7-15, L7-15
	125/250	1	3	1-1/2 L-L# 1/2 L-N	14-15
	250	3	3	2	11-15, L11-15, 15-15
	120/208	3	4	2	18-15
20	125	1	2	1	5-20, L5-20
	250	1	2	2#	2-20, L2-20, 6-20, L6-20
	277	1	2	2	7-20, L7-20
	480	1	2	3	L8-20
	125/250	1	3	2 L-L# 1 L-N	10-20, L10-20, 14-20, L14-20
	250	3	3	3	11-20, L11-20, 15-20, L15-20
	480	3	3	5	L12-20, L16-20
	120/208	3	4	2	18-20, L18-20, L21-20
	277/480	3	4	5	L19-20, L22-20
30	125	1	2	2	5-30, L5-30
	250	1	2	2#	2-30, 6-30, L6-30
	277	1	2	3	7-30, L7-30
	480	1	2	5	L8-30
	125/250	1	3	2 L-L# 2 L-N	10-30, L10-30 14-30, L14-30
	250	3	3	3	11-30, L11-30, 15-30, L15-30
	480	3	3	10	L12-30, L16-30
	120/208	3	4	3	18-30, L18-30, L21-30
	277/480	3	4	10	L19-30, L22-30
50	125	1	2	2	5-50
	250	1	2	3	6-50
	277	1	2	5	7-50
	125/250	1	3	3 L-L# 2 L-N	10-50, 14-50
	250	3	3	7-1/2	11-50, 15-50
	120/208	3	4	7-1/2	18-50
60	125/250	1	3	3 L-L# 2 L-N	14-60
	250	3	3	10	15-60
	120/208	3	4	7-1/2	18-60


L-L: Motor connected line-to-line.
L-N: Motor connected line-to-neutral.
#: Also suitable for 208V motor applications at the indicated horsepower rating.

Switches

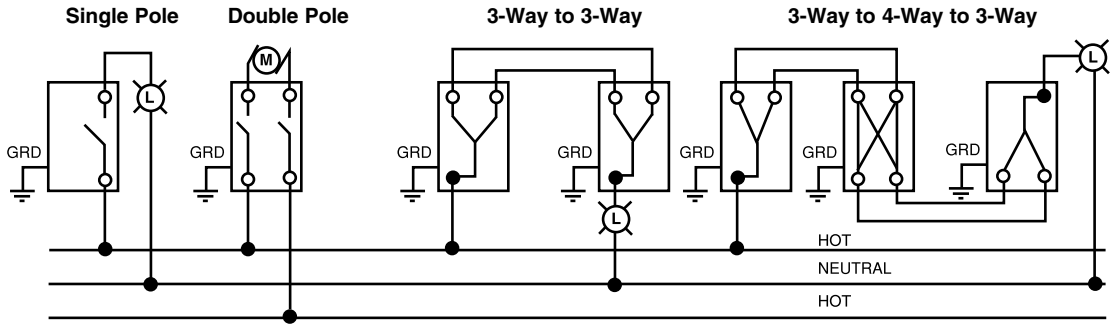


Pilot Light Switch & Lighted Toggle Switch


Single Pole Pilot Light Switch Toggle Glows when Light is On




Single Pole Lighted Toggle Switch Toggle Glows when Switch is Off




Double Pole Pilot Light Switch Toggle Glows when Switch is On



3-Way Lighted Toggle Switch (Two Lighted or Pilots May Be Used)




3-Way Pilot Lighted Toggle Switch




Maintained & Momentary Contact

Maintained Contact 3-Position, 2-Circuit Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1222

Momentary Contact Either Direction 3-Position, Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1256

Maintained Contact Either Direction 2-Position, No Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1276

Receptacles


1 Circuit



Split Circuit




1 Circuit



legrand®
Pass & Seymour


Technical Specifications
Wiring Diagrams – GFCIs

Wiring Diagram GFCI Receptacle, Feed-Thru Installation

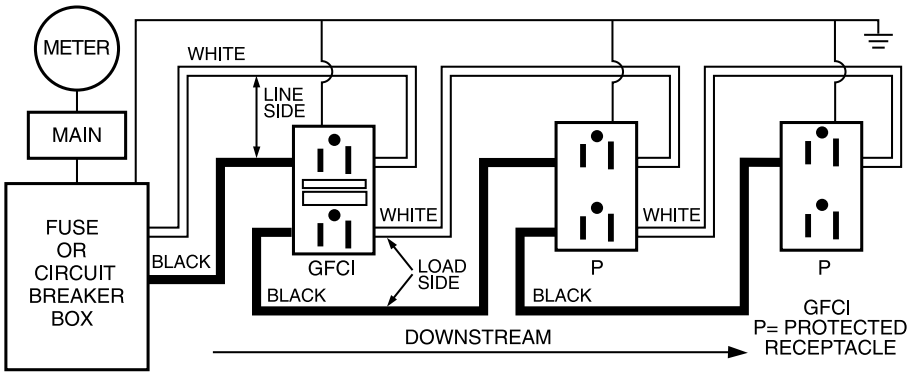

To protect the entire branch circuit the GFCI must be the first receptacle from the fuse or circuit breaker box. Receptacles on the circuit between the GFCI and the box will not be protected, but receptacles downstream from the GFCI will have protection.

Wiring Diagram GFCI Receptacle, Non-Feed-Thru Installation

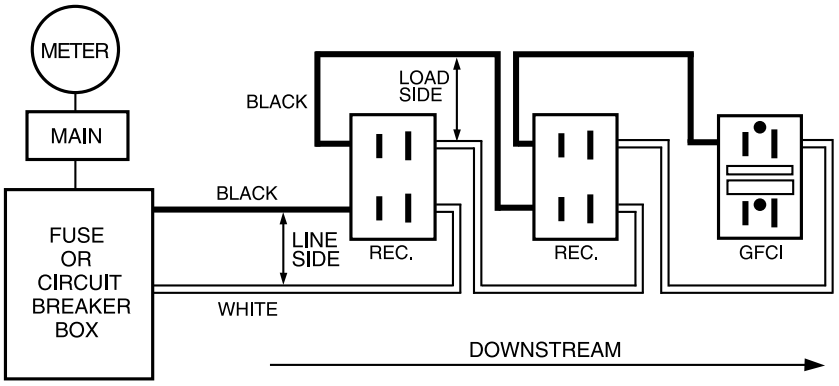


Terminal, or one-outlet-only protection can be achieved on a multi-outlet circuit by connecting the hot and neutral line conductors to the corresponding line side terminals of the GFCI. Only the GFCI receptacle will be protected.


legrand®
Pass & Seymour

2 Pole, 2 Wire Non-Grounding

125V

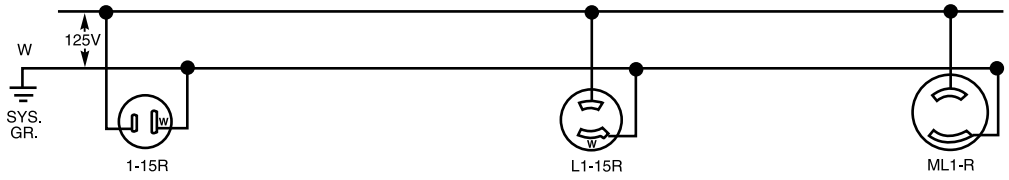


250V

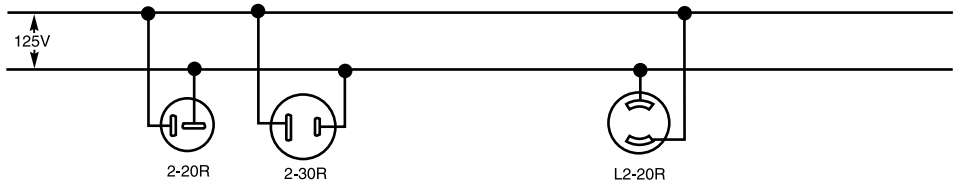


3 Pole, 3 Wire Non-Grounding

125V/250V

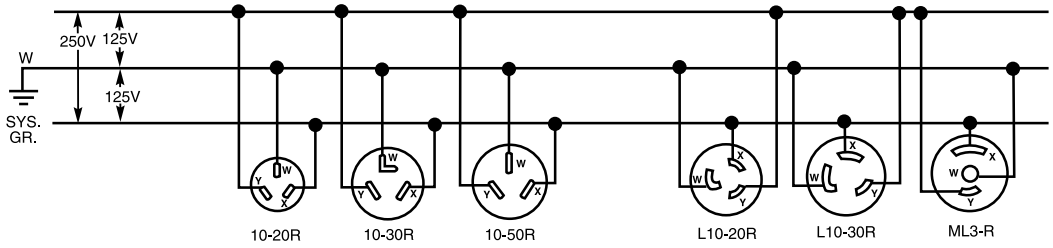

3ø250V

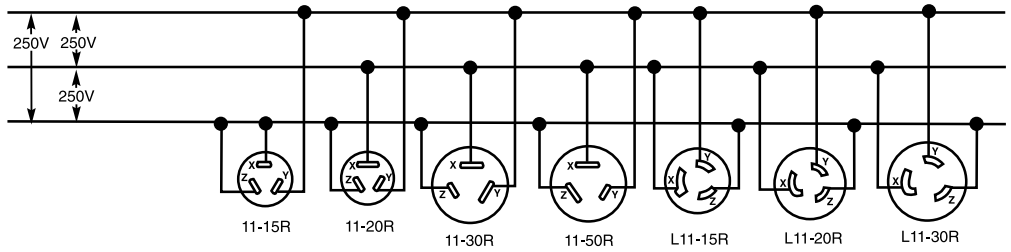


Pass & Seymour


Technical Specifications
Wiring Diagrams – 2 Pole, 3 Wire Grounding

2 Pole, 3 Wire Grounding


125V

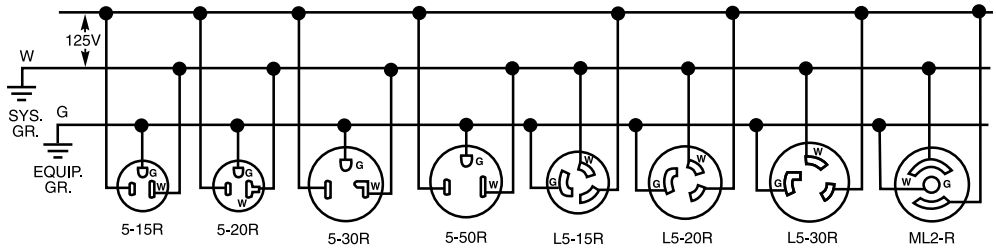


250V

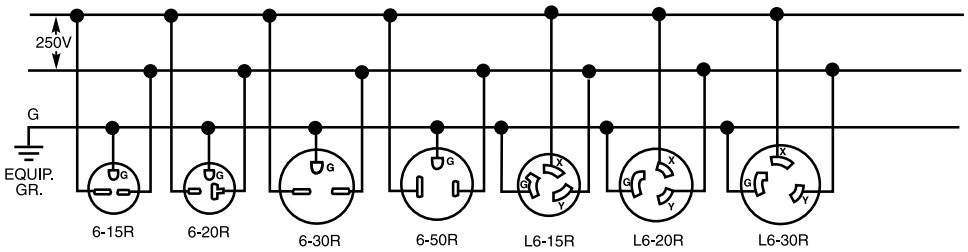

277VAC

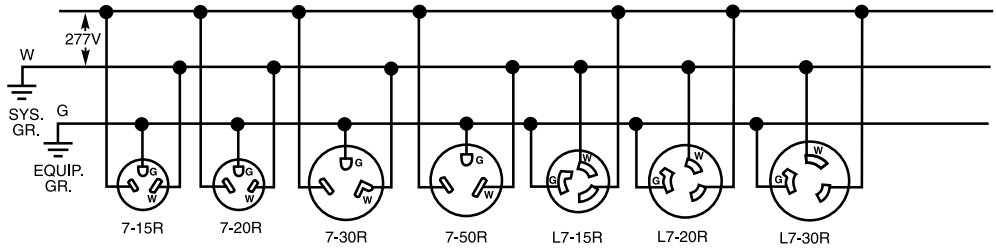


480VAC

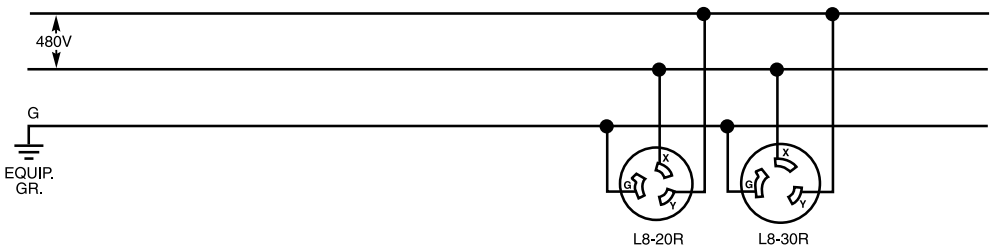


legrand®
Pass & Seymour

3 Pole, 4 Wire Grounding


125V/250V

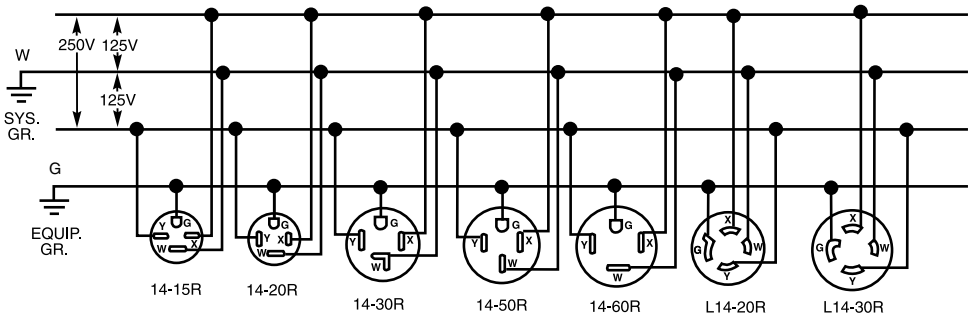


3ø250V

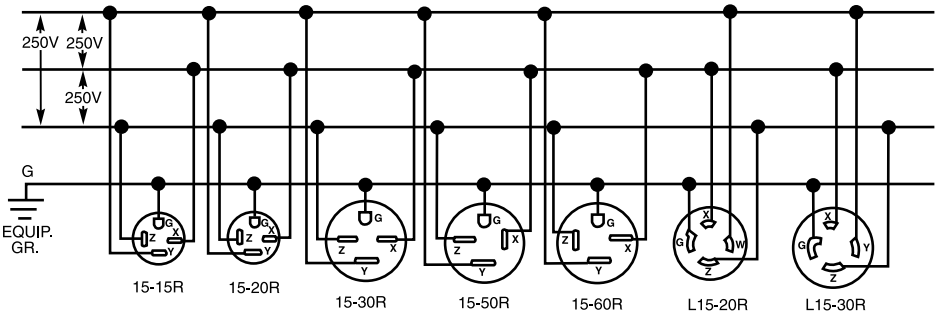

3ø480V

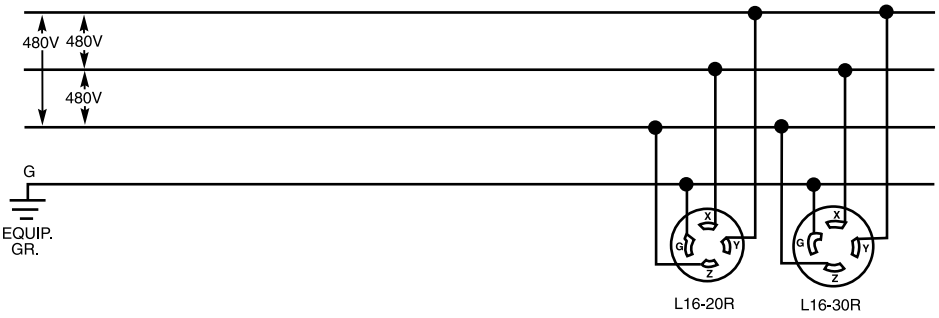

3ø600V

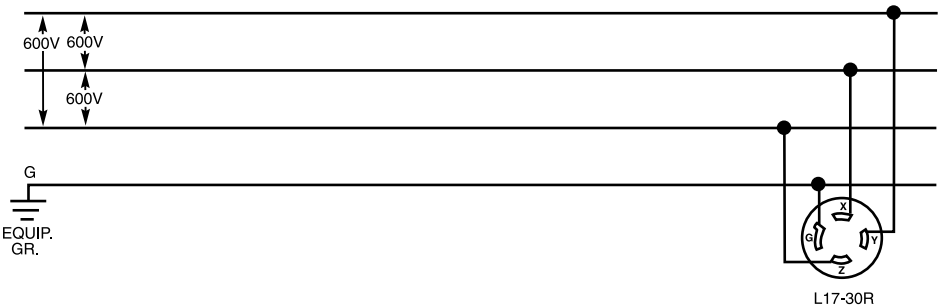


Pass & Seymour


Technical Specifications
Wiring Diagrams – 4 Pole, 4 Wire Non-Grounding

4 Pole, 4 Wire Non-Grounding


3øY120V/208V

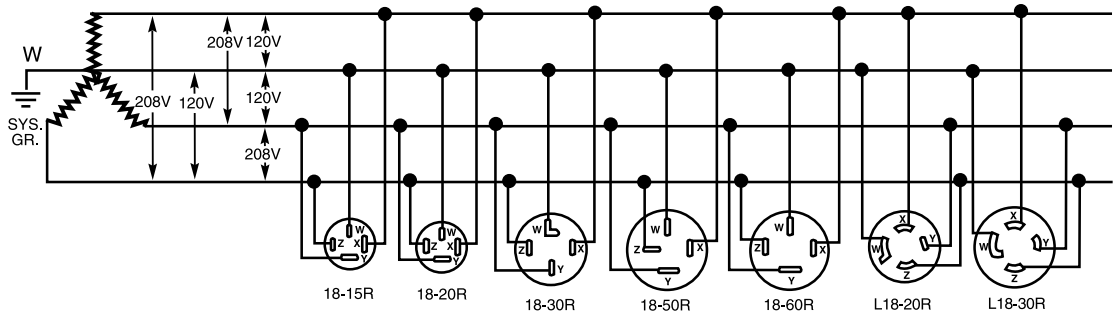

3øY277/480V

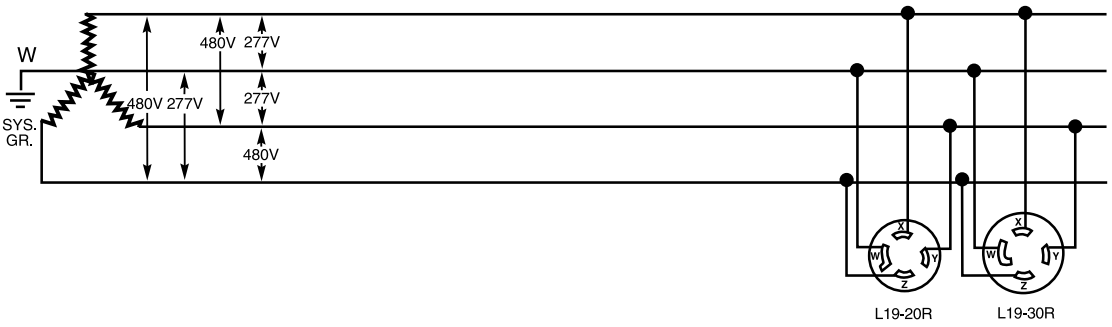


3ø347/600V

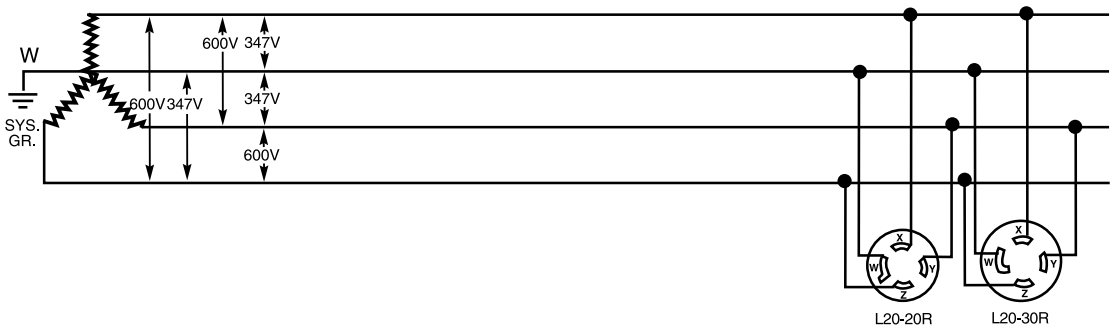


4 Pole, 5 Wire Grounding


3øY120V/208V

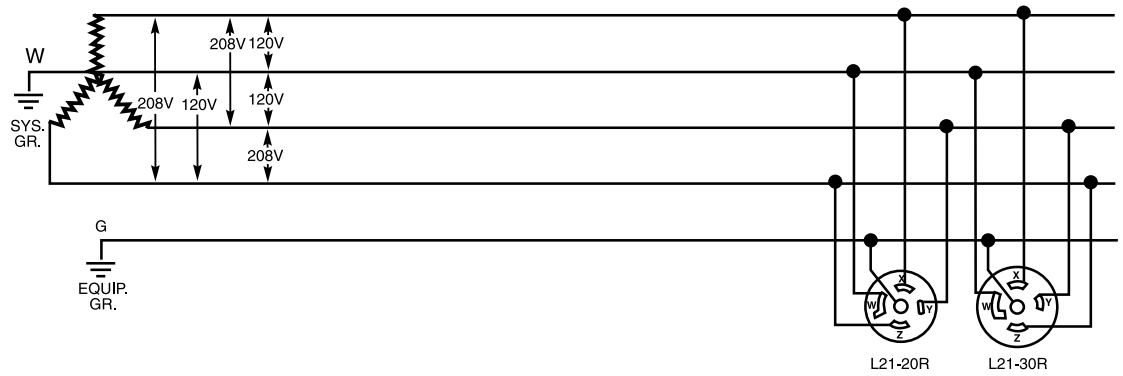

3øY277/480V

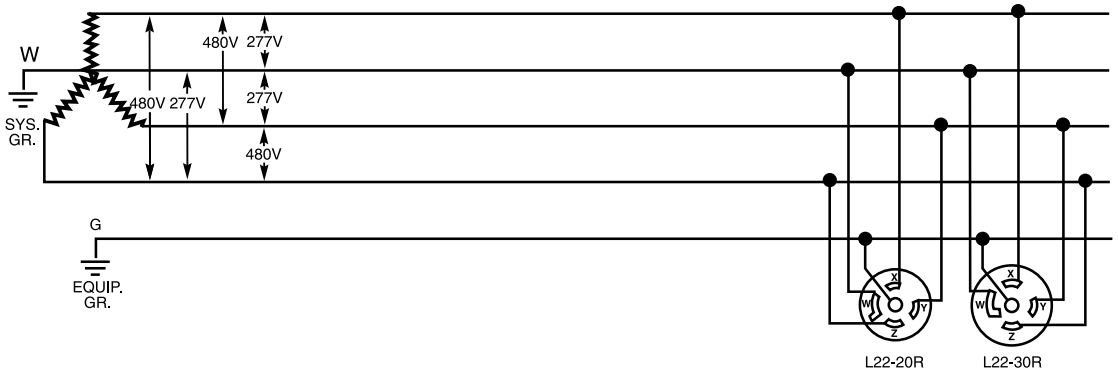


3øY347/600V

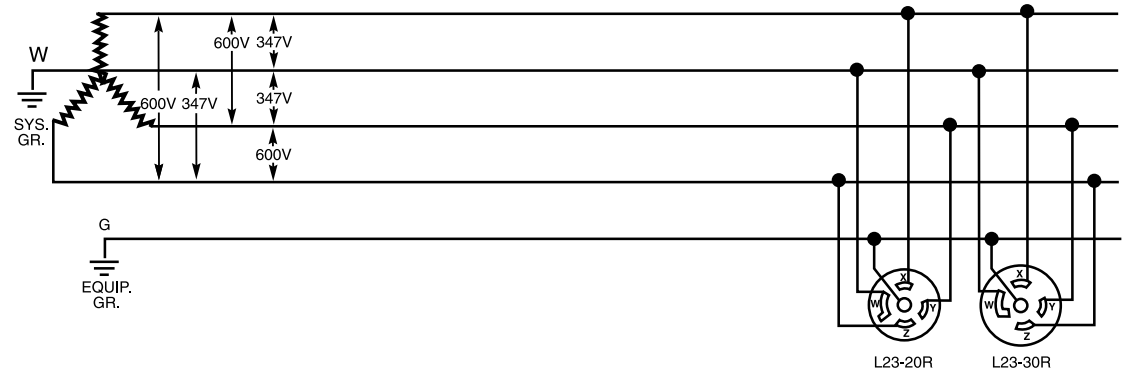


legrand®
Pass & Seymour

Technical Specifications
Wiring Diagrams – Sensors Connected to Power Packs


1 Sensor, 1 Power Pack
Standard Wiring

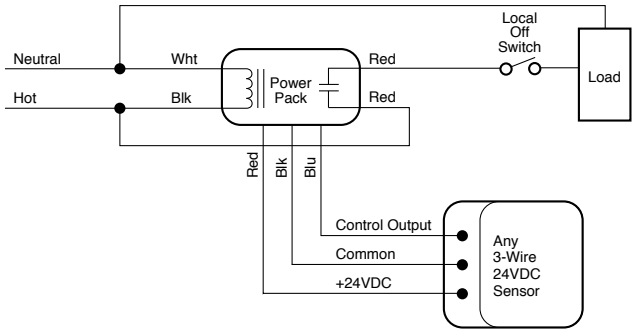


1 Sensor, 1 Power Pack
Bi-Level Lighting

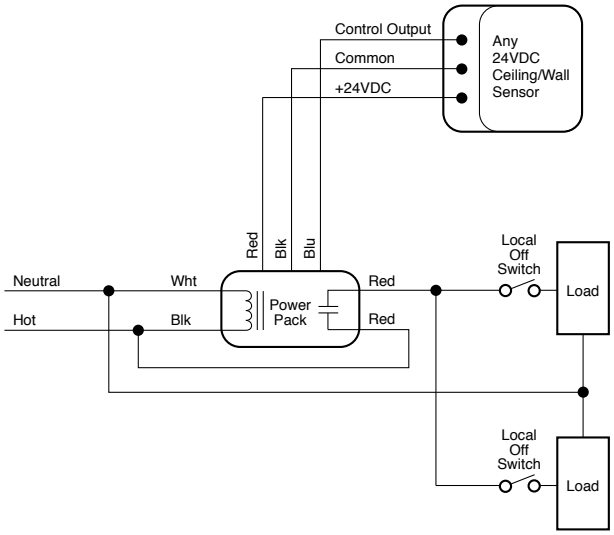

1 Sensor, 1 Power Pack
3-Way Switching

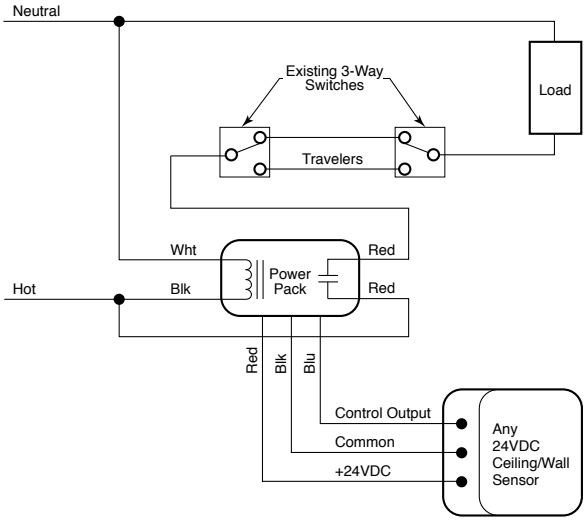


1 Sensor, 1 Power Pack
2 Lighting Loads

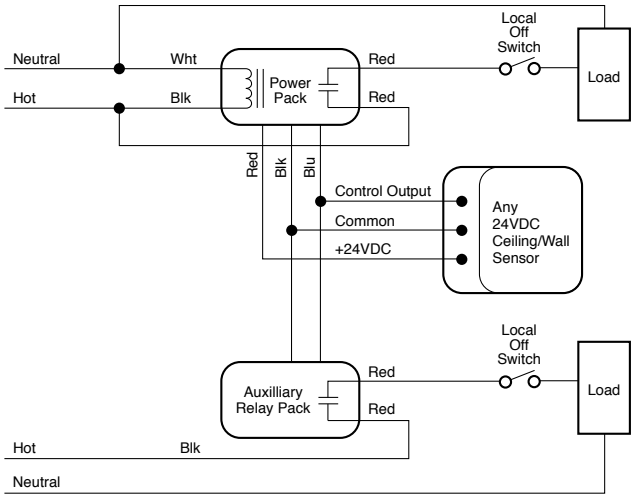


legrand®
Pass & Seymour


1 Sensor & Up to 3 Power Packs

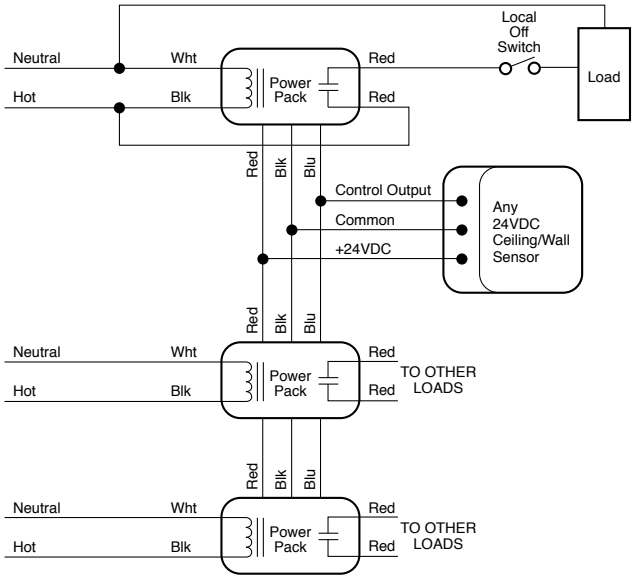

Multiple Sensors, 1 Power Pack

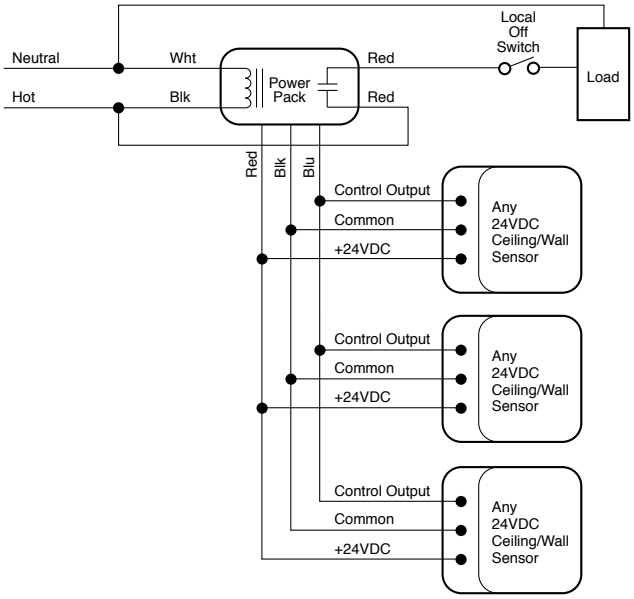


Multiple Sensors, Multiple Power Packs

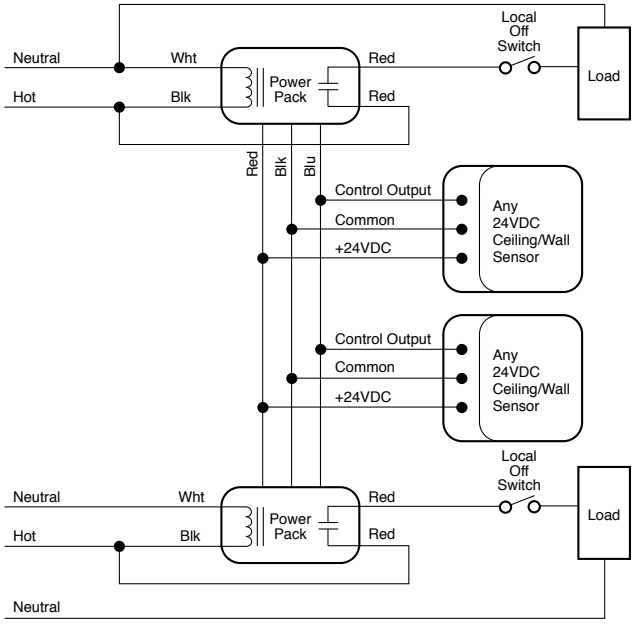


legrand®
Pass & Seymour

Technical Specifications
Wiring Diagrams – Dimmers & Fan Speed Controls

Single-Pole Wiring

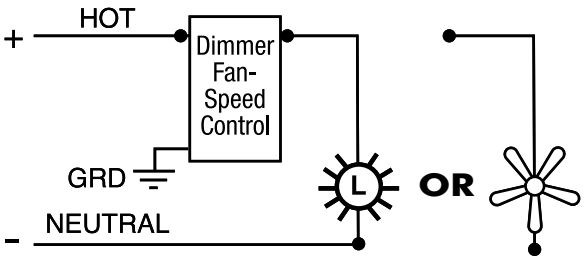


Single-Pole Wiring Using 3-Way Preset Dimmer

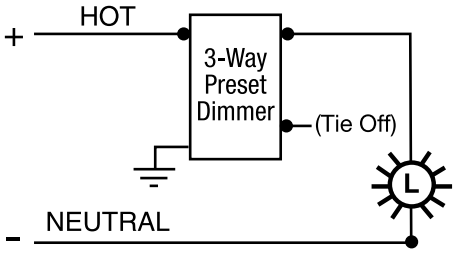


3-Way Wiring

Control Line Side

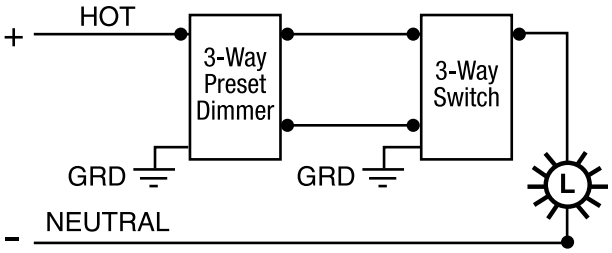


OR

Control Load Side

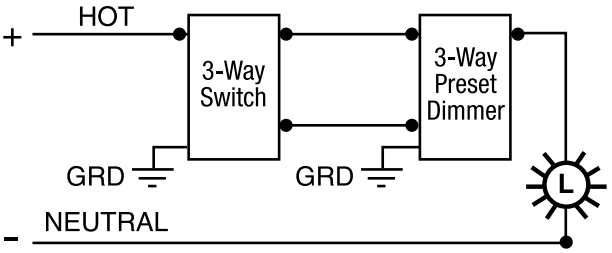


4-Way Wiring

Control Line Side

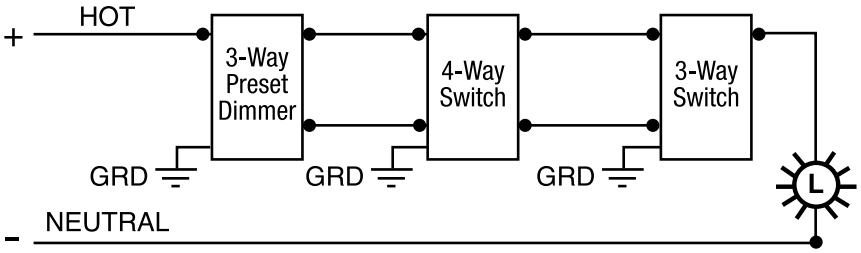

OR

Control Load Side

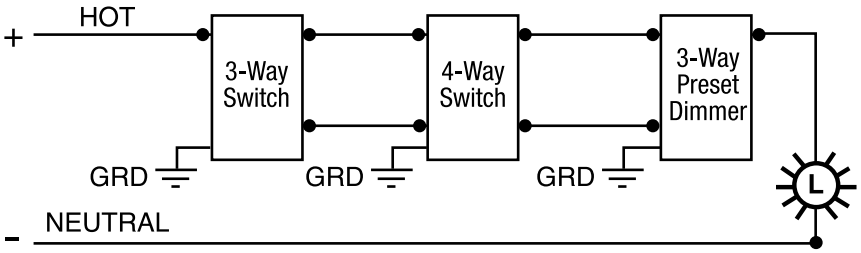

For Scene Director Wiring Diagrams, see Page M-9.

For Leandro® Wiring Diagrams, see Page M-10.

For Dual Timer Cat.# 97352 Wiring Diagrams, see Page L-20.

Technical Specifications
PlugTail™ Specification Grade Switches
15 & 20A, 120/277VAC

legrand®
Pass & Seymour


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT15AC1
Description: PlugTail™ Specification Grade Switches
Rating: 15 & 20A, 120/277VAC
3rd Party Compliance: cULus Listed, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Federal Specification WS896. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating
❒PT15AC1I	Ivory	15A 120/277VAC, Single Pole
❒PT15AC1W	White	15A 120/277VAC, Single Pole
❒PT15AC1	Brown	15A 120/277VAC, Single Pole
❒PT15AC1GRY	Gray	15A 120/277VAC, Single Pole
❒PT15AC1RED	Red	15A 120/277VAC, Single Pole
❒PT15AC1LA	Lt. Al.	15A 120/277VAC, Single Pole
❒PT15AC3I	Ivory	15A 120/277VAC, 3-Way
❒PT15AC3W	White	15A 120/277VAC, 3-Way
❒PT15AC3	Brown	15A 120/277VAC, 3-Way
❒PT15AC3GRY	Gray	15A 120/277VAC, 3-Way
❒PT15AC3RED	Red	15A 120/277VAC, 3-Way
❒PT15AC3LA	Lt. Al.	15A 120/277VAC, 3-Way
❒PT20AC1I	Ivory	20A 120/277VAC, Single Pole
❒PT20AC1W	White	20A 120/277VAC, Single Pole
❒PT20AC1	Brown	20A 120/277VAC, Single Pole
❒PT20AC1GRY	Gray	20A 120/277VAC, Single Pole
❒PT20AC1RED	Red	20A 120/277VAC, Single Pole
❒PT20AC1LA	Lt. Al.	20A 120/277VAC, Single Pole


Catalog Number	Color	Description/Rating
❒PT20AC3I	Ivory	20A 120/277VAC, 3-Way
❒PT20AC3W	White	20A 120/277VAC, 3-Way
❒PT20AC3	Brown	20A 120/277VAC, 3-Way
❒PT20AC3GRY	Gray	20A 120/277VAC, 3-Way
❒PT20AC3RED	Red	20A 120/277VAC, 3-Way
❒PT20AC3LA	Lt. Al.	20A 120/277VAC, 3-Way
Illuminated*		
❒PT15AC1CSL	Clear	15A 120/277VAC, Single Pole
❒PT15AC1ISL	White	15A 120/277VAC, Single Pole
❒PT15AC1WSL	White	15A 120/277VAC, Single Pole
❒PT15AC3CSL	Clear	15A 120/277VAC, 3-Way
❒PT15AC3ISL	White	15A 120/277VAC, 3-Way
❒PT15AC3WSL	White	15A 120/277VAC, 3-Way
❒PT20AC1CSL	Clear	20A 120/277VAC, Single Pole
❒PT20AC1ISL	White	20A 120/277VAC, Single Pole
❒PT20AC1WSL	White	20A 120/277VAC, Single Pole
❒PT20AC3CSL	Clear	20A 120/277VAC, 3-Way
❒PT20AC3ISL	White	20A 120/277VAC, 3-Way
❒PT20AC3WSL	White	20A 120/277VAC, 3-Way

*For Illuminated versions. May not be compatible with some fluorescent lighting loads.

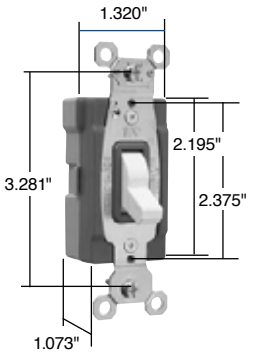

PT20AC1W





PTS6STR3 PTS6STR4

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	277VAC 347VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC 20A
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Switches only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Front Body	Nylon	Spring Arm	Brass
Back Body	Glass-Reinforced Nylon	Bumper	Rubber
Toggle	Thermoplastic Polycarbonate	Spring	Zinc-Plated Steel
Contacts	Brass	Auto Ground Clip	Nickel-Plated Brass
Mounting Strap	Nickel-Plated Brass	Illuminating Lamp*	Neon


PlugTail Connector Materials

Housing	Polycarbonate	Contacts	Brass

*For Illuminated versions. May not be compatible with some fluorescent lighting loads.

Project
Location/Type

legrand®
Pass & Seymour



15 & 20 Amp*

*30AC series is 1.437" wide

Technical Specifications
Industrial Extra Heavy-Duty Specification Grade Switches
Back & Side Wire 15, 20 & 30A, 120/277VAC

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS15AC1

Description: Industrial EHD Specification Grade Switch, Back & Side Wire

Rating: 15A, 120/277VAC

3rd Party Compliance: UL Listed File Number E140597; Standard UL20, General Use Snap Switches. Federal Specification WS896, CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating
❒PS15AC1I	Ivory	15A 120/277VAC, Single Pole
❒PS15AC1W	White	15A 120/277VAC, Single Pole
❒PS15AC1	Brown	15A 120/277VAC, Single Pole
❒PS15AC1GRY	Gray	15A 120/277VAC, Single Pole
❒PS15AC1LA	Lt. Al.	15A 120/277VAC, Single Pole
❒PS15AC2I	Ivory	15A 120/277VAC, Double Pole
❒PS15AC2W	White	15A 120/277VAC, Double Pole
❒PS15AC2	Brown	15A 120/277VAC, Double Pole
❒PS15AC2GRY	Gray	15A 120/277VAC, Double Pole
❒PS15AC2LA	Lt. Al.	15A 120/277VAC, Double Pole
❒PS15AC3I	Ivory	15A 120/277VAC, 3-Way
❒PS15AC3W	White	15A 120/277VAC, 3-Way
❒PS15AC3	Brown	15A 120/277VAC, 3-Way
❒PS15AC3GRY	Gray	15A 120/277VAC, 3-Way
❒PS15AC3LA	Lt. Al.	15A 120/277VAC, 3-Way
❒PS15AC4I	Ivory	15A 120/277VAC, 4-Way
❒PS15AC4W	White	15A 120/277VAC, 4-Way
❒PS15AC4	Brown	15A 120/277VAC, 4-Way
❒PS15AC4GRY	Gray	15A 120/277VAC, 4-Way
❒PS15AC4LA	Lt. Al.	15A 120/277VAC, 4-Way
❒PS20AC1I	Ivory	20A 120/277VAC, Single Pole
❒PS20AC1W	White	20A 120/277VAC, Single Pole
❒PS20AC1	Brown	20A 120/277VAC, Single Pole
❒PS20AC1GRY	Gray	20A 120/277VAC, Single Pole
❒PS20AC1BK	Black	20A 120/277VAC, Single Pole
❒PS20AC1RED	Red	20A 120/277VAC, Single Pole
❒PS20AC1LA	Lt. Al.	20A 120/277VAC, Single Pole
❒PS20AC2I	Ivory	20A 120/277VAC, Double Pole
❒PS20AC2W	White	20A 120/277VAC, Double Pole
❒PS20AC2	Brown	20A 120/277VAC, Double Pole
❒PS20AC2GRY	Gray	20A 120/277VAC, Double Pole
❒PS20AC2BK	Black	20A 120/277VAC, Double Pole
❒PS20AC2RED	Red	20A 120/277VAC, Double Pole
❒PS20AC2LA	Lt. Al.	20A 120/277VAC, Double Pole
❒PS20AC3I	Ivory	20A 120/277VAC, 3-Way
❒PS20AC3W	White	20A 120/277VAC, 3-Way
❒PS20AC3	Brown	20A 120/277VAC, 3-Way
❒PS20AC3GRY	Gray	20A 120/277VAC, 3-Way
❒PS20AC3BK	Black	20A 120/277VAC, 3-Way
❒PS20AC3RED	Red	20A 120/277VAC, 3-Way
❒PS20AC3LA	Lt. Al.	20A 120/277VAC, 3-Way
❒PS20AC4I	Ivory	20A 120/277VAC, 4-Way
❒PS20AC4W	White	20A 120/277VAC, 4-Way
❒PS20AC4	Brown	20A 120/277VAC, 4-Way
❒PS20AC4GRY	Gray	20A 120/277VAC, 4-Way
❒PS20AC4BK	Black	20A 120/277VAC, 4-Way
❒PS20AC4RED	Red	20A 120/277VAC, 4-Way
❒PS20AC4LA	Lt. Al.	20A 120/277VAC, 4-Way
❒PS30AC1I	Ivory	30A 120/277VAC, Single Pole
❒PS30AC1W	White	30A 120/277VAC, Single Pole
❒PS30AC1	Brown	30A 120/277VAC, Single Pole
❒PS30AC2I	Ivory	30A 120/277VAC, Double Pole
❒PS30AC2W	White	30A 120/277VAC, Double Pole
❒PS30AC2	Brown	30A 120/277VAC, Double Pole
❒PS30AC3I	Ivory	30A 120/277VAC, 3-Way
❒PS30AC3	Brown	30A 120/277VAC, 3-Way

Performance

Electrical	
Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	277VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials

Back Body	Glass-Reinforced Nylon	Contacts	Silver Cadmium Oxide
Front Body	Nylon	Spring Arm	Brass
Toggle	Thermoplastic Polycarbonate	Bumper	Rubber
Terminals	Brass	Spring	Zinc-Plated Steel
Terminal Screws	Tri-Drive Brass	Ground Terminal	Brass
Mounting Strap	Nickel-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel
Pressure Plate	Brass	Auto-Ground Clip	Nickel-Plated Brass

Project

Location/Type

Technical Specifications
Industrial Extra Heavy-Duty & Extra Heavy-Duty Specification Grade Switches

15, 20 & 30A, 120, 277 & 120/277VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS15AC1ISL

Description: Industrial EHD Specification Grade Switch, Back & Side Wire

Rating: 15A, 120/277VAC

3rd Party Compliance: UL Listed, File Number E140597, Standard UL20, General Use Snap Switches. Federal Specification WS896, CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating	Catalog Number	Color	Description/Rating
❒PS15AC1CSL	Clear	15A 120/277VAC, Single Pole	❒PS20AC1KL	—	20A 120/277VAC, Single Pole
❒PS15AC1ISL	Ivory	15A 120/277VAC, Single Pole	❒PS20AC2CPL	Clear	20A 120/277VAC, Double Pole
❒PS15AC1WSL	White	15A 120/277VAC, Single Pole	❒PS20AC2RPL	Red	20A 120/277VAC, Double Pole
❒PS15AC1CPL	Clear	15A 120VAC, Single Pole	❒PS20AC2CPL	Clear	20A 120/277VAC, Double Pole
❒PS15AC1RPL	Red	15A 120VAC, Single Pole	❒PS20AC2RPL	Red	20A 120/277VAC, Double Pole
❒PS15AC1L	Gray	15A 120/277VAC, Single Pole	❒PS20AC2IL	Ivory	20A 120/277VAC, Double Pole
❒PS15AC3CSL	Clear	15A 120/277VAC, 3-Way	❒PS20AC2WL	White	20A 120/277VAC, Double Pole
❒PS15AC3ISL	Ivory	15A 120/277VAC, 3-Way	❒PS20AC2L	Gray	20A 120/277VAC, Double Pole
❒PS15AC3WSL	White	15A 120/277VAC, 3-Way	❒PS20AC2LAL	Lt. Al.	20A 120/277VAC, Double Pole
❒PS15AC3CPL	Clear	15A 120VAC, 3-Way	❒PS20AC2KL	—	20A 120/277VAC, Double Pole
❒PS15AC3RPL	Red	15A 120VAC, 3-Way	❒PS20AC3LASL	Lt. Al.	20A 120/277VAC, 3-Way
❒PS15AC3L	Gray	15A 120/277VAC, 3-Way	❒PS20AC3CPL	Clear	20A 120VAC, 3-Way
❒PS20AC1CSL	Clear	20A 120/277VAC, Single Pole	❒PS20AC3RPL	Red	20A 120VAC, 3-Way
❒PS20AC1ISL	Ivory	20A 120/277VAC, Single Pole	❒PS20AC3RPL7	Red	20A 277VAC, 3-Way
❒PS20AC1WSL	White	20A 120/277VAC, Single Pole	❒PS20AC3IL	Ivory	20A 120/277VAC, 3-Way
❒PS20AC1LASL	Lt. Al.	20A 120/277VAC, Single Pole	❒PS20AC3WL	White	20A 120/277VAC, 3-Way
❒PS20AC1LASL	Lt. Al.	20A 120/277VAC, Single Pole	❒PS20AC3L	Gray	20A 120/277VAC, 3-Way
❒PS20AC1CPL	Clear	20A 120VAC, Single Pole	❒PS20AC3REDL	Red	20A 120/277VAC, 3-Way
❒PS20AC1CPL7	Clear	20A 277VAC, Single Pole	❒PS20AC3LAL	Lt. Al.	20A 120/277VAC, 3-Way
❒PS20AC1RPL	Red	20A 120VAC, Single Pole	❒PS20AC3KL	—	20A 120/277VAC, 3-Way
❒PS20AC1RPL7	Red	20A 277VAC, Single Pole	❒PS20AC4IL	Ivory	20A 120/277VAC, 4-Way
❒PS20AC1CPL	Clear	20A 120VAC, Single Pole	❒PS20AC4WL	White	20A 120/277VAC, 4-Way
❒PS20AC1CPL7	Clear	20A 277VAC, Single Pole	❒PS20AC4L	Gray	20A 120/277VAC, 4-Way
❒PS20AC1RPL	Red	20A 120VAC, Single Pole	❒PS20AC4REDL	Red	20A 120/277VAC, 4-Way
❒PS20AC1RPL7	Red	20A 277VAC, Single Pole	❒PS20AC4LAL	Lt. Al.	20A 120/277VAC, 4-Way
❒PS20AC1IL	Ivory	20A 120/277VAC, Single Pole	❒PS20AC4KL	—	20A 120/277VAC, 4-Way
❒PS20AC1WL	White	20A 120/277VAC, Single Pole	❒PS30AC1RPL	Red	30A 120VAC, Single Pole
❒PS20AC1L	Gray	20A 120/277VAC, Single Pole	❒PS30AC2RPL	Red	30A 120/ 277VAC, Double Pole
❒PS20AC1LAL	Lt. Al.	20A 120/277VAC, Single Pole	❒PS30AC3RPL	Red	30A 120VAC, 3-Way

Performance


Electrical	
Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	277VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials


Back Body	Glass-Reinforced Nylon	Spring Arm	Brass
Front Body	Nylon	Bumper	Rubber
Toggle	Thermoplastic Polycarbonate	Spring	Zinc-Plated Steel
Key Slot**	Thermoplastic Polycarbonate	Ground Terminal†	Brass
Terminals	Brass	Ground Screw	Tri-Drive Zinc-Plated Steel
Terminal Screws	Tri-Drive Brass	Auto-Ground Clip†	Nickel-Plated Brass
Strap	Nickel-Plated Brass	Illuminating Lamp*	Neon
Pressure Plate	Brass	Lock Housing†	Stainless Steel
Contacts	Silver Cadmium Oxide		

Project

Location/Type




15 & 20 Amp Lighted & Pilot Lighted



Locking

30AC series is 1.437" wide



Security Switch


*For Lighted versions. May not be compatible with some fluorescent lighting loads.

**For Locking versions.

†For Security versions Ground Terminal is Zinc-Plated Steel. No Auto-Ground Clip on Security Switches.

legrand®
Pass & Seymour

Technical Specifications
Hard Use Specification Grade Switches
Back & Side Wire 15 & 20A, 120/277VAC



15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour CSB15AC1

Description: Hard Use Specification Grade Switch, Back & Side Wire

Rating: 15A, 120/277VAC

3rd Party Compliance: UL Listed, File Number E140597, Standard UL20, General Use Snap Switches. Federal Specification WS896, CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating	Catalog Number	Color	Description/Rating
❒CSB15AC1I	Ivory	15A 120/277VAC, Single Pole	❒CSB15AC3I	Ivory	15A 120/277VAC, 3-Way
❒CSB15AC1W	White	15A 120/277VAC, Single Pole	❒CSB15AC3W	White	15A 120/277VAC, 3-Way
❒CSB15AC1	Brown	15A 120/277VAC, Single Pole	❒CSB15AC3	Brown	15A 120/277VAC, 3-Way
❒CSB15AC1GRY	Gray	15A 120/277VAC, Single Pole	❒CSB15AC3GRY	Gray	15A 120/277VAC, 3-Way
❒CSB15AC1LA	Lt. Al.	15A 120/277VAC, Single Pole	❒CSB15AC3LA	Lt. Al.	15A 120/277VAC, 3-Way
❒CSB20AC1I	Ivory	20A 120/277VAC, Single Pole	❒CSB20AC3I	Ivory	20A 120/277VAC, 3-Way
❒CSB20AC1W	White	20A 120/277VAC, Single Pole	❒CSB20AC3W	White	20A 120/277VAC, 3-Way
❒CSB20AC1	Brown	20A 120/277VAC, Single Pole	❒CSB20AC3	Brown	20A 120/277VAC, 3-Way
❒CSB20AC1GRY	Gray	20A 120/277VAC, Single Pole	❒CSB20AC3GRY	Gray	20A 120/277VAC, 3-Way
❒CSB20AC1BK	Black	20A 120/277VAC, Single Pole	❒CSB20AC3BK	Black	20A 120/277VAC, 3-Way
❒CSB20AC1LA	Lt. Al.	20A 120/277VAC, Single Pole	❒CSB20AC3LA	Lt. Al.	20A 120/277VAC, 3-Way
❒CSB15AC2I	Ivory	15A 120/277VAC, Double Pole	❒CSB15AC4I	Ivory	15A 120/277VAC, 4-Way
❒CSB15AC2W	White	15A 120/277VAC, Double Pole	❒CSB15AC4W	White	15A 120/277VAC, 4-Way
❒CSB15AC2	Brown	15A 120/277VAC, Double Pole	❒CSB15AC4	Brown	15A 120/277VAC, 4-Way
❒CSB15AC2GRY	Gray	15A 120/277VAC, Double Pole	❒CSB15AC4GRY	Gray	15A 120/277VAC, 4-Way
❒CSB15AC2LA	Lt. Al.	15A 120/277VAC, Double Pole	❒CSB15AC4LA	Lt. Al.	15A 120/277VAC, 4-Way
❒CSB20AC2I	Ivory	20A 120/277VAC, Double Pole	❒CSB20AC4I	Ivory	20A 120/277VAC, 4-Way
❒CSB20AC2W	White	20A 120/277VAC, Double Pole	❒CSB20AC4W	White	20A 120/277VAC, 4-Way
❒CSB20AC2	Brown	20A 120/277VAC, Double Pole	❒CSB20AC4	Brown	20A 120/277VAC, 4-Way
❒CSB20AC2GRY	Gray	20A 120/277VAC, Double Pole	❒CSB20AC4GRY	Gray	20A 120/277VAC, 4-Way
❒CSB20AC2LA	Lt. Al.	20A 120/277VAC, Double Pole	❒CSB20AC4LA	Lt. Al.	20A 120/277VAC, 4-Way

Performance

Electrical	
Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	277VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials

Back Body	Glass-Reinforced Nylon	Contacts	Silver Cadmium Oxide
Front Body	Nylon	Spring Arm	Brass
Toggle	Thermoplastic Polycarbonate	Bumper	Rubber
Terminals	Brass	Spring	Zinc-Plated Steel
Terminal Screws	Tri-Drive Brass-Plated Steel	Ground Terminal	Brass
Mounting Strap	Zinc-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel
Pressure Plate	Brass		


Project
Location/Type

Technical Specifications
Commercial Specification Grade Switches
Side Wire 15 & 20A, 120/277VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour CS15AC1
Description: Commercial Specification Grade Switch, Side Wire
Rating: 15A, 120/277VAC
3rd Party Compliance: UL Listed, File Number E140597, Standard UL20, General Use Snap Switches. Federal Specification WS896, CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Conforms to NEMA WD-1 and WD-6.



15 & 20 Amp

Catalog Number	Color	Description/Rating	Catalog Number	Color	Description/Rating
❒CS15AC1I	Ivory	15A 120/277VAC, Single Pole	❒CS15AC3I	Ivory	15A 120/277VAC, 3-Way
❒CS15AC1W	White	15A 120/277VAC, Single Pole	❒CS15AC3W	White	15A 120/277VAC, 3-Way
❒CS15AC1	Brown	15A 120/277VAC, Single Pole	❒CS15AC3	Brown	15A 120/277VAC, 3-Way
❒CS15AC1GRY	Gray	15A 120/277VAC, Single Pole	❒CS15AC3GRY	Gray	15A 120/277VAC, 3-Way
❒CS15AC1BK	Black	15A 120/277VAC, Single Pole	❒CS15AC3BK	Black	15A 120/277VAC, 3-Way
❒CS15AC1LA	Lt. Al.	15A 120/277VAC, Single Pole	❒CS15AC3LA	Lt. Al.	15A 120/277VAC, 3-Way
❒CS20AC1I	Ivory	20A 120/277VAC, Single Pole	❒CS20AC3I	Ivory	20A 120/277VAC, 3-Way
❒CS20AC1W	White	20A 120/277VAC, Single Pole	❒CS20AC3W	White	20A 120/277VAC, 3-Way
❒CS20AC1	Brown	20A 120/277VAC, Single Pole	❒CS20AC3	Brown	20A 120/277VAC, 3-Way
❒CS20AC1GRY	Gray	20A 120/277VAC, Single Pole	❒CS20AC3GRY	Gray	20A 120/277VAC, 3-Way
❒CS20AC1LA	Lt. Al.	20A 120/277VAC, Single Pole	❒CS20AC3LA	Lt. Al.	20A 120/277VAC, 3-Way

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	277VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials


Back Body	Glass-Reinforced Nylon	Contacts	Silver Cadmium Oxide
Front Body	Nylon	Spring Arm	Brass
Toggle	Thermoplastic Polycarbonate	Bumper	Rubber
Terminals	Brass	Spring	Zinc-Plated Steel
Terminal Screws	Tri-Drive Brass-Plated Steel	Ground Terminal	Brass
Mounting Strap	Zinc-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel

For double pole and 4-Way switches refer to CSB version on Page S-24.

Project
Location/Type

legrand®
Pass & Seymour


Technical Specifications
Manual Controller Switches
30A, 600VAC, 1ø & 3ø




7802
7803



7812P
7813P



7812EX
7813EX



7832
7833

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 7802

Description: Manual Controller, Double Pole, Single Phase

Rating: 30A, 600VAC max.

3rd Party Compliance: UL Listed, File Number E31169, Standard UL508, Industrial Control Equipment; CSA Certified, File Number LR17949, Standard CSA-C22.23, No. 14, Industrial Control Equipment. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating			Description
❒ 7802	General Use 30 600Max.	2 3 7.5 10	120 240 480 600	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)
❒ 7802MD	Same as 7802			7802, See Footnote 1
❒ 7812P	Same as 7802			7802 in a NEMA 1 Enclosure
❒ 7812PMD	Same as 7802			7812P, See Footnote 1
❒ 7812EX	Same as 7802			7802 in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I – Groups C, D; Class II – Groups E, F, G
❒ 7832	Same as 7802			7802 in a NEMA 3R Enclosure
❒ 7832MD	Same as 7802			7832, See Footnote 1
❒ 7803	General Use 30 600Max.	3 7.5 10 20	120 240 480 600	Three Phase, Three Pole AC Manual Motor Starting Switch (No overload protection)
❒ 7803MD	Same as 7803			7803, See Footnote 1
❒ 7813P	Same as 7803			7803 in a NEMA 1 Enclosure
❒ 7813PMD	Same as 7803			7813P , See Footnote 1
❒ 7813EX	Same as 7803			7803 in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I – Groups C, D; Class II – Groups E, F, G
❒ 7833	Same as 7803			7803 in a NEMA 3R Enclosure
❒ 7833MD	Same as 7803			7803, See Footnote 1

All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote 1. Suitable as Motor Disconnect – 10KA @ 600VAC, 30A max. Class J Fuse

Performance

Electrical	
Dielectric Withstand Voltage	2000V Minimum
Maximum Working Voltage	600VAC
Overload	50 cycles, 132 Amps/600VAC .5 PF
Temperature Rise	50°C maximum
Maximum Continuous Current	30A
Endurance	1000 Cycles, 44Amp/600VAC 0.5 PF 5000 Cycles, 30Amp/600VAC 0.75 PF
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG copper or copper-clad wire
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C

Materials


Back Body	Nylon	Terminal Screws	Brass
Front Body	Nylon	Leaf Springs	Stainless Steel
Carrier	Nylon	Coil Springs	Zinc-Plated Steel
Toggle	Nylon	Strap	Zinc-Plated Steel
Contact Arm	Brass	Rivets	Brass
Terminals	Brass	Contacts	Silver Cadmium Oxide

Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 7842
Description: Manual Controller, Double Pole, Single Phase
Rating: 40A, 600VAC max.
3rd Party Compliance: UL Listed, File Number E31169, Standard UL508, Industrial Control Equipment; CSA Certified, File Number LR17949, Standard CSA-C22.23, No. 14, Industrial Control Equipment. Conforms to NEMA WD-1 and WD-6.



7842
7843

Catalog Number	Rating			Description
❒ 7842	General Use 40 600Max.	2 5 10 15	120 240 480 600	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)
❒ 7842MD	Same as 7842			7842, See Footnote 2
❒ 7843	General Use 40 600Max.	3 7.5 15 20	120 240 480 600	Three Phase, Three Pole AC Manual Motor Starting Switch (No overload protection)
❒ 7843MD	Same as 7843			7843, See Footnote 2
❒ 7801P				Handle Locking Guard has opening for padlock to secure control in either ON or OFF position.
❒ 7806P				NEMA 1 Black Nylon Enclosure has baked-on gray enamel finish with 1/2" and 3/4" knockouts at each end.
❒ 7830				NEMA 3R Aluminum Enclosure

All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote:

2. Suitable as Motor Disconnect – 10KA @ 600VAC, 60A max. Class J Fuse or 100A max. Ferraz Shawmut HSJ Fuse

Performance

Electrical	
Dielectric Withstand Voltage	2000V Minimum
Maximum Working Voltage	600VAC
Overload	50 cycles, 132 Amps/600VAC .5 PF
Temperature Rise	50°C maximum
Maximum Continuous Current	30A
Endurance	1000 Cycles, 44Amp/600VAC 0.5 PF 5000 Cycles, 30Amp/600VAC 0.75 PF
Mechanical	
Terminal Accommodations	#14 AWG – #10 AWG copper or copper-clad wire
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C


Materials

Back Body	Nylon	Terminal Screws	Brass
Front Body	Nylon	Leaf Springs	Stainless Steel
Carrier	Nylon	Coil Springs	Zinc-Plated Steel
Toggle	Nylon	Strap	Zinc-Plated Steel
Contact Arm	Brass	Rivets	Brass
Terminals	Brass	Contacts	Silver Cadmium Oxide

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Specification Grade Decorator Switches
15 & 20A, 120/277VAC

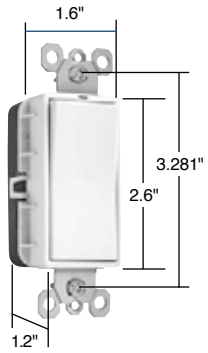


PT2626W



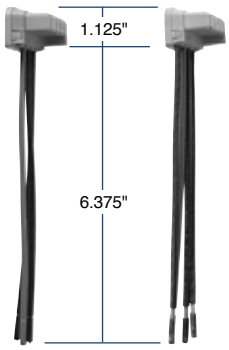

PTS6STR3 **PTS6STR4**



PTS6STR3BP **PTS6STR4BP**

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT2601
Description: PlugTail™ Specification Grade Decorator Switches
Rating: 15 & 20A, 120/277VAC

3rd Party Compliance: cULus Listed, File Number E140597, Standard CSA-C22.2 No. 111, General Use Snap Switches. Federal Specification WS896. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating
❒PT2601I	Ivory	15A 120/277VAC, Single Pole
❒PT2601W	White	15A 120/277VAC, Single Pole
❒PT2601	Brown	15A 120/277VAC, Single Pole
❒PT2601GRY	Gray	15A 120/277VAC, Single Pole
❒PT2601RED	Red	15A 120/277VAC, Single Pole
❒PT2601BK	Black	15A 120/277VAC, Single Pole
❒PT2601LA	Lt. Al.	15A 120/277VAC, Single Pole
❒PT2603I	Ivory	15A 120/277VAC, 3-Way
❒PT2603W	White	15A 120/277VAC, 3-Way
❒PT2603	Brown	15A 120/277VAC, 3-Way
❒PT2603GRY	Gray	15A 120/277VAC, 3-Way
❒PT2603RED	Red	15A 120/277VAC, 3-Way
❒PT2603BK	Black	15A 120/277VAC, 3-Way
❒PT2603LA	Lt. Al.	15A 120/277VAC, 3-Way
❒PT2621I	Ivory	20A 120/277VAC, Single Pole
❒PT2621W	White	20A 120/277VAC, Single Pole
❒PT2621	Brown	20A 120/277VAC, Single Pole
❒PT2621GRY	Gray	20A 120/277VAC, Single Pole

Catalog Number	Color	Description/Rating
❒PT2621RED	Red	20A 120/277VAC, Single Pole
❒PT2621BK	Black	20A 120/277VAC, Single Pole
❒PT2621LA	Lt. Al.	20A 120/277VAC, Single Pole
❒PT2623I	Ivory	20A 120/277VAC, 3-Way
❒PT2623W	White	20A 120/277VAC, 3-Way
❒PT2623	Brown	20A 120/277VAC, 3-Way
❒PT2623GRY	Gray	20A 120/277VAC, 3-Way
❒PT2623RED	Red	20A 120/277VAC, 3-Way
❒PT2623BK	Black	20A 120/277VAC, 3-Way
❒PT2623LA	Lt. Al.	20A 120/277VAC, 3-Way
Illuminated*		
❒PT2625I	Ivory	20A 120/277VAC, Single Pole
❒PT2625W	White	20A 120/277VAC, Single Pole
❒PT2625BK	Black	20A 120/277VAC, Single Pole
❒PT2625LA	Lt. Al.	20A 120/277VAC, Single Pole
❒PT2626I	Ivory	20A 120/277VAC, 3-Way
❒PT2626W	White	20A 120/277VAC, 3-Way
❒PT2626BK	Black	20A 120/277VAC, 3-Way
❒PT2626LA	Lt. Al.	20A 120/277VAC, 3-Way

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	277VAC 347VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	20A
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load (Fed Spec)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Switches only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Front Body	Polycarbonate	Spring Arm	Brass
Back Body	Polycarbonate	Spring	Zinc-Plated Steel
Paddle	Thermoplastic Polycarbonate	Auto Ground Clip	Steel
Contacts	Slver Cadmiun Oxide	Illuminating Lamp*	LED
Mounting Strap	Steel		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	Brass

*For Illuminated versions. May not be compatible with some fluorescent lighting loads.

Project
Location/Type

Technical Specifications

Specification Grade Decorator Switches

15 & 20A, 120/277VAC; 20A, 120VAC

legrand®
Pass & Seymour


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 2601
Description: Specification Grade Decorator Switch, Back & Side Wire
Rating: 15A, 120/277VAC


3rd Party Compliance: UL Listed, File Number E140597, Standard UL20, General Use Snap Switches, CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description/Rating
❒2601I	Ivory	15A 120/277VAC, Single Pole
❒2601W	White	15A 120/277VAC, Single Pole
❒2601GRY	Gray	15A 120/277VAC, Single Pole
❒2601BK	Black	15A 120/277VAC, Single Pole
❒2601LA	Lt. Al.	15A 120/277VAC, Single Pole
❒2621I	Ivory	20A 120/277VAC, Single Pole
❒2621W	White	20A 120/277VAC, Single Pole
❒2621	Brown	20A 120/277VAC, Single Pole
❒2621GRY	Gray	20A 120/277VAC, Single Pole
❒2621BK	Black	20A 120/277VAC, Single Pole
❒2621RED	Red	20A 120/277VAC, Single Pole
❒2621LA	Lt. Al.	20A 120/277VAC, Single Pole
❒2622I	Ivory	20A 120/277VAC, Double Pole
❒2622W	White	20A 120/277VAC, Double Pole
❒2622	Brown	20A 120/277VAC, Double Pole
❒2622GRY	Gray	20A 120/277VAC, Double Pole
❒2622BK	Black	20A 120/277VAC, Double Pole
❒2622LA	Lt. Al.	20A 120/277VAC, Double Pole
❒2603I	Ivory	15A 120/277VAC, 3-Way
❒2603W	White	15A 120/277VAC, 3-Way
❒2603GRY	Gray	15A 120/277VAC, 3-Way
❒2603BK	Black	15A 120/277VAC, 3-Way
❒2603LA	Lt. Al.	15A 120/277VAC, 3-Way
❒2623I	Ivory	20A 120/277VAC, 3-Way
❒2623W	White	20A 120/277VAC, 3-Way
❒2623	Brown	20A 120/277VAC, 3-Way
❒2623GRY	Gray	20A 120/277VAC, 3-Way
❒2623BK	Black	20A 120/277VAC, 3-Way

Catalog Number	Color	Description/Rating
❒2623RED	Red	20A 120/277VAC, 3-Way
❒2623LA	Lt. Al.	20A 120/277VAC, 3-Way
❒2604I	Ivory	15A 120/277VAC, 4-Way
❒2604W	White	15A 120/277VAC, 4-Way
❒2604LA	Lt. Al.	15A 120/277VAC, 4-Way
❒2624I	Ivory	20A 120/277VAC, 4-Way
❒2624W	White	20A 120/277VAC, 4-Way
❒2624	Brown	20A 120/277VAC, 4-Way
❒2624GRY	Gray	20A 120/277VAC, 4-Way
❒2624BK	Black	20A 120/277VAC, 4-Way
❒2624RED	Red	20A 120/277VAC, 4-Way
❒2624LA	Lt. Al.	20A 120/277VAC, 4-Way
Illuminated*		
❒2625I	Ivory	20A 120VAC, Single Pole
❒2625W	White	20A 120VAC, Single Pole
❒2625	Brown	20A 120VAC, Single Pole
❒2625LA	Lt. Al.	20A 120VAC, Single Pole
❒2626I	Ivory	20A 120VAC, 3-Way
❒2626W	White	20A 120VAC, 3-Way
❒2626LA	Lt. Al.	20A 120VAC, 3-Way
❒2628I	Ivory	20A 120VAC, 4-Way
❒2628W	White	20A 120VAC, 4-Way
❒2628LA	Lt. Al.	20A 120VAC, 4-Way
Pilot Lighted		
❒2629I	Ivory	20A 120VAC, Single Pole
❒2629W	White	20A 120VAC, Single Pole
❒2629LA	Lt. Al.	20A 120VAC, Single Pole

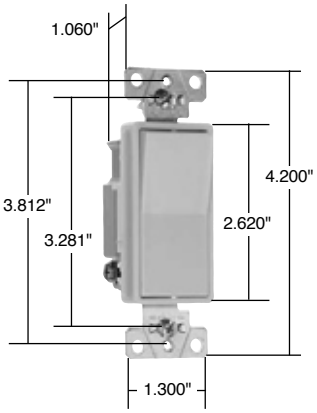

2601

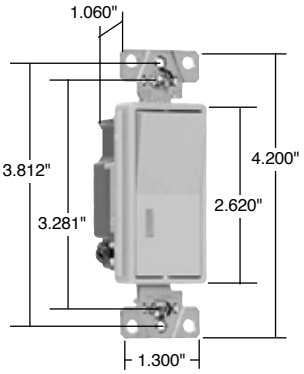

2625, 2626, 2629

*For Illuminated versions. May not be compatible with some fluorescent lighting loads.

Performance

Electrical

Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	277VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	277VAC
Endurance	50,000 cycles minimum, resistive, inductive, tungsten filament lamp load

Mechanical

Terminal Accommodation	#14 AWG – #10 AWG

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C


Materials

Back Body	Polycarbonate	Spring Arm	Brass
Frame	Polycarbonate	Bumper	Rubber
Paddle	Thermoplastic	Spring	Zinc-Plated Steel
Terminals	Brass	Ground Terminal	Brass
Terminal Screws	Tri-Drive Brass-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel
Strap	Steel	Illuminating Lamp*	Neon
Pressure Plate	Steel	Lens*	Polycarbonate
Contacts	Silver Cadmium Oxide		


Project

Location/Type


legrand®
Pass & Seymour



15 & 20 Amp



Momentary Contact



Maintained Contact

Technical Specifications

Specification Grade Combination & Momentary & Maintained Contact Switches

15A, 120VAC; 20A, 277VAC

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS81120, PS811120, TM811DTMO & TM811DTMA

Rating: PS81120 & PS811120: 20A, 277VAC. TM811DTMO & TM811DTMA: 15A, 120VAC

3rd Party Compliance: PS81120, PS811120, TM811DTMA: cULus Listed, File Number E140597, Standard UL20, General Use Snap Switches.TM811DTMO: cULus Listed, File Number E31169, UL508, Industrial Control. Conforms to NEMA WD-1 and WD-6.

Performance

Electrical	
Maximum Amperage per Circuit	PS81120 and PS811120 = 20A
Maximum Amperage per Device	PS81120 = 30A, PS811120 = 35A
Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	PS81120 and PS811120 = 277VAC TM811DTMO and TM811DTMA = 120VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	PS81120 and PS811120 = 277VAC TM811DTMO and TM811DTMA = 120VAC
Mechanical	
Terminal Accommodation	#14 AWG – #10 AWG
Product Identification	Amperage, Voltage, 3rd Party Compliance
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials

Back Body	Polycarbonate	Pressure Plate	Steel
Frame	Polycarbonate	Contacts	Silver Cadmium Oxide
Paddle	Thermoplastic	Spring	Zinc-Plated Steel
Terminals	Brass	Ground Terminal	Brass
Terminal Screws	Tri-Drive Brass-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel
Strap	Steel		

Project
Location/Type

Technical Specifications

PlugTail™ Extra Heavy-Duty Specification Grade Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT5262A & PTTR62

Description: PlugTail™ Straight Blade Duplex Receptacle & Tamper-Resistant Duplex Receptacle – Extra Heavy-Duty

Type: 2 Pole, 3 Wire Grounding

Rating: 15A, 125V

Configuration: NEMA 5-15R

3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498, Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒	Ivory	15A 125V	5-15R	❒ PTTR62I	Ivory	15A 125V	5-15R
❒ PT5262AW	White	15A 125V	5-15R	❒ PTTR62W	White	15A 125V	5-15R
❒ PT5262A	Brown	15A 125V	5-15R	❒ PTTR62	Brown	15A 125V	5-15R
❒ PT5262AGRY	Gray	15A 125V	5-15R	❒ PTTR62GRY	Gray	15A 125V	5-15R
❒ PT5262ABK	Black	15A 125V	5-15R	❒ PTTR62BK	Black	15A 125V	5-15R
❒ PT5262ARED	Red	15A 125V	5-15R	❒ PTTR62RED	Red	15A 125V	5-15R
❒ PT5262ALA	Lt. Al.	15A 125V	5-15R	❒ PTTR62LA	Lt. Al.	15A 125V	5-15R
❒ PT5262ABL	Blue	15A 125V	5-15R	❒ PTTR62BL	Blue	15A 125V	5-15R
❒ PT5362AI	Ivory	20A 125V	5-20R	❒ PTTR63I	Ivory	20A 125V	5-20R
❒ PT5362AW	White	20A 125V	5-20R	❒ PTTR63W	White	20A 125V	5-20R
❒ PT5362A	Brown	20A 125V	5-20R	❒ PTTR63	Brown	20A 125V	5-20R
❒ PT5362AGRY	Gray	20A 125V	5-20R	❒ PTTR63GRY	Gray	20A 125V	5-20R
❒ PT5362ABK	Black	20A 125V	5-20R	❒ PTTR63BK	Black	20A 125V	5-20R
❒ PT5362ARED	Red	20A 125V	5-20R	❒ PTTR63RED	Red	20A 125V	5-20R
❒ PT5362ALA	Lt. Al.	20A 125V	5-20R	❒ PTTR63LA	Lt. Al.	20A 125V	5-20R
❒ PT5362ABL	Blue	20A 125V	5-20R	❒ PTTR63BL	Blue	20A 125V	5-20R

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connectors Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	Nylon	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Brass
Mounting Strap	.050 260 Brass	Mounting Screws	Tri-Drive Steel
Tamper Shutter*	Thermoplastic		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	036 688 Brass

*For Tamper-Resistant version.

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-15R




NEMA 5-20R

Project
Location/Type


EXCLUSIVE! P&S




PT5362AW

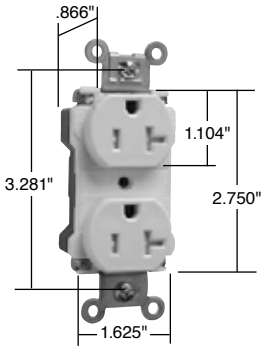

PTTR63W

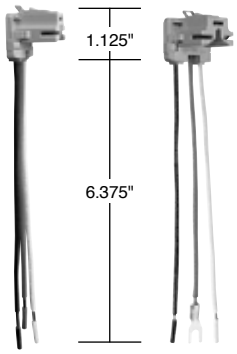

PTRA6STR PTRA6STRG




PTRA6STRBP


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Extra Heavy-Duty Hospital Grade Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

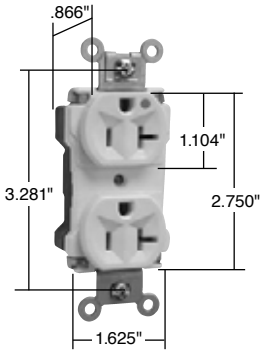

PT8300W

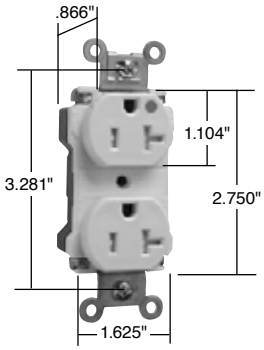

PTTR63HW





NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT8200 & PTTR62H

Description: PlugTail™ Straight Blade Duplex Receptacle & Tamper-Resistant Duplex Receptacle – Extra Heavy-Duty

Type: 2 Pole, 3 Wire Grounding

Rating: 15A, 125V

Configuration: NEMA 5-15R

3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498, Federal Specification WC596, Hospital Grade. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT8200I	Ivory	15A 125V	5-15R	❒ PTTR62HI	Ivory	15A 125V	5-15R
❒ PT8200W	White	15A 125V	5-15R	❒ PTTR62HW	White	15A 125V	5-15R
❒ PT8200	Brown	15A 125V	5-15R	❒ PTTR62H	Brown	15A 125V	5-15R
❒ PT8200GRY	Gray	15A 125V	5-15R	❒ PTTR62HGRY	Gray	15A 125V	5-15R
❒ PT8200BK	Black	15A 125V	5-15R	❒ PTTR62HBK	Black	15A 125V	5-15R
❒ PT8200RED	Red	15A 125V	5-15R	❒ PTTR62HRED	Red	15A 125V	5-15R
❒ PT8200LA	Lt. Al.	15A 125V	5-15R	❒ PTTR62HLA	Lt. Al.	15A 125V	5-15R
❒ PT8200BL	Blue	15A 125V	5-15R	❒ PTTR62HBL	Blue	15A 125V	5-15R
❒ PT8300I	Ivory	20A 125V	5-20R	❒ PTTR63HI	Ivory	20A 125V	5-20R
❒ PT8300W	White	20A 125V	5-20R	❒ PTTR63HW	White	20A 125V	5-20R
❒ PT8300	Brown	20A 125V	5-20R	❒ PTTR63H	Brown	20A 125V	5-20R
❒ PT8300GRY	Gray	20A 125V	5-20R	❒ PTTR63HGRY	Gray	20A 125V	5-20R
❒ PT8300BK	Black	20A 125V	5-20R	❒ PTTR63HBK	Black	20A 125V	5-20R
❒ PT8300RED	Red	20A 125V	5-20R	❒ PTTR63HRED	Red	20A 125V	5-20R
❒ PT8300LA	Lt. Al.	20A 125V	5-20R	❒ PTTR63HLA	Lt. Al.	20A 125V	5-20R
❒ PT8300BL	Blue	20A 125V	5-20R	❒ PTTR63HBL	Blue	20A 125V	5-20R

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connectors Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	Nylon	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Brass
Mounting Strap	.050 260 Brass	Mounting Screws	Tri-Drive Steel
Tamper Shutter*	Thermoplastic		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.036 688 Brass

*For Tamper-Resistant version.

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.

Project
Location/Type

Technical Specifications

PlugTail™ Extra Heavy-Duty Hospital Grade Illuminated Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT8200IL
Description: PlugTail™ Straight Blade Illuminated Duplex Receptacle – Extra Heavy-Duty Hospital Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498, Federal Specification WC596, Hospital Grade. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT8200ILI	Ivory	15A 125V	5-15R	❒ PT8300ILI	Ivory	20A 125V	5-20R
❒ PT8200ILW	White	15A 125V	5-15R	❒ PT8300ILW	White	20A 125V	5-20R
❒ PT8200IL	Brown	15A 125V	5-15R	❒ PT8300IL	Brown	20A 125V	5-20R
❒ PT8200ILGRY	Gray	15A 125V	5-15R	❒ PT8300ILGRY	Gray	20A 125V	5-20R
❒ PT8200ILBK	Black	15A 125V	5-15R	❒ PT8300ILBK	Black	20A 125V	5-20R
❒ PT8200ILRED	Red	15A 125V	5-15R	❒ PT8300ILRED	Red	20A 125V	5-20R
❒ PT8200ILLA	Lt. Al.	15A 125V	5-15R	❒ PT8300ILLA	Lt. Al.	20A 125V	5-20R

EXCLUSIVE! P&S EXCLUSIVE!

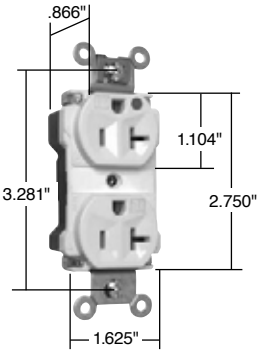

PT8300ILLA

Performance


Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connectors Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials


Face	Nylon	Assembly Drive Screw	Zinc-Plated Steel
Back Body	Nylon	Auto-Ground Clip	Brass
Line Contacts	.036 688 Brass	Mounting Screws	Tri-Drive Steel
Mounting Strap	.050 260 Brass	LED	8-9 Years
Integral Ground System	.036 260 Brass		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.036 688 Brass

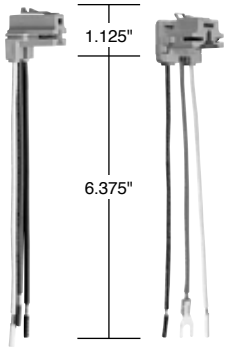

PTRA6STR **PTRA6STRG**



PTRA6STRBP

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.



NEMA 5-15R




NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Extra Heavy-Duty Hospital Grade Receptacles
Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

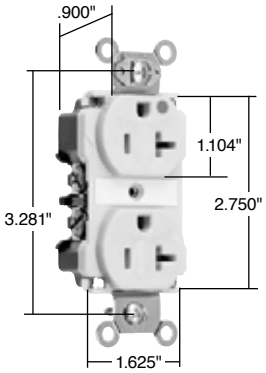

15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 8200
Description: Straight Blade Duplex Receptacle – Extra Heavy-Duty Hospital Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, Hospital Grade. CSA Certified, File Number LR16063, Standard CSA-C22.2, No. 42.. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 8200I	Ivory	15A 125V	5-15R	❒ 8300BK	Black	20A 125V	5-20R
❒ 8200W	White	15A 125V	5-15R	❒ 8300RED	Red	20A 125V	5-20R
❒ 8200	Brown	15A 125V	5-15R	❒ 8300LA	Lt. Al.	20A 125V	5-20R
❒ 8200GRY	Gray	15A 125V	5-15R	❒ 8300ILI	Ivory	20A 125V	5-20R
❒ 8200BK	Black	15A 125V	5-15R	❒ 8300ILW	White	20A 125V	5-20R
❒ 8200RED	Red	15A 125V	5-15R	❒ 8300ILGRY	Gray	20A 125V	5-20R
❒ 8200LA	Lt. Al.	15A 125V	5-15R	❒ 8300ILRED	Red	20A 125V	5-20R
❒ 8200ILI	Ivory	15A 125V	5-15R	❒ 8300ILLA	Lt. Al.	20A 125V	5-20R
❒ 8200ILW	White	15A 125V	5-15R	❒ 8800I	Ivory	20A 250V	6-20R
❒ 8200ILRED	Red	15A 125V	5-15R	❒ 8800W	White	20A 250V	6-20R
❒ 8300I	Ivory	20A 125V	5-20R	❒ 8800	Brown	20A 250V	6-20R
❒ 8300W	White	20A 125V	5-20R	❒ 8800GRY	Gray	20A 250V	6-20R
❒ 8300	Brown	20A 125V	5-20R	❒ 8800BK	Black	20A 250V	6-20R
❒ 8300GRY	Gray	20A 125V	5-20R	❒ 8800LA	Lt. Al.	20A 250V	6-20R
				❒ 8800RED	Red	20A 250V	6-20R

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminals identified in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2 and UL94-5 VA
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	Nylon		
Line Contacts	.040 688 Nickel-Plated Brass	Ground Screw	#10 Hex Tri-Drive Brass
Mounting Strap	.050 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	Strap with Integral Ground	Auto-Ground Clip	Brass
Pressure Plate	.031 260 Nickel-Plated Brass	Mounting Screws	Tri-Drive Steel
		Illuminating Lamp*	Neon

*For LED Illuminated Face version.

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.



NEMA 5-15R



NEMA 5-20R



NEMA 6-20R

Project
Location/Type

Technical Specifications

Extra Heavy-Duty Hospital Grade MRI Receptacles

Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125V


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 8200MRI
Description: Straight Blade Duplex Receptacle – Extra Heavy-Duty Hospital Grade MRI
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, Hospital Grade. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 8200IMRI	Ivory	15A 125V	5-15R	❒ 8300IMRI	Ivory	20A 125V	5-20R
❒ 8200WMRI	White	15A 125V	5-15R	❒ 8300WMRI	White	20A 125V	5-20R
❒ 8200MRI	Brown	15A 125V	5-15R	❒ 8300MRI	Brown	20A 125V	5-20R
❒ 8200GRYMRI	Gray	15A 125V	5-15R	❒ 8300GRYMRI	Gray	20A 125V	5-20R
❒ 8200BKMRI	Black	15A 125V	5-15R	❒ 8300BKMRI	Black	20A 125V	5-20R
❒ 8200REDMRI	Red	15A 125V	5-15R	❒ 8300REDMRI	Red	20A 125V	5-20R
❒ 8200LAMRI	Lt. Al.	15A 125V	5-15R	❒ 8300LAMRI	Lt. Al.	20A 125V	5-20R

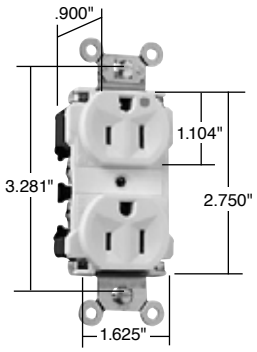


15 & 20 Amp

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Pressure Plate	.031 260 Brass
Back Body	Nylon	Terminal Screws	#10 Tri-Drive Brass
Line Contacts	.036 688 Brass	Ground Screw	#10 Hex Tri-Drive Brass
Mounting Strap	.050 688 Brass	Auto-Ground Clip	Brass
Ground Contacts	Strap with Integral Ground	Mounting Screws	Slotted Brass



NEMA 5-15R **NEMA 5-20R**


Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Industrial Extra Heavy-Duty Specification Grade Receptacles

Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

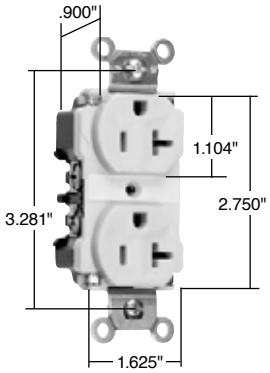

15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 5262A
Description: Straight Blade Duplex Receptacle – Industrial Extra Heavy-Duty Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 5262AI	Ivory	15A 125V	5-15R	❒ 5362AI	Ivory	20A 125V	5-20R
❒ 5262AW	White	15A 125V	5-15R	❒ 5362AW	White	20A 125V	5-20R
❒ 5262A	Brown	15A 125V	5-15R	❒ 5362A	Brown	20A 125V	5-20R
❒ 5262AGRY	Gray	15A 125V	5-15R	❒ 5362AGRY	Gray	20A 125V	5-20R
❒ 5262ABK	Black	15A 125V	5-15R	❒ 5362ABK	Black	20A 125V	5-20R
❒ 5262ARED	Red	15A 125V	5-15R	❒ 5362ARED	Red	20A 125V	5-20R
❒ 5262ALA	Lt. Al.	15A 125V	5-15R	❒ 5362ALA	Lt. Al.	20A 125V	5-20R
				❒ 5362ABL	Blue	20A 125V	5-20R
❒ CR6200*	Yellow	15A 125V	5-15R				
❒ CR6200GRY*	Gray	15A 125V	5-15R	❒ CR6300*	Yellow	20A 125V	5-20R
				❒ CR6300BR*	Brown	20A 125V	5-20R
❒ 5662AI	Ivory	15A 250V	6-15R				
❒ 5662AW	White	15A 250V	6-15R	❒ 5862AI	Ivory	20A 250V	6-20R
❒ 5662A	Brown	15A 250V	6-15R	❒ 5862AW	White	20A 250V	6-20R
❒ 5662AGRY	Gray	15A 250V	6-15R	❒ 5862A	Brown	20A 250V	6-20R
❒ 5662ABK	Black	15A 250V	6-15R	❒ 5862AGRY	Gray	20A 250V	6-20R
❒ 5662ARED	Red	15A 250V	6-15R	❒ 5862ABK	Black	20A 250V	6-20R
				❒ 5862ARED	Red	20A 250V	6-20R
				❒ 5862ALA	Lt. Al.	20A 250V	6-20R

*Corrosion-Resistant


Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	Nylon		
Line Contacts*	.036 688 Brass	Ground Screw	#10 Hex Tri-Drive Brass
Mounting Strap*	.050 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	Strap with Integral Ground	Auto-Ground Clip	Brass
Pressure Plate	.031 260 Brass	Mounting Screws	Tri-Drive Steel

*Corrosion-Resistant versions have nickel-plated straps and contacts.
Consult Straight Blade Section B for complete compliance listing.



NEMA 5-15R | NEMA 5-20R
NEMA 6-15R | NEMA 6-20R

Project
Location/Type


Technical Specifications
Heavy-Duty Specification Grade Receptacles
Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5262
Description: Straight Blade Duplex Receptacle – Heavy-Duty Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PS5262I	Ivory	15A 125V	5-15R	❒ PS5362I	Ivory	20A 125V	5-20R
❒ PS5262W	White	15A 125V	5-15R	❒ PS5362W	White	20A 125V	5-20R
❒ PS5262	Brown	15A 125V	5-15R	❒ PS5362	Brown	20A 125V	5-20R
❒ PS5262GRY	Gray	15A 125V	5-15R	❒ PS5362GRY	Gray	20A 125V	5-20R
❒ PS5262BK	Black	15A 125V	5-15R	❒ PS5362BK	Black	20A 125V	5-20R
❒ PS5262RED	Red	15A 125V	5-15R	❒ PS5362RED	Red	20A 125V	5-20R
❒ PS5262LA	Lt. Almond	15A 125V	5-15R	❒ PS5362LA	Lt. Almond	20A 125V	5-20R
❒ PS5262BL	Blue	15A 125V	5-15R	❒ PS5362BL	Blue	20A 125V	5-20R
❒ 5662I	Ivory	15A 250V	6-15R	❒ 5862I	Ivory	20A 250V	6-20R
❒ 5662W	White	15A 250V	6-15R	❒ 5862W	White	20A 250V	6-20R
❒ 5662	Brown	15A 250V	6-15R	❒ 5862	Brown	20A 250V	6-20R
				❒ 5862GRY	Gray	20A 250V	6-20R
				❒ 5862BK	Black	20A 250V	6-20R
				❒ 5862RED	Red	20A 250V	6-20R

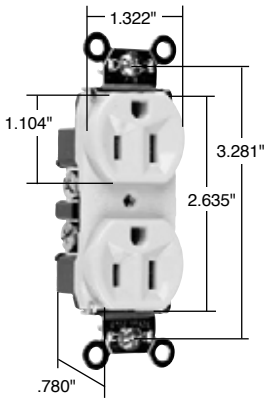


15 & 20 Amp

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60ºC, minimum -40º (without impact)

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Brass
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.043 688 Brass	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 688 Brass	Mounting Screws	Tri-Drive Steel
Pressure Plate	.080 Steel		




Consult Straight Blade Section B for complete compliance listing.


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Heavy-Duty Hospital Grade Receptacles
Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125V

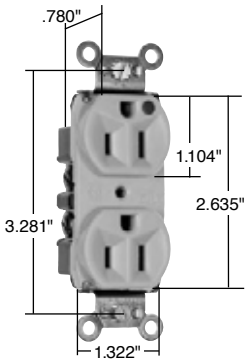

PS8200HI

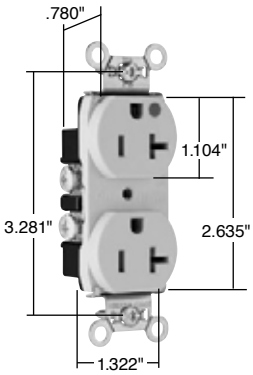

PS8300HSLA

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS8200H
Description: Straight Blade Duplex Receptacle – Heavy-Duty Hospital Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498. Federal Specification WC596, Hospital Grade. CSA Certified, File Number LR16063, Standard CSA C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PS8200HI	Ivory	15A 125V	5-15R	❒ PS8200HSI	Ivory	15A 125V	5-15R
❒ PS8200HW	White	15A 125V	5-15R	❒ PS8200HSW	White	15A 125V	5-15R
❒ PS8200H	Brown	15A 125V	5-15R	❒ PS8200HS	Brown	15A 125V	5-15R
❒ PS8200HGRY	Gray	15A 125V	5-15R	❒ PS8200HSGRY	Gray	15A 125V	5-15R
❒ PS8200HRED	Red	15A 125V	5-15R	❒ PS8200HSBK	Black	15A 125V	5-15R
❒ PS8200HLA	Lt. Al.	15A 125V	5-15R	❒ PS8200HSRED	Red	15A 125V	5-15R
				❒ PS8200HSLA	Lt. Al.	15A 125V	5-15R
❒ PS8300HI	Ivory	20A 125V	5-20R				
❒ PS8300HW	White	20A 125V	5-20R	❒ PS8300HSI	Ivory	20A 125V	5-20R
❒ PS8300H	Brown	20A 125V	5-20R	❒ PS8300HSW	White	20A 125V	5-20R
❒ PS8300HGRY	Gray	20A 125V	5-20R	❒ PS8300HS	Brown	20A 125V	5-20R
❒ PS8300HRED	Red	20A 125V	5-20R	❒ PS8300HSGRY	Gray	20A 125V	5-20R
❒ PS8300HLA	Lt. Al.	20A 125V	5-20R	❒ PS8300HSBK	Black	20A 125V	5-20R
				❒ PS8300HSRED	Red	20A 125V	5-20R
				❒ PS8300HSLA	Lt. Al.	20A 125V	5-20R

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC		
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Brass
Mounting Strap	.043 260 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 688 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel



NEMA 5-15R **NEMA 5-20R**

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.

Project
Location/Type

Technical Specifications

Heavy-Duty Hospital Grade Compact Design Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

legrand®
Pass & Seymour


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 8200H
Description: Straight Blade Duplex Receptacle – Heavy-Duty Hospital Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498. Federal Specification WC596, Hospital Grade. CSA Certified, File Number LR16063, Standard CSA C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 8200HI	Ivory	15A 125V	5-15R	❒ IG8200I	Ivory	15A 125V	5-15R
❒ 8200HW	White	15A 125V	5-15R	❒ IG8200	Orange	15A 125V	5-15R
❒ 8200H	Brown	15A 125V	5-15R	❒ IG8200RED	Red	15A 125V	5-15R
❒ 8200HGRY	Gray	15A 125V	5-15R	❒ IG8300I	Ivory	20A 125V	5-20R
❒ 8200HRED	Red	15A 125V	5-15R	❒ IG8300W	White	20A 125V	5-20R
❒ 8200HLA	Lt. Al.	15A 125V	5-15R	❒ IG8300RED	Red	20A 125V	5-20R
❒ 8300HI	Ivory	20A 125V	5-20R	❒ IG8300	Orange	20A 125V	5-20R
❒ 8300HW	White	20A 125V	5-20R	❒ IG8300LA	Lt. Al.	20A 125V	5-20R
❒ 8300H	Brown	20A 125V	5-20R	❒ IG8800	Orange	20A 250V	6-20R
❒ 8300HGRY	Gray	20A 125V	5-20R	❒ IG8800LA	Lt. Al.	20A 250V	6-20R
❒ 8300HBK	Black	20A 125V	5-20R				
❒ 8300HRED	Red	20A 125V	5-20R				
❒ 8300HLA	Lt. Al.	20A 125V	5-20R				
❒ 8300HBL	Blue	20A 125V	5-20R				

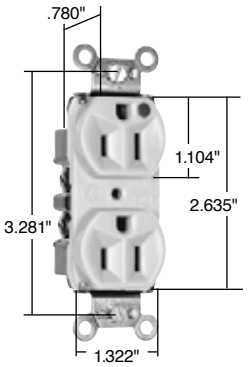

8200HI

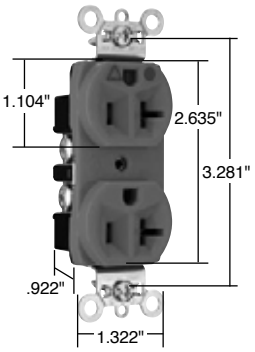

IG8300

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC		
Line Contacts	.032 688 Brass	Ground Screw	#8 Hex Tri-Drive Brass
Mounting Strap	.043 260 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	.040 688 Brass	Auto-Ground Clip	Stainless Steel
Pressure Plate	.080 Steel	Mounting Screws	Tri-Drive Steel




NEMA 5-15R **NEMA 5-20R** **NEMA 6-20R**

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.

Project
Location/Type


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

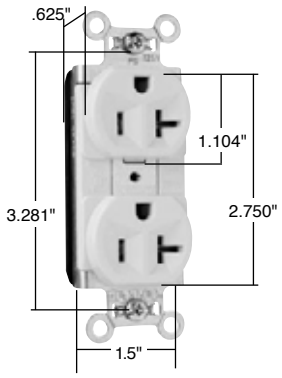


PT5362LA



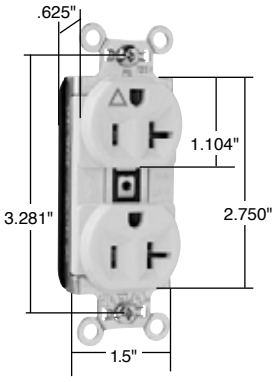

PTIG5362LA



NEMA 5-15R **NEMA 5-20R**

Technical Specifications
PlugTail™ Specification & Hospital Grade Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT5262
Description: Plugtail™ Straight Blade Duplex Receptacle – Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT5262I	Ivory	15A 125V	5-15R	❒ PTIG5262I	Ivory	15A 125V	5-15R
❒ PT5262W	White	15A 125V	5-15R	❒ PTIG5262W	White	15A 125V	5-15R
❒ PT5262	Brown	15A 125V	5-15R	❒ PTIG5262	Orange	15A 125V	5-15R
❒ PT5262GRY	Gray	15A 125V	5-15R	❒ PTIG5262GRY	Gray	15A 125V	5-15R
❒ PT5262BK	Black	15A 125V	5-15R	❒ PTIG5262RED	Red	15A 125V	5-15R
❒ PT5262RED	Red	15A 125V	5-15R	❒ PTIG5262LA	Lt. Al.	15A 125V	5-15R
❒ PT5262LA	Lt. Al.	15A 125V	5-15R	❒ PTIG5362I	Ivory	20A 125V	5-20R
❒ PT5262BL	Blue	15A 125V	5-15R	❒ PTIG5362W	White	20A 125V	5-20R
❒ PT5362I	Ivory	20A 125V	5-20R	❒ PTIG5362	Orange	20A 125V	5-20R
❒ PT5362W	White	20A 125V	5-20R	❒ PTIG5362GRY	Gray	20A 125V	5-20R
❒ PT5362	Brown	20A 125V	5-20R	❒ PTIG5362RED	Red	20A 125V	5-20R
❒ PT5362GRY	Gray	20A 125V	5-20R	❒ PTIG5362LA	Lt. Al.	20A 125V	5-20R
❒ PT5362BK	Black	20A 125V	5-20R	❒ PTIG8200I	Ivory	15A 125V	5-15R
❒ PT5362RED	Red	20A 125V	5-20R	❒ PTIG8200	Orange	15A 125V	5-15R
❒ PT5362LA	Lt. Al.	20A 125V	5-20R	❒ PTIG8200RED	Red	15A 125V	5-15R
❒ PT5362BL	Blue	20A 125V	5-20R	❒ PTIG8300I	Ivory	15A 125V	5-15R
				❒ PTIG8300	Orange	15A 125V	5-15R
				❒ PTIG8300RED	Red	15A 125V	5-15R
				❒ PTIG8300LA	Lt. Al.	15A 125V	5-15R

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.

Project
Location/Type

Technical Specifications

PlugTail™ Tamper-Resistant Specification & Hospital Grade Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125V

legrand®
Pass & Seymour

Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour PTTR5262
Description: Plugtail™ Straight Blade Duplex Receptacle – Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PTTR5262I	Ivory	15A 125V	5-15R	❒ PTTR8200I	Ivory	15A 125V	5-15R
❒ PTTR5262W	White	15A 125V	5-15R	❒ PTTR8200W	White	15A 125V	5-15R
❒ PTTR5262	Brown	15A 125V	5-15R	❒ PTTR8200	Brown	15A 125V	5-15R
❒ PTTR5262BK	Black	15A 125V	5-15R	❒ PTTR8200GRY	Gray	15A 125V	5-15R
❒ PTTR5262LA	Lt. Al.	15A 125V	5-15R	❒ PTTR8200BK	Black	15A 125V	5-15R
				❒ PTTR8200RED	Red	15A 125V	5-15R
❒ PTTR5362I	Ivory	20A 125V	5-20R	❒ PTTR8200LA	Lt. Al.	15A 125V	5-15R
❒ PTTR5362W	White	20A 125V	5-20R				
❒ PTTR5362	Brown	20A 125V	5-20R	❒ PTTR8300I	Ivory	20A 125V	5-20R
❒ PTTR5362BK	Black	20A 125V	5-20R	❒ PTTR8300W	White	20A 125V	5-20R
❒ PTTR5362LA	Lt. Al.	20A 125V	5-20R	❒ PTTR8300	Brown	20A 125V	5-20R
				❒ PTTR8300GRY	Gray	20A 125V	5-20R
				❒ PTTR8300BK	Black	20A 125V	5-20R
				❒ PTTR8300RED	Red	20A 125V	5-20R
				❒ PTTR8300LA	Lt. Al.	20A 125V	5-20R

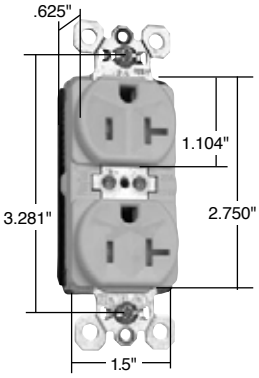

PTTR5362W



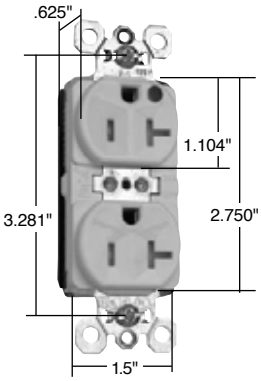

PTTR8300W

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact


PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass

Consult Straight Blade Section B and Hospital Grade Section E for complete compliance listing.




NEMA 5-15R NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour


Technical Specifications
PlugTail™ Specification Grade Receptacles Split Circuit

2 Pole, 3 Wire Grounding 15 & 20A, 125V

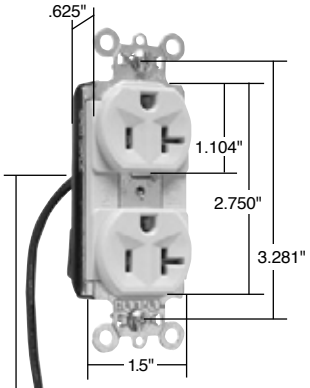


PT5362SCI



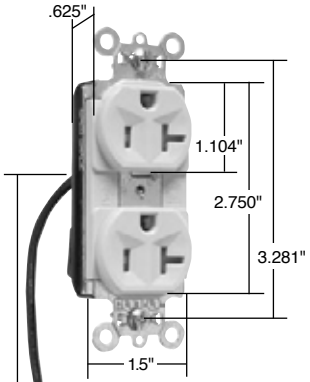

PTTR5362SCI



NEMA 5-15R NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT5262SC
Description: Plugtail™ Straight Blade Duplex Receptacle – Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT5262SCI	Ivory	15A 125V	5-15R	❒ PTTR5262SCI	Ivory	15A 125V	5-15R
❒ PT5262SCW	White	15A 125V	5-15R	❒ PTTR5262SCW	White	15A 125V	5-15R
❒ PT5262SC	Brown	15A 125V	5-15R	❒ PTTR5262SC	Brown	15A 125V	5-15R
❒ PT5262SCGRY	Gray	15A 125V	5-15R	❒ PTTR5262SCBK	Black	15A 125V	5-15R
❒ PT5262SCBK	Black	15A 125V	5-15R	❒ PTTR5262SCLA	Lt. Al.	15A 125V	5-15R
❒ PT5262SCRED	Red	15A 125V	5-15R	❒ PTTR5362SCI	Ivory	20A 125V	5-20R
❒ PT5262SCLA	Lt. Al.	15A 125V	5-15R	❒ PTTR5362SCW	White	20A 125V	5-20R
❒ PT5262SCBL	Blue	15A 125V	5-15R	❒ PTTR5362SC	Brown	20A 125V	5-20R
❒ PT5362SCI	Ivory	20A 125V	5-20R	❒ PTTR5362SCBK	Black	20A 125V	5-20R
❒ PT5362SCW	White	20A 125V	5-20R	❒ PTTR5362SCLA	Lt. Al.	20A 125V	5-20R
❒ PT5362SC	Brown	20A 125V	5-20R				
❒ PT5362SCGRY	Gray	20A 125V	5-20R				
❒ PT5362SCBK	Black	20A 125V	5-20R				
❒ PT5362SCRED	Red	20A 125V	5-20R				
❒ PT5362SCLA	Lt. Al.	20A 125V	5-20R				
❒ PT5362SCBL	Blue	20A 125V	5-20R				

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel	Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass

Consult Straight Blade Section B for complete compliance listing.


Project
Location/Type

Technical Specifications
Hard Use Specification Grade Receptacles
Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 5262
Description: Straight Blade Duplex Receptacle – Hard Use Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.27. Conforms to NEMA WD-1 and WD-6.

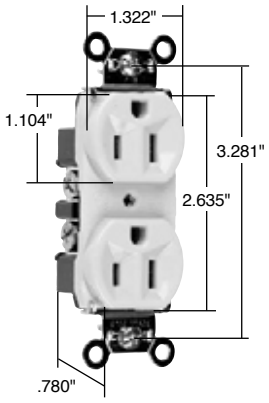

15 & 20 Amp

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 5262I	Ivory	15A 125V	5-15R	❒ 5362BK	Black	20A 125V	5-20R
❒ 5262W	White	15A 125V	5-15R	❒ 5362RED	Red	20A 125V	5-20R
❒ 5262	Brown	15A 125V	5-15R	❒ 5362LA	Lt. Almond	20A 125V	5-20R
❒ 5262GRY	Gray	15A 125V	5-15R	❒ 5362BL	Blue	20A 125V	5-20R
❒ 5262BK	Black	15A 125V	5-15R	❒ 5362GN	Green	20A 125V	5-20R
❒ 5262RED	Red	15A 125V	5-15R	❒ 5290I*	Ivory	15A 125/250V	5/6-15R
❒ 5262LA	Lt. Almond	15A 125V	5-15R	❒ 5290*	Brown	15A 125/250V	5/6-15R
❒ 5262BL	Blue	15A 125V	5-15R	❒ 5890I*	Ivory	20A 125/250V	5/6-20R
❒ 5362I	Ivory	20A 125V	5-20R	❒ 5890W*	White	20A 125/250V	5/6-20R
❒ 5362W	White	20A 125V	5-20R	❒ 5890*	Brown	20A 125/250V	5/6-20R
❒ 5362	Brown	20A 125V	5-20R				
❒ 5362GRY	Gray	20A 125V	5-20R				

*Side wire only.


Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

Materials

Face	Nylon	Hex Head Grounding Screw	Tri-Drive Zinc-Plated Steel
Back Body	PVC	Assembly Rivets	Steel
Contacts	.032" (.8) Brass	Auto-Ground Clip	Stainless Steel
Clamping Plate	.080" Steel	Mounting Screws	Tri-Drive Steel
Mounting Strap	.042" Steel		
Terminal Screws	Tri-Drive Brass		

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-15R **NEMA 5-20R** **NEMA 6-15R** **NEMA 6-20R**


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Construction Specification Grade Receptacles
Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125V

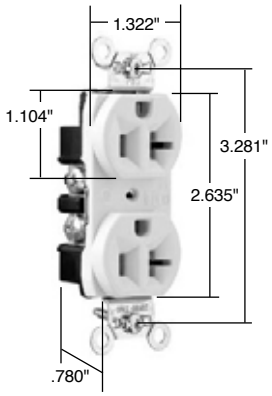

15 & 20 Amp

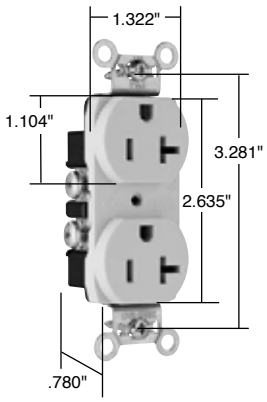

CRB5362SLA



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour CRB5262

Description: Straight Blade Duplex Receptacle – Construction Specification Grade

Type: 2 Pole, 3 Wire Grounding

Rating: 15A, 125V

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ CRB5262I	Ivory	15A 125V	5-15R	❒ CRB5262SI	Ivory	15A 125V	5-15R
❒ CRB5262W	White	15A 125V	5-15R	❒ CRB5262SW	White	15A 125V	5-15R
❒ CRB5262	Brown	15A 125V	5-15R	❒ CRB5262S	Brown	15A 125V	5-15R
❒ CRB5262GRY	Gray	15A 125V	5-15R	❒ CRB5262SGRY	Gray	15A 125V	5-15R
❒ CRB5262BK	Black	15A 125V	5-15R	❒ CRB5262SRED	Red	15A 125V	5-15R
❒ CRB5262RED	Red	15A 125V	5-15R	❒ CRB5262SLA	Lt. Al.	15A 125V	5-15R
❒ CRB5262LA	Lt. Al.	15A 125V	5-15R	❒ CRB5362SI	Ivory	20A 125V	5-20R
❒ CRB5362I	Ivory	20A 125V	5-20R	❒ CRB5362SW	White	20A 125V	5-20R
❒ CRB5362W	White	20A 125V	5-20R	❒ CRB5362S	Brown	20A 125V	5-20R
❒ CRB5362	Brown	20A 125V	5-20R	❒ CRB5362SGRY	Gray	20A 125V	5-20R
❒ CRB5362GRY	Gray	20A 125V	5-20R	❒ CRB5362SRED	Red	20A 125V	5-20R
❒ CRB5362BK	Black	20A 125V	5-20R	❒ CRB5362SLA	Lt. Al.	20A 125V	5-20R
❒ CRB5362RED	Red	20A 125V	5-20R				
❒ CRB5362LA	Lt. Al.	20A 125V	5-20R				

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Steel with Green Zinc Coating
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 260 Brass	Mounting Screws	Tri-Drive Steel
Pressure Plate	.080 Steel		

Consult Straight Blade Section B for complete compliance listing.


Project
Location/Type

Technical Specifications
Commercial Specification Grade Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V; 20A, 250V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour CR15
Description: Straight Blade Duplex Receptacle – Commercial Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

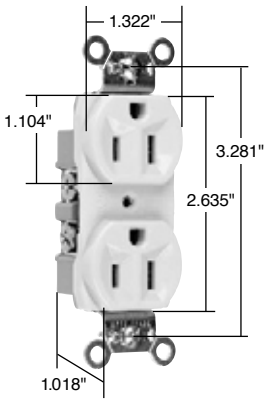

15 & 20 Amp

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ CR15I	Ivory	15A 125V	5-15R	❒ CR20I	Ivory	20A 125V	5-20R
❒ CR15W	White	15A 125V	5-15R	❒ CR20W	White	20A 125V	5-20R
❒ CR15	Brown	15A 125V	5-15R	❒ CR20	Brown	20A 125V	5-20R
❒ CR15GRY	Gray	15A 125V	5-15R	❒ CR20GRY	Gray	20A 125V	5-20R
❒ CR15LA	Lt. Al.	15A 125V	5-15R	❒ CR20BK	Black	20A 125V	5-20R
				❒ CR20RED	Red	20A 125V	5-20R
				❒ CR20LA	Lt. Al.	20A 125V	5-20R
				❒ 5850I*	Ivory	20A 250V	6-20R
				❒ 5850W*	White	20A 250V	6-20R

*Side wire only

Performance

Electrical	
Dielectric Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Maximum Continuous Current	15A – CR15/BR15; 20A – CR20/BR20/5850
Temperature Rise	Maximum 30°C after 50 cycles at 150% of rated current
Mechanical	
Terminal Accommodation	#14 – #10 AWG
Product Identification	Amp, Voltage, 3rd Party Compliance
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +50°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Steel with Green Zinc Coating
Line Contacts	.032 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 260 Brass	Mounting Screws	Tri-Drive Steel

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-15R | NEMA 5-20R | NEMA 6-20R

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
Tamper-Resistant Specification & Hospital Grade Receptacles

Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125

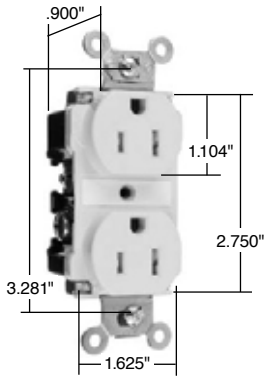

TR62I

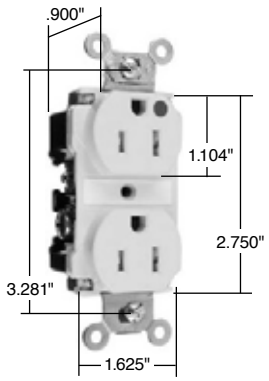

TR62HI



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR62
Description: Straight Blade Duplex Receptacle – Tamper-Resistant Specification & Hospital Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR62I	Ivory	15A 125V	5-15R	❒ TR62HI	Ivory	15A 125V	5-15R
❒ TR62W	White	15A 125V	5-15R	❒ TR62HW	White	15A 125V	5-15R
❒ TR62	Brown	15A 125V	5-15R	❒ TR62H	Brown	15A 125V	5-15R
❒ TR62GRY	Gray	15A 125V	5-15R	❒ TR62HGRY	Gray	15A 125V	5-15R
❒ TR62BK	Black	15A 125V	5-15R	❒ TR62HRED	Red	15A 125V	5-15R
❒ TR62RED	Red	15A 125V	5-15R	❒ TR62HLA	Lt. Al.	15A 125V	5-15R
❒ TR62LA	Lt. Al.	15A 125V	5-15R	❒ TR63HI	Ivory	20A 125V	5-20R
❒ TR62BL	Blue	15A 125V	5-15R	❒ TR63HW	White	20A 125V	5-20R
❒ TR63I	Ivory	20A 125V	5-20R	❒ TR63H	Brown	20A 125V	5-20R
❒ TR63W	White	20A 125V	5-20R	❒ TR63HGRY	Gray	20A 125V	5-20R
❒ TR63	Brown	20A 125V	5-20R	❒ TR63HRED	Red	20A 125V	5-20R
❒ TR63GRY	Gray	20A 125V	5-20R	❒ TR63HLA	Lt. Al	20A 125V	5-20R
❒ TR63BK	Black	20A 125V	5-20R	❒ TR63HBL	Blue	20A 125V	5-20R
❒ TR63RED	Red	20A 125V	5-20R				
❒ TR63LA	Lt. Al.	20A 125V	5-20R				

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	Nylon	Ground Screw	#10 Hex Tri-Drive Brass
Line Contacts	.036 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.050 688 Brass	Auto-Ground Clip	Brass
Ground Contacts	Strap with Integral Ground	Mounting Screws	Tri-Drive Steel
Pressure Plate	.031 260 Brass		
Tamper Shutter	Thermoplastic		

Consult Straight Blade Section B for complete compliance listing.

Project
Location/Type


Technical Specifications
Tamper-Resistant Hard Use Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR5262
Description: Straight Blade Duplex Receptacle – Tamper-Resistant Hard Use
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, CSA/CUL Approved, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR5262I	Ivory	15A 125V	5-15R	❒ TR5362I	Ivory	20A 125V	5-20R
❒ TR5262W	White	15A 125V	5-15R	❒ TR5362W	White	20A 125V	5-20R
❒ TR5262	Brown	15A 125V	5-15R	❒ TR5362	Brown	20A 125V	5-20R
❒ TR5262GRY	Gray	15A 125V	5-15R	❒ TR5362GRY	Gray	20A 125V	5-20R
❒ TR5262BK	Black	15A 125V	5-15R	❒ TR5362BK	Black	20A 125V	5-20R
❒ TR5262RED	Red	15A 125V	5-15R	❒ TR5362RED	Red	20A 125V	5-20R
❒ TR5262LA	Lt. Al.	15A 125V	5-15R	❒ TR5362LA	Lt. Al.	20A 125V	5-20R

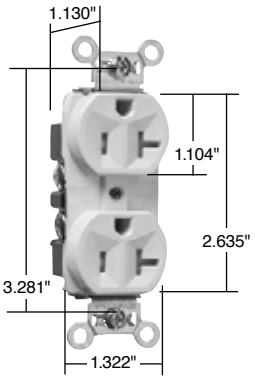

TR5362LA


Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Maximum Continuous Current	TR5262 = 15A TR5263 = 20A
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Amperage, Voltage, 3rd Party Compliance
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screw	#8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate
Line Contacts	.036 Olin 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Zinc-Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 Olin 688 Brass	Mounting Screws	Tri-Drive Steel
Pressure Plate	.080 Steel		
Tamper-Resistant Shutters	Thermoplastic		

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-15R NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Tamper-Resistant Commercial Grade Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V

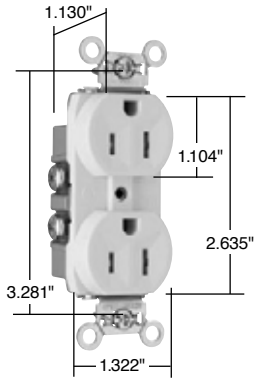

TR15LA

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR15
Description: Straight Blade Duplex Receptacle – Tamper-Resistant Commercial Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULs Listed, File Number E140596, Standard UL498, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR15I	Ivory	15A 125V	5-15R	❒ TR20I	Ivory	20A 125V	5-20R
❒ TR15W	White	15A 125V	5-15R	❒ TR20W	White	20A 125V	5-20R
❒ TR15	Brown	15A 125V	5-15R	❒ TR20	Brown	20A 125V	5-20R
❒ TR15GRY	Gray	15A 125V	5-15R	❒ TR20GRY	Gray	20A 125V	5-20R
❒ TR15LA	Lt. Al.	15A 125V	5-15R	❒ TR20BK	Black	20A 125V	5-20R
				❒ TR20LA	Lt. Al.	20A 125V	5-20R

Performance

Electrical	
Dielectric Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Maximum Continuous Current	15A – TR15; 20A – TR20
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Accommodation	#14 – #10 AWG
Product Identification	Amperage, Voltage, 3rd Party Compliance
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +50°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screws	#8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate
Line Contacts	.032 260 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Zinc-Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contacts	.040 260 Brass	Mounting Screws	Tri-Drive Steel
Tamper-Resistant Shutters	Thermoplastic		

Consult Straight Blade Section B for complete compliance listing.



NEMA 5-15R



NEMA 5-20R

Project
Location/Type

Technical Specifications


Tamper-Resistant Construction Grade Single Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR5251
Description: Straight Blade Single Receptacle – Tamper-Resistant Construction Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, CSA Certified, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

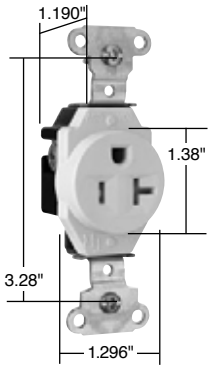

TR5351LA

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒TR5251I	Ivory	15A 125V	5-15R	❒TR5351I	Ivory	20A 125V	5-20R
❒TR5251W	White	15A 125V	5-15R	❒TR5351W	White	20A 125V	5-20R
❒TR5251	Brown	15A 125V	5-15R	❒TR5351	Brown	20A 125V	5-20R
❒TR5251LA	Lt. Al.	15A 125V	5-15R	❒TR5351LA	Lt. Al.	20A 125V	5-20R


Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass
Back Body	PVC	Hex Head Grounding Screw	Tri-Drive Zinc-Plated Steel
Contacts	.032" (.8)Brass	Assembly Rivets	Steel
Clamping Plate	.080" Steel	Mounting Screws	Tri-Drive Steel
Mounting Strap	.042" Steel		
Tamper-Resistant Shutters	Thermoplastic		

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-15R NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Weather-Resistant Heavy-Duty Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

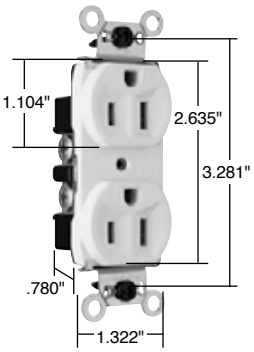

WR5262W

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour WR5262
Description: Straight Blade Duplex Receptacle – Weather-Resistant Heavy-Duty
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ WR5262I	Ivory	15A 125V	5-15R	❒ WR5662I	Ivory	15A 250V	6-15R
❒ WR5262W	White	15A 125V	5-15R	❒ WR5662W	White	15A 250V	6-15R
❒ WR5262GRY	Gray	15A 125V	5-15R	❒ WR5662GRY	Gray	15A 250V	6-15R
❒ WR5362I	Ivory	20A 125V	5-20R	❒ WR5362I	Ivory	20A 250V	6-20R
❒ WR5362W	White	20A 125V	5-20R	❒ WR5362W	White	20A 250V	6-20R
❒ WR5362GRY	Gray	20A 125V	5-20R	❒ WR5362GRY	Gray	20A 250V	6-20R


Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V/250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	UV Resistant Nylon	Ground Screw	#8 Hex Tri-Drive Nickel-Plated Steel
Back Body	PVC	Assembly Drive Screw	.0004" Zinc-Plated Steel
Line Contacts	.032 688 Brass	Auto-Ground Clip	Stainless Steel
Mounting Strap	.043 260 Brass	Mounting Screws	Tri-Drive Steel .0004" Zinc-Plated Steel
Ground Contact	.040 688 Brass		
Pressure Plate	.080 Nickel-Plated Steel		
Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)		

Consult Straight Blade Section B for complete compliance listing.



NEMA 5-15R | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

Project
Location/Type

Technical Specifications


Weather-Resistant Commercial Grade Receptacles

2 Pole, 3 Wire Grounding 20A, 125V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour WR20TR
Description: Straight Blade Duplex Receptacle – Weather-Resistant Commercial Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA 5-20R
3rd Party Compliance: cUL Listed, File Number E140596, Standard UL498, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

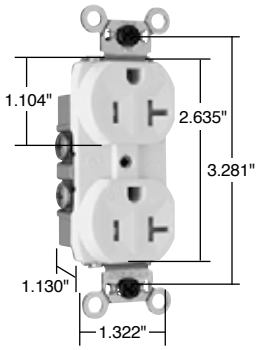

WR20TRW

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ WR20TRI	Ivory	20A 125V	5-20R	❒ WR20TRGRY	Gray	20A 125V	5-20R
❒ WR20TRW	White	20A 125V	5-20R	❒ WR20TRLA	Lt. Al.	20A 125V	5-20R
❒ WR20TR	Brown	20A 125V	5-20R				

WR20TR models are Tamper-Resistant.

Performance

Electrical	
Dielectric Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +50°C, minimum -40°C without impact

Materials

Face	UV Resistant Nylon	Ground Screw	#8 Hex Tri-Drive Nickel-Plated Steel
Back Body	PVC	Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.032 260 Brass	Auto-Ground Clip	Stainless Steel
Mounting Strap	.042 Nickel-Plated Steel	Mounting Screws	Tri-Drive Steel
Ground Contact	.040 260 Brass		
Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel-Plated Brass)		

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-20R

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Decorator Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V

EXCLUSIVE! P&S EXCLUSIVE!

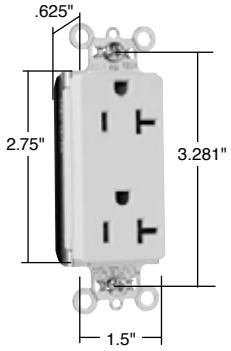


PT26352LA

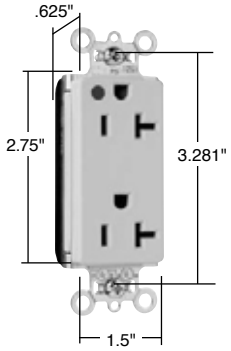

PT26362HGI



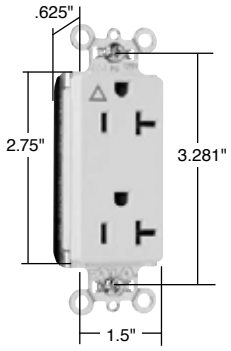

PTIG26362LA

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT26252
Description: PlugTail™ Straight Blade Duplex Receptacle – Decorator Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498. Federal Specification WC596. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	NEMA Rating	Config. No.
❒ PT26252I	Ivory	15A 125V	5-15R	❒ PT26362HGI	Ivory	20A 125V	5-20R
❒ PT26252W	White	15A 125V	5-15R	❒ PT26362HGW	White	20A 125V	5-20R
❒ PT26252	Brown	15A 125V	5-15R	❒ PT26362HGGRY	Gray	20A 125V	5-20R
❒ PT26252GRY	Gray	15A 125V	5-15R	❒ PT26362HGRED	Red	20A 125V	5-20R
❒ PT26252BK	Black	15A 125V	5-15R	❒ PT26362HGLA	Lt. Al.	20A 125V	5-20R
❒ PT26252RED	Red	15A 125V	5-15R	❒ PTIG26262I	Ivory	15A 125V	5-15R
❒ PT26252LA	Lt. Al.	15A 125V	5-15R	❒ PTIG26262W	White	15A 125V	5-15R
❒ PT26352I	Ivory	20A 125V	5-20R	❒ PTIG26262	Orange	15A 125V	5-15R
❒ PT26352W	White	20A 125V	5-20R	❒ PTIG26262GRY	Gray	15A 125V	5-15R
❒ PT26352	Brown	20A 125V	5-20R	❒ PTIG26262RED	Red	15A 125V	5-15R
❒ PT26352GRY	Gray	20A 125V	5-20R	❒ PTIG26262LA	Lt. Al.	15A 125V	5-15R
❒ PT26352BK	Black	20A 125V	5-20R	❒ PTIG26362I	Ivory	20A 125V	5-20R
❒ PT26352RED	Red	20A 125V	5-20R	❒ PTIG26362W	White	20A 125V	5-20R
❒ PT26352LA	Lt. Al.	20A 125V	5-20R	❒ PTIG26362	Orange	20A 125V	5-20R
❒ PT26262HGI	Ivory	15A 125V	5-15R	❒ PTIG26362GRY	Gray	20A 125V	5-20R
❒ PT26262HGW	White	15A 125V	5-15R	❒ PTIG26362RED	Red	20A 125V	5-20R
❒ PT26262HGGRY	Gray	15A 125V	5-15R	❒ PTIG26362LA	Lt. Al.	20A 125V	5-20R
❒ PT26262HGRED	Red	15A 125V	5-15R				

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

PlugTail Receptacle Materials

Face	Nylon	Integral Ground System	.036 260 Brass
Back Body	PVC	Assembly Drive Screw	Plated Steel
Line Contacts	.036 688 Brass	Auto-Ground Clip	Steel
Mounting Strap	.042 Plated Steel	Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030 Brass



NEMA 5-15R



NEMA 5-20R

Consult Straight Blade Section B for complete compliance listing.

Project

Location/Type

Technical Specifications

Heavy-Duty Tamper-Resistant Decorator Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR26362

Description: PlugTail™ Straight Blade Duplex Receptacle – Heavy-Duty Tamper-Resistant Decorator


Type: 2 Pole, 3 Wire Grounding

Rating: 15A, 125V


Configuration: NEMA 5-15R

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR26262I	Ivory	15A 125V	5-15R	❒ TR26262HGI	Ivory	15A 125V	5-15R
❒ TR26262W	White	15A 125V	5-15R	❒ TR26262HGW	White	15A 125V	5-15R
❒ TR26262	Brown	15A 125V	5-15R	❒ TR26262HGGRY	Gray	15A 125V	5-15R
❒ TR26262GRY	Gray	15A 125V	5-15R	❒ TR26262HGRED	Red	15A 125V	5-15R
❒ TR26262BK	Black	15A 125V	5-15R	❒ TR26262HGLA	Lt. Al.	15A 125V	5-15R
❒ TR26262RED	Red	15A 125V	5-15R	❒ TR26362HGI	Ivory	20A 125V	5-20R
❒ TR26262LA	Lt. Al.	15A 125V	5-15R	❒ TR26362HGW	White	20A 125V	5-20R
❒ TR26362I	Ivory	20A 125V	5-20R	❒ TR26362HGGRY	Gray	20A 125V	5-20R
❒ TR26362W	White	20A 125V	5-20R	❒ TR26362HGBK	Black	20A 125V	5-20R
❒ TR26362	Brown	20A 125V	5-20R	❒ TR26362HGRED	Red	20A 125V	5-20R
❒ TR26362GRY	Gray	20A 125V	5-20R	❒ TR26362HGLA	Lt. Al.	20A 125V	5-20R
❒ TR26362BK	Black	20A 125V	5-20R				
❒ TR26362RED	Red	20A 125V	5-20R				
❒ TR26362LA	Lt. Al.	20A 125V	5-20R				

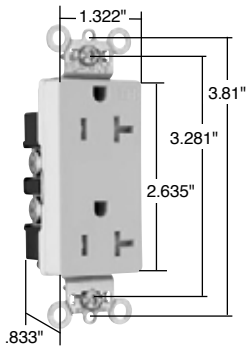

TR26362I



TR26362HGI

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Tamper Shutter	Thermoplastic
Back Body	Nylon	Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Line Contacts	.036 688 Brass		
Mounting Strap	Plated Steel	Ground Screw	#10 Hex Tri-Drive Brass
Ground Contacts	Strap with Integral Ground	Auto-Ground Clip	Steel
Pressure Plate	.031 260 Brass	Mounting Screws	Tri-Drive Steel

Consult Straight Blade Section B for complete compliance listing.



NEMA 5-15R




NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Heavy-Duty Tamper-Resistant Decorator Single Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125V

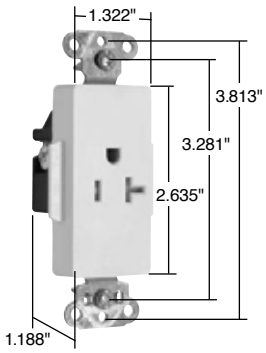

TR26361LA

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR26261
Description: PlugTail™ Straight Blade Duplex Receptacle – Heavy-Duty Tamper-Resistant Decorator
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification WC596, CSA Certified, Standard CSA-C22.2 No. 42. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR26261I	Ivory	15A 125V	5-15R	❒ TR26361I	Ivory	20A 125V	5-20R
❒ TR26261W	White	15A 125V	5-15R	❒ TR26361W	White	20A 125V	5-20R
❒ TR26261	Brown	15A 125V	5-15R	❒ TR26361	Brown	20A 125V	5-20R
❒ TR26261GRY	Gray	15A 125V	5-15R	❒ TR26361GRY	Gray	20A 125V	5-20R
❒ TR26261BK	Black	15A 125V	5-15R	❒ TR26361BK	Black	20A 125V	5-20R
❒ TR26261LA	Lt. Al.	15A 125V	5-15R	❒ TR26361LA	Lt. Al.	20A 125V	5-20R

Performance

Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass
Back Body	PVC	Hex Head Grounding Screw	Tri-Drive Zinc-Plated Steel with Green Chromate
Line Contacts	.032 (.8) Brass		
Mounting Strap	.042 Zinc-Plated Steel	Assembly Drive Screws	Zinc-Plated Steel
Clamping Plate	.080 Steel	Auto-Ground Clip	StainlessSteel
Tamper Shutter	Thermoplastic	Mounting Screws	Tri-Drive Steel




NEMA 5-15R **NEMA 5-20R**

Consult Straight Blade Section B for complete compliance listing.

Project
Location/Type

Technical Specifications
Specification Grade Combination Receptacles
2 Pole, 3 Wire Grounding 20A, 120/125VAC

legrand®
Pass & Seymour



PS8HWLLA

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS8HWL
Description: Combination Straight Blade Receptacle – Specification Grade
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 120/125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULus Listed, File Number E140596, Standard UL498. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PS8HWLI	Ivory	20A 120/125V	5-20R	❒ PS8HWLLA	Lt. Al.	20A 120/125V	5-20R
❒ PS8HWLW	White	20A 120/125V	5-20R				

Light output in 1' FCD = 0.2561. FCD = Foot Candle Distance. 1 Lumen = 1 FCD.
See Page S-56 for more information.

Performance

Electrical	
Dielectric Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Maximum Continuous Current	20A
Temperature Rise	Maximum 30°C after 50 cycles at 150% of rated current
Mechanical	
Terminal Accommodation	#14 AWG – #10 AWG
Product Identification	Amperage, Voltage, 3rd Party Compliance
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +50°C, minimum -40°C (without impact)

Materials

Face	Polycarbonate	Terminal Screws	#8 Tri-Drive Brass
Back Body	Polycarbonate	Ground Screw	#8 Hex Tri-Drive Brass
Line Contacts	.031 688 Brass	Mounting Screws	Tri-Drive Steel
Mounting Strap	.047 Steel	Lens	Polycarbonate
Ground Contacts	.040 260 Brass	Illuminating Lamp	2 LED
Pressure Plate	.031 260 Brass		

Consult Straight Blade Section B for complete compliance listing.




NEMA 5-20R

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
Hallway Lights
Light Output Measurements


Standard 4 Watt Incandescent Nightlight

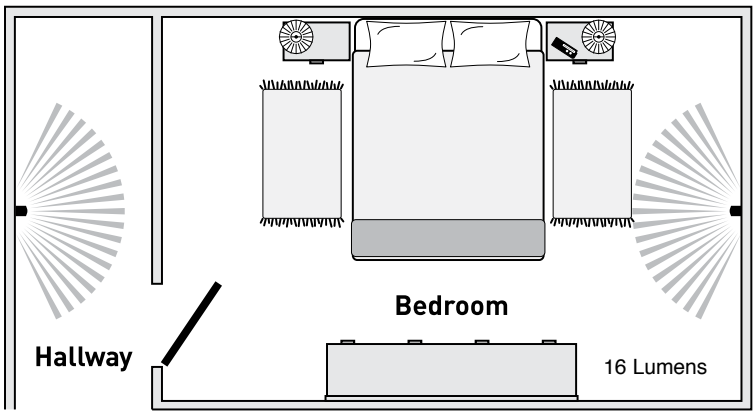

P&S Enhanced LED Nightlight

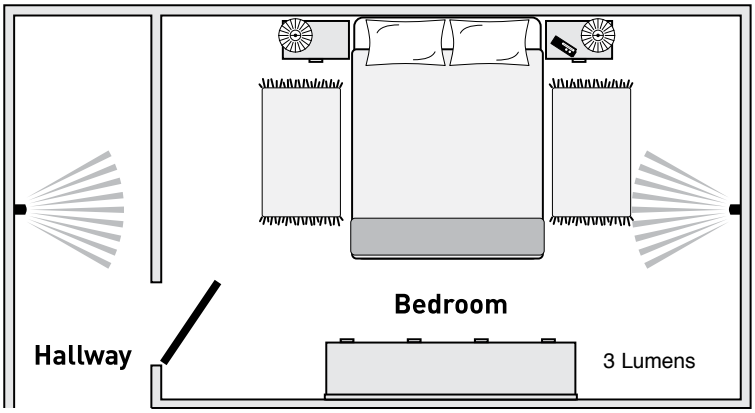

P&S LED Nightlight

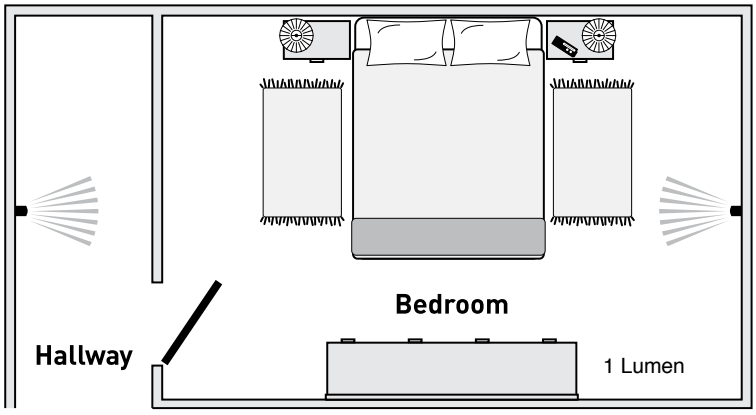

Catalog Number	Description	Light Output in 1' FCD*
P&S Enhanced LED Nightlights		
TMHWLECC	Enhanced Decorator Full Hallway Light with Light Sensor	1.079
TMHWLENSCC	Enhanced Decorator Full Hallway Light without Light Sensor	1.113
TMHWLLOUVCC	Full Hallway Decorator Light for use with P&S Metal Louver Plates	0.0843
TM8HWLTRCC	Decorator Hallway Light with High Output Light & Tamper-Resistant Single Receptacle	0.2561
PS8HWL	Specification Grade Enhanced Decorator Hallway Light & Single Receptacle	0.2561
1595NTLTRCC4	Combination Enhanced Nightlight/ GFCI (15 Amp)	0.180
2095NTLTR	Combination Enhanced Nightlight/ GFCI (20 Amp)	0.180
P&S LED Nightlights		
TMHWLCC	Decorator Full Hallway Light with Light Sensor	0.1328
TM8HWLCC	Decorator Hallway Light & Single Receptacle	0.1442

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD.

Project
Location/Type

Technical Specifications

Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595TR
Description: Straight Blade Duplex Tamper-Resistant GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595TRI	Ivory	15A 125VAC	5-15R
❒ 1595TRW	White	15A 125VAC	5-15R
❒ 1595TR	Brown	15A 125VAC	5-15R
❒ 1595TRBK	Black	15A 125VAC	5-15R
❒ 1595TRLA	Light Almond	15A 125VAC	5-15R
❒ 1595TRBNCC4	Brushed Nickel	15A 125VAC	5-15R
❒ 1595TRTI	Titanium	15A 125VAC	5-15R
❒ 1595TRSI*	Ivory	15A 125VAC	5-15R
❒ 1595TRSW*	White	15A 125VAC	5-15R
❒ 1595TRSLA*	Light Almond	15A 125VAC	5-15R
❒ 2095TRI	Ivory	20A 125VAC	5-20R
❒ 2095TRW	White	20A 125VAC	5-20R
❒ 2095TR	Brown	20A 125VAC	5-20R
❒ 2095TRGRY	Gray	20A 125VAC	5-20R
❒ 2095TRBK	Black	20A 125VAC	5-20R
❒ 2095TRRED	Red	20A 125VAC	5-20R
❒ 2095TRLA	Light Almond	20A 125VAC	5-20R
❒ 2095TRSI*	Ivory	20A 125VAC	5-20R
❒ 2095TRSW*	White	20A 125VAC	5-20R
❒ 2095TRSLA*	Light Almond	20A 125VAC	5-20R

Performance


Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials


Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Tamper-Resistant Shutter	Thermoplastic
Terminal Screws	Steel #8 - 32	Auto-Ground Clip*	Brass Alloy C260

*Tamper-Resistant GFCIs with Auto-Ground feature.

Project
Location/Type

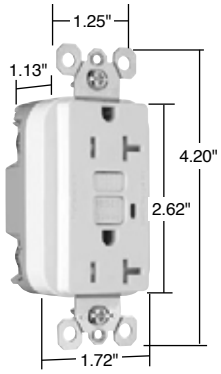

Dimensions for 15 & 20 Amp

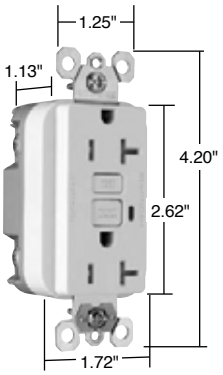

Dimensions for 15 & 20 Amp With Auto-Ground




NEMA 5-15R



NEMA 5-20R

legrand®
Pass & Seymour

Technical Specifications
Hospital Grade Tamper-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

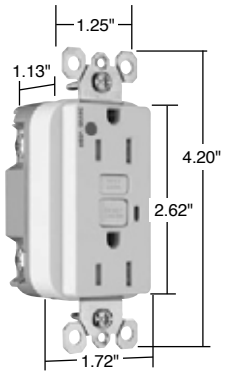

Dimensions for 15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595HGTR
Description: Straight Blade Duplex Hospital Grade Tamper-Resistant GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190, Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595HGTRI	Ivory	15A 125VAC	5-15R
❒ 1595HGTRW	White	15A 125VAC	5-15R
❒ 1595HGTR	Brown	15A 125VAC	5-15R
❒ 1595HGTRGRY	Gray	15A 125VAC	5-15R
❒ 1595HGTRRED	Red	15A 125VAC	5-15R
❒ 1595HGTRLA	Light Almond	15A 125VAC	5-15R
❒ 2095HGTRI	Ivory	20A 125VAC	5-20R
❒ 2095HGTRW	White	20A 125VAC	5-20R
❒ 2095HGTR	Brown	20A 125VAC	5-20R
❒ 2095HGTRGRY	Gray	20A 125VAC	5-20R
❒ 2095HGTRRED	Red	20A 125VAC	5-20R
❒ 2095HGTRLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screw	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Strap	.05" Zinc-Plated Steel (1.3)	Tamper-Resistant Shutter	Thermoplastic
Terminal Screws	Steel #8 - 32		



NEMA 5-15R **NEMA 5-20R**

Project
Location/Type


Technical Specifications
TradeMaster® & Specification Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595
Description: Straight Blade Duplex GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595I	Ivory	15A 125VAC	5-15R
❒ 1595W	White	15A 125VAC	5-15R
❒ 1595	Brown	15A 125VAC	5-15R
❒ 1595GRY	Gray	15A 125VAC	5-15R
❒ 1595BK	Black	15A 125VAC	5-15R
❒ 1595RED	Red	15A 125VAC	5-15R
❒ 1595LA	Light Almond	15A 125VAC	5-15R
❒ 1595SI*	Ivory	15A 125VAC	5-15R
❒ 1595SW*	White	15A 125VAC	5-15R
❒ 1595SLA*	Light Almond	15A 125VAC	5-15R
❒ 2095I	Ivory	20A 125VAC	5-20R
❒ 2095W	White	20A 125VAC	5-20R
❒ 2095	Brown	20A 125VAC	5-20R
❒ 2095GRY	Gray	20A 125VAC	5-20R
❒ 2095BK	Black	20A 125VAC	5-20R
❒ 2095RED	Red	20A 125VAC	5-20R
❒ 2095LA	Light Almond	20A 125VAC	5-20R
❒ 2095SI*	Ivory	20A 125VAC	5-20R
❒ 2095SW*	White	20A 125VAC	5-20R
❒ 2095SLA*	Light Almond	20A 125VAC	5-20R

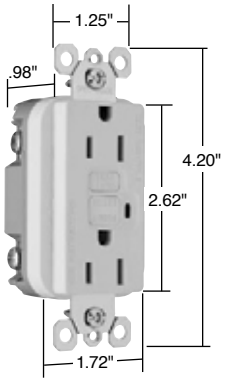

Dimensions for 15 & 20 Amp

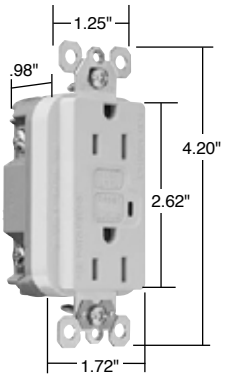

Dimensions for 15 & 20 Amp With Auto-Ground

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon
		Auto-Ground Clip*	Brass Alloy C260

*GFCIs with Auto-Ground feature.



NEMA 5-15R




NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

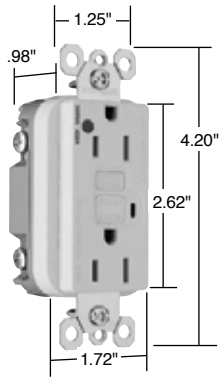

Dimensions for 15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595HG
Description: Straight Blade Duplex Hospital Grade GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190, Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595HGI	Ivory	15A 125VAC	5-15R
❒ 1595HGW	White	15A 125VAC	5-15R
❒ 1595HG	Brown	15A 125VAC	5-15R
❒ 1595HGGRY	Gray	15A 125VAC	5-15R
❒ 1595HGRED	Red	15A 125VAC	5-15R
❒ 1595HGLA	Light Almond	15A 125VAC	5-15R
❒ 2095HGI	Ivory	20A 125VAC	5-20R
❒ 2095HGW	White	20A 125VAC	5-20R
❒ 2095HG	Brown	20A 125VAC	5-20R
❒ 2095HGGRY	Gray	20A 125VAC	5-20R
❒ 2095HGRED	Red	20A 125VAC	5-20R
❒ 2095HGLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screw	Zinc-Plated Steel
Mounting Strap	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon



NEMA 5-15R



NEMA 5-20R

Project
Location/Type


Technical Specifications
Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595L
Description: Straight Blade Duplex Illuminated GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 2095IL	Ivory	20A 125VAC	5-20R
❒ 2095WL	White	20A 125VAC	5-20R
❒ 2095LAL	Light Almond	20A 125VAC	5-20R

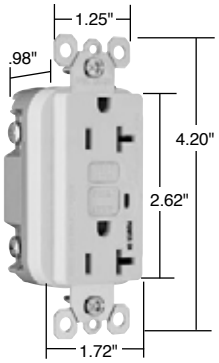

Dimensions for 15 & 20 Amp

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Green, ON when power is available
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon




NEMA 5-20R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Hospital Grade Illuminated GFCI Receptacles
2 Pole, 3 Wire Grounding 20A, 125VAC

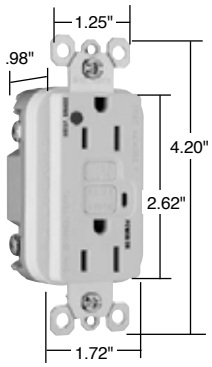

Dimensions for 15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595HGL
Description: Straight Blade Duplex Hospital Grade Illuminated GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190, Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 2095HGIL	Ivory	20A 125VAC	5-20R
❒ 2095HGWL	White	20A 125VAC	5-20R
❒ 2095HGREDL	Red	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Green, ON when power is available
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Steel #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screw	Zinc-Plated Steel
Mounting Strap	.05" Zinc-Plated Steel (1.3)	Test/Reset Buttons	Nylon



NEMA 5-20R

Project
Location/Type

Technical Specifications
Tamper-Resistant Nightlight/ GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595NTLTRCC4
Description: Straight Blade Duplex Tamper-Resistant Nightlight/GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595NTLTRICC4	Ivory	15A 125VAC	5-15R
❒ 1595NTLTRWCC4	White	15A 125VAC	5-15R
❒ 1595NTLTRBKCC4	Black	15A 125VAC	5-15R
❒ 1595NTLTRLACC4	Light Almond	15A 125VAC	5-15R
❒ 1595NTLTRBNCC4	Brushed Nickel	15A 125VAC	5-15R
❒ 1595NTLTRTICC4	Titanium	15A 125VAC	5-15R
❒ 2095NTLTRI	Ivory	20A 125VAC	5-20R
❒ 2095NTLTRW	White	20A 125VAC	5-20R
❒ 2095NTLTRGRY	Gray	20A 125VAC	5-20R
❒ 2095NTLTRLA	Light Almond	20A 125VAC	5-20R

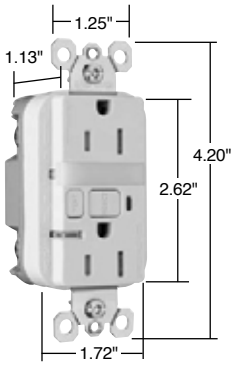

Dimensions for 15 & 20 Amp

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Nightlight Lens	Lexan®
Terminal Screws	Steel #8 - 32	Tamper-Resistant Shutter	Thermoplastic



NEMA 5-15R




NEMA 5-20R


Project
Location/Type

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

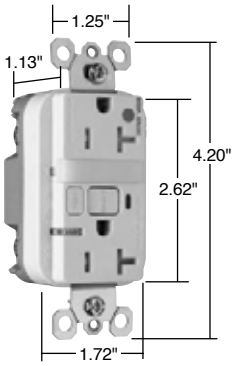

Dimensions for 15 & 20 Amp



NEMA 5-15R **NEMA 5-20R**

Technical Specifications

Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595HGNTLTR

Description: Straight Blade Duplex Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed, File Number E42190, Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595HGNTLTRI	Ivory	15A 125VAC	5-15R
❒ 1595HGNTLTRW	White	15A 125VAC	5-15R
❒ 1595HGNTLTR	Brown	15A 125VAC	5-15R
❒ 1595HGNTLTRGRY	Gray	15A 125VAC	5-15R
❒ 1595HGNTLTRRED	Red	15A 125VAC	5-15R
❒ 1595HGNTLTRLA	Light Almond	15A 125VAC	5-15R
❒ 2095HGNTLTRI	Ivory	20A 125VAC	5-20R
❒ 2095HGNTLTRW	White	20A 125VAC	5-20R
❒ 2095HGNTLTRGRY	Gray	20A 125VAC	5-20R
❒ 2095HGNTLTRRED	Red	20A 125VAC	5-20R
❒ 2095HGNTLTRLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screw	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Strap	.05" Zinc-Plated Steel (1.3)	Nightlight Lens	Lexan®
Terminal Screws	Steel #8 - 32	Tamper-Resistant Shutter	Thermoplastic

Project
Location/Type

Technical Specifications

Weather-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour 1595TRWR

Description: Straight Blade Duplex Weather-Resistant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498 Weather-Resistant, Tamper-Resistant, Attachment Plugs and Receptacles; UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

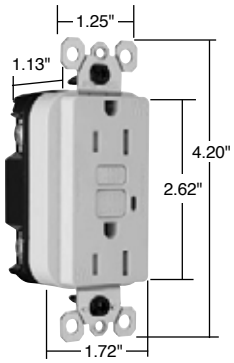

Dimensions for 15 & 20 Amp


Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595TRWRI	Ivory	15A 125VAC	5-15R
❒ 1595TRWRW	White	15A 125VAC	5-15R
❒ 1595TRWR	Brown	15A 125VAC	5-15R
❒ 1595TRWRLA	Light Almond	15A 125VAC	5-15R
❒ 2095TRWRI	Ivory	20A 125VAC	5-20R
❒ 2095TRWRW	White	20A 125VAC	5-20R
❒ 2095TRWR	Brown	20A 125VAC	5-20R
❒ 2095TRWRGRY	Gray	20A 125VAC	5-20R
❒ 2095TRWRLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon 66	Terminal Screws	Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Strap	.05" Nickel Post-Plated Steel (1.3)	Test/Reset Buttons	Nylon 66
		Tamper-Resistant Shutter	Thermoplastic




NEMA 5-15R **NEMA 5-20R**

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Weather-Resistant DuraShield™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

EXCLUSIVE! P&S EXCLUSIVE!

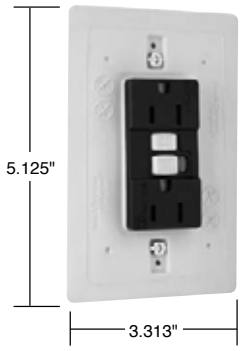

Dimensions for 15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595DSWRBKCC4

Description: Straight Blade Duplex Weather-Resistant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498 Weather-Resistant, Attachment Plugs and Receptacles; UL943 GFCIs. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs.Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 1595DSWRBKCC4	Black	15A 125VAC	5-15R
❒ 2095DSWRBK	Black	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon 66	Terminal Screws	Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Steel (Green)
Contacts	.03" Brass (.8)	Flat Head Mounting Screws	Zinc-Plated Steel
Mounting Strap	.05" Nickel Post-Plated Steel (1.3)	Test/Reset Buttons	Nylon 66
		Integral Gasket	Santoprene®



NEMA 5-15R



NEMA 5-20R

Project
Location/Type

Technical Specifications

PlugTail™ Specification Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour PT1595
Description: PlugTail™ Straight Blade Duplex GFCI Receptacle
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595I	Ivory	15A 125VAC	5-15R
❒ PT1595W	White	15A 125VAC	5-15R
❒ PT1595	Brown	15A 125VAC	5-15R
❒ PT1595GRY	Gray	15A 125VAC	5-15R
❒ PT1595BK	Black	15A 125VAC	5-15R
❒ PT1595RED	Red	15A 125VAC	5-15R
❒ PT1595LA	Light Almond	15A 125VAC	5-15R
❒ PT2095I	Ivory	20A 125VAC	5-20R
❒ PT2095W	White	20A 125VAC	5-20R
❒ PT2095	Brown	20A 125VAC	5-20R
❒ PT2095GRY	Gray	20A 125VAC	5-20R
❒ PT2095BK	Black	20A 125VAC	5-20R
❒ PT2095RED	Red	20A 125VAC	5-20R
❒ PT2095LA	Light Almond	20A 125VAC	5-20R

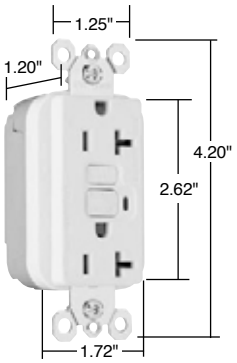

Dimensions for 15 & 20 Amp





PTRA6STR

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Mounting Strap	.05" Zinc-Plated Steel (1.3)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass



NEMA 5-15R



NEMA 5-20R


Project
Location/Type

Technical Specifications

PlugTail™ Hospital Grade GFCIs


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Hospital Grade GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

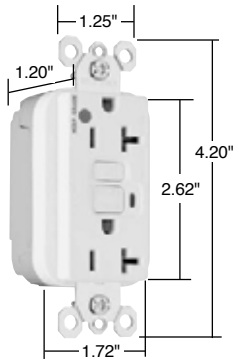

Dimensions for 15 & 20 Amp





PTRA6STR



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595HG

Description: PlugTail™ Straight Blade Duplex Hospital Grade GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595HGI	Ivory	15A 125VAC	5-15R
❒ PT1595HGW	White	15A 125VAC	5-15R
❒ PT1595HG	Brown	15A 125VAC	5-15R
❒ PT1595HGGRY	Gray	15A 125VAC	5-15R
❒ PT1595HGRED	Red	15A 125VAC	5-15R
❒ PT1595HGLA	Light Almond	15A 125VAC	5-15R
❒ PT2095HGI	Ivory	20A 125VAC	5-20R
❒ PT2095HGW	White	20A 125VAC	5-20R
❒ PT2095HG	Brown	20A 125VAC	5-20R
❒ PT2095HGGRY	Gray	20A 125VAC	5-20R
❒ PT2095HGRED	Red	20A 125VAC	5-20R
❒ PT2095HGLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Mounting Strap	.05" Zinc-Plated Steel (1.3)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass

Project
Location/Type

Technical Specifications

PlugTail™ Specification Grade Tamper-Resistant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595NTL


Description: PlugTail™ Straight Blade Duplex Tamper-Resistant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face


3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595TRI	Ivory	15A 125VAC	5-15R
❒ PT1595TRW	White	15A 125VAC	5-15R
❒ PT1595TR	Brown	15A 125VAC	5-15R
❒ PT1595TRGRY	Gray	15A 125VAC	5-15R
❒ PT1595TRBK	Black	15A 125VAC	5-15R
❒ PT1595TRRED	Red	15A 125VAC	5-15R
❒ PT1595TRLA	Light Almond	15A 125VAC	5-15R
❒ PT2095TRI	Ivory	20A 125VAC	5-20R
❒ PT2095TRW	White	20A 125VAC	5-20R
❒ PT2095TR	Brown	20A 125VAC	5-20R
❒ PT2095TRGRY	Gray	20A 125VAC	5-20R
❒ PT2095TRBK	Black	20A 125VAC	5-20R
❒ PT2095TRRED	Red	20A 125VAC	5-20R
❒ PT2095TRLA	Light Almond	20A 125VAC	5-20R

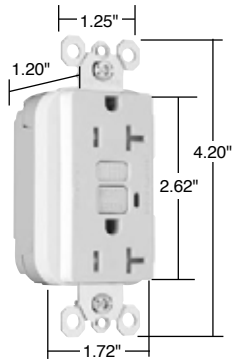

Dimensions for 15 & 20 Amp





PTRA6STR

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Tamper-Resistant Shutter	Thermoplastic
Mounting Strap	.05" Zinc-Plated Steel (1.3)		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass



NEMA 5-15R




NEMA 5-20R

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Hospital Grade Tamper-Resistant GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

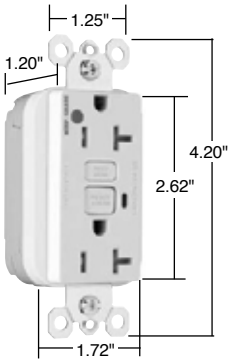

Dimensions for 15 & 20 Amp





PTRA6STR



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595HGTR

Description: PlugTail™ Straight Blade Duplex Hospital Grade Tamper-Resistant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595HGTRI	Ivory	15A 125VAC	5-15R
❒ PT1595HGTRW	White	15A 125VAC	5-15R
❒ PT1595HGTRGRY	Gray	15A 125VAC	5-15R
❒ PT1595HGTRRED	Red	15A 125VAC	5-15R
❒ PT1595HGTRLA	Light Almond	15A 125VAC	5-15R
❒ PT2095HGTRI	Ivory	20A 125VAC	5-20R
❒ PT2095HGTRW	White	20A 125VAC	5-20R
❒ PT2095HGTRGRY	Gray	20A 125VAC	5-20R
❒ PT2095HGTRRED	Red	20A 125VAC	5-20R
❒ PT2095HGTRLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Tamper-Resistant Shutter	Thermoplastic
Mounting Strap	.05" Zinc-Plated Steel (1.3)		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass

Project
Location/Type

Technical Specifications

PlugTail™ Specification Grade Tamper-Resistant Nightlight/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595NTL


Description: PlugTail™ Straight Blade Duplex Tamper-Resistant Nightlight/GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face


3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595NTLTRI	Ivory	15A 125VAC	5-15R
❒ PT2095NTLTRI	Ivory	20A 125VAC	5-20R
❒ PT2095NTLTRW	White	20A 125VAC	5-20R

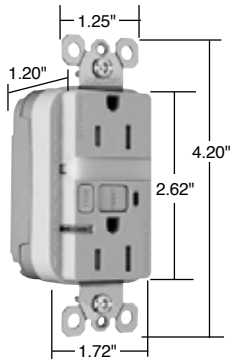

Dimensions for 15 & 20 Amp





PTRA6STR

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Nightlight Lens	Lexan®
Mounting Strap	.05" Nickel-Plated Steel (1.3)	Tamper-Resistant Shutter	Thermoplastic

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass



NEMA 5-15R




NEMA 5-20R

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

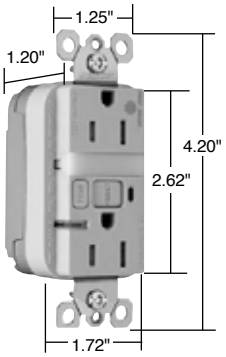

Dimensions for 15 & 20 Amp





PTRA6STR



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595HG

Description: PlugTail™ Straight Blade Duplex Hospital Grade Tamper-Resistant Nightlight/GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498 Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595HGNTLTRI	Ivory	15A 125VAC	5-15R
❒ PT1595HGNTLTRW	White	15A 125VAC	5-15R
❒ PT1595HGNTLTRRED	Red	15A 125VAC	5-15R
❒ PT2095HGNTLTRI	Ivory	20A 125VAC	5-20R
❒ PT2095HGNTLTRW	White	20A 125VAC	5-20R
❒ PT2095HGNTLTRLA	Light Almond	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Nightlight Lens	Lexan®
Mounting Strap	.05" Zinc-Plated Steel (1.3)		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass

Project
Location/Type

Technical Specifications
NAFTA-Compliant & RoHS-Compliant GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 1595TRNA, 1595NA, 1595R


Description: Straight Blade Duplex NAFTA-Compliant GFCI Receptacle, Duplex NAFTA-Compliant Tamper-Resistant GFCI Receptacle & Duplex RoHS-Compliant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 1595TRNAI	Ivory	15A 125VAC	5-15R	❒ 1595NA	Brown	15A 125VAC	5-15R
❒ 1595TRNAW	White	15A 125VAC	5-15R	❒ 1595NAGRY	Gray	15A 125VAC	5-15R
❒ 1595TRNA	Brown	15A 125VAC	5-15R	❒ 1595NABK	Black	15A 125VAC	5-15R
❒ 1595TRNAGRY	Gray	15A 125VAC	5-15R	❒ 1595NALA	Lt Almond	15A 125VAC	5-15R
❒ 1595TRNABK	Black	15A 125VAC	5-15R	❒ 2095NAI	Ivory	20A 125VAC	5-20R
❒ 1595TRNALA	Lt Almond	15A 125VAC	5-15R	❒ 2095NAW	White	20A 125VAC	5-20R
❒ 2095TRNAI	Ivory	20A 125VAC	5-20R	❒ 2095NA	Brown	20A 125VAC	5-20R
❒ 2095TRNAW	White	20A 125VAC	5-20R	❒ 2095NAGRY	Gray	20A 125VAC	5-20R
❒ 2095TRNA	Brown	20A 125VAC	5-20R	❒ 2095NABK	Black	20A 125VAC	5-20R
❒ 2095TRNAGRY	Gray	20A 125VAC	5-20R	❒ 2095NALA	Lt Almond	20A 125VAC	5-20R
❒ 2095TRNABK	Black	20A 125VAC	5-20R	❒ 1595RI	Ivory	15A 125VAC	5-15R
❒ 2095TRNALA	Lt Almond	20A 125VAC	5-20R	❒ 1595RW	White	15A 125VAC	5-15R
❒ 1595NAI	Ivory	15A 125VAC	5-15R	❒ 1595RLA	Lt. Almond	15A 125VAC	5-15R
❒ 1595NAW	White	15A 125VAC	5-15R				

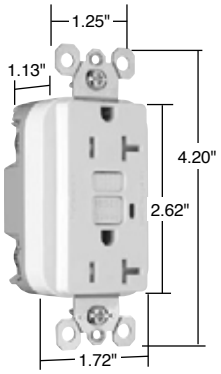

Dimensions for 15 & 20 Amp

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2


Materials

Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Straps	.05" Zinc-Plated Steel (1.3)	Tamper-Resistant Shutter*	Thermoplastic
Terminal Screws	Steel #8 - 32		

*Tamper-Resistant GFCIs.

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

RoHS-Compliant GFCI Receptacles meet the requirements of Restriction of Hazardous Substances directives and regulations.




NEMA 5-15R **NEMA 5-20R**

Project
Location/Type

legrand®
Pass & Seymour

NAFTA-Compliant Hospital Grade GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

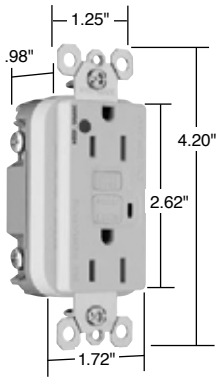

Dimensions for 15 & 20 Amp

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 2095HGTRNA, 1595HTNA

Description: Straight Blade Duplex Hospital Grade NAFTA-Compliant GFCI Receptacle & Duplex Tamper-Resistant Hospital Grade NAFTA-Compliant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed, File Number E42190, Standard UL498, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596 Hospital Grade. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ 2095HGTRNAI	Ivory	20A 125VAC	5-20R
❒ 2095HGTRNAW	White	20A 125VAC	5-20R
❒ 2095HGTRNAGRY	Gray	20A 125VAC	5-20R
❒ 2095HGTRNARED	Red	20A 125VAC	5-20R
❒ 2095HGTRNALA	Light Almond	20A 125VAC	5-20R
❒ 1595HGNAI	Ivory	15A 125VAC	5-15R
❒ 1595HGNAW	White	15A 125VAC	5-15R
❒ 1595HGNARED	Red	15A 125VAC	5-15R
❒ 2095HGNAI	Ivory	20A 125VAC	5-20R
❒ 2095HGNAW	White	20A 125VAC	5-20R
❒ 2095HGNA	Brown	20A 125VAC	5-20R
❒ 2095HGNAGRY	Gray	20A 125VAC	5-20R
❒ 2095HGNARED	Red	20A 125VAC	5-20R
❒ 2095HGNALA	Light Almond	20A 125VAC	5-20R


Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
Terminal Identification	Terminals identified in accordance with UL498 (Hot, White, Green)
Terminal Accommodation	#14 – #10 AWG solid or stranded copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

Materials

Face	Nylon	Hex Head Grounding Screw	Steel (Green)
Body	Nylon	Flat Head Mounting Screw	Zinc-Plated Steel
Contacts	.03" Brass (.8)	Test/Reset Buttons	Nylon
Mounting Strap	.05" Zinc-Plated Steel (1.3)	Tamper-Resistant Shutter*	Thermoplastic
Terminal Screws	Steel #8 - 32		

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R **NEMA 5-20R**

Project
Location/Type

Technical Specifications
NAFTA-Compliant PlugTail™ GFCI Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595NA, PT1595TRNA

Description: PlugTail™ Straight Blade Duplex NAFTA-Compliant GFCI Receptacle & Straight Blade Duplex Tamper-Resistant NAFTA-Compliant GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498, Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT1595NAI	Ivory	15A 125VAC	5-15R
❒ PT1595NAW	White	15A 125VAC	5-15R
❒ PT1595NAGRY	Gray	15A 125VAC	5-15R
❒ PT1595NALA	Light Almond	15A 125VAC	5-15R
❒ PT2095NAI	Ivory	20A 125VAC	5-20R
❒ PT2095NAW	White	20A 125VAC	5-20R
❒ PT2095NAGRY	Gray	20A 125VAC	5-20R
❒ PT2095NABK	Black	20A 125VAC	5-20R
❒ PT2095NALA	Light Almond	20A 125VAC	5-20R
❒ PT2095TRNAI	Ivory	20A 125VAC	5-20R
❒ PT2095TRNAW	White	20A 125VAC	5-20R
❒ PT2095TRNAGRY	Gray	20A 125VAC	5-20R
❒ PT2095TRNALA	Light Almond	20A 125VAC	5-20R
❒ PT1595NTLTRNAI	Ivory	15A 125VAC	5-15R
❒ PT1595NTLTRNAW	White	15A 125VAC	5-15R
❒ PT2095NTLTRNAI	Ivory	15A 125VAC	5-15R
❒ PT2095NTLTRNAW	White	15A 125VAC	5-15R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials


Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Tamper-Resistant Shutter	Thermoplastic
Mounting Strap	.05" Zinc-Plated Steel (1.3)		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass


Project

Location/Type

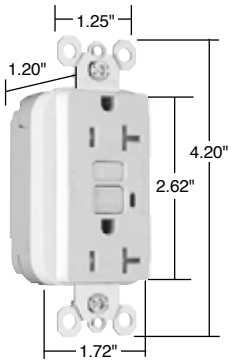


Dimensions for 15 & 20 Amp





PTRA6STR


NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R **NEMA 5-20R**


legrand®
Pass & Seymour

Technical Specifications
NAFTA-Compliant PlugTail™ Hospital Grade GFCI Receptacles
15 & 20A, 125VAC 2 Pole, 3 Wire Grounding

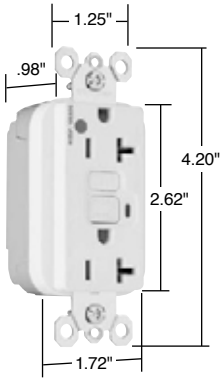

Dimensions for 15 & 20 Amp





PTRA6STR

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R



NEMA 5-20R

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT1595HG

Description: PlugTail™ Straight Blade Duplex Hospital Grade NAFTA-Compliant GFCI Receptacle, Straight Blade Duplex Hospital Grade Tamper-Resistant NAFTA-Compliant GFCI Receptacle & Straight Blade Duplex Tamper-Resistant NAFTA-Compliant Nightlight/GFCI Receptacle

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face

3rd Party Compliance: cULus Listed File Number E42190 and E140596, Standard UL498, Attachment Plugs and Receptacles, UL943 GFCIs. Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Configuration No.
❒ PT2095HGNAI	Ivory	20A 125VAC	5-20R
❒ PT2095HGNAW	White	20A 125VAC	5-20R
❒ PT2095HGNAGRY	Gray	20A 125VAC	5-20R
❒ PT2095HGNARED	Red	20A 125VAC	5-20R
❒ PT2095HGNALA	Light Almond	20A 125VAC	5-20R
❒ PT1595HGTRNAI	Ivory	15A 125VAC	5-15R
❒ PT1595HGTRNAW	White	15A 125VAC	5-15R
❒ PT1595HGTRNAGRY	Gray	15A 125VAC	5-15R
❒ PT1595HGTRNARED	Red	15A 125VAC	5-15R
❒ PT1595HGTRNALA	Light Almond	15A 125VAC	5-15R
❒ PT1595HGNTLTRNAI	Ivory	15A 125VAC	5-15R
❒ PT1595HGNTLTRNAW	White	15A 125VAC	5-15R
❒ PT1595HGNTLTRNARED	Red	15A 125VAC	5-15R
❒ PT2095HGNTLTRNAI	Ivory	20A 125VAC	5-20R
❒ PT2095HGNTLTRNAW	White	20A 125VAC	5-20R
❒ PT2095HGNTLTRNARED	Red	20A 125VAC	5-20R

Performance

Electrical	
Dielectric	Withstands 1500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 Second Nominal
Frequency	60 Hz
Voltage	125VAC
Voltage Range	102-132VAC
Mechanical	
Indicator Light (LED)	Red, ON when GFCI is tripped
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device
Environmental	
Operating Temperature	-35°C to +66°C
Maximum Humidity	95%
Flammability	UL94 V2

PlugTail™ GFCI Receptacle Materials

Face	Nylon	Flat Head Mounting Screws	Zinc-Plated Steel
Body	Nylon	Test/Reset Buttons	Nylon
Contacts	.03" Brass (.8)	Tamper-Resistant Shutter	Thermoplastic
Mounting Strap	.05" Zinc-Plated Steel (1.3)		

PlugTail Connector Materials

Housing	Polycarbonate	Contacts	.030" Brass

Project

Location/Type

Technical Specifications
Hospital Grade Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config.No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 8200ISP	Ivory	15A 125VAC	5-15R	❒ 8300ISP	Ivory	20A 125VAC	5-20R
❒ 8200WSP	White	15A 125VAC	5-15R	❒ 8300WSP	White	20A 125VAC	5-20R
❒ 8200SP	Brown	15A 125VAC	5-15R	❒ 8300SP	Brown	20A 125VAC	5-20R
❒ 8200GRYSP	Gray	15A 125VAC	5-15R	❒ 8300GRYSP	Gray	20A 125VAC	5-20R
❒ 8200REDSP	Red	15A 125VAC	5-15R	❒ 8300REDSP	Red	20A 125VAC	5-20R
❒ 8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ 8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ 8200BLSP	Blue	15A 125VAC	5-15R	❒ 8300BLSP	Blue	20A 125VAC	5-20R

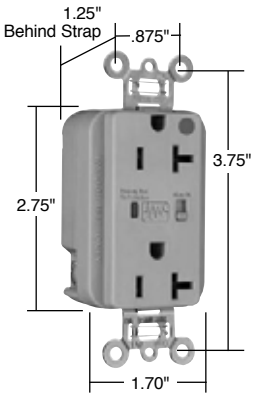

8300GRYSP

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes; Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Warranty	1 year		

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal




NEMA 5-15R **NEMA 5-20R**

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Hospital Grade Isolated Ground Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

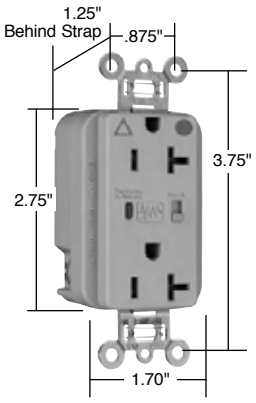

IG8300GRYSP

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour IG8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) & 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config.No.	Catalog Number	Color	Rating	NEMA Config.No.
❒ IG8200ISP	Ivory	15A 125VAC	5-15R	❒ IG8300ISP	Ivory	20A 125VAC	5-20R
❒ IG8200WSP	White	15A 125VAC	5-15R	❒ IG8300WSP	White	20A 125VAC	5-20R
❒ IG8200GRYSP	Gray	15A 125VAC	5-15R	❒ IG8300SP	Brown	20A 125VAC	5-20R
❒ IG8200REDSP	Red	15A 125VAC	5-15R	❒ IG8300GRYSP	Gray	20A 125VAC	5-20R
❒ IG8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ IG8300REDSP	Red	20A 125VAC	5-20R
❒ IG8200BLSP	Blue	15A 125VAC	5-15R	❒ IG8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ IG8200OSP	Orange	15A 125VAC	5-15R	❒ IG8300BLSP	Blue	20A 125VAC	5-20R
				❒ IG8300OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick		
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Auto-Ground Clip	Stainless Steel
		Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Warranty	1 year		

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R **NEMA 5-20R**

Project
Location/Type

Technical Specifications

Specification Grade Extra Heavy-Duty Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 5262ISP	Ivory	15A 125VAC	5-15R	❒ 5362ISP	Ivory	20A 125VAC	5-20R
❒ 5262WSP	White	15A 125VAC	5-15R	❒ 5362WSP	White	20A 125VAC	5-20R
❒ 5262SP	Brown	15A 125VAC	5-15R	❒ 5362SP	Brown	20A 125VAC	5-20R
❒ 5262GRYSP	Gray	15A 125VAC	5-15R	❒ 5362GRYSP	Gray	20A 125VAC	5-20R
❒ 5262BKSP	Black	15A 125VAC	5-15R	❒ 5362BKSP	Black	20A 125VAC	5-20R
❒ 5262REDSP	Red	15A 125VAC	5-15R	❒ 5362REDSP	Red	20A 125VAC	5-20R
❒ 5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ 5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ 5262BLSP	Blue	15A 125VAC	5-15R	❒ 5362BLSP	Blue	20A 125VAC	5-20R

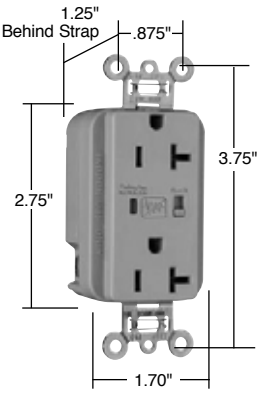

5362GRYSP

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Warranty	1 year		

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal




NEMA 5-15R NEMA 5-20R

Project	
Location/Type	

legrand®
Pass & Seymour

Technical Specifications
Specification Grade Isolated Ground Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

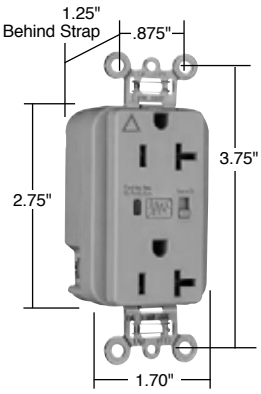

IG5362GRYSP

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour IG5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config.No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ IG5262ISP	Ivory	15A 125VAC	5-15R	❒ IG5362ISP	Ivory	20A 125VAC	5-20R
❒ IG5262WSP	White	15A 125VAC	5-15R	❒ IG5362WSP	White	20A 125VAC	5-20R
❒ IG5262GRYSP	Gray	15A 125VAC	5-15R	❒ IG5362SP	Brown	20A 125VAC	5-20R
❒ IG5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ IG5362GRYSP	Gray	20A 125VAC	5-20R
❒ IG5262BLSP	Blue	15A 125VAC	5-15R	❒ IG5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ IG5262OSP	Orange	15A 125VAC	5-15R	❒ IG5362BLSP	Blue	20A 125VAC	5-20R
				❒ IG5362OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Warranty	1 year		

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R **NEMA 5-20R**

Project	
Location/Type	

Technical Specifications
Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 5252ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ 5252ISP	Ivory	15A 125VAC	5-15R	❒ 5352ISP	Ivory	20A 125VAC	5-20R
❒ 5252WSP	White	15A 125VAC	5-15R	❒ 5352WSP	White	20A 125VAC	5-20R
❒ 5252GRYSP	Gray	15A 125VAC	5-15R	❒ 5352GRYSP	Gray	20A 125VAC	5-20R
❒ 5252BKSP	Black	15A 125VAC	5-15R	❒ 5352BKSP	Black	20A 125VAC	5-20R
❒ 5252LASP	Lt Almond	15A 125VAC	5-15R	❒ 5352LASP	Lt Almond	20A 125VAC	5-20R
❒ 5252BLSP	Blue	15A 125VAC	5-15R	❒ 5352BLSP	Blue	20A 125VAC	5-20R

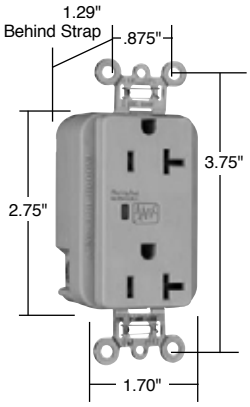

5352GRYSP

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Mode: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Warranty	1 year		

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal




NEMA 5-15R NEMA 5-20R

Project	
Location/Type	

legrand®
Pass & Seymour

Technical Specifications
Tamper-Resistant Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

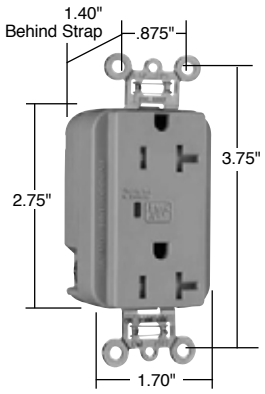

TR5352GRYSP

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR5252ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR5252ISP	Ivory	15A 125VAC	5-15R	❒ TR5352ISP	Ivory	20A 125VAC	5-20R
❒ TR5252WSP	White	15A 125VAC	5-15R	❒ TR5352WSP	White	20A 125VAC	5-20R
❒ TR5252GRYSP	Gray	15A 125VAC	5-15R	❒ TR5352GRYSP	Gray	20A 125VAC	5-20R
❒ TR5252BKSP	Black	15A 125VAC	5-15R	❒ TR5352BKSP	Black	20A 125VAC	5-20R
❒ TR5252LASP	Lt Almond	15A 125VAC	5-15R	❒ TR5352LASP	Lt Almond	20A 125VAC	5-20R
❒ TR5252BLSP	Blue	15A 125VAC	5-15R	❒ TR5352BLSP	Blue	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Mode: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Body	Nylon	Auto-Ground Clip	Stainless Steel
Line Terminal	Olin #260 EH, 0.8mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	LED	Green/Red
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	Tamper Shutter	Thermoplastic
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
Terminal Screws	Tri-Drive Brass #8 - 32		

Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R



NEMA 5-20R

Project
Location/Type

Technical Specifications
PlugTail™ Extra Heavy-Duty Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT5262ISP	Ivory	15A 125VAC	5-15R	❒ PT5362ISP	Ivory	20A 125VAC	5-20R
❒ PT5262WSP	White	15A 125VAC	5-15R	❒ PT5362WSP	White	20A 125VAC	5-20R
❒ PT5262SP	Brown	15A 125VAC	5-15R	❒ PT5362SP	Brown	20A 125VAC	5-20R
❒ PT5262GRYSP	Gray	15A 125VAC	5-15R	❒ PT5362GRYSP	Gray	20A 125VAC	5-20R
❒ PT5262BKSP	Black	15A 125VAC	5-15R	❒ PT5362BKSP	Black	20A 125VAC	5-20R
❒ PT5262REDSP	Red	15A 125VAC	5-15R	❒ PT5362REDSP	Red	20A 125VAC	5-20R
❒ PT5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ PT5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ PT5262BLSP	Blue	15A 125VAC	5-15R	❒ PT5362BLSP	Blue	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

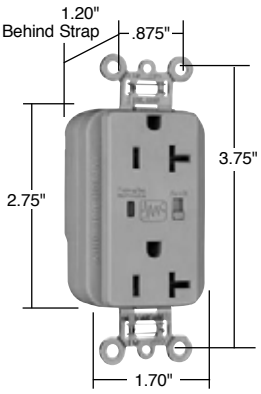

PT5362GRYSP






PTRA6STR

Features


- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Isolated Ground Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

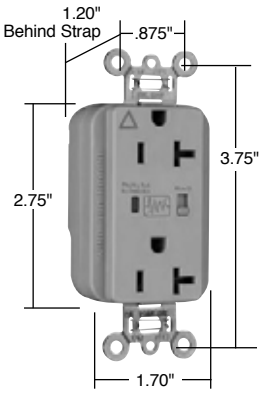

PTIG5362GRYSP






PTRA6STR

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PTIG5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PTIG5262ISP	Ivory	15A 125VAC	5-15R	❒ PTIG5362ISP	Ivory	20A 125VAC	5-20R
❒ PTIG5262WSP	White	15A 125VAC	5-15R	❒ PTIG5362WSP	White	20A 125VAC	5-20R
❒ PTIG5262GRYSP	Gray	15A 125VAC	5-15R	❒ PTIG5362GRYSP	Gray	20A 125VAC	5-20R
❒ PTIG5262BKSP	Black	15A 125VAC	5-15R	❒ PTIG5362BKSP	Black	20A 125VAC	5-20R
❒ PTIG5262REDSP	Red	15A 125VAC	5-15R	❒ PTIG5362REDSP	Red	20A 125VAC	5-20R
❒ PTIG5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ PTIG5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ PTIG5262BLSP	Blue	15A 125VAC	5-15R	❒ PTIG5362BLSP	Blue	20A 125VAC	5-20R
❒ PTIG5262OSP	Orange	15A 125VAC	5-15R	❒ PTIG5362OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector	
		Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Technical Specifications

PlugTail™ Tamper-Resistant Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PTTR5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PTTR5262ISP	Ivory	15A 125VAC	5-15R	❒ PTTR5362ISP	Ivory	20A 125VAC	5-20R
❒ PTTR5262WSP	White	15A 125VAC	5-15R	❒ PTTR5362WSP	White	20A 125VAC	5-20R
❒ PTTR5262SP	Brown	15A 125VAC	5-15R	❒ PTTR5362SP	Brown	20A 125VAC	5-20R
❒ PTTR5262GRYSP	Gray	15A 125VAC	5-15R	❒ PTTR5362GRYSP	Gray	20A 125VAC	5-20R
❒ PTTR5262BKSP	Black	15A 125VAC	5-15R	❒ PTTR5362BKSP	Black	20A 125VAC	5-20R
❒ PTTR5262REDSP	Red	15A 125VAC	5-15R	❒ PTTR5362REDSP	Red	20A 125VAC	5-20R
❒ PTTR5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ PTTR5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ PTTR5262BLSP	Blue	15A 125VAC	5-15R	❒ PTTR5362BLSP	Blue	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

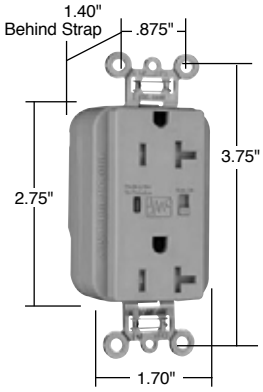

PTTR5362GRYSP






PTRA6STR

Features


- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Hospital Grade Extra Heavy-Duty Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

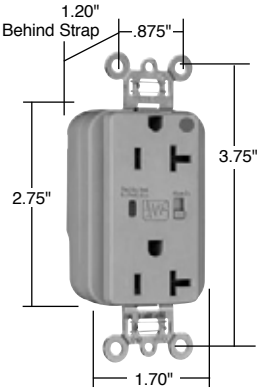

PT8300GRYSP






PTRA6STR

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PT8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PT8200ISP	Ivory	15A 125VAC	5-15R	❒ PT8300ISP	Ivory	20A 125VAC	5-20R
❒ PT8200WSP	White	15A 125VAC	5-15R	❒ PT8300WSP	White	20A 125VAC	5-20R
❒ PT8200SP	Brown	15A 125VAC	5-15R	❒ PT8300SP	Brown	20A 125VAC	5-20R
❒ PT8200GRYSP	Gray	15A 125VAC	5-15R	❒ PT8300GRYSP	Gray	20A 125VAC	5-20R
❒ PT8200REDSP	Red	15A 125VAC	5-15R	❒ PT8300REDSP	Red	20A 125VAC	5-20R
❒ PT8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ PT8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ PT8200BLSP	Blue	15A 125VAC	5-15R	❒ PT8300BLSP	Blue	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector	
		Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Technical Specifications

PlugTail™ Hospital Grade Isolated Ground Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PTIG8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PTIG8200ISP	Ivory	15A 125VAC	5-15R	❒ PTIG8300ISP	Ivory	20A 125VAC	5-20R
❒ PTIG8200WSP	White	15A 125VAC	5-15R	❒ PTIG8300WSP	White	20A 125VAC	5-20R
❒ PTIG8200GRYSP	Gray	15A 125VAC	5-15R	❒ PTIG8300GRYSP	Gray	20A 125VAC	5-20R
❒ PTIG8200REDSP	Red	15A 125VAC	5-15R	❒ PTIG8300REDSP	Red	20A 125VAC	5-20R
❒ PTIG8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ PTIG8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ PTIG8200BLSP	Blue	15A 125VAC	5-15R	❒ PTIG8300BLSP	Blue	20A 125VAC	5-20R
❒ PTIG8200OSP	Orange	15A 125VAC	5-15R	❒ PTIG8300OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2


Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector	
		Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

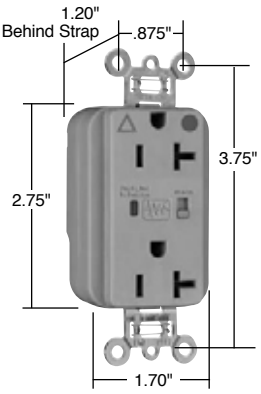

PTIG8300GRYSP






PTRA6STR

Features


- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**


legrand®
Pass & Seymour

Technical Specifications
PlugTail™ Hospital Grade Tamper-Resistant Surge Protective Receptacles
2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC

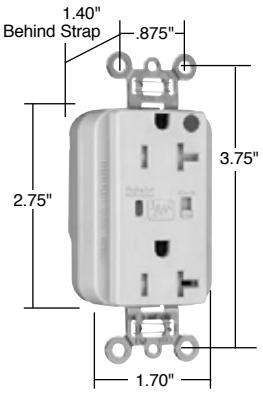

PTTR8300ISP






PTRA6STR

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly



NEMA 5-15R **NEMA 5-20R**

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PTTR8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ PTTR8200ISP	Ivory	15A 125VAC	5-15R	❒ PTTR8300ISP	Ivory	20A 125VAC	5-20R
❒ PTTR8200WSP	White	15A 125VAC	5-15R	❒ PTTR8300WSP	White	20A 125VAC	5-20R
❒ PTTR8200SP	Brown	15A 125VAC	5-15R	❒ PTTR8300SP	Brown	20A 125VAC	5-20R
❒ PTTR8200GRYSP	Gray	15A 125VAC	5-15R	❒ PTTR8300GRYSP	Gray	20A 125VAC	5-20R
❒ PTTR8200REDSP	Red	15A 125VAC	5-15R	❒ PTTR8300REDSP	Red	20A 125VAC	5-20R
❒ PTTR8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ PTTR8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ PTTR8200BLSP	Blue	15A 125VAC	5-15R	❒ PTTR8300BLSP	Blue	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules (L-N) and (L-G) Modes; 680 Joules (N-G) Mode
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 1000V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Two Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Two Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with Plugtail Receptacles only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Auto-Ground Clip	Stainless Steel
Body	Nylon	Mounting Screws	Tri-Drive Zinc-Plated Steel
Line Terminal	Olin #260 EH, 0.8mm thick	LED	Green/Red
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Encapsulation	Conformal Coating
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	PlugTail Connector	
		Housing	Polycarbonate
		Contacts	.030" Brass

Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Technical Specifications

Extra Heavy-Duty Tamper-Resistant Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR5262ISP	Ivory	15A 125VAC	5-15R	❒ TR5362ISP	Ivory	20A 125VAC	5-20R
❒ TR5262WSP	White	15A 125VAC	5-15R	❒ TR5362WSP	White	20A 125VAC	5-20R
❒ TR5262SP	Brown	15A 125VAC	5-15R	❒ TR5362SP	Brown	20A 125VAC	5-20R
❒ TR5262GRYSP	Gray	15A 125VAC	5-15R	❒ TR5362GRYSP	Gray	20A 125VAC	5-20R
❒ TR5262BKSP	Black	15A 125VAC	5-15R	❒ TR5362BKSP	Black	20A 125VAC	5-20R
❒ TR5262REDSP	Red	15A 125VAC	5-15R	❒ TR5362REDSP	Red	20A 125VAC	5-20R
❒ TR5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ TR5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ TR5262BLSP	Blue	15A 125VAC	5-15R	❒ TR5362BLSP	Blue	20A 125VAC	5-20R

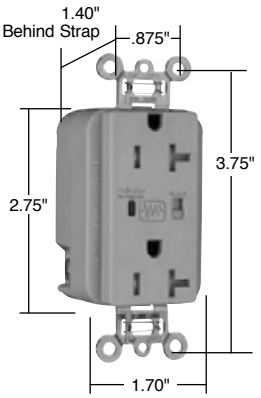

TR5362GRYSP

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
		Tamper Shutter	Thermoplastic


Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Features


- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R NEMA 5-20R

legrand®
Pass & Seymour

Technical Specifications
Tamper-Resistant Isolated Ground Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

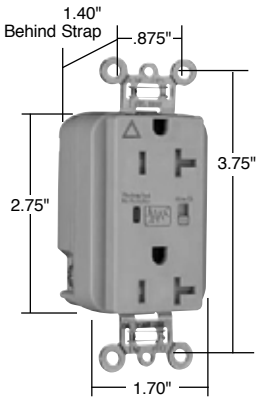

TRIG5362GRYSP

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TRIG5262ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TRIG5262ISP	Ivory	15A 125VAC	5-15R	❒ TRIG5362ISP	Ivory	20A 125VAC	5-20R
❒ TRIG5262WSP	White	15A 125VAC	5-15R	❒ TRIG5362WSP	White	20A 125VAC	5-20R
❒ TRIG5262GRYSP	Gray	15A 125VAC	5-15R	❒ TRIG5362GRYSP	Gray	20A 125VAC	5-20R
❒ TRIG5262BKSP	Black	15A 125VAC	5-15R	❒ TRIG5362BKSP	Black	20A 125VAC	5-20R
❒ TRIG5262REDSP	Red	15A 125VAC	5-15R	❒ TRIG5362REDSP	Red	20A 125VAC	5-20R
❒ TRIG5262LASP	Lt. Almond	15A 125VAC	5-15R	❒ TRIG5362LASP	Lt. Almond	20A 125VAC	5-20R
❒ TRIG5262BLSP	Blue	15A 125VAC	5-15R	❒ TRIG5362BLSP	Blue	20A 125VAC	5-20R
❒ TRIG5262OSP	Orange	15A 125VAC	5-15R	❒ TRIG5362OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
		Tamper Shutter	Thermoplastic


Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R **NEMA 5-20R**

Technical Specifications

Extra Heavy-Duty Tamper-Resistant Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TR8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TR8200ISP	Ivory	15A 125VAC	5-15R	❒ TR8300ISP	Ivory	20A 125VAC	5-20R
❒ TR8200WSP	White	15A 125VAC	5-15R	❒ TR8300WSP	White	20A 125VAC	5-20R
❒ TR8200SP	Brown	15A 125VAC	5-15R	❒ TR8300SP	Brown	20A 125VAC	5-20R
❒ TR8200GRYSP	Gray	15A 125VAC	5-15R	❒ TR8300GRYSP	Gray	20A 125VAC	5-20R
❒ TR8200REDSP	Red	15A 125VAC	5-15R	❒ TR8300REDSP	Red	20A 125VAC	5-20R
❒ TR8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ TR8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ TR8200BLSP	Blue	15A 125VAC	5-15R	❒ TR8300BLSP	Blue	20A 125VAC	5-20R

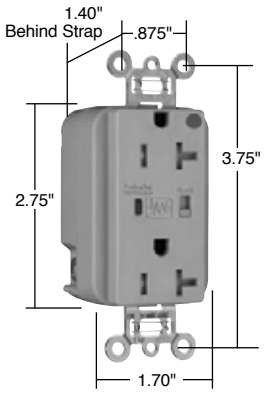

TR8300GRYSP

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
		Tamper Shutter	Thermoplastic


Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Features


- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R **NEMA 5-20R**

legrand®
Pass & Seymour

Technical Specifications
Tamper-Resistant Hospital Grade Isolated Ground Surge Protective Receptacles
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

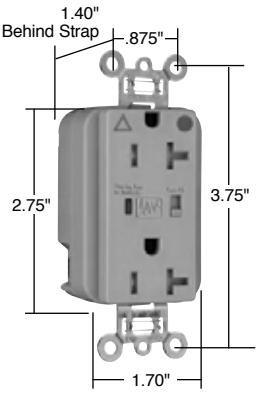

TRIG8300GRYSP

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour TRIG8200ISP

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Attachment Plugs and Receptacles UL1449 Transient Voltage Surge Suppressor. Federal Specification WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42, ANSI/EEE C62.41 (Formerly IEEE 587), ANSI/IEEE C62.45 Installation Categories "A" (Ring Wave) "B" (Unidirectional Impulse). Complies with NEC 410-56(c) and 250-74 exception 4. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Rating	NEMA Config. No.	Catalog Number	Color	Rating	NEMA Config. No.
❒ TRIG8200ISP	Ivory	15A 125VAC	5-15R	❒ TRIG8300ISP	Ivory	20A 125VAC	5-20R
❒ TRIG8200WSP	White	15A 125VAC	5-15R	❒ TRIG8300WSP	White	20A 125VAC	5-20R
❒ TRIG8200GRYSP	Gray	15A 125VAC	5-15R	❒ TRIG8300GRYSP	Gray	20A 125VAC	5-20R
❒ TRIG8200REDSP	Red	15A 125VAC	5-15R	❒ TRIG8300REDSP	Red	20A 125VAC	5-20R
❒ TRIG8200LASP	Lt. Almond	15A 125VAC	5-15R	❒ TRIG8300LASP	Lt. Almond	20A 125VAC	5-20R
❒ TRIG8200BLSP	Blue	15A 125VAC	5-15R	❒ TRIG8300BLSP	Blue	20A 125VAC	5-20R
❒ TRIG8200OSP	Orange	15A 125VAC	5-15R	❒ TRIG8300OSP	Orange	20A 125VAC	5-20R

Performance

Electrical	
Frequency	60 Hz
Voltage	125VAC
MOV Rating	130V 17mm Dual Pack
Suppressed Voltage	500V
Energy Rating	340 Joules
Max Surge Capability	24kA
Protection Modes	Normal and Common Modes: Normal Mode (L-N) 500V Clamping; Common Mode (L-G) 500V Clamping, (N-G) 500V Clamping
Noise Attenuation	Normal Mode (L-N) Capacitance Value = 0.0056 μF 7:1 Average Noise Reduction
Thermal Protection	Three Thermal Fuses (128°C or 262°F)
Overcurrent Protection	Three Fuses Protects 3 Modes
Operating Temperature	-20°C to 55°C (-4 to 131°F)
Storage Temperature	-40°C to 85°C (-40 to 185°F)
Mechanical	
Terminal Identification	Brass = Hot, Nickel = Neutral, Green = Ground
Terminal Accommodation	#14 – 10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device
Weight	125 grams
Environmental	
Flammability	UL94 V2

Materials

Face	Nylon	Terminal Screws	Tri-Drive Brass #8 - 32
Body	Nylon	Hex Head Grounding Screw	Tri-Drive Steel (Green)
Line Terminal	Olin #260 EH, 0.8mm thick	Auto-Ground Clip	Stainless Steel
Grounding Terminal (Uni-Ground Assembly)	70/30 Brass, 0.4mm thick	Mounting Screws	Tri-Drive Zinc-Plated Steel
Mounting Strap	Super Dyma Cold-Rolled Steel, 1.2mm thick	LED	Green/Red
Clamping Plate	Cold-Rolled Steel, 1.6mm	Encapsulation	Conformal Coating
		Tamper Shutter	Thermoplastic


Warranty 1 year

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

Project
Location/Type

Features

- LED Indication:
  - Steady green = protected
  - Flashing red = not protected
  - OFF = no power to unit
- Alarm
- Alarm shut off/override
- Brass 1-piece ground terminal assembly
- Back and side wire capability including ground terminal



NEMA 5-15R **NEMA 5-20R**


Technical Specifications
Surge Protection Panels
Heavy-, Medium- & Light-Duty

legrand®
Pass & Seymour

Typical Specifications
Manufacturer's Identification: Legrand/Pass & Seymour 1224SL 3rd Party Compliance: UL Listed: Basic UL File Number – E324279; ML File Number – E332797. Standard UL1449, 3rd Edition (effective 9/29/09): – Light Duty: UL1449 3rd Edition Type 2 SPD, cUL – Medium Duty: UL1449 3rd Edition Type 2 SPD, cUL – Heavy Duty: UL1449 3rd Edition Type 1 SPD UL1283, CSA, CE, NEMA LS-1.



Heavy-Duty



Medium-Duty



Light-Duty

Performance		
LED Indicators Green LED is illuminated at all times while unit is functioning with no faults. A red LED will come on if any phase/mode has a fault.		
Audible Alarm Visible on the enclosure cover; will sound whenever surge protection is lost.		
Rotary Disconnect Switch Lockable only in the off position for increased safety.		
NEMA 12 Enclosure Epoxy painted steel with gasketing, rated for indoor operating use.		
Three-Position Test Switch Used for the audible alarm and LEDs – functions are: enable/switch/test.		
Environmental Recommended ambient temperature range		Designed for -40 degrees C to +60 degrees C, with a relative humidity of 0% to 5% (non-condensing)
Warranty	5 years	




MFKIT

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


Project
Location/Type

legrand®
Pass & Seymour


Technical Specifications
Straight Blade Plugs
2 Pole, 3 Wire Grounding 15 & 20A, 125, 250 & 277V




PS5266X



PS5266HGAN



PS5266XHG



PS5266SSAN

NEMA Config.	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5266X
Description: Straight Blade Plug, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15P
3rd Party Compliance:UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒ PS5266XHG	15A 125V	5-15P	❒ PS5266XBK	15A 125V	5-15P
❒ PS5266HGAN	15A 125V	5-15P	❒ CR5266X	15A 125V	5-15P
❒ PS5366XHG	20A 125V	5-20P	❒ PS5366X	20A 125V	5-20P
❒ PS5366HGAN	20A 125V	5-20P	❒ PS5366SSAN	20A 125V	5-20P
❒ PS5666XHG	15A 250V	6-15P	❒ PS5666X	15A 250V	6-15P
❒ PS5666HGAN	15A 250V	6-15P	❒ PS5666SSAN	15A 250V	6-15P
❒ PS5466XHG	20A 250V	6-20P	❒ PS5466X	20A 250V	6-20P
❒ PS5466HGAN	20A 250V	6-20P	❒ PS5466SSAN	20A 250V	6-20P
❒ PS5266X	15A 125V	5-15P	❒ PS5766X	15A 277V	7-15P
❒ PS5266SSAN	15A 125V	5-15P	❒ PS5866X	20A 277V	7-20P
❒ PS5266XGRY	15A 125V	5-15P			


Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	277V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter, Angle Plugs – .320"–.655"
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Nylon	Terminal Clamp	* Zinc-Plated Steel
Front Body	Nylon	Terminal Screws	Nickel- or Brass-Plated Steel
Terminal Chamber	Polycarbonate	Ground Screws	Nickel-Plated Steel
Cord Clamp	Nylon	Cord Clamp Screws	Nickel-Plated Steel #8
Insert	Nylon	Assembly Screws	Nickel-Plated Steel
Blades	* Brass		

*Nickel-Plated for Corrosion-Resistant Product.



NEMA 5-15P | NEMA 5-20P | NEMA 6-15P | NEMA 6-20P | NEMA 7-15P | NEMA 7-20P

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.


Project
Location/Type

Technical Specifications
Straight Blade Connectors
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5269X
Description: Straight Blade Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A. 125V
Configuration: NEMA 5-15R
3rd Party Compliance:UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



PS5269X



PS5269XHG

Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒PS5269XHG	15A 125V	5-15R	❒PS5269XBK	15A 125V	5-15R
❒PS5369XHG	20A 125V	5-20R	❒CR5269X	15A 125V	5-15R
❒PS5669XHG	15A 250V	6-15R	❒PS5369X	20A 125V	5-20R
❒PS5469XHG	20A 250V	6-20R	❒PS5669X	15A 250V	6-15R
❒PS5269X	15A 125V	5-15R	❒PS5469X	20A 250V	6-20R
❒PS5269XGRY	15A 125V	5-15R			


Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Nylon	Terminal Clamp	* Zinc-Plated Steel
Front Body	Nylon	Terminal Screws	Nickel- or Brass-Plated Steel
Terminal Chamber	Polycarbonate		
Cord Clamp	Nylon	Ground Screws	Nickel-Plated Steel
Insert	Nylon	Cord Clamp Screws	Nickel-Plated Steel #8
Contacts	* Brass	Assembly Screws	Nickel-Plated Steel

* Nickel-Plated for Corrosion-Resistant Product.



NEMA 5-15R | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.

NEMA Config.	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.


Project
Location/Type

legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Technical Specifications
Straight Blade Ground Continuity Monitoring (GCM) Plugs

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5266XGCM

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5266XGCM
Description: Straight Blade Plug, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15P
3rd Party Compliance: cULus Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒PS5266XGCM	15A 125V	5-15P	❒PS5666XGCM	15A 250V	6-15P
❒PS5266XGCMAN	15A 125V	5-15P	❒PS5666XGCMAN	15A 250V	6-15P
❒PS5366XGCM	20A 125V	5-20P	❒PS5466XGCM	20A 250V	6-20P
❒PS5366XGCMAN	20A 125V	5-20P	❒PS5466XGCMAN	20A 250V	6-20P

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter, Angle Plugs – .320"–.655"
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Nylon	Terminal Clamp	Zinc-Plated Steel
Front Body	Nylon	Terminal Screws	Nickel- or Brass-Plated Steel
Terminal Chamber	Polycarbonate	Ground Screws	Nickel-Plated Steel
Cord Clamp	Nylon	Cord Clamp Screws	Nickel-Plated Steel #8
Insert	Nylon	Assembly Screws	Nickel-Plated Steel
Blades	Brass		



NEMA 5-15P | NEMA 5-20P | NEMA 6-15P | NEMA 6-20P

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.

NEMA Config.	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.

Project
Location/Type

Technical Specifications

Straight Blade Ground Continuity Monitoring (GCM) Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5269XGCM
Description: Straight Blade Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A. 125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULus Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒PS5269XGCM	15A 125V	5-15R	❒PS5669XGCM	15A 250V	6-15R
❒PS5369XGCM	20A 125V	5-20R	❒PS5469XGCM	20A 250V	6-20R




PS5269XGCM

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Nylon	Terminal Clamp	Zinc-Plated Steel
Front Body	Nylon	Terminal Screws	Nickel- or Brass-Plated Steel
Terminal Chamber	Polycarbonate		
Cord Clamp	Nylon	Ground Screws	Nickel-Plated Steel
Insert	Nylon	Cord Clamp Screws	Nickel-Plated Steel #8
Contacts	Brass	Assembly Screws	Nickel-Plated Steel



NEMA 5-15R | NEMA 6-15R | NEMA 5-20R | NEMA 6-20R

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.


NEMA Config.	AC HP Rating
Straight Blade Horsepower Rating for NEMA Configuration	
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
MaxGrip® M³ Plugs
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5965Y



PS8115

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5965Y
Description: Plug Straight Blade, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15P
3rd Party Compliance:UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒PS8115	15A 125V	5-15P	❒PS5364Y	20A 125V	5-20P
❒PS5965Y	15A 125V	5-15P	❒PS5364GRY	20A 125V	5-20P
❒PS5965GRY	15A 125V	5-15P	❒PS5666Y	15A 250V	6-15P
❒PS5965O	15A 125V	5-15P	❒PS5464Y	20A 250V	6-20P

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C, maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperatures	Maximum continuous +75°C, minimum -40°C without impact

Materials

Body/Housing	Nylon	Ground Screw	Zinc-Plated Steel
Cord Grip Insert	Nylon	Blades	Brass
Terminal Clamp	Brass	Cord Clamp Assembly Screws	Zinc-Plated Steel
Terminal Screws	Zinc- and Brass-Plated Steel		



NEMA 5-15P | NEMA 5-20P | NEMA 6-15P | NEMA 6-20P

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.

Project
Location/Type

Technical Specifications
MaxGrip® M³ Connectors
2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS5969Y
Description: Connector Straight Blade, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance:UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



PS5969Y



PS8119


Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒ PS8119	15A 125V	5-15R	❒ PS5369Y	20A 125V	5-20R
❒ PS5969Y	15A 125V	5-15R	❒ PS5369GRY	20A 125V	5-20R
❒ PS5969GRY	15A 125V	5-15R	❒ PS5669Y	15A 250V	6-15R
❒ PS5969O	15A 125V	5-15R	❒ PS5469Y	20A 250V	6-20R

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C, maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperatures	Maximum continuous +75°C, minimum -40°C without impact

Materials

Body/Housing	Nylon	Ground Screw	Zinc-Plated Steel
Cord Grip Insert	Nylon	Contacts	Brass
Terminal Clamp	Brass	Cord Clamp Assembly Screws	Zinc-Plated Steel
Terminal Screws	Zinc- and Brass-Plated Steel		




NEMA 5-15R | NEMA 5-20R | NEMA 6-15R | NEMA 6-20R

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Clamp-Lock™ Plugs & Connectors
2 Pole, 3 Wire Grounding 15A, 125 & 250V; 20A, 125V



PS515PCLB



PS515CCLB

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS515PCLB
Description: Connector Straight Blade, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance:UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒ PS515PCLB	15A 125V	5-15P	❒ PS615PCLB	15A 250V	6-15P
❒ PS515CCLB	15A 125V	5-15R	❒ PS615CCLB	15A 250V	6-15R
❒ PS520PCLB	20A 125V	5-20P			
❒ PS520CCLB	20A 125V	5-20R			

Performance

Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C, maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.20"–.470" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperatures	Maximum continuous +75°C, minimum -40°C without impact

Materials

Body/Housing	Nylon	Ground Screw	Zinc-Plated Steel
Cord Grip Insert	Nylon	Contacts	Brass
Terminal Clamp	Brass	Cord Clamp Assembly Screws	Zinc-Plated Steel
Terminal Screws	Zinc- and Brass-Plated Steel		



NEMA 5-15P **NEMA 5-15R** **NEMA 6-15P** **NEMA 6-15R** **NEMA 5-20P** **NEMA 5-20R**

Consult Straight Blade Plugs & Connectors Section G for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 4700
Description: Locking Receptacle, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA L5-15R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
15	❒ 4710	L5-15R	15	❒ 4550	L6-15R
15	❒ 4700	L5-15R	15	❒ 4760	L7-15R
15	❒ 4792	L5-15R	15	❒ 4750	L7-15R
15	❒ 4560	L5-15R			


Performance

Electrical	
Dielectric Withstand Voltage	2000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, NEMA Configuration molded into face
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact


Materials

Front Body	Nylon
Back Body	Nylon
Mounting Strap	Steel
Contacts	Brass
Terminal Clamps	Brass
Terminal Screws	Brass
Mounting Screws	Zinc-Plated Steel


Consult Turnlok® Section H for complete compliance listing.




4710




4700




4792




4560



4760



4750



4550




NEMA L5-15R | NEMA L6-15R | NEMA L7-15R

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
20A Turnlok® Receptacles





20A Receptacle


Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour L520R
Description: Locking Receptacle, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA L5-20R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.


Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
20	❒ L520R	L5-20R	20	❒ L1420R	L14-20R
20	❒ CRL520R	L5-20R	20	❒ L1520R	L15-20R
20	❒ L620R	L6-20R	20	❒ L1620R	L16-20R
20	❒ L720R	L7-20R	20	❒ L1820R	L18-20R
20	❒ L820R	L8-20R	20	❒ L1920R	L19-20R
20	❒ L920R	L9-20R	20	❒ L2020R	L20-20R
20	❒ L1020R	L10-20R	20	❒ L2120R	L21-20R
20	❒ L1120R	L11-20R	20	❒ L2220R	L22-20R
20	❒ L1220R	L12-20R	20	❒ L2320R	L23-20R



NEMA L5-20R NEMA L6-20R NEMA L7-20R


NEMA L8-20R NEMA L9-20R NEMA L10-20R


NEMA L11-20R NEMA L12-20R NEMA L14-20R


NEMA L15-20R NEMA L16-20R NEMA L18-20R


NEMA L19-20R NEMA L20-20R NEMA L21-20R


NEMA L22-20R NEMA L23-20R

Performance

Electrical	
Dielectric Withstand Voltage	2000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Accommodation	#14 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, NEMA Configuration molded into face
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Front Body	Nylon	Nylon
Back Body	Nylon	Nylon
Mounting Strap	Brass	Nickel-Plated Brass
Pressure Plate	Brass	Nickel-Plated Brass
Contacts	Brass	Nickel-Plated Brass
Terminal Clamps	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Brass
Mounting Screws	Zinc-Plated Steel	Stainless Steel


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L530R
Description: Locking Receptacle, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 30A, 125V
Configuration: NEMA L5-30R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



30A Receptacle

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
30	❒ L530R	L5-30R	30	❒ L1430R	L14-30R
30	❒ CRL530R	L5-30R	30	❒ L1530R	L15-30R
30	❒ L630R	L6-30R	30	❒ L1630R	L16-30R
30	❒ L730R	L7-30R	30	❒ L1730R	L17-30R
30	❒ L830R	L8-30R	30	❒ L1830R	L18-30R
30	❒ L930R	L9-30R	30	❒ L1930R	L19-30R
30	❒ L1030R	L10-30R	30	❒ L2030R	L20-30R
30	❒ L1130R	L11-30R	30	❒ L2130R	L21-30R
30	❒ L1230R	L12-30R	30	❒ L2230R	L22-30R
30	❒ L1330R	L13-30R	30	❒ L2330R	L23-30R

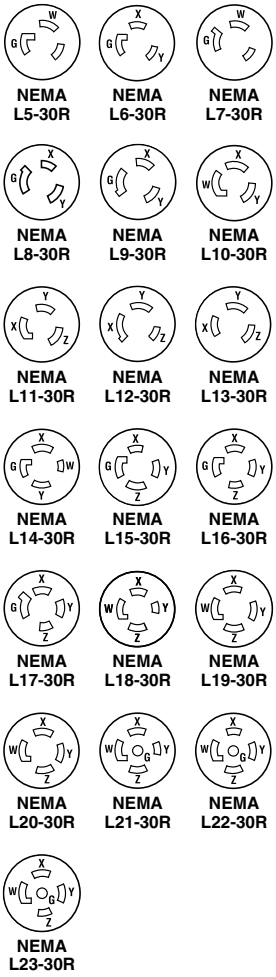

Performance

Electrical	
Dielectric Withstand Voltage	2000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Accommodation	#14 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, NEMA Configuration molded into face
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials


	Standard	Corrosion-Resistant
Front Body	Nylon	Nylon
Back Body	Nylon	Nylon
Mounting Strap	Brass	Nickel-Plated Brass
Pressure Plate	Brass	Nickel-Plated Brass
Contacts	Brass	Nickel-Plated Brass
Terminal Clamps	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Brass
Mounting Screws	Zinc-Plated Steel	Stainless Steel

Consult Turnlok® Section H for complete compliance listing.


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
15A Turnlok® EHU Plugs & Connectors



15A Connector



15A Plug

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PSL515C
Description: Locking Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA L5-15R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
15	❒ PSL515C	L5-15R	15	❒ PSL615C	L6-15R
15	❒ PSL515P	L5-15P	15	❒ PSL615P	L6-15P
15	❒ CRL515C	L5-15R	15	❒ PSL715C	L7-15R
15	❒ CRL515P	L5-15P	15	❒ PSL715P	L7-15P

Performance

Electrical	
Dielectric Withstand Voltage	1600V minimum
Max. Working Voltage	277VAC
Current Interrupting	Certified for current interrupting at full-rated current.
Temperature Rise	30°C max. after 50 cycles at 150% rated current.
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62.
Cord Grip Accommodations	.230"-.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Plugs	**Standard**	**Corrosion-Resistant**
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber Separator	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Blades	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
Connectors	**Standard**	**Corrosion-Resistant**
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber Separator	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Contacts	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel




NEMA L5-15P

NEMA L5-15R



NEMA L6-15P

NEMA L6-15R



NEMA L7-15P

NEMA L7-15R


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L520P
Description: Locking Plug, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA L5-20P
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



20A Plug

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
20	❒ L520P	L5-20P	20	❒ L1520P	L15-20P
20	❒ L520PBK	L5-20P	20	❒ L1520PBK	L15-20P
20	❒ CRL520P	L5-20P	20	❒ L1620P	L16-20P
20	❒ L620P	L6-20P	20	❒ L1820P	L18-20P
20	❒ CRL620P	L6-20P	20	❒ L1920P	L19-20P
20	❒ L720P	L7-20P	20	❒ L2020P	L20-20P
20	❒ L820P	L8-20P	20	❒ L2120P	L21-20P
20	❒ L920P	L9-20P	20	❒ L2220P	L22-20P
20	❒ L1020P	L10-20P	20	❒ L2320P	L23-20P
20	❒ L1120P	L11-20P	20	❒ L3720P	L24-20P
20	❒ L1220P	L12-20P	20	❒ 7311SS	Non-NEMA
20	❒ L1420P	L14-20P	20	❒ 7411SS	Non-NEMA
20	❒ CRL1420P	L14-20P			

Performance


Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	3 Wire = .225"–.750" diameter; 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	"GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	#18 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Cover	Neoprene	Neoprene
Blades	Brass	Nickel-Plated Brass
Terminal Clamp	Nickel-Plated Steel	Nickel-Plated Steel
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

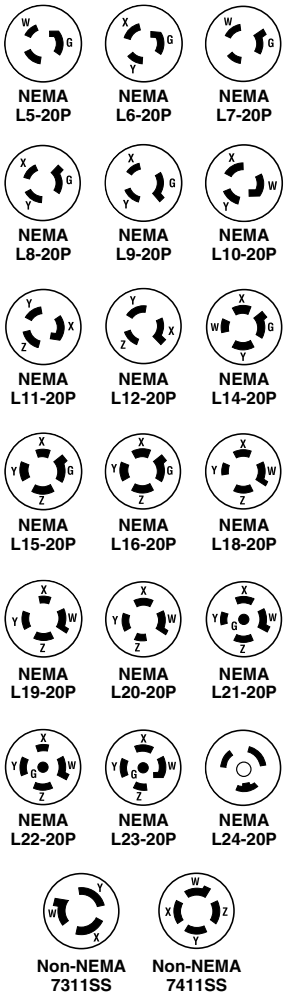

legrand®
Pass & Seymour

Technical Specifications
20A Turnlok® Connectors




20A Connector

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L520C
Description: Locking Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA L5-20R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
20	❒ L520C	L5-20R	20	❒ CRL1420C	L14-20R
20	❒ L520CBK	L5-20R	20	❒ L1520C	L15-20R
20	❒ CRL520C	L5-20R	20	❒ L1520CBK	L15-20R
20	❒ L620C	L6-20R	20	❒ L1620C	L16-20R
20	❒ CRL620C	L6-20R	20	❒ L1820C	L18-20R
20	❒ L720C	L7-20R	20	❒ L1920C	L19-20R
20	❒ L820C	L8-20R	20	❒ L2020C	L20-20R
20	❒ L920C	L9-20R	20	❒ L2120C	L21-20R
20	❒ L1020C	L10-20R	20	❒ L2220C	L22-20R
20	❒ L1120C	L11-20R	20	❒ L2320C	L23-20R
20	❒ L1220C	L12-20R	20	❒ L3720C	L24-20R
20	❒ L1420C	L14-20R	20	❒ 7313SS	Non-NEMA


NEMA L5-20R

NEMA L6-20R

NEMA L7-20R


NEMA L8-20R


NEMA L9-20R


NEMA L10-20R


NEMA L11-20R


NEMA L12-20R


NEMA L14-20R


NEMA L15-20R


NEMA L16-20R


NEMA L18-20R


NEMA L19-20R


NEMA L20-20R


NEMA L21-20R


NEMA L22-20R


NEMA L23-20R


NEMA L24-20R


Non-NEMA 7313SS

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	3 Wire = .225"–.750" diameter; 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	"GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	#18 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Cover	Neoprene	Neoprene
Contacts	Brass	Nickel-Plated Brass
Terminal Clamp	Nickel-Plated Steel	Nickel-Plated Steel
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L530P
Description: Locking Plug, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 30A, 125V
Configuration: NEMA L5-30P
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



30A Plug

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
30	❒ L530P	L5-30P	30	❒ L1530P	L15-30P
30	❒ CRL530P	L5-30P	30	❒ L1630P	L16-30P
30	❒ L630P	L6-30P	30	❒ L1730P	L17-30P
30	❒ CRL630P	L6-30P	30	❒ L1830P	L18-30P
30	❒ L730P	L7-30P	30	❒ L1930P	L19-30P
30	❒ L830P	L8-30P	30	❒ L2030P	L20-30P
30	❒ L930P	L9-30P	30	❒ L2130P	L21-30P
30	❒ L1030P	L10-30P	30	❒ L2230P	L22-30P
30	❒ L1130P	L11-30P	30	❒ L2230PBK	L22-30P
30	❒ L1230P	L12-30P	30	❒ L2330P	L23-30P
30	❒ L1330P	L13-30P	30	❒ 3331SS	Non-NEMA
30	❒ L1430P	L14-30P	30	❒ 3431SS	Non-NEMA
30	❒ CRL1430P	L14-30P			

Performance


Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	3 Wire = .225"–.750" diameter; 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	"GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	#18 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Cover	Neoprene	Neoprene
Blades	Brass	Tin-Plated Brass
Terminal Clamp	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

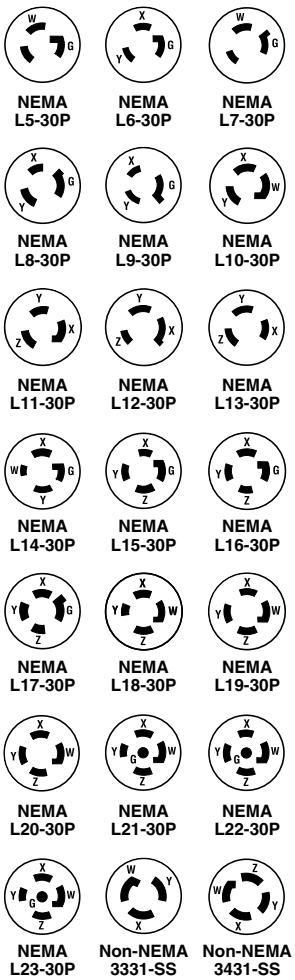

legrand®
Pass & Seymour

Technical Specifications
30A Turnlok® Connectors



30A Connector

Typical Specifications


Manufacturer's Identification: Legrand/Pass & Seymour L530C
Description: Locking Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 30A, 125V
Configuration: NEMA L5-30R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
30	❒ L530C	L5-30R	30	❒ L1530C	L15-30R
30	❒ CRL530C	L5-30R	30	❒ L1630C	L16-30R
30	❒ L630C	L6-30R	30	❒ L1730C	L17-30R
30	❒ CRL630C	L6-30R	30	❒ L1830C	L18-30R
30	❒ L730C	L7-30R	30	❒ L1930C	L19-30R
30	❒ L830C	L8-30R	30	❒ L2030C	L20-30R
30	❒ L930C	L9-30R	30	❒ L2130C	L21-30R
30	❒ L1030C	L10-30R	30	❒ L2230C	L22-30R
30	❒ L1130C	L11-30R	30	❒ L2330C	L23-30R
30	❒ L1230C	L12-30R	30	❒ 3333SS	Non-NEMA
30	❒ L1330C	L13-30R	30	❒ 3433SS	Non-NEMA
30	❒ L1430C	L14-30R			
30	❒ CRL1430C	L14-30R			


NEMA L5-30R | NEMA L6-30R | NEMA L7-30R


NEMA L8-30R | NEMA L9-30R | NEMA L10-30R


NEMA L11-30R | NEMA L12-30R | NEMA L13-30R


NEMA L14-30R | NEMA L15-30R | NEMA L16-30R


NEMA L17-30R | NEMA L18-30R | NEMA L19-30R


NEMA L20-30R | NEMA L21-30R | NEMA L22-30R


NEMA L23-30R | Non-NEMA 3333-SS | Non-NEMA 3433-SS

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	3 Wire = .225"–.750" diameter; 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	"GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	#18 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Cover	Neoprene	Neoprene
Contacts	Brass	Tin-Plated Brass
Terminal Clamp	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel

Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

Technical Specifications

Turnlok® Heavy-Duty Ground Continuity Monitoring (GCM) Plugs

15, 20 & 30A; 125, 250, 277 & 347V, 125/250V


legrand®
Pass & Seymour

EXCLUSIVE! P&S EXCLUSIVE!


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PSL515PGCM
Description: Ground Continuity Monitoring (GCM) Locking Plug, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15P
3rd Party Compliance: cULus Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒ PSL515PGCM	15 125	L5-15P	❒ PSL715PGCM	15 277	L7-15P
❒ L520PGCM	20 125	L5-20P	❒ L720PGCM	20 277	L7-20P
❒ L530PGCM	30 125	L5-30P	❒ L730PGCM	30 277	L7-30P
❒ PSL615PGCM	15 250	L6-15P	❒ L3720PGCM	20 347	L24-20P
❒ L620PGCM	20 250	L6-20P	❒ L1420PGCM	20 125/250	L14-20P
❒ L630PGCM	30 250	L6-30P	❒ L1430PGCM	30 125/250	L14-30P



15A Plug



20 & 30A Plug

Performance

Electrical

Dielectric Withstand Voltage	15A = 1600V minimum, 20 & 30A = 2200V minimum
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current

Mechanical

Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	15A = .230"–.720" diameter, 20 & 30A 3 Wire = .225"–.750" diameter, 20 & 30A 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	15A = Green = Ground, White = Neutral, Brass = Hot 20 & 30A = "GR" and Green Color = Ground, "WH" and white Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	15A = #18 AWG min. - #10 AWG max. 20A = #18 AWG min. - #8 AWG max. 30A = #18 AWG min. - #6 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device


Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Super Tough Nylon	Terminal Clamp	15A = Zinc-Plated Steel 20A = Nickel-Plated Steel 30A = Brass
Front Body	Nylon		
Terminal Chamber	Polycarbonate	Terminal Screws	15A = Nickel- or Brass-Plated Steel 20 & 30A = Brass
Cord Clamp	Nylon		
Insert	Nylon	Ground Screws	15A = Nickel-Plated Steel 20 & 30A = Brass
Dust Shield**	Neoprene		
Blades	Brass	Cord Clamp Screws	Nickel-Plated Steel
		Assembly Screws	Nickel-Plated Steel

**Dust Shield for 20 & 30 Amp Plugs.
Consult Turnlok® Section H for complete compliance listing.

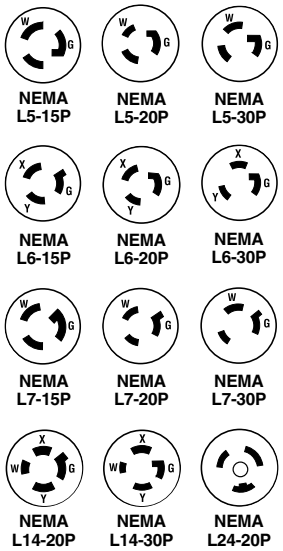


Project
Location/Type

legrand®
Pass & Seymour


EXCLUSIVE! P&S EXCLUSIVE!

Technical Specifications
Turnlok® Heavy-Duty Ground Continuity Monitoring (GCM) Connectors


15, 20 & 30A; 125, 250, 277 & 347V, 125/250V



15A Connector



20 & 30A Connector

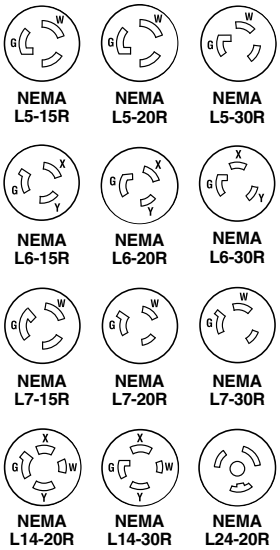

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PSL515CGCM
Description: Ground Continuity Monitoring (GCM) Locking Connector, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA 5-15R
3rd Party Compliance: cULus Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating	NEMA Config. No.	Catalog Number	Rating	NEMA Config. No.
❒PSL515CGCM	15 125	L5-15R	❒PSL715CGCM	15 277	L7-15R
❒L520CGCM	20 125	L5-20R	❒L720CGCM	20 277	L7-20R
❒L530CGCM	30 125	L5-30R	❒L730CGCM	30 277	L7-30R
❒PSL615CGCM	15 250	L6-15R	❒L3720CGCM	20 347	L24-20R
❒L620CGCM	20 250	L6-20R	❒L1420CGCM	20 125/250	L14-20R
❒L630CGCM	30 250	L6-30R	❒L1430CGCM	30 125/250	L14-30R

Performance

Electrical	
Dielectric Withstand Voltage	15A = 1600V minimum, 20 & 30A = 2200V minimum
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	15A = .230"–.720" diameter, 20 & 30A 3 Wire = .225"–.750" diameter 20 & 30A 4 & 5 Wire = .225"–1.150" diameter
Terminal Identification	15A = Green = Ground, White = Neutral, Brass = Hot 20 & 30A = "GR" and Green Color = Ground, "WH" and white Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	15A = #18 AWG min. - #10 AWG max. 20A = #18 AWG min. - #8 AWG max. 30A = #18 AWG min. - #6 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configurationhot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Back Body	Super Tough Nylon	Terminal Clamp	15A = Zinc-Plated Steel 20A = Nickel-Plated Steel 30A = Brass
Front Body	Nylon		
Terminal Chamber	Polycarbonate	Terminal Screws	15A = Nickel- or Brass-Plated Steel 20 & 30A = Brass
Cord Clamp	Nylon		
Insert	Nylon		
Dust Shield**	Neoprene	Ground Screws	15A = Nickel-Plated Steel 20 & 30A = Brass
Contacts	Brass	Cord Clamp Screws	Nickel-Plated Steel
		Assembly Screws	Nickel-Plated Steel


**Dust Shield for 20 & 30A Connectors.
Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour 4715SS
Description: Locking Flanged Outlet, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 15A, 125V
Configuration: NEMA L5-15R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



4715SS



4716SS


Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
15	❒ 4715SS	L5-15R	15	❒ 4716SS	L5-15P

Performance

Electrical	
Dielectric Withstand Voltage	2000V minimum
Maximum Working Voltage	277VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min. – #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C without impact

Materials

	Inlet	Outlet
Flanged Casing	Polycarbonate	Polycarbonate
Body Contact	Polycarbonate	Polycarbonate
Blades	Nickel-Plated Brass	Brass
Terminal Clamp	Zinc-Plated Steel	Zinc-Plated Steel
Terminal Screws	Zinc- or Brass-Plated Steel	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel	Zinc-Plated Steel
Assembly Screws	Zinc-Plated Steel	Zinc-Plated Steel




NEMA 5-15P **NEMA 5-15R**

Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
20A Turnlok® Flanged Inlets



Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L520FI
Description: Locking Flanged Inlet, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA L5-20P
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
20	❒ L520FI	L5-20P	20	❒ L1520FI	L15-20P
20	❒ L620FI	L6-20P	20	❒ L1620FI	L16-20P
20	❒ L720FI	L7-20P	20	❒ L1820FI	L18-20P
20	❒ L820FI	L8-20P	20	❒ L1920FI	L19-20P
20	❒ L920FI	L9-20P	20	❒ L2020FI	L20-20P
20	❒ L1020FI	L10-20P	20	❒ L2120FI	L21-20P
20	❒ L1120FI	L11-20P	20	❒ L2220FI	L22-20P
20	❒ L1220FI	L12-20P	20	❒ L2220FIBK	L22-20P
20	❒ L1420FI	L14-20P	20	❒ L2320FI	L23-20P


Performance

Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#12 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C without impact

Materials

Flanged Casing	Polycarbonate
Blade Holder	Polycarbonate
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Assembly Screws	Zinc-Plated Steel

Consult Turnlok® Section H for complete compliance listing.

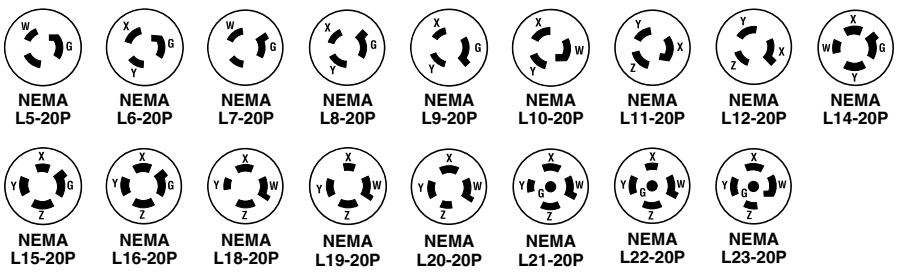


Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L520FO
Description: Locking Flanged Outlet, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 20A, 125V
Configuration: NEMA L5-20R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
20	❒ L520FO	L5-20R	20	❒ L1520FO	L15-20R
20	❒ L620FO	L6-20R	20	❒ L1620FO	L16-20R
20	❒ L720FO	L7-20R	20	❒ L1820FO	L18-20R
20	❒ L820FO	L8-20R	20	❒ L1920FO	L19-20R
20	❒ L920FO	L9-20R	20	❒ L2020FO	L20-20R
20	❒ L1020FO	L10-20R	20	❒ L2120FO	L21-20R
20	❒ L1120FO	L11-20R	20	❒ L2220FO	L22-20R
20	❒ L1220FO	L12-20R	20	❒ L2220FOBK	L22-20R
20	❒ L1420FO	L14-20R	20	❒ L2320FO	L23-20R
			20	❒ L3720FO	L24-20R


Performance

Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#12 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C without impact

Materials

Flanged Casing	Polycarbonate
Contact Carrier	Polycarbonate
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Assembly Screws	Zinc-Plated Steel


Consult Turnlok® Section H for complete compliance listing.

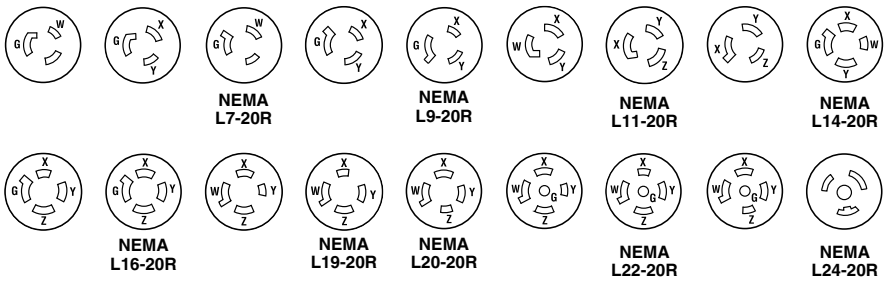


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
30A Turnlok® Flanged Inlets



3 HOLES ON ø2.72" C/L @ 120°


NEMA L5-30P

NEMA L6-30P

NEMA L7-30P


NEMA L8-30P


NEMA L9-30P


NEMA L10-30P


NEMA L11-30P


NEMA L12-30P


NEMA L13-30P


NEMA L14-30P


NEMA L15-30P


NEMA L16-30P


NEMA L17-30P


NEMA L18-30P


NEMA L19-30P


NEMA L20-30P


NEMA L21-30P


NEMA L22-30P


NEMA L23-30P

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L530FI
Description: Locking Flanged Inlet, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 30A, 125V
Configuration: NEMA L5-30P
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
30	❒ L530FI	L5-30P	30	❒ L1530FI	L15-30P
30	❒ L630FI	L6-30P	30	❒ L1530FIBK	L15-30P
30	❒ L730FI	L7-30P	30	❒ L1630FI	L16-30P
30	❒ L830FI	L8-30P	30	❒ L1730FI	L17-30P
30	❒ L930FI	L9-30P	30	❒ L1830FI	L18-30P
30	❒ L1030FI	L10-30P	30	❒ L1930FI	L19-30P
30	❒ L1130FI	L11-30P	30	❒ L2030FI	L20-30P
30	❒ L1230FI	L12-30P	30	❒ L2130FI	L21-30P
30	❒ L1430FI	L14-30P	30	❒ L2230FI	L22-30P
			30	❒ L2230FIBK	L22-30P
			30	❒ L2330FI	L23-30P

Performance

Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#12 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Flanged Casing	Polycarbonate
Blade Holder	Nylon
Blades	Tin-Plated Stresscon
Terminal Clamp	Brass
Terminal Screws	Brass
Ground Screws	Brass
Assembly Screws	Zinc-Plated Steel


Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type


legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour L530FO
Description: Locking Flanged Outlet, Power Supply
Type: 2 Pole, 3 Wire Grounding
Rating: 30A, 125V
Configuration: NEMA L5-30R
3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.



Amps	Catalog Number	NEMA Config. No.	Amps	Catalog Number	NEMA Config. No.
30	❒ L530FO	L5-30R	30	❒ L1530FO	L15-30R
30	❒ L630FO	L6-30R	30	❒ L1530FOBK	L15-30R
30	❒ L730FO	L7-30R	30	❒ L1630FO	L16-30R
30	❒ L830FO	L8-30R	30	❒ L1730FO	L17-30R
30	❒ L930FO	L9-30R	30	❒ L1830FO	L18-30R
30	❒ L1030FO	L10-30R	30	❒ L1930FO	L19-30R
30	❒ L1130FO	L11-30R	30	❒ L2030FO	L20-30R
30	❒ L1230FO	L12-30R	30	❒ L2130FO	L21-30R
30	❒ L1330FO	L13-30R	30	❒ L2230FO	L22-30R
30	❒ L1430FO	L14-30R	30	❒ L2230FOBK	L22-30R
			30	❒ L2330FO	L23-30R

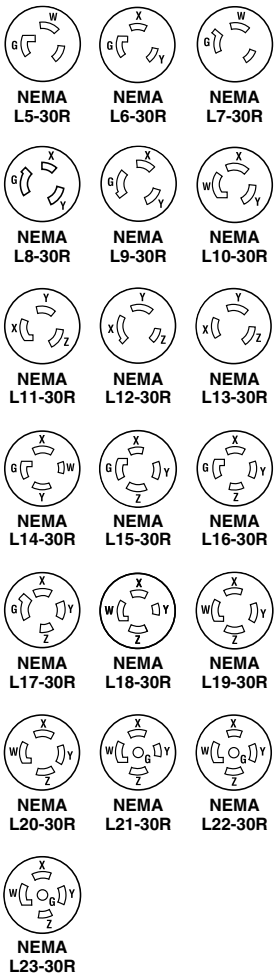

Performance

Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C max. after 50 cycles at 150% rated current
Mechanical	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#12 AWG min. – #8 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact

Materials

Flanged Casing	Polycarbonate
Contact Carrier	Nylon
Contacts	Tin-Plated Brass
Terminal Clamp	Brass- or Nickel-Plated Steel
Terminal Screws	Brass- or Nickel-Plated Steel
Ground Screws	Nickel-Plated Brass
Assembly Screws	Zinc-Plated Steel

Consult Turnlok® Section H for complete compliance listing.

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Cam-Type Devices
Series 16 In-Line Connectors



Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS40MBBK, PS40FBBK

Description: Series 16 Single Pole In-Line Connector

Type: Single Pole

Electrical Rating: 400A, 600V

Enclosure Rating: NEMA 3R, 4

3rd Party Compliance: UL Listed, File Number E111198, cCSAus Certified, File Number LR81290. Applicable standards: UL50, Enclosures for Electrical Equipment, UL498, Attachment Plugs and Receptacles, UL1682, Plugs, Receptacles and Cable Connectors of the Pin & Sleeve Type, CSA-C22.2 No. 65-93, Wire Connectors, CSA-C22.2 No. 94-M91, Special Purpose Enclosures, CSA-C22.2 No. 182.1-1988, Industrial Type, Special Use Attachment Plugs, Receptacles. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating*	Cable Size	Color	Catalog Number	Rating*	Cable Size	Color
❒ PS20MBBK	400 600	#2 - 2/0	Black	❒ PS20FBBK	400 600	#2 - 2/0	Black
❒ PS20MBW	400 600	#2 - 2/0	White	❒ PS20FBW	400 600	#2 - 2/0	White
❒ PS20MBR	400 600	#2 - 2/0	Red	❒ PS20FBR	400 600	#2 - 2/0	Red
❒ PS20MBBL	400 600	#2 - 2/0	Blue	❒ PS20FBBL	400 600	#2 - 2/0	Blue
❒ PS20MBG	400 600	#2 - 2/0	Green	❒ PS20FBG	400 600	#2 - 2/0	Green
❒ PS20MBBR	400 600	#2 - 2/0	Brown	❒ PS20FBBR	400 600	#2 - 2/0	Brown
❒ PS20MBO	400 600	#2 - 2/0	Orange	❒ PS20FBO	400 600	#2 - 2/0	Orange
❒ PS20MBY	400 600	#2 - 2/0	Yellow	❒ PS20FBY	400 600	#2 - 2/0	Yellow
❒ PS40MBBK	400 600	2/0 - 4/0	Black	❒ PS40FBBK	400 600	2/0 - 4/0	Black
❒ PS40MBW	400 600	2/0 - 4/0	White	❒ PS40FBW	400 600	2/0 - 4/0	White
❒ PS40MBR	400 600	2/0 - 4/0	Red	❒ PS40FBR	400 600	2/0 - 4/0	Red
❒ PS40MBBL	400 600	2/0 - 4/0	Blue	❒ PS40FBBL	400 600	2/0 - 4/0	Blue
❒ PS40MBG	400 600	2/0 - 4/0	Green	❒ PS40FBG	400 600	2/0 - 4/0	Green
❒ PS40MBBR	400 600	2/0 - 4/0	Brown	❒ PS40FBBR	400 600	2/0 - 4/0	Brown
❒ PS40MBO	400 600	2/0 - 4/0	Orange	❒ PS40FBO	400 600	2/0 - 4/0	Orange
❒ PS40MBY	400 600	2/0 - 4/0	Yellow	❒ PS40FBY	400 600	2/0 - 4/0	Yellow

*All ratings are both AC/DC.

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Not for interrupting current
Temperature Rise	45°C maximum
Mechanical	
Cord Accommodation	Individual conductor, Type SC, SCE, SCT or W, 75°C, copper wire only
Terminal Accommodation	PS20 Series = #2 AWG min. – 2/0 AWG max. PS40 Series = 2/0 AWG min. – 4/0 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Standards molded into external product body
Environmental	
Flammability	UL94V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact
Enclosure	NEMA Type 3R and 4

Materials

Body – Connectors	Thermoplastic Elastomer
Body – Panel Mounts	Nylon
Body – Adapters	Thermoplastic Elastomer
Terminal / Pin / Cam	Brass
Terminal Screw	Plated Steel
Retaining Screw	Plastic
Strain Relief Wire	Copper
Shim	Copper

Project
Location/Type

legrand®
Pass & Seymour

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PSM2MBK, PSM2FBK

Description: Series 15 Single Pole In-Line Connector

Type: Single Pole

Electrical Rating: 150A, 600V

Enclosure Rating: NEMA 3R, 4

3rd Party Compliance: UL Listed, File Number E111198, cCSAus Certified, File Number LR81290. Applicable standards: UL50, Enclosures for Electrical Equipment, UL498, Attachment Plugs and Receptacles, UL1682, Plugs, Receptacles and Cable Connectors of the Pin & Sleeve Type, CSA-C22.2 No. 65-93, Wire Connectors, CSA-C22.2 No. 94-M91, Special Purpose Enclosures, CSA-C22.2 No. 182.1-1988, Industrial Type, Special Use Attachment Plugs, Receptacles. Conforms to NEMA WD-1 and WD-6.



Catalog Number	Rating	Cable Size	Color	Catalog Number	Rating	Cable Size	Color
❒ PSM2MBK	150 600	#8 – #2	Black	❒ PSM2FBK	150 600	#8 – #2	Black
❒ PSM2MW	150 600	#8 – #2	White	❒ PSM2FW	150 600	#8 – #2	White
❒ PSM2MR	150 600	#8 – #2	Red	❒ PSM2FR	150 600	#8 – #2	Red
❒ PSM2MBL	150 600	#8 – #2	Blue	❒ PSM2FBL	150 600	#8 – #2	Blue
❒ PSM2MG	150 600	#8 – #2	Green	❒ PSM2FG	150 600	#8 – #2	Green

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Not for interrupting current
Temperature Rise	45°C maximum
Mechanical	
Cord Accommodation	Individual conductor, Type SC, SCE, SCT or W, 75°C, copper wire only
Terminal Accommodation	PSM Series = #8 AWG min. – #2 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Standards molded into external product body
Environmental	
Flammability	UL94V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact
Enclosure	NEMA Type 3R and 4

Materials

Body – Connectors	Thermoplastic Elastomer
Body – Panel Mounts	Nylon
Body – Adapters	Thermoplastic Elastomer
Terminal / Pin / Cam	Brass
Terminal Screw	Plated Steel
Retaining Screw	Plastic
Strain Relief Wire	Copper
Shim	Copper

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Cam-Type Devices
Series 18 In-Line Connectors

PLS182MBK



PLS182FBK

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PLS182MBK, PLS182FBK
Description: Series 18 Single Pole In-Line Connector
Type: Single Pole
Electrical Rating: 400A, 600V
Enclosure Rating: NEMA 3R, 4
3rd Party Compliance: UL Listed, File Number E111198, cCSAus Certified, File Number LR81290. Applicable standards: UL50, Enclosures for Electrical Equipment, UL498, Attachment Plugs and Receptacles, UL1682, Plugs, Receptacles and Cable Connectors of the Pin & Sleeve Type, CSA-C22.2 No. 65-93, Wire Connectors, CSA-C22.2 No. 94-M91, Special Purpose Enclosures, CSA-C22.2 No. 182.1-1988, Industrial Type, Special Use Attachment Plugs, Receptacles. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Rating*	Cable Size	Color	Catalog Number	Rating*	Cable Size	Color
❒ PLS182MBK	400 600	#6 - #2	Black	❒ PLS182FBK	400 600	#6 - #2	Black
❒ PLS182MW	400 600	#6 - #2	White	❒ PLS182FW	400 600	#6 - #2	White
❒ PLS182MR	400 600	#6 - #2	Red	❒ PLS182FR	400 600	#6 - #2	Red
❒ PLS182MBL	400 600	#6 - #2	Blue	❒ PLS182FBL	400 600	#6 - #2	Blue
❒ PLS182MG	400 600	#6 - #2	Green	❒ PLS182FG	400 600	#6 - #2	Green
❒ PLS1820MBK	400 600	#2 - 2/0	Black	❒ PLS1820FBK	400 600	#2 - 2/0	Black
❒ PLS1820MW	400 600	#2 - 2/0	White	❒ PLS1820FW	400 600	#2 - 2/0	White
❒ PLS1820MR	400 600	#2 - 2/0	Red	❒ PLS1820FR	400 600	#2 - 2/0	Red
❒ PLS1820MBL	400 600	#2 - 2/0	Blue	❒ PLS1820FBL	400 600	#2 - 2/0	Blue
❒ PLS1820MG	400 600	#2 - 2/0	Green	❒ PLS1820FG	400 600	#2 - 2/0	Green
❒ PLS1840MBK	400 600	4/0	Black	❒ PLS1840FBK	400 600	4/0	Black
❒ PLS1840MBL	400 600	4/0	Blue	❒ PLS1840FBL	400 600	4/0	Blue

*All ratings are both AC/DC.

Performance

Electrical	
Dielectric Withstand Voltage	2200V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Not for interrupting current
Temperature Rise	45°C maximum
Mechanical	
Cord Accommodation	Individual conductor, Type SC, SCE, SCT or W, 75°C, copper wire only
Terminal Accommodation	PLS182 Series = #6 AWG min. – #2 AWG max. PLS1820 Series = #2 AWG min. – 2/0 AWG max. PLS1840 Series = 2/0 AWG min. – 4/0 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Standards molded into external product body
Environmental	
Flammability	UL94V2
Operating Temperature	Maximum continuous +75°C, minimum -40°C without impact
Enclosure	NEMA Type 3R and 4

Materials

Body – Connectors	Thermoplastic Elastomer
Body – Panel Mounts	Nylon
Body – Adapters	Thermoplastic Elastomer
Terminal / Pin / Cam	Brass
Terminal Screw	Plated Steel
Retaining Screw	Plastic
Strain Relief Wire	Copper
Shim	Copper

Project
Location/Type

legrand®
Pass & Seymour

Adapting To Worldwide Configuration Standards

Application

Legrand/Pass & Seymour's Pin & Sleeve products are designed to meet IEC 309-1, 309-2 specifications. These specifications are recognized around the world and are intended to prevent the mating of plugs and receptacles of different voltage and current ratings (see Section 406.3(F) of the National Electrical Code® relating to this noninterchangeability feature).

Global Product Offering

Legrand/Pass & Seymour provides IEC 309-1, 309-2 Pin & Sleeve products in both Series I (International) and Series II (North American) current ratings:

Series I (International)	16, 32, 63, 125 Amps
Series II (North American)	20, 30, 60, 100 Amps

North American Catalog Numbering System

Catalog numbers within the North American product offering are structured to communicate the following: manufacturer, number of conductors, amperage rating, device type, clocking position of the ground sleeve, and environmental rating. This applies to all receptacles, inlets, plugs, and connectors in the Legrand/Pass & Seymour North American Pin & Sleeve product line (see sample below).

Here's How It Works


The amperage rating is determined by the size of the device. Voltage rating is determined by the location of the ground sleeve on the receptacle and/or connector along with the number of conductors.

Ground sleeve position for all connectors and receptacles is based on a clock face with the keyway always being at 6 o'clock. The ground sleeve is positioned at a specific hour point, depending on the device's voltage rating.


The clocking position for plugs and inlets is a mirror image of the mating device, allowing for interconnection.

In addition, voltage ratings for all Pin & Sleeve products are color coded for visual identification.

IEC 309 Clocking System

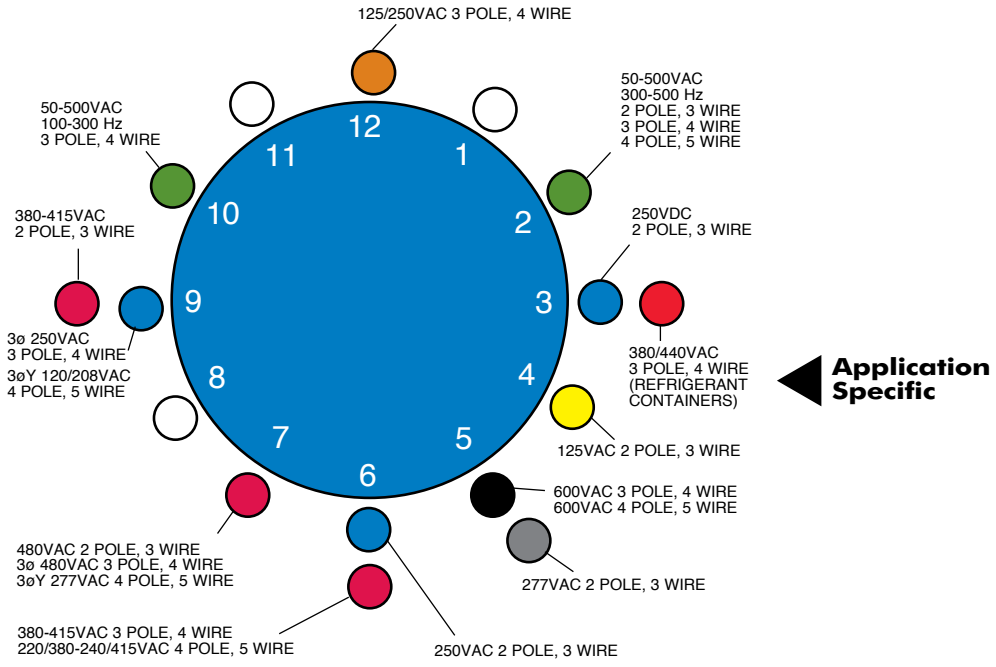

North American Catalog Numbering System

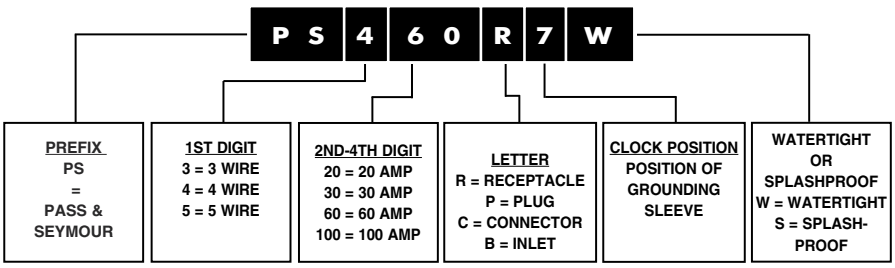

legrand®
Pass & Seymour

Technical Specifications
Watertight Pin & Sleeve Receptacles
20, 30, 60 & 100A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460R7W
Description: Receptacle, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number	Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
20	❒2P3W		125	PS320R4W	30	❒2P3W		125	PS330R4W
20	❒2P3W		250	PS320R6W	30	❒2P3W		250	PS330R6W
20	❒2P3W		480	PS320R7W	30	❒2P3W		480	PS330R7W
20	❒2P3W		277	PS320R5W	30	❒3P4W		125/250	PS430R12W
20	❒3P4W		125/250	PS420R12W	30	❒3P4W		3ø250	PS430R9W
20	❒3P4W		3ø250	PS420R9W	30	❒3P4W		3ø480	PS430R7W
20	❒3P4W		3ø480	PS420R7W	30	❒3P4W		3ø600	PS430R5W
20	❒3P4W		3ø600	PS420R5W	30	❒3P4W		380/440	*PS430R3W
20	❒4P5W		3øY120/208	PS520R9W	30	❒4P5W		3øY120/208	PS530R9W
20	❒4P5W		3øY277/480	PS520R7W	30	❒4P5W		3øY277/480	PS530R7W
20	❒4P5W		3øY347/600	PS520R5W	30	❒4P5W		3øY347/600	PS530R5W

*Application specific.

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number	Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
60	❒2P3W		125	PS360R4W	100	❒2P3W		125	PS3100R4W
60	❒2P3W		250	PS360R6W	100	❒2P3W		250	PS3100R6W
60	❒2P3W		480	PS360R7W	100	❒2P3W		480	PS3100R7W
60	❒3P4W		125/250	PS460R12W	100	❒3P4W		125/250	PS4100R12W
60	❒3P4W		3ø250	PS460R9W	100	❒3P4W		3ø250	PS4100R9W
60	❒3P4W		3ø480	PS460R7W	100	❒3P4W		3ø480	PS4100R7W
60	❒3P4W		3ø600	PS460R5W	100	❒3P4W		3ø600	PS4100R5W
60	❒4P5W		3øY120/208	PS560R9W	100	❒4P5W		3øY120/208	PS5100R9W
60	❒4P5W		3øY277/480	PS560R7W	100	❒4P5W		3øY277/480	PS5100R7W
60	❒4P5W		3øY347/600	PS560R5W	100	❒4P5W		3øY347/600	PS5100R5W

Project
Location/Type

Technical Specifications
Watertight Pin & Sleeve Receptacles
20, 30, 60 & 100A

legrand®
Pass & Seymour

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size




Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Materials	20 Amp	30 Amp	60 Amp	100 Amp
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel

Amps	Wire Config.		A	B	C	D	E	F
Watertight Receptacles								
20	2 Pole, 3 Wire	inch	2.85	1.80	1.60	3.40	2.05	2.36
	3 Pole, 4 Wire	inch	3.20	1.90	1.60	3.80	2.36	2.75
	4 Pole, 5 Wire	inch	3.40	2.00	1.70	3.80	2.36	2.75
30	2 Pole, 3 Wire	inch	3.72	2.60	1.80	4.30	2.75	3.15
	3 Pole, 4 Wire	inch	3.72	2.60	1.90	4.30	2.75	3.15
	4 Pole, 5 Wire	inch	3.98	2.70	1.95	4.30	2.75	3.15
60	2 Pole, 3 Wire	inch	4.20	3.10	3.50	5.00	3.03	3.35
	3 Pole, 4 Wire	inch	4.20	3.10	3.50	5.00	3.03	3.35
	4 Pole, 5 Wire	inch	4.20	3.10	3.50	5.00	3.03	3.35
100	2 Pole, 3 Wire	inch	5.20	2.20	4.40	5.60	4.88	4.88
	3 Pole, 4 Wire	inch	5.20	2.20	4.40	5.60	4.88	4.88
	4 Pole, 5 Wire	inch	5.20	2.20	4.40	5.60	4.88	4.88

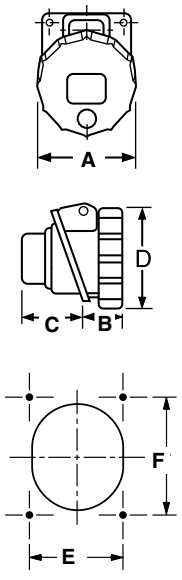

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Watertight Pin & Sleeve Plugs
20, 30, 60 & 100A


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460P7W
Description: Plug, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Plug/Inlet	Voltage/Color Coding	Catalog Number
20	❒2P3W		125	PS320P4W
20	❒2P3W		250	PS320P6W
20	❒2P3W		480	PS320P7W
20	❒2P3W		277	PS320P5W
20	❒3P4W		125/250	PS420P12W
20	❒3P4W		3ø250	PS420P9W
20	❒3P4W		3ø480	PS420P7W
20	❒3P4W		3ø600	PS420P5W
20	❒4P5W		3øY120/208	PS520P9W
20	❒4P5W		3øY277/480	PS520P7W
20	❒4P5W		3øY347/600	PS520P5W
30	❒2P3W		125	PS330P4W
30	❒2P3W		250	PS330P6W
30	❒2P3W		480	PS330P7W
30	❒3P4W		3ø250	PS430P9W
30	❒3P4W		3ø480	PS430P7W
30	❒3P4W		3ø600	PS430P5W
30	❒3P4W		380/440	*PS430P3W
30	❒4P5W		3øY120/208	PS530P9W
30	❒4P5W		3øY277/480	PS530P7W
60	❒2P3W		125	PS360P4W
60	❒2P3W		250	PS360P6W
60	❒2P3W		480	PS360P7W
60	❒3P4W		125/250	PS460P12W
60	❒3P4W		3ø250	PS460P9W
60	❒3P4W		3ø480	PS460P7W
60	❒3P4W		3ø600	PS460P5W
60	❒4P5W		3øY120/208	PS560P9W
60	❒4P5W		3øY277/480	PS560P7W
60	❒4P5W		3øY347/600	PS560P5W

*Application specific.

Amps	Poles & Wires	Config. Plug/Inlet	Voltage/Color Coding	Catalog Number
100	❒2P3W		125	PS3100P4W
100	❒2P3W		250	PS3100P6W
100	❒2P3W		480	PS3100P7W
100	❒3P4W		125/250	PS4100P12W
100	❒3P4W		3ø250	PS4100P9W
100	❒3P4W		3ø480	PS4100P7W
100	❒3P4W		3ø600	PS4100P5W
100	❒4P5W		3øY120/208	PS5100P9W
100	❒4P5W		3øY277/480	PS5100P7W
100	❒4P5W		3øY347/600	PS5100P5W

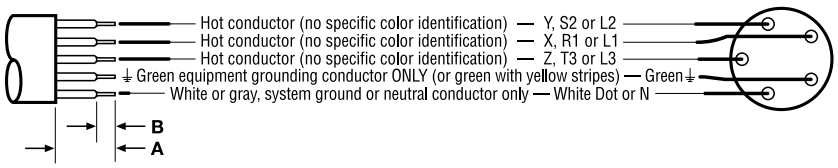

CABLE STRIPPING GUIDE

Device Size	Con-ductors	A		B	
		Inches	(mm)	Inches	(mm)
20 Amp	All	1-1/8	29	1/2	12
30 Amp	All	1-1/2	38	13/16	21
60 Amp	All	2-3/4	70	13/16	21
100 Amp	All	5-5/16	135	1-3/8	35

TIGHTENING GUIDE

Device Size	Terminal Screw		Cable Clamp Screw		Assembly Screw		Compression Nut	
	In-lbs	N-m	In-lbs	N-m	In-lbs	N-m	In-lbs	N-m
20 Amp	7	.8	6	.8	7	.8	18-36	2-4
30 Amp	7	.8	6	.8	7	.8	18-36	2-4
60 Amp	17	1.9	12	1.4	7	.8	45-90	5-10
100 Amp	70	7.9	15	1.8	7	.8	45-90	5-10

Project
Location/Type

Technical Specifications
Watertight Pin & Sleeve Plugs
20, 30, 60 & 100A

legrand®
Pass & Seymour

Performance

Electrical

Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle


Mechanical

Impact Resistance: Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)

Cord Grip Retention

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size

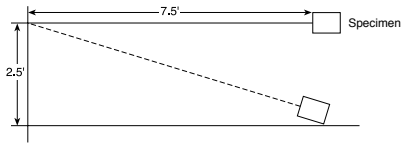


Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing


Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Materials	20 Amp	30 Amp	60 Amp	100 Amp
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel

Amps	Wire Config.		A	B	C	D	E	F
Watertight Plugs								
20	2 Pole, 3 Wire	inch	5.30	2.85		.31-.59		
	3 Pole, 4 Wire	inch	5.50	3.20		.31-.59		
	4 Pole, 5 Wire	inch	6.00	3.40		.39-.71		
30	2 Pole, 3 Wire	inch	6.50	3.70		.39-.71		
	3 Pole, 4 Wire	inch	6.50	3.70		.47-.87		
	4 Pole, 5 Wire	inch	6.70	3.98		.47-.87		
60	2 Pole, 3 Wire	inch	10.00	4.50		.63-1.04		
	3 Pole, 4 Wire	inch	10.00	4.50		.73-1.14		
	4 Pole, 5 Wire	inch	10.00	4.50		.80-1.26		
100/125	2 Pole, 3 Wire	inch	13.40	5.20		.59-1.97		
	3 Pole, 4 Wire	inch	13.40	5.20		.59-1.97		
	4 Pole, 5 Wire	inch	13.40	5.20		.59-1.97		





Project

Location/Type

legrand®
Pass & Seymour

Technical Specifications
Watertight Pin & Sleeve Connectors
20, 30, 60 & 100A


Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460C7W
Description: Connector, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
20	❒2P3W		125	PS320C4W
20	❒2P3W		250	PS320C6W
20	❒2P3W		480	PS320C7W
20	❒2P3W		277	PS320C5W
20	❒3P4W		125/250	PS420C12W
20	❒3P4W		3ø250	PS420C9W
20	❒3P4W		3ø480	PS420C7W
20	❒3P4W		3ø600	PS420C5W
20	❒4P5W		3øY120/208	PS520C9W
20	❒4P5W		3øY277/480	PS520C7W
20	❒4P5W		3øY347/600	PS520C5W
30	❒2P3W		125	PS330C4W
30	❒2P3W		250	PS330C6W
30	❒2P3W		480	PS330C7W
30	❒3P4W		125/250	PS430C12W
30	❒3P4W		3ø250	PS430C9W
30	❒3P4W		3ø480	PS430C7W
30	❒3P4W		3ø600	PS430C5W
30	❒3P4W		380/440	*PS430C3W
30	❒4P5W		3øY120/208	PS530C9W
30	❒4P5W		3øY277/480	PS530C7W
30	❒4P5W		3øY347/600	PS530C5W
60	❒2P3W		125	PS360C4W
60	❒2P3W		250	PS360C6W
60	❒2P3W		480	PS360C7W
60	❒3P4W		125/250	PS460C12W
60	❒3P4W		3ø250	PS460C9W
60	❒3P4W		3ø480	PS460C7W
60	❒3P4W		3ø600	PS460C5W
60	❒4P5W		3øY120/208	PS560C9W
60	❒4P5W		3øY277/480	PS560C7W
60	❒4P5W		3øY347/600	PS560C5W

*Application specific.

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
100	❒2P3W		125	PS3100C4W
100	❒2P3W		250	PS3100C6W
100	❒2P3W		480	PS3100C7W
100	❒3P4W		125/250	PS4100C12W
100	❒3P4W		3ø250	PS4100C9W
100	❒3P4W		3ø480	PS4100C7W
100	❒3P4W		3ø600	PS4100C5W
100	❒4P5W		3øY120/208	PS5100C9W
100	❒4P5W		3øY277/480	PS5100C7W
100	❒4P5W		3øY347/600	PS5100C5W

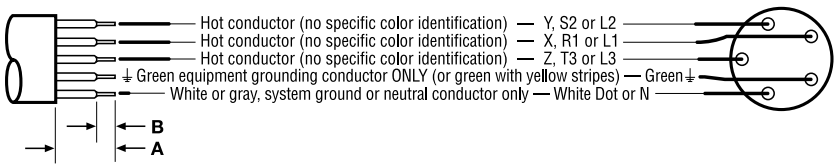

CABLE STRIPPING GUIDE

Device Size	Con-ductors	A		B	
		inches	(mm)	inches	(mm)
20 Amp	All	1-1/8	29	1/2	12
30 Amp	All	1-1/2	38	13/16	21
60 Amp	All	2-3/4	70	13/16	21
100 Amp	All	5-5/16	135	1-3/8	35

TIGHTENING GUIDE

Device Size	Terminal Screw		Cable Clamp Screw		Assembly Screw		Compression Nut	
	In-lbs	N-m	In-lbs	N-m	In-lbs	N-m	In-lbs	N-m
20 Amp	7	.8	6	.8	7	.8	18-36	2-4
30 Amp	7	.8	6	.8	7	.8	18-36	2-4
60 Amp	17	1.9	12	1.4	7	.8	45-90	5-10
100 Amp	70	7.9	15	1.8	7	.8	45-90	5-10

Project
Location/Type

Technical Specifications
Watertight Pin & Sleeve Connectors
20, 30, 60 & 100A

legrand®
Pass & Seymour

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size

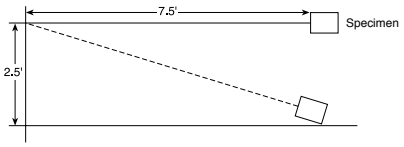


Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Materials	20 Amp	30 Amp	60 Amp	100 Amp
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel

Amps	Wire Config.		A	B	C	D	E	F
Watertight Connectors								
20	2 Pole, 3 Wire	inch	5.90	2.85	3.00	.31-.59		
	3 Pole, 4 Wire	inch	6.00	3.20	3.40	.31-.59		
	4 Pole, 5 Wire	inch	6.70	3.40	3.50	.39-.71		
30	2 Pole, 3 Wire	inch	7.00	3.70	3.90	.39-.71		
	3 Pole, 4 Wire	inch	7.00	3.70	3.90	.47-.87		
	4 Pole, 5 Wire	inch	7.30	3.98	4.10	.47-.87		
60	2 Pole, 3 Wire	inch	10.90	4.50	4.70	.63-1.04		
	3 Pole, 4 Wire	inch	10.90	4.50	4.70	.73-1.14		
	4 Pole, 5 Wire	inch	10.90	4.50	4.70	.80-1.26		
100	2 Pole, 3 Wire	inch	14.30	5.20	5.30	.59-1.97		
	3 Pole, 4 Wire	inch	14.30	5.20	5.30	.59-1.97		
	4 Pole, 5 Wire	inch	14.30	5.20	5.30	.59-1.97		





Project

Location/Type

legrand®
Pass & Seymour

Technical Specifications
Watertight Pin & Sleeve Inlets
60 & 100A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460B7W
Description: Inlet, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Watertight (IP67)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
60	❒2P3W		125	PS360B4W
60	❒2P3W		250	PS360B6W
60	❒2P3W		480	PS360B7W
60	❒3P4W		125/250	PS460B12W
60	❒3P4W		3ø250	PS460B9W
60	❒3P4W		3ø480	PS460B7W
60	❒3P4W		3ø600	PS460B5W
60	❒4P5W		3øY120/208	PS560B9W
60	❒4P5W		3øY277/480	PS560B7W
60	❒4P5W		3øY347/600	PS560B5W

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
100	❒2P3W		250	PS3100B6W
100	❒2P3W		480	PS3100B7W
100	❒3P4W		125/250	PS4100B12W
100	❒3P4W		3ø250	PS4100B9W
100	❒3P4W		3ø480	PS4100B7W
100	❒3P4W		3ø600	PS4100B5W
100	❒4P5W		3øY120/208	PS5100B9W
100	❒4P5W		3øY277/480	PS5100B7W
100	❒4P5W		3øY347/600	PS5100B5W

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size

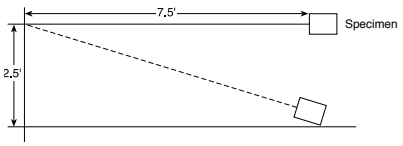

Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Project


Location/Type


Technical Specifications
Watertight Pin & Sleeve Inlets
60 & 100A


legrand®
Pass & Seymour

Materials	60 Amp	100 Amp
Housing	Valox	Valox
Mounting Flange	Valox	Valox
Locking Ring	Valox	Valox
Sealing Gasket	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6
Pins	Brass with Nickel Plate	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel

Amps	Wire Config.		A	B	C	D	E	F
Watertight Inlets								
60	2 Pole, 3 Wire	inch	4.50	4.25			3.03	3.35
	3 Pole, 4 Wire	inch	4.50	4.25			3.03	3.35
	4 Pole, 5 Wire	inch	4.50	4.25			3.03	3.35
100	2 Pole, 3 Wire	inch	5.75	5.71			4.88	4.88
	3 Pole, 4 Wire	inch	5.75	5.71			4.88	4.88
	4 Pole, 5 Wire	inch	5.75	5.71			4.88	4.88







Project	
Location/Type	

legrand®
Pass & Seymour

Technical Specifications
Splashproof Pin & Sleeve Receptacles
20, 30 & 60A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460R7S
Description: Receptacle, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
20	❒2P3W		125	PS320R4S
20	❒2P3W		250	PS320R6S
20	❒2P3W		277	PS320R5S
20	❒3P4W		125/250	PS420R12S
20	❒3P4W		3ø250	PS420R9S
20	❒3P4W		3ø480	PS420R7S
20	❒3P4W		3ø600	PS420R5S
20	❒4P5W		3øY120/208	PS520R9S
20	❒4P5W		3øY347/600	PS520R5S
30	❒2P3W		125	PS330R4S
30	❒2P3W		250	PS330R6S
30	❒3P4W		125/250	PS430R12S
30	❒3P4W		3ø250	PS430R9S
30	❒3P4W		3ø480	PS430R7S
30	❒3P4W		3ø600	PS430R5S
30	❒4P5W		3øY120/208	PS530R9S
30	❒4P5W		3øY347/600	PS530R5S
60	❒2P3W		250	PS360R6S
60	❒2P3W		480	PS360R7S
60	❒3P4W		125/250	PS460R12S
60	❒3P4W		3ø250	PS460R9S
60	❒3P4W		3ø480	PS460R7S
60	❒3P4W		3ø600	PS460R5S
60	❒4P5W		3øY120/208	PS560R9S
60	❒4P5W		3øY277/480	PS560R7S
60	❒4P5W		3øY347/600	PS560R5S

Performance

Electrical

Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle


Mechanical

Impact Resistance: Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)

Cord Grip Retention

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size

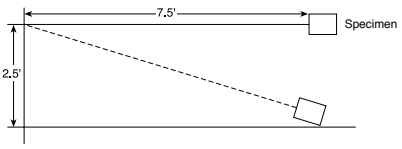

Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact


Project
Location/Type

Technical Specifications
Splashproof Pin & Sleeve Receptacles
20, 30 & 60A

legrand®
Pass & Seymour

Materials	20 Amp	30 Amp	60 Amp
Housing	Polyamide 6	Polyamide 6	Valox
Cover	Polyamide 66	Polyamide 66	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel
Mounting Gasket	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass	Brass	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel

Amps	Wire Config.		A	B	C	D	E	F
Splashproof Receptacles								
20	2 Pole, 3 Wire	inch	2.50	1.57	1.60	3.10	2.05	2.36
	3 Pole, 4 Wire	inch	2.90	1.57	1.73	3.46	2.36	2.75
	4 Pole, 5 Wire	inch	2.90	1.73	1.73	3.66	2.36	2.75
30	2 Pole, 3 Wire	inch	3.30	2.10	1.97	4.06	2.75	3.15
	3 Pole, 4 Wire	inch	3.30	2.10	1.97	4.06	2.75	3.15
	4 Pole, 5 Wire	inch	3.30	2.20	2.05	4.20	2.75	3.15
60	2 Pole, 3 Wire	inch	4.20	3.50	2.76	5.08	3.03	3.35
	3 Pole, 4 Wire	inch	4.20	3.50	2.76	5.08	3.03	3.35
	4 Pole, 5 Wire	inch	4.20	3.50	2.76	5.08	3.03	3.35

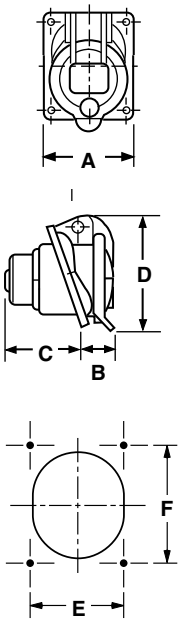

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Splashproof Pin & Sleeve Plugs
20, 30 & 60A

Typical Specifications

Description: Plug, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
20	❒2P3W		125	PS320P4S
20	❒2P3W		250	PS320P6S
20	❒2P3W		277	PS320P5S
20	❒3P4W		125/250	PS420P12S
20	❒3P4W		3ø250	PS420P9S
20	❒3P4W		3ø480	PS420P7S

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
30	❒2P3W		125	PS330P4S
30	❒2P3W		250	PS330P6S
30	❒2P3W		480	PS330P7S
30	❒3P4W		3ø250	PS430P9S
30	❒3P4W		3ø480	PS430P7S
30	❒3P4W		3ø600	PS430P5S
30	❒4P5W		3øY120/208	PS530P9S
30	❒4P5W		3øY277/480	PS530P7S
30	❒4P5W		3øY347/600	PS530P5S

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
60	❒2P3W		250	PS360P6S
60	❒2P3W		480	PS360P7S
60	❒3P4W		125/250	PS460P12S
60	❒3P4W		3ø250	PS460P9S
60	❒3P4W		3ø480	PS460P7S
60	❒3P4W		3ø600	PS460P5S
60	❒4P5W		3øY120/208	PS560P9S
60	❒4P5W		3øY277/480	PS560P7S
60	❒4P5W		3øY347/600	PS560P5S

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size



Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact


Project
Location/Type

Technical Specifications
Splashproof Pin & Sleeve Plugs
20, 30 & 60A

legrand®
Pass & Seymour

Materials	20 Amp	30 Amp	60 Amp
Housing	Polyamide 6	Polyamide 6	Valox
Housing Gasket	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass	Brass	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel

Amps	Wire Config.		A	B	C	D	E	F
Splashproof Plugs								
20	2 Pole, 3 Wire	inch	5.30	2.17		.31-.59		
	3 Pole, 4 Wire	inch	5.50	2.36		.31-.59		
	4 Pole, 5 Wire	inch	6.00	2.60		.39-.71		
30	2 Pole, 3 Wire	inch	6.50	2.78		.39-.71		
	3 Pole, 4 Wire	inch	6.50	2.78		.47-.87		
	4 Pole, 5 Wire	inch	6.70	3.03		.47-.87		
60	2 Pole, 3 Wire	inch	10.00	4.02		.63-1.04		
	3 Pole, 4 Wire	inch	10.00	4.02		.73-1.14		
	4 Pole, 5 Wire	inch	10.00	4.02		.80-1.26		



Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Splashproof Pin & Sleeve Connectors
20, 30 & 60A

Typical Specifications

Description: Connector, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
20	❒2P3W		125	PS320C4S
20	❒2P3W		250	PS320C6S
20	❒3P4W		125/250	PS420C12S
20	❒3P4W		3ø250	PS420C9S
20	❒3P4W		3ø480	PS420C7S
20	❒4P5W		3øY120/208	PS520C9S
20	❒4P5W		3øY277/480	PS520C7S
20	❒4P5W		3øY347/600	PS520C5S

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
30	❒2P3W		125	PS330C4S
30	❒2P3W		250	PS330C6S
30	❒2P3W		480	PS330C7S
30	❒3P4W		125/250	PS430C12S
30	❒3P4W		3ø250	PS430C9S
30	❒3P4W		3ø480	PS430C7S
30	❒3P4W		3ø600	PS430C5S
30	❒4P5W		3øY120/208	PS530C9S
30	❒4P5W		3øY347/600	PS530C5S

Amps	Poles & Wires	Config. Recep/ Conn.	Voltage/ Color Coding	Catalog Number
60	❒2P3W		250	PS360C6S
60	❒2P3W		480	PS360C7S
60	❒3P4W		125/250	PS460C12S
60	❒3P4W		3ø250	PS460C9S
60	❒3P4W		3ø480	PS460C7S
60	❒3P4W		3ø600	PS460C5S
60	❒4P5W		3øY120/208	PS560C9S
60	❒4P5W		3øY277/480	PS560C7S
60	❒4P5W		3øY347/600	PS560C5S

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size

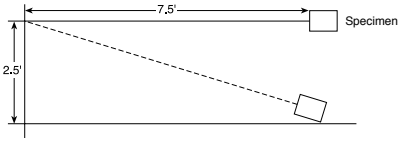

Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Project
Location/Type


Splashproof Pin & Sleeve Connectors

20, 30 & 60A

legrand®
Pass & Seymour

Materials	20 Amp	30 Amp	60 Amp
Housing	Polyamide 6	Polyamide 6	Valox
Cover	Polyamide 66	Polyamide 66	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel
Housing Gasket	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 66
Sleeves	Brass	Brass	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel

Amps	Wire Config.		A	B	C	D	E	F
Splashproof Connectors								
20	2 Pole, 3 Wire	inch	5.79	2.15	2.91	.31-.59		
	3 Pole, 4 Wire	inch	5.94	2.42	3.19	.31-.59		
	4 Pole, 5 Wire	inch	6.77	2.73	3.54	.39-.71		
30	2 Pole, 3 Wire	inch	6.97	2.80	3.66	.39-.71		
	3 Pole, 4 Wire	inch	6.97	2.80	3.66	.47-.87		
	4 Pole, 5 Wire	inch	7.20	3.05	3.94	.47-.87		
60	2 Pole, 3 Wire	inch	10.75	3.78	4.67	.63-1.04		
	3 Pole, 4 Wire	inch	10.75	3.78	4.67	.73-1.14		
	4 Pole, 5 Wire	inch	10.75	3.78	4.67	.80-1.26		



Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Splashproof Pin & Sleeve Inlets
20, 30 & 60A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS460B7S
Description: Inlet, Power Supply
Type: 3 Pole, 4 Wire Grounding
Rating: 60A, 3 Phase 480VAC
Configuration: IEC 309-2, Clock Position 7, Splashproof (IP44)
3rd Party Compliance: UL Listed to UL Standard 1682; CSA Certified to CSA 22.2 No. 182.2; UL Classified to IEC 309-1 and IEC 309-2

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
20	❒2P3W		250	PS320B6S
20	❒3P4W		3ø250	PS420B9S
20	❒3P4W		3ø480	PS420B7S
20	❒3P4W		3ø600	PS420B5S
20	❒4P5W		3øY120/208	PS520B9S
20	❒4P5W		3øY277/480	PS520B7S
20	❒4P5W		3øY347/600	PS520B5S

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
30	❒2P3W		125	PS330B4S
30	❒2P3W		250	PS330B6S
30	❒2P3W		480	PS330B7S
30	❒3P4W		125/250	PS430B12S
30	❒3P4W		3ø250	PS430B9S
30	❒3P4W		3ø480	PS430B7S
30	❒3P4W		3ø600	PS430B5S
30	❒4P5W		3øY120/208	PS530B9S
30	❒4P5W		3øY277/480	PS530B7S
30	❒4P5W		3øY347/600	PS530B5S

Amps	Poles & Wires	Config. Plug/ Inlet	Voltage/ Color Coding	Catalog Number
60	❒2P3W		250	PS360B6S
60	❒2P3W		480	PS360B7S
60	❒3P4W		125/250	PS460B12S
60	❒3P4W		3ø250	PS460B9S
60	❒3P4W		3ø480	PS460B7S
60	❒3P4W		3ø600	PS460B5S
60	❒4P5W		3øY120/208	PS560B9S
60	❒4P5W		3øY277/480	PS560B7S
60	❒4P5W		3øY347/600	PS560B5S

Performance

Electrical


Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600 RMS
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 Amp: 5000 cycles with full-rated current and voltage 30, 60 & 100 Amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)
Cord Grip Retention	

	Force, Lbs.*	Torque, Ft. lbs.*
20A	30	.4
30A	75	.5
60A	150	1
100A	150	1

*Applied to minimum recommended cable size



Cord Accommodation	Round portable service cords. Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2
Product Identification	Identification and ratings are labeled on the device housing

Environmental

Moisture Resistance	Watertight per IEC 309-1.
Flammability	Contact with live parts: V2 or V0. Enclosure: HB or better per UL94
Operating Temperature	+80°C maximum continuous, -50°C minimum without impact

Project
Location/Type


Splashproof Pin & Sleeve Inlets

20, 30 & 60A

legrand®
Pass & Seymour

Materials	20 Amp	30 Amp	60 Amp
Housing	Polyamide 6	Polyamide 6	Valox
Mounting Flange	Polyamide 6	Polyamide 6	Valox
Mounting Gasket	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass	Brass	Brass with Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel

Amps	Wire Config.		A	B	C	D	E	F
Splashproof Inlets								
20	2 Pole, 3 Wire	inch	2.83	3.07			2.44	3.70
	3 Pole, 4 Wire	inch	3.70	3.39			3.27	4.29
	4 Pole, 5 Wire	inch	3.70	3.39			3.27	4.29
30	2 Pole, 3 Wire	inch	3.98	4.37			3.54	5.86
	3 Pole, 4 Wire	inch	3.98	4.37			3.54	5.86
	4 Pole, 5 Wire	inch	3.98	4.25			3.54	5.86
60	2 Pole, 3 Wire	inch	4.50	4.25			3.03	3.35
	3 Pole, 4 Wire	inch	4.50	4.25			3.03	3.35
	4 Pole, 5 Wire	inch	4.50	4.25			3.03	3.35

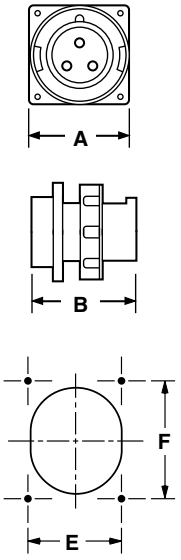

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Watertight Pin & Sleeve Non-Fusible Mechanical Interlock
20, 30, 60 & 100A

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour PS560MIR5W
Description: Non-Fusible Pin & Sleeve Mechanical Interlock
Electrical Type: 3 Pole + Neutral + Earth
Rating: 60A, 3ø, 600VAC 15 HP standard, 40 HP maximum
Configuration: IEC Clock Position 5
Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

Amps	Catalog Number	Voltage/Color Coding	Horsepower Rating
20	❒ PS420MIR12W	120/240VAC	1 HP @ 120V 2 HP @ 208-240V L-L
20	❒ PS420MIR9W	3ø 240VAC	5
20	❒ PS420MIR7W	3ø 480VAC	10
20	❒ PS420MIR5W	3ø 600VAC	15

Amps	Catalog Number	Voltage/Color Coding	Horsepower Rating
30	❒ PS330MIR4W	120VAC	2
30	❒ PS430MIR9W	3ø 240VAC	7.5
30	❒ PS430MIR7W	3ø 480VAC	15
30	❒ PS430MIR5W	3ø 600VAC	20
30	❒ PS430MIR3W	380/440VAC	15
30	❒ PS530MIR9W	3øY 120/208VAC	5
30	❒ PS530MIR7W	3øY 277/480VAC	15
30	❒ PS530MIR5W	3øY347/600	20

Amps	Catalog Number	Voltage/Color Coding	Horsepower Rating
60	❒ PS360MIR6W	240VAC	7.5 @ 208-240V
60	❒ PS360MIR7W	480VAC	10
60	❒ PS460MIR12W	120/240VAC	3 @ 120V 7.5 @ 208-240VAC L-L
60	❒ PS460MIR9W	3ø 240VAC	15
60	❒ PS460MIR7W	3ø 480VAC	30
60	❒ PS460MIR5W	3ø 600VAC	40
60	❒ PS560MIR9W	3øY 120/208VAC	15
60	❒ PS560MIR7W	3øY 277/480VAC	30
60	❒ PS560MIR5W	3øY 347/600VAC	40

Amps	Catalog Number	Voltage/Color Coding	Horsepower Rating
100	❒ PS3100MIR6W	240VAC	10 @ 208V 15 @ 240V
100	❒ PS3100MIR7W	480VAC	30
100	❒ PS4100MIR5W	3ø 600VAC	50
100	❒ PS4100MIR7W	3ø 480VAC	50
100	❒ PS4100MIR9W	3ø 240VAC	25
100	❒ PS4100MIR12W	120/240VAC	5 @ 120V 10 @ 208V L-L 15 @ 240V L-L
100	❒ PS5100MIR5W	3øY 347/600VAC	50
100	❒ PS5100MIR7W	3øY 277/480VAC	50
100	❒ PS5100MIR9W	3øY 120/208VAC	20



Project	
Location/Type	

Technical Specifications
Watertight Pin & Sleeve Non-Fusible Mechanical Interlock
20, 30, 60 & 100A

legrand®
Pass & Seymour

Materials

Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Gasket	Neoprene
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Locktab	10% Glass-Filled Nylon
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Receptacle Lid	Valox 357®
Receptacle Gasketing	Neoprene
Receptacle Lid Hinge Spring	300 Series Stainless Steel
Receptacle Contact Carrier	Polyamide 6
Receptacle Sleeves	Brass/Nickel-Plate
Receptacle Terminal Screws	Zinc-Plated Steel
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc 20/30 amp shipped with one (1) 1" 60 amp shipped with one (1) 1¼" 100 amp shipped with one (1) 1½" (will also fit a 2" hub, not provided)


Performance

Electrical	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600V 1 N.O. & 1 N.C.
Mechanical	
Impact Resistance	Per UL746C
Terminal Identification	Per UL, CSA, and IEC specifications
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions. Can be mounted directly to channel or strut (no washer required)
Environmental	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable


Non-Fusible Mechanical Interlock Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
20	1.38	6.88	9.13	8.00	12.38	11.06	4.75	6.88	7.75	8.00	10.13	11.00
30	1.38	6.88	9.13	8.25	12.38	11.50	4.75	6.88	7.75	8.00	10.13	11.00
60	1.19	6.88	9.13	9.00	13.63	14.13	4.75	6.88	7.75	9.75	11.88	12.75
100	1.19	6.88	9.13	9.50	14.13	14.13	4.75	6.88	7.75	9.75	11.88	12.75


All measurements shown in inches.



(See dimensions above.) Front



Side



Back

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Occupancy Sensors

General Specifications

1. Occupancy sensors shall control lighting and/or HVAC in the sensed area only.
2. Controlled lighting and/or HVAC zones shall not be larger than 2500 sq. ft.
3. The contractor shall be responsible for a complete, operable system, and installation should be warranted for a period of one year after acceptance.
4. The product shall be warranted for a period of (5) five years for wall switch sensors, ceiling sensors, and power packs.
5. Occupancy sensors shall be installed as per manufacturer's recommendations.
6. Specific low-voltage wire surface routing shall be approved by the facilities engineer.
7. Sensor and control unit manufacturer must have experience in the lighting and/or HVAC controls industry equal to a minimum of (5) five years with a minimum of (5) five similar projects.
8. Contractor shall be responsible for contacting the manufacturer for proper placement and adjustment of sensor.

Wall Box Switches

WSP250, WDT100*, WDT200*, OS300S, OSR300S Features & Benefits	
Zero Crossing	This feature ensures the closing of the contacts as close to 0° as possible, extending the life of the relay contacts, and limiting the effect of inrush current from some electronic ballasts.
ASIC Chip	Application Specific Integrated Component chip is a custom-designed microprocessor that improves reliability and boosts immunity to RFI and EMI.
30 sec. - 30 min. Time Delay	Such a large range allows users to adjust time delay to fit the application and ensure maximum savings without compromising convenience.
180° Coverage	Provides detection even along the wall it is mounted on.
Maximum Rating	Allows for the combining of potential savings with room size. Wall switches that offer too much wattage handling capacity are used in larger rooms where ceiling sensors should be used, compromising the reliability of the installation.
Self-Adaptive	On the OS units only: Units automatically adjust the delay time by monitoring room usage patterns. No user adjustment required, automatically sets delay time for most efficient use of energy.
2 relays for bi-level switching	The OSR300S is designed for areas with two lighting zones or bi-level lighting applications.
Adjustable Sensitivity	Enables the installer or user to adjust the sensitivity level to suit the application.
Voltage Drop Protection	Protects the electronics to ensure long-term performance.
Five-Year Warranty	Allows installer or user to receive a replacement or refund if a sensor is found to be defective within 5 years of purchase.

*Dual Technology

Wall- and Ceiling-Mount Sensors

Feature	WA1001	HS1001	CS500/CS1200	CSU600/1100/2200	CSD1000
Technology	Passive Infrared	Passive Infrared	Passive Infrared	Ultrasonic*	Dual Technology
Coverage Pattern	Wide Angle	Long Range	360°	360°	360°
Mounting Method	Wall or Ceiling	Wall or Ceiling	Ceiling	Ceiling	Ceiling
Adjustable Sensitivity	Yes	Yes	Yes	Yes	Yes
Viewing Range	1200 sq. ft.	90 x 20 ft.	500/1200 sq. ft.	600/1100/2200 sq. ft.	1000 sq. ft.
Fresnel Lens**	Yes	Yes	Yes	N/A	Yes
ASIC†	Yes	Yes	Yes	Yes	Yes
5-Year Warranty	Yes	Yes	Yes	Yes	Yes

* Provides occupancy detection around obstacles.
** Dual tech has both Ultrasonic and PIR Fresnel lens.
† Improves reliability and boosts immunity to RFI and EMI.

Power Packs & Add-A-Relay

PWP120277 & AR120/277 Features			
Load Rating at 120V	20A Ballast 13A Incandescent	Mounting Method	1/2" Knockout
Load Rating at 277V	20A Ballast	Sized to Fit into Approved Enclosure for Plenum Applications	Yes
Add-A-Relay Rating at 120V	20A Ballast 13A Incandescent	Teflon-Coated Leads	Yes
Add-A-Relay Rating at 277V	20A Ballast	Five Year Warranty	Yes
HP Rating	1HP		
Output Rating*	24VDC; 225mA		

*PWP unit only.

Project
Location/Type

Technical Specifications
Wall Switch – WSP250, OS300S, OSR300S

legrand®
Pass & Seymour

Typical Specifications

Wall switch occupancy sensors shall be cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. Sensors shall be self-contained and fit in a standard wall box. Sensors shall be capable of detecting changes in the infrared background caused by motion. Sensors shall be capable of switching incandescent and fluorescent lighting loads on and off. Sensors shall use optics that operate with a 180° field of view. The wall switch occupancy sensor shall be equipped with controls to adjust sensitivity and ambient light threshold. The sensor shall also offer a time-delay adjustment from 30 seconds to 30 minutes, as well as an override. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Description
❒ WSP250	Passive Infrared Wall Switch
❒ OS300S	Self-Adaptive Passive Infrared Occupancy/Vacancy Sensor
❒ OSR300S	Dual-Relay Self-Adaptive Passive Infrared Occupancy/Vacancy Sensor

Performance


Electrical	
Supply Voltage	120/277 Volt AC 60 Hz
Maximum Load	800W Incandescent/Fluorescent at 120V 1/4 HP 1200W Fluorescent at 277V
Minimum Load	None
AC Switching	WSP250, OS300S: Normally Open Relay, Zero Crossing Circuitry OSR300S: 2 Normally Open Relays, Zero Crossing Circuitry
Sensor	
Technology	WSP250: Passive Infrared OS300S, OSR300S: Self-Adaptive Passive Infrared
Time Delay	WSP250: Adjustable 30 sec. to 30 min. OS300S, OSR300S: Adjustable 5 min. to 30 min.
Light Level Adjustment	WSP250: Adjustable from full daylight to 10 foot-candles OS300S, OSR300S: 8-180 fcs
Sensitivity Adjustment	WSP250: 20% to 100% OS300S, OSR300S: Self-Adaptive and Fixed Low
Spectral Response	WSP250: 6 to 14 μm OS300S: 7 to 14 μm OSR300S: 8 to 14 μm
Field of View	Horizontal: 180° Vertical: 2° and 8.6° down from the center
Indicator Light	Red LED flashes when motion is detected
Lens Type	Two-tier lens
Walk-through Mode	WSP250: No; OS300S, OSR300S: Yes
Audible Alert	WSP250: No; OS300S, OSR300S: Yes
Test Mode	WSP250: No; OS300S, OSR300S: Yes
Environmental	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UV-resistant plastic
Color(s)	Ivory, White, Gray, Light Almond
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

Wiring Diagrams on Pages L-8, L-10, and L-11.


Project
Location/Type

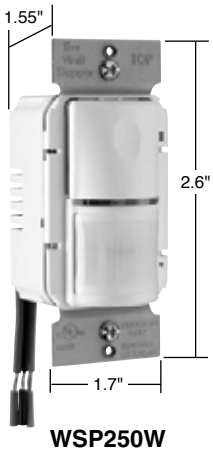

WSP250W



OS300SW

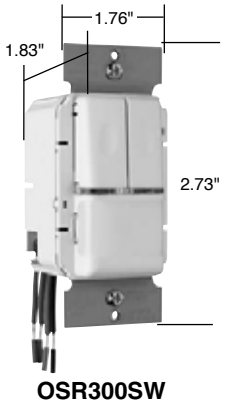

OSR300SW

legrand®
Pass & Seymour

Technical Specifications
Dual Technology Wall Switch – WDT100, WDT200



WDT100W

Typical Specifications

Dual technology wall switch occupancy sensors shall be cULus Listed UL508 and C22.2 No. 14, California Title 24 Compliant and RoHS-Compliant as provided by Legrand/Pass & Seymour. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description
❒ WDT100	Dual Technology Wall Switch Sensor
❒ WDT200	Bi-Level Dual Technology Wall Switch Sensor

Performance

Electrical	
Supply Voltage	120/230/277VAC
Maximum Supply Voltage	277VA
Frequency	50-60 Hz
Sensor	
Technology	Passive Infrared and Ultrasonic
PIR Adjustment	Two Settings – Maximum (100%) and Minimum (50%)
Ultrasonic Adjustment	Ultrasonic sensitivity can be adjusted using a trimpot. Output frequency of transmitter is fixed at 40kHz.
Time Delay	Adjustable 5 min. to 30 min.
Light Level Adjustment	8fc to 180+fc
Spectral Response	6 to 14 μm
Field of View	88°; 110° Vertical, 360° Horizontal
Coverage	1050 sq. ft., 180°
Indicator Light(s)	Red and Green LEDs
Lens Type	Two Horizontal Layers
Sensor Type	Multi-Directional Transmitter/Receiver with Quartz Oscillator
Audible Alert	Selectable
Environmental	
Temperature Range	0°C to 55°C
Mechanical	
Enclosure Material	ABS KJW Flame-Retardant Cycolac, 940-0 or Equivalent
Color(s)	Ivory, White, Black, Gray, Light Almond
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant RoHS-Compliant

Coverage Diagram on Page L-9.


Project
Location/Type

Technical Specifications
PIR Wide Angle Sensor – WA1001

legrand®
Pass & Seymour

Typical Specifications

Wide angle motion sensors shall be cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. Sensors shall be ceiling or wall mount type, capable of detecting infrared emissions from personnel movement, and switching lighting and HVAC systems on and off based on occupancy. Wide angle motion sensor switch shall make use of optics that operate within an 88° field of view, offering a typical coverage of up to 1200 sq ft. Mounting shall be wall or ceiling. Motion sensor switch must be used in conjunction with the PWP120 (120VAC supply) or PWP277 (277VAC supply) switching modules, and capable of handling additional loads with the support of an Add-A-Relay AR120/277. Also, the sensor shall offer a time delay adjustment from 15 seconds to 30 minutes, as well as an override. Conforms to NEMA WD-1 and WD-6.



WA1001

Catalog Number	Description
❒ WA1001	Passive Infrared Wall/Ceiling Sensor

Performance

Electrical	
Supply Voltage	+ 24VDC Typical
Minimum Supply Voltage	+ 20VDC
Maximum Supply Voltage	+ 30VDC
Sensor Output	+ 24VDC for external relay DC coil drive Maximum Output Current: 100mA DC
Sensor	
Technology	Passive Infrared
Time Delay	Adjustable 15 sec. to 30 min.
Light Level Adjustment	No
Sensitivity Adjustment	14% to 100%
Spectral Response	6 to 14 μm
Field of View	88°
Coverage	Up to 1200 sq. ft.
Indicator Light	Red LED flashes when motion is detected
Lens Type	Four horizontal layers
Environment	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UV-resistant plastic
Color	White
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

Wiring Diagrams on Page L-12.

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
PIR Hallway Sensor – HS1001



HS1001

Typical Specifications

Hallway motion sensors shall be cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. Sensors shall be ceiling or wall mount type, capable of detecting infrared emissions from personnel movement, and switching lighting and HVAC systems on and off based on occupancy. Hallway motion sensor switches shall make use of optics that operate within field of view 90 feet long by 20 feet wide. Mounting shall be wall or ceiling. Motion sensor switch must be used in conjunction with the PWP120 (120VAC supply) or PWP277 (277VAC supply) switching modules, and capable of handling additional loads by including the support of an Add-A-Relay AR120/277. Also, the sensor shall offer a time delay adjustment from 15 seconds to 30 minutes, as well as an override. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description
❒ HS1001	Passive Infrared Wall/Ceiling Sensor for hallway applications

Performance

Electrical	
Supply Voltage	+ 24VDC Typical
Minimum Supply Voltage	+ 20VDC
Maximum Supply Voltage	+ 30VDC
Sensor Output	+ 24VDC for external relay DC coil drive Maximum Output Current: 100mA DC
Sensor	
Technology	Passive Infrared
Time Delay	Adjustable 15 sec. to 30 min.
Light Level Adjustment	No
Sensitivity Adjustment	14% to 100%
Spectral Response	6 to 14 μm
Field of View	13°
Coverage	90 linear feet typical
Indicator Light	Red LED flashes when motion is detected
Lens Type	Two horizontal layers
Environment	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UV-resistant plastic
Color	White
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

Wiring Diagrams on Page L-12.

Project
Location/Type

Technical Specifications
PIR Occupancy Ceiling Sensors – CS500, CS1200

legrand®
Pass & Seymour

Typical Specifications

Motion sensor switches shall be cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. Sensors shall be ceiling mount type, capable of detecting infrared emissions from personnel movement and switching incandescent and fluorescent lighting loads on and off. Motion sensor switches shall make use of optics that operate within a 110° field of view. Motion sensors may be mounted in a drop ceiling, solid ceiling, or wall. Motion sensor switch must be used in conjunction with the PWP120 (120VAC supply) or PWP277 (277VAC supply) switching modules, and capable of handling additional loads with the support of an Add-A-Relay AR120/277. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description
❒ CS500	Ceiling Sensor , 500 sq. ft.
❒ CS1200	Ceiling Sensor , 1200 sq. ft.




CS500
CS1200

Performance

Electrical	
Supply Voltage	+ 24VDC Typical
Minimum Supply Voltage	+ 20VDC
Maximum Supply Voltage	+ 30VDC
Sensor Output	+ 24VDC for external relay DC coil drive Maximum Output Current: 100mA DC
Sensor	
Technology	Passive Infrared
Time Delay	15 sec. to 30 min.
Light Level Adjustment	No
Sensitivity Adjustment	Yes
Spectral Response	6 to 14 µm
Field of View	110° Vertical, 360° Horizontal
Coverage	Up to 900 sq. ft.
Indicator Light	Red LED flashes when motion is detected
Lens Type	Multi-zone fresnel type
Environment	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UV-resistant plastic
Color	White
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

CS500, CS1200 Wiring Diagram

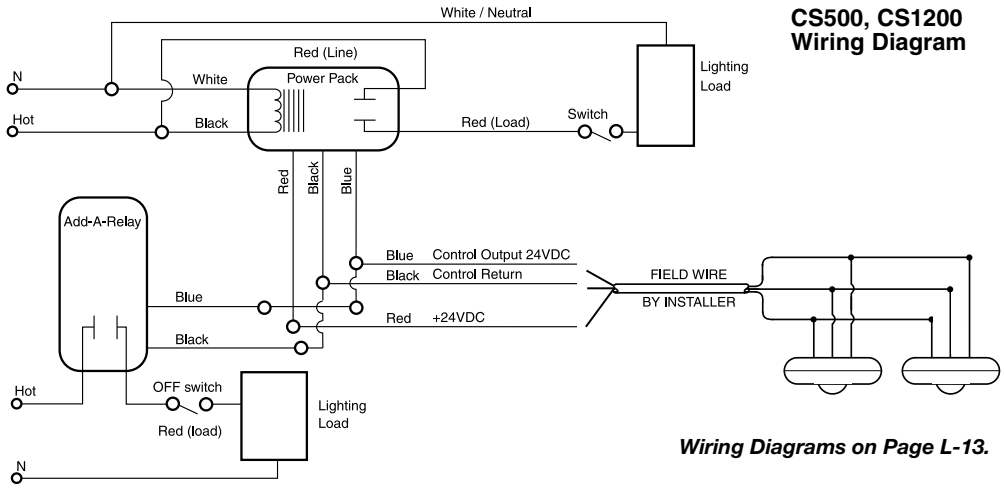


Wiring Diagrams on Page L-13.


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Ultrasonic Ceiling Sensors – CSU600, CSU1100, CSU2200



CSU600



CSU1100
CSU2200

Typical Specifications

Ultrasonic motion sensors shall b e cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. Sensors shall be ceiling or wall mount ceiling mount type, capable of detecting motion from personnel movement, and switching lighting and HVAC systems on and off based on occupancy. Ultrasonic motion sensor switches shall use a multi-directional transmitter/receiver system to broadcast ultrasonic 32 kHz sound waves generated by a quartz oscillator. The ultrasonic motion sensor switch must be used in conjunction with PWP2120 (120VAC supply) or PWP2277 (277VAC supply) switching modules, and capable of handling additional loads by including the support of an Add-A-Relay AR120/277. Also, the sensor shall offer a time delay adjustment from 15 seconds to 30 minutes, as well as an override. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description
❒ CSU600	Ultrasonic Ceiling Sensor
❒ CSU1100	Ultrasonic Ceiling Sensor
❒ CSU2200	Ultrasonic Ceiling Sensor

Performance

Electrical	
Supply Voltage	+ 24VDC Typical
Minimum Supply Voltage	+ 20VDC
Maximum Supply Voltage	+ 30VDC
Sensor Output	+ 24VDC for external relay DC coil drive Maximum Output Current: 100mA DC
Sensor	
Technology	Ultrasonic
Time Delay	Adjustable 15 sec. to 30 min.
Light Level Adjustment	No
Sensitivity Adjustment	14% to 100%
Frequency	32 kHz +/- 4 Hz
Coverage	Up to 600/1100/2200 sq. ft.
Indicator Light	Red LED flashes when motion is detected
Sensor Type	Multidirectional transmitter/receiver with quartz oscillator
Environment	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UV-resistant plastic
Color	White
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

Wiring Diagrams on Page L-14.


Project
Location/Type

Technical Specifications
Dual-Technology Ceiling Sensor – CSD1000

legrand®
Pass & Seymour

Typical Specifications

The P&S CSD1000 Dual Technology Ceiling Sensor shall be cULus Listed, and California Title 24 Compliant as provided by Legrand/Pass & Seymour. The sensor shall detect occupancy in the control area by detecting Doppler shifts in transmitted ultrasound and passive infrared heat changes. Detection verification of both technologies must occur in order to activate lighting systems. Upon verification, detection by either shall hold lighting on. Unit shall be white, ceiling mounted with a flat, unobtrusive appearance and provide 360° coverage. CSD1000 sensor shall operate at 24 VDC/VAC and utilize a P&S power pack. For additional loads use the P&S Add-A-Relay Pack. Sensor shall have a time delay that is adjustable from 15 seconds to 30 minutes, set by DIP switch. Each sensing technology shall have an LED indicator that remains active at all times in order to verify detection within the area to be controlled. Sensor shall have standard 5 year warranty. Conforms to NEMA WD-1 and WD-6.



CSD1000

Catalog Number	Description
❒ CSD1000	Dual-Technology Ceiling Sensor

Performance


Electrical	
Supply Voltage	+ 24VDC Typical
Sensor output	+ 24VDC for external relay DC coil drive
Current Consumption	35mA
Sensor	
Technology	Ultrasonic and Passive Infrared
Time Delay	15 seconds to 30 minutes
Ultrasonic Sensitivity Adjustment	Min to max (trim pot)
Passive Infrared Sensitivity Adjustment	30% to 100% (dip switches)
Frequency	40 kHz
Ultrasonic Coverage	1076 sq. ft. (100 sq. m)
Passive Infrared Coverage	1290 sq. ft. (120 sq m)
Indicator Lights	Red and Green LEDs
Environment	
Temperature Range	32° to 131°F (0° to 55°C)
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Material	Thermoplastic, UV-resistant plastic
Color	White
Mounting	Mounting hardware for acoustic ceiling tile and keyhole mounting template included
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14 California Title 24 Compliant

Wiring Diagrams on Page L-15

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Power Pack – PWP120277
Add-A-Relay – AR120/277



PWP120277
AR120/277

Typical Specifications

Switching modules shall be cULus Listed as provided by Legrand/Pass & Seymour. Switching modules shall contain a 24VAC transformer, a full wave bridge rectifier, and a 24VDC coil-isolated relay capable of handling both incandescent and fluorescent lighting loads as well as inductive loads. Normal current consumption for the relay shall be 36mA, and the coil resistance shall be 660 Ohms. The transformer input shall be 120VAC or 277VAC; output shall be 24VDC, with a maximum current of 114mA. Power Packs shall have Teflon-coated wire leads for use in plenum ceilings.

Add-A-Relay modules shall be UL and CUL Listed as provided by Legrand/Pass & Seymour. Add-A-Relay modules shall contain a 24VDC coil-isolated relay capable of handling both incandescent and fluorescent lighting loads as well as inductive loads. Nominal current consumption for the relay shall be 36mA, and the coil resistance shall be 660 Ohms. Add-A-Relay modules shall have Teflon-coated wire leads for use in plenum ceilings. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description
❒ PWP120277	Power Pack
❒ AR120/277	Add-A-Relay (120V or 277V)

Performance

Transformer	
Supply Voltage	PWP120277: 120/230/277 Volt AC 50/60 Hz
Output	24VDC
	Maximum Current: 225mA (with relay connected)
Relay	
Type	Normally Open
Control Input:	
Nominal Current	36mA
Coil Resistance	660 Ohms
Nominal Voltage	24VDC
Maximum Voltage	28.8VDC
Minimum Voltage	18VDC
AC Load Output:	
Incandescent	13 Amp Max. (120V, 50 Hz only)
Fluorescent	20 Amp Max. (120V, 50 Hz or 277V, 60 Hz)
Motor Load	1 HP (120V, 60 Hz only or 240VAC)
Environment	
Temperature Range	0°C to 35°C
Non-condensing Relative Humidity	20 to 90%
Mechanical	
Enclosure Material	Thermoplastic, UL flame class rating 94 V2
Color	Gray
Third Party Compliance	cULus Listed – UL508 and C22.2 No. 14
	California Title 24 Compliant

Wiring Diagrams on Page L-16.

Project
Location/Type

Technical Specifications
Titan™ Series Incandescent & Magnetic Low-Voltage

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Typical Specifications

Manufacturer's Identification: Legrand/Pass & Seymour CD700
Description: Incandescent Dimmer
Type: Single Pole
Rating: 120V, 700W
3rd Party Compliance: cULus Listed, File Number E95219 Standard UL1472 Solid State Dimming Controls, Standard C22.2 No. 184-1; File Number E109655 Standard UL1917 Solid State Fan Controls, Standard C22.2 No. 156. California Title 24 Compliant. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Description	Ratings	Narrow or Wide
❒CD700	Single Pole, Slide-to-OFF	120V, 700W	Narrow
❒CD703P	Single Pole/3-Way, Preset	120V, 700W	Narrow
❒CD1100	Single Pole, Slide-to-OFF	120V, 1100W	Narrow
❒CD1103P	Single Pole/3-Way, Preset	120V, 1100W	Narrow
❒CD1600	Single Pole, Slide-to-OFF	120V, 1600W	Wide
❒CD1603P	Single Pole/3-Way, Preset	120V, 1600W	Wide
❒CD2000	Single Pole, Slide-to-OFF	120V, 2000W	Wide
❒CD2003P	Single Pole/3-Way, Preset	120V, 2000W	Wide
❒CDLV700	Single Pole, Slide-to-OFF	120V, 700W	Narrow
❒CDLV703P	Single Pole/3-Way, Preset	120V, 700W	Narrow
❒CDLV1100	Single Pole, Slide-to-OFF	120V, 1100W	Narrow
❒CDLV1103P	Single Pole/3-Way, Preset	120V, 1100W	Narrow
❒CDLV1600	Single Pole, Slide-to-OFF	120V, 1600W	Wide
❒CDLV1603P	Single Pole/3-Way, Preset	120V, 1600W	Wide

Performance


Electrical	
Supply Voltage	120VAC 60Hz
Maximum Load	Up to rating of device (including derating)
Environment	
Ambient Temperature	Between 0° and 40°C
Humidity	Less than 95% non-condensing
Mechanical	
Aluminum Heat Sink	Thermoplastic enclosure, wall plate, and ganging parts

Materials


Back Body	Thermoplastic	Spacers	Thermoplastic
Front Body	Thermoplastic	Heat Sink/Strap	Aluminum
Wall Plate	Thermoplastic	Screws	Plated Steel
End Caps	Thermoplastic		




CD703PW
Narrow



CD1100W
Narrow



CD1603PW
Wide



CDLV1103PW
Wide

Project
Location/Type

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Technical Specifications
Titan™ Series Incandescent & Magnetic Low-Voltage

De-Rating for Multi-Gang Installations

Dimmer Catalog No.	1-Gang Installation	Fins: NOT Removed		Fins: Removed	
		2-Gang Installation	3- or More Gang Installation	2-Gang Installation	3- or More Gang Installation
CD700	700W	700W	700W	700W	700W
CDLV700	700VA	700VA	700VA	700VA	700VA
CD703P	700W	700W	700W	700W	700W
CDLV703P	700VA	700VA	700VA	700VA	700VA
CD1100	1100W	1100W	1000W	1000W	900W
CDLV1100	1100VA	1100VA	1000VA	1000VA	850VA
CD1103P	1100W	1100W	1000W	1000W	950W
CDLV1103P	1100VA	1100VA	1000VA	1000VA	850VA
CD1600	1600W	1600W	1600W	1600W	1550W
CDLV1600	1600VA	1600VA	1600VA	1600VA	1550VA
CD1603P	1600W	1600W	1600W	1600W	1550W
CDLV1603P	1600VA	1600VA	1600VA	1600VA	1550VA
CD2000	2000W	2000W	2000W	—	—
CD2003P	2000W	2000W	2000W	—	—

Wall box gang requirements

1. Choose fin style (not removed or removed).
2. Select the column for the number of narrow dimmers to be installed.
3. Select the row for the number of wide dimmers to be installed.
4. The number at the intersection of the selected column and row indicates the number of wall box gangs required.

FINS: NOT Removed							
Wide Dimmers	Narrow Dimmers						
	0	1	2	3	4	5	6
0	0	1	1+1*	4	4+1*	7	7+1*
1	1	3	5	6	8	9	11
2	4	5	7	8	10	11	13
3	6	8	9	11	12	14	15
4	9	10	12	13	15	16	
5	11	13	14	16			
6	14	15					

*Refer to instruction sheets for exact placement of boxes for even number of narrow dimmers.

FINS: Removed							
Wide Dimmers	Narrow Dimmers						
	0	1	2	3	4	5	6
0	0	1	2	3	4	5	6
1	1	3	4	5	6	7	8
2	3	4	5	6	7	8	9
3	5	6	7	8	9	10	11
4	7	8	9	10	11	12	13
5	9	10	11	12	13	14	15
6	11	12	13	14	15	16	17

Project
Location/Type

Technical Specifications
Titan™ Series Fluorescent 2, 3 & 4 Wire


legrand®
Pass & Seymour

Typical Specifications


Manufacturer's Identification: Legrand/Pass and Seymour CDFB5
Description: Fluorescent Dimmer
Type: Single Pole 2 Wire
Rating: 5A, 120V
3rd Party Compliance: cULus Listed, File Number E95219 Standard UL1472 Solid State Dimming Controls, Standard C22.2 No. 184-1; File Number E109655 Standard UL1917 Solid State Fan Controls, Standard C22.2 No. 156. California Title 24 Compliant. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description	Ratings	Narrow or Wide
❒ CDFB5	2 Wire, Electronic, Single Pole, Slide-to-OFF	5A, 120V	Narrow
❒ CDFB8	2 Wire, Electronic, Single Pole, Slide-to-OFF	8A, 120V	Narrow
❒ CDFB10	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 120V	Wide
❒ CDFB16	2 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Wide
❒ CDFB7277	2 Wire, Electronic, Single Pole, Slide-to-OFF	7A, 277V	Wide
❒ CDFB10277	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Wide
❒ CDFB53P	2 Wire, Electronic, Single Pole/3-Way, Preset	5A, 120V	Narrow
❒ CDFB83P	2 Wire, Electronic, Single Pole/3-Way, Preset	8A, 120V	Narrow
❒ CDFB103P	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 120V	Wide
❒ CDFB163P	2 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Wide
❒ CDFB73P277	2 Wire, Electronic, Single Pole/3-Way, Preset	7A, 277V	Wide
❒ CDFB103P277	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Wide
❒ CD3FB16	3 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Narrow
❒ CD3FB163P	3 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Narrow
❒ CD3FB10277	3 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Narrow
❒ CD3FB103P277	3 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Narrow
❒ CD4FB*	4 Wire, Electronic, Single Pole, Slide-to-OFF	24VDC	Narrow
❒ CD4FB3P*	4 Wire, Electronic, Single Pole/3-Way, Preset	24VDC	Narrow


*4 Wire Dimmers require PWP120277 Power Pack, refer to Technical Specifications Page S-146.



Narrow



Narrow Preset



Wide Preset

Performance

Electrical	
Supply Voltage	2 & 3 Wire – 120VAC or 277VAC, 60Hz 4 Wire – 24VDC Class Two Wiring
Maximum Load	Up to rating of device (including de-rating)
Environment	
Ambient Temperature	Between 0° and 40°C
Humidity	Less than 95% non-condensing
Mechanical	
Aluminum Heat Sink	Thermoplastic enclosure, wall plate, and ganging parts

Materials

Back Body	Thermoplastic	Spacers	Thermoplastic
Front Body	Thermoplastic	Heat Sink/Strap	Aluminum
Wall Plate	Thermoplastic	Screws	Plated Steel
End Caps	Thermoplastic		

Project
Location/Type

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER

Technical Specifications
Titan™ Series Fluorescent 2, 3 & 4 Wire

De-Rating for Multi-Gang Installations

Dimmer Catalog No.	1-Gang Installation	Fins: NOT Removed		Fins: Removed	
		2-Gang Installation	3- or More Gang Installation	2-Gang Installation	3- or More Gang Installation
CDFB5	5A	5A	5A	5A	5A
CDFB8	8A	8A	8A	7.7A	6.3A
CDFB53P	5A	5A	5A	5A	5A
CDFB83P	8A	8A	8A	7.7A	6.3A
CDFB10	10A	10A	10A	10A	10A
CDFB16	16A	16A	16A	—	—
CDFB7277	7A	7A	7A	7A	7A
CDFB10277	10A	10A	10A	10A	10A
CDFB103P	10A	10A	10A	10A	10A
CDFB163P	16A	16A	16A	—	—
CDFB73P277	7A	7A	7A	7A	7A
CDFB103P277	10A	10A	10A	10A	10A
CD3FB16	16A	16A	16A	16A	16A
CD3FB163P	16A	16A	16A	16A	16A
CD3FB10277	10A	10A	10A	10A	10A
CD3FB103P277	10A	10A	10A	10A	10A
CD4FB	DO NOT EXCEED 60 BALLASTS				
CD4FB3P	DO NOT EXCEED 60 BALLASTS				

2 & 4 Wire Electronic Fluorescent Dimmer Ballast Compatibility

Compatible P&S Catalog Number	Voltage	Ballast Manufacturer	Model & Series
2 Wire Ballast Compatability			
CDFB5 CDFB8 CDFB53P CDFB83P CDFB10 CDFB16 CDFB103P CDFB163P	120VAC 60Hz	Advance	REZ-132-SC, REZ-2S32-SC, REZ-3S32-SC, REZ-154, REZ-2554, REZ-1Q18-M2, REZ-2Q18-M2, REZ-1T42-M2, REZ-2T42-M3, REZ-1TTS40/REZ-1TTS40-SC, REZ-2TTS40/REZ-2TTS40-SC, IEZ-2S24-D, REB-2S26-M1-LS-DIM/REB-2S26-M1-BS-DIM
		Lutron	2W-T426-120-1-S, 2W-T426-120-2-S, 2W-T432-120-1-S, 2W-T432-120-2-S, 2W-T832-120-1-S, 2W-T832-120-2-S
		Sylvania/Osram	
CDFB7277 CDFB10277 CDFB73P277 CDFB103P277	277VAC 60Hz	Advance	VEZ-132-SC, VEZ-2S32-SC, VEZ-3S32-SC, VEZ-154, VEZ2S54, VEZ-1Q18-M2, VEZ-2Q18-M2, VEZ-2T42-M3, VEZ-1TTS40/VEZ-1TTS40-SC, VEZ-2TTS40/VEZ-2TTS40-SC, IEZ-2S24-D
		Sylvania/Osram	QTP1x32T8/UNV DIM, QTP2x32T8/UNV DIM, QTP3x32T8/UNV DIM, QTP4x32T8/UNV DIM
4 Wire Ballast Compatability*			
CD4FB CD4FB3	24VDC	Advance Transformer	Mark 7, Xitanium, IZT, RZT, VZT, LED120
		Lutron	Eco-10 TVE
		Sylvania/Osram	Quicktronic Powersense, Helios, Optotronic QTP, QT, OT
		Universal	SuperDim, Ballastar ES, B132, B232, B332, B432
		GE	T8 Dimming Ballasts B132, B232, B332

*Additional 0-10V ballasts and/or LED drivers may also be compatible with this control. Contact Legrand/Pass & Seymour to verify compatibility.

Project
Location/Type

3 Wire Electronic Fluorescent Dimmer Ballast Compatibility

Compatible P&S Catalog Number	Voltage	Ballast Manufacturer	Compatible Dimmer Ballast Model & Series		
			1% Hi-Lume, Hi-Lume 3D	5% Compact SE	10% Eco-10
3 Wire Ballast Compatability					
CD3FB16 **CD3FB163P**	120VAC 60Hz	Lutron	HL3-T426-120-1-S, HL3-T432-120-1-S, FDB-T524-120-1, FDB-T524-120-2, FDB-T539-120-1, FDB-T539-120-2, FDB-T554-120-1, FDB-T554-120-2, FDB-2427-120-1, FDB-2427-120-2, FDB-2427-120-3, FDB-3627-120-1, FDB-3627-120-2, FDB-3627-120-3, FDB-4827-120-1, FDB-4827-120-2, FDB-4827-120-3, FDB-6027-120-1, FDB-6027-120-2, FDB-7280-120-1, FDB-8480-120-1, FDB-9680-120-1, H3DT832CUNV110, H3DT832CUNV117, H3DT832CUNV210, H3DT832CUNV217	FDB-T418-120-1-S, FDB-T418-120-2-S, FDB-T426-120-1-S, FDB-T426-120-2-S, FDB-T418-120-1-S, FDB-T418-120-2-S, FDB-T426-120-1-S, FDB-T426-120-2-S, FDB-T432-120-1-S, FDB-T432-120-2-S, FDB-T442-120-1-S, FDB-T442-120-2-S, FDB-1643-120-1, FDB-1643-120-2, FDB-1643-120-3, FDB-2227-120-1, FDB-2227-120-2, FDB-2227-120-3, FDB-2243-120-1, FDB-2243-120-2	E3-T514C-120-1, E3-T514C-120-2, E3-T521C-120-1, E3-T521C-120-2, ECO-T528-120-1, ECO-T528-120-2, ECO-T524-120-1, ECO-T524-120-2, ECO-T5H39-120-1, ECO-T5H39-120-2, ECO-T554-120-1, ECO-T554-120-2, ECO-T539-120-1, ECO-T539-120-2, ECO-T539-120-3, ECO-T540-120-1, ECO-T540-120-2, ECO-T540-120-3, ECO-T550-120-1, ECO-T550-120-2, ECO-T817-120-1, ECO-T817-120-2, ECO-T817-120-3, ECO-T825-120-1, ECO-T825-120-2, ECO-T832-120-1-L, ECO-T832-120-1-T, ECO-T832-120-2-L, ECO-T832-120-2-T, ECO-T832-120-3
CD3FB10277 **CD3FB103P277**	277VAC 60Hz	Lutron	HL3-T426-277-1-S, HL3-T432-277-1-S, FDB-T524-277-1, FDB-T524-277-2, FDB-T539-277-1, FDB-T539-277-2, FDB-T554-277-1, FDB-T554-277-2, FDB-2427-277-1, FDB-2427-277-2, FDB-2427-277-3, FDB-3627-277-1, FDB-3627-277-2, FDB-3627-277-3, FDB-4827-277-1, FDB-4827-277-2, FDB-4827-277-3, FDB-6027-277-1, FDB-6027-277-2, H3DT832CUNV110, H3DT832CUNV117, H3DT832CUNV210, H3DT832CUNV217	FDB-T418-277-1-S, FDB-T418-277-2-S, FDB-T426-277-1-S, FDB-T426-277-2-S, FDB-T418-277-1-S, FDB-T418-277-2-S, FDB-T426-277-1-S, FDB-T426-277-2-S, FDB-T432-277-1-S, FDB-T432-277-2-S, FDB-T442-277-1-S, FDB-T442-277-2-S, FDB-1643-277-1, FDB-1643-277-2, FDB-1643-277-3, FDB-2227-277-1, FDB-2227-277-2, FDB-2227-277-3, FDB-2243-277-1, FDB-2243-277-2	E3-T514C-277-1, E3-T514C-277-2, E3-T521C-277-1, E3-T521C-277-2, ECO-T528-277-1, ECO-T528-277-2, ECO-T524-277-1, ECO-T524-277-2, ECO-T5H39-277-1, ECO-T5H39-277-2, ECO-T554-277-1, ECO-T554-277-2, ECO-T539-277-1, ECO-T539-277-2, ECO-T539-277-3, ECO-T540-277-1, ECO-T540-277-2, ECO-T540-277-3, ECO-T550-277-1, ECO-T550-277-2, ECO-T817-277-1, ECO-T817-277-2, ECO-T817-277-3, ECO-T825-277-1, ECO-T825-277-2, E3-T832C-277-1, ECO-T832-277-1-L, ECO-T832-277-1-T, ECO-T832-277-1, E3-T832C-277-2, ECO-T832-277-2-L, ECO-T832-277-2-T, ECO-T832-277-2, ECO-T832-277-3

Wall box gang requirements

1. Choose fin style (not removed or removed).
2. Select the column for the number of narrow dimmers to be installed.
3. Select the row for the number of wide dimmers to be installed.
4. The number at the intersection of the selected column and row indicates the number of wall box gangs required.

FINS: NOT Removed							
Wide Dimmers	Narrow Dimmers						
	0	1	2	3	4	5	6
0	0	1	1+1*	4	4+1*	7	7+1*
1	1	3	5	6	8	9	11
2	4	5	7	8	10	11	13
3	6	8	9	11	12	14	15
4	9	10	12	13	15	16	
5	11	13	14	16			
6	14	15					

*Refer to instruction sheets for exact placement of boxes for even number of narrow dimmers.


FINS: Removed							
Wide Dimmers	Narrow Dimmers						
	0	1	2	3	4	5	6
0	0	1	2	3	4	5	6
1	1	3	4	5	6	7	8
2	3	4	5	6	7	8	9
3	5	6	7	8	9	10	11
4	7	8	9	10	11	12	13
5	9	10	11	12	13	14	15
6	11	12	13	14	15	16	17

Project
Location/Type

legrand®
Pass & Seymour


Technical Specifications
Incandescent Wide Slide Dimmers
120VAC, 60 Hz

TITLE 24 ENERGY SAVER



WS700TC
Shown with the Three Interchangeable Faces

All 1100W versions are 2.50" W



Preset Models

Typical Specifications

Incandescent dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour Specification Grade, with full range solid-state circuitry that shall provide even control by means of a slide mechanism. Preset lighting levels may be maintained by means of a separate ON/OFF switch. Dimmers shall fit in standard single gang wall boxes. California Title 24 Compliant. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description	Rating	Color
❒ WS700TC	Single Pole, Slide to OFF	120V, 700W	Ivory/White/Lt. Almond
❒ WS700W	Single Pole, Slide to OFF	120V, 700W	White
❒ WS703PTC	Preset, Single Pole/3-Way	120V, 700W	Ivory/White/Lt. Almond
❒ WS703PW	Preset, Single Pole/3-Way	120V, 700W	White
❒ WS1100TC	Preset, Single Pole/3-Way	120V, 1100W	Ivory/White/Lt. Almond
❒ WS1100W	Preset, Single Pole/3-Way	120V, 1100W	White
❒ WS1103PTC	Preset, Single Pole/3-Way	120V, 1100W	Ivory/White/Lt. Almond
❒ WS1103PW	Preset, Single Pole/3-Way	120V, 1100W	White

Features

- Maximum ratings are for continuous full load.
- Preset models include ON/OFF rocker switch that allows ON/OFF switching without disturbing preset intensity levels.
- 700 Watt models may be ganged without de-rating.
- RFI suppression built-in.
- Installs in NEMA standard single-gang wall boxes.
- Screw-pressure-plate back and side wire.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see Page M-17).

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	(See Above) Incandescent Only
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed, CSA Certified
Physical	
Size	One Gang
Heat Sink	Black Anodized Aluminum Mounting Strap
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Front Cover and Knob	Flame Retardant UL94 V0, UV Stable Polycarbonate
Back Body	Unbreakable ABS

Accessories

Installation and Operating Instructions Provided

Project
Location/Type

Technical Specifications
Magnetic Low-Voltage Wide Slide Dimmers
120VAC, 60 Hz

legrand®
Pass & Seymour

TITLE 24 ENERGY SAVER


Typical Specifications

Low-voltage dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour Specification Grade, with full range solid-state circuitry that shall provide even control by means of a slide mechanism. Preset lighting levels may be maintained by means of a separate ON/OFF switch. Dimmers shall fit in standard single gang wall boxes. California Title 24 Compliant. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Description	Rating	Color
❒ WSLV700TC	Single Pole	120V, 700VA	Ivory/White/Lt. Almond
❒ WSLV700W	Single Pole	120V, 700VA	White
❒ WSLV703PTC	Preset, Single Pole/3-Way	120V, 700VA	Ivory/White/Lt. Almond
❒ WSLV703PW	Preset, Single Pole/3-Way	120V, 700VA	White

Features

- Maximum ratings are for continuous full load.
- 700VA dimmers may be ganged without de-rating.
- Installs in NEMA standard single-gang wall boxes.
- Preset models include ON/OFF rocker switch that allows ON/OFF switching without disturbing preset intensity levels.
- RFI suppression built-in.
- Screw-pressure-plate back and side wire.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see Page M-17).



WSLV700TC
Shown with the Three Interchangeable Faces



WSLV703PW

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	(See Above) Low-Voltage Only
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed, CSA Certified
Physical	
Size	One Gang
Heat Sink	Black Anodized Aluminum Mounting Strap
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Front Cover and Knob	Flame Retardant UL94 V0, UV Stable Polycarbonate
Back Body	Unbreakable ABS

Accessories


Installation and Operating Instructions Provided

Project
Location/Type


legrand®
Pass & Seymour

Technical Specifications
Incandescent Rotary Dimmers
120VAC, 60 Hz


TITLE 24 ENERGY SAVER

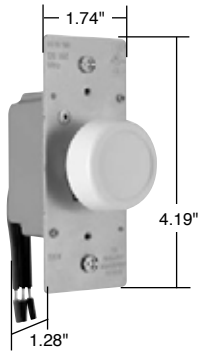

R600PWV

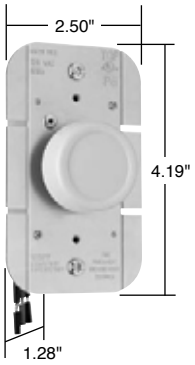

R1000WV



90621

Typical Specifications

Incandescent dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour Specification Grade, with full range solid-state circuitry giving even control by means of rotary action and positive ON/OFF switching. All dimmers shall fit standard single gang wall boxes. California Title 24 Compliant. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Description	Rated Load
❒ R600V	Rotary Dial ON/Dial OFF Incandescent Dimmer, Single Pole Rotate to OFF	600W
❒ R1000V	Rotary Dial ON/Dial OFF Incandescent Dimmer, Single Pole Rotate to OFF	1000W
❒ R600P	Rotary Preset Incandescent Dimmer, Single Pole Push ON/Push OFF	600W
❒ R603P	Rotary Preset Incandescent Dimmer, 3-Way Push ON/Push OFF	600W
❒ R1000P	Rotary Preset Incandescent Dimmer, Single Pole Push ON/Push OFF	1000W
❒ R1003P	Rotary Preset Incandescent Dimmer, 3-Way Push ON/Push OFF	1000W
❒ R600PLV	Rotary Preset Lighted Incandescent Dimmer, Single Pole Push ON/Push OFF	600W
❒ R603PLV	Rotary Preset Lighted Incandescent Dimmer, 3-Way Push ON/Push OFF	600W
❒ 90621V	Low-Profile Rotary Dimmer, Rotate to OFF	600W

Features

- Maximum ratings are for continuous full load.
- Push-ON/OFF rotary switch permits full-range dimming control and switching at any pre-set level.
- Excellent state-of-the-art solid-state electronic circuitry design saves energy and extends bulb life when lighting level is reduced.
- 600V, UL/CSA hook-up wire, multi-stranded, fray-resistant, pre-tinned, 18-gauge wire, insulation rated at 105°C.
- Thick aluminum mounting strap provides heat sink for electronic components.
- Installs in NEMA standard single-gang wall boxes.
- May be ganged without de-rating.
- RFI protected.

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	600 Watt Incandescent Only
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed CSA Certified
Controls	
Range	Dial with Push On and Off
Output	Safety Power Off Switch
Physical	
Size	Single Gang, No Derating Necessary
Heat Sink	Aluminum Mounting Strap
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Knob	Unbreakable ABS
Back Body	Unbreakable ABS

Accessories

Twist Wire Connectors	Provided
Installation and Operating Instructions	Provided

Project
Location/Type


Technical Specifications
High Wattage Rotary Dimmers
Dial On/Off Incandescent 120VAC, 60 Hz

legrand®
Pass & Seymour

Typical Specifications

Incandescent dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour Specification Grade, with full range solid-state circuitry giving even control by means of rotary action and positive ON/OFF switching. All dimmers shall fit standard single gang wall boxes. Conforms to NEMA WD-1 and WD-6.


Catalog Number	Color	Description	Rated Load
❒ 91001I	Ivory	Single Pole – Dial ON/OFF	1000W
❒ 91001W	White	Single Pole – Dial ON/OFF	1000W
❒ 91501I	Ivory	Single Pole – Dial ON/OFF	1500W
❒ 91501W	White	Single Pole – Dial ON/OFF	1500W
❒ 92001I	Ivory	Single Pole – Dial ON/OFF	2000W
❒ 92001W	White	Single Pole – Dial ON/OFF	2000W



91001

Features

- Maximum ratings are for continuous full load.
- Superior state-of-the-art solid-state electronic circuitry design increases energy savings and extends bulb life as lighting level is reduced.
- Field-adjustable trim control permits user to set minimum light level as desired.
- Includes line voltage compensation circuitry, to reduce changes in light level caused by line voltage fluctuation.
- 600V, UL/CSA hook-up wire, multi-stranded, fray-resistant, pre-tinned, insulation rated at 105°C.
- Anodized extruded aluminum fins provide heat sink for electronic components.
- Installs in NEMA standard single-gang wall boxes.
- De-rating required when fins are removed.
- Includes the soft-start feature on some models, to increase bulb life.



91501
92001

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	(See Above) Incandescent Only
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed CSA Certified
Controls	
Output	Safety Power Off Switch
Physical	
Size	Gangable
Heat Sink	Finned Aluminum
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Knob	Flame Retardant UL94 V0, UV Stable Polycarbonate
Back Body	Unbreakable ABS


Accessories

Snap-On Cover Plate	Provided
Twist Wire Connectors	Provided
Installation and Operating Instructions	Provided
1000 Watt White Cover Plate and Knob Kit	Available: DAPK1W
1500/2000 Watt White Cover Plate and Knob Kit	Available: DAPK2W
1000 Watt Brown Cover Plate and Knob Kit	Available: DAPK1
1500/2000 Watt Brown Cover Plate and Knob Kit	Available: DAPK2
Matching Rotary Switch	Available: 90200


Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
High Wattage Rotary Dimmers
Preset Push On/Off Incandescent 120VAC, 60 Hz



91000
91003



91500
91503

Typical Specifications

Incandescent dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour Specification Grade, with full range solid-state circuitry giving even control by means of rotary action and positive ON/OFF switching. All dimmers shall fit standard single gang wall boxes. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description	Rated Load
❒ 91000I	Ivory	Single Pole – Preset Push ON/OFF	1000W
❒ 91000W	White	Single Pole – Preset Push ON/OFF	1000W
❒ 91003I	Ivory	Three-Way – Preset Push ON/OFF	1000W
❒ 91003W	White	Three-Way – Preset Push ON/OFF	1000W
❒ 91500I	Ivory	Single Pole – Preset Push ON/OFF	1500W
❒ 91503I	Ivory	Three-Way – Preset Push ON/OFF	1500W
❒ 91503W	White	Three-Way – Preset Push ON/OFF	1500W

Features

- Maximum ratings are for continuous full load.
- Superior state-of-the-art solid-state electronic circuitry design increases energy savings and extends bulb life as lighting level is reduced.
- Field-adjustable trim control permits user to set minimum light level as desired.
- Includes line voltage compensation circuitry, to reduce changes in light level caused by line voltage fluctuation.
- 600V, UL/CSA hook-up wire, multi-stranded, fray-resistant, pre-tinned, insulation rated at 105°C.
- Anodized extruded aluminum fins provide heat sink for electronic components.
- Installs in NEMA standard single-gang wall boxes.
- De-rating required when fins are removed.

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	(See Above) Incandescent Only
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed CSA Certified
Controls	
Output	Safety Power Off Switch
Physical	
Size	Gangable
Heat Sink	Finned Aluminum
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Knob	Flame Retardant UL94 V0, UV Stable Polycarbonate
Back Body	Unbreakable ABS

Accessories

Snap-On Cover Plate	Provided
Twist Wire Connectors	Provided
Installation and Operating Instructions	Provided
1000 Watt White Cover Plate and Knob Kit	Available: DAPK1W
1500/2000 Watt White Cover Plate and Knob Kit	Available: DAPK2W
1000 Watt Brown Cover Plate and Knob Kit	Available: DAPK1
1500/2000 Watt Brown Cover Plate and Knob Kit	Available: DAPK2
Matching Rotary Switch	Available: 90200

Project
Location/Type

Technical Specifications
Magnetic Low-Voltage Rotary Dimmer


Magnetic Low-Voltage Rotary Strap – 120VAC, 60 Hz

legrand®
Pass & Seymour

Typical Specifications

Magnetic Low-Voltage lighting dimmer shall be UL Listed/CSA Certified Legrand/Pass & Seymour low voltage, rated 600VA max., to control the primary side of the magnetic transformer for low voltage fixtures. Dimmer shall provide even control by means of rotary action and positive ON/OFF switching. They shall be capable of maintaining a desired preset lighting level. Dimmers shall fit in standard single gang wall boxes. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description	Rated Load
❒ 95600I	Ivory	Preset – Push ON/OFF	600VA max.
❒ 95600W	White	Preset – Push ON/OFF	600VA max.



95600

Features

- Maximum ratings are for continuous load.
- Push-ON/OFF at any setting.
- Superior state-of-the-art solid-state electronic circuitry design increases energy savings and extends bulb life as lighting level is reduced.
- Field-adjustable trim control permits user to set minimum light level as desired.
- 600V, UL/CSA hook-up wire, multi-stranded, fray-resistant, pre-tinned, 18-gauge wire, insulation rated at 105°C.
- Thick aluminum mounting strap provides heat sink for electronic components.
- Installs in NEMA standard single-gang wall boxes.
- Includes line voltage compensation circuitry, to reduce changes in light level caused by line voltage fluctuation.

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	600VA Magnetic Ballast Low-Voltage Only
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed CSA Certified
Controls	
Range	Dial with Push On and Off
Output	Safety Power Off Switch
Physical	
Size	Single Gang, No Derating Necessary
Heat Sink	Aluminum Mounting Strap
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Knob	Unbreakable ABS
Back Body	Unbreakable ABS


Accessories

Twist Wire Connectors	Provided
Installation and Operating Instructions	Provided

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Magnetic Low-Voltage Rotary Dimmer
High Wattage Rotary 120VAC, 60 Hz



95100

Typical Specifications

Magnetic Low-Voltage lighting dimmer shall be UL Listed and CSA Certified Legrand/Pass & Seymour, rated at 1000 VA max., to control the primary side of the magnetic transformer for low voltage lighting fixtures. Dimmer shall provide even control by means of rotary action and positive ON/OFF switching. Dimmers shall fit in standard single wall boxes. Conforms to NEMA WD-1 and WD-6.

Catalog Number	Color	Description	Rated Load
❒ 95100I	Ivory	Dial ON/OFF	1000VA

Features

- Maximum ratings are for continuous full load.
- Superior state-of-the-art solid-state electronic circuitry design increases energy savings and extends bulb life as lighting level is reduced.
- Field-adjustable trim control permits user to set minimum light level as desired.
- Includes line voltage compensation circuitry, to reduce changes in light level caused by line voltage fluctuation.
- 600V, UL/CSA hook-up wire, multi-stranded, fray-resistant, pre-tinned, 16-gauge wire, insulation rated at 105°C.
- Anodized extruded aluminum fins provide heat sink for electronic components.
- Installs in NEMA standard single-gang wall boxes.
- De-rating required when fins are removed for multi-gang installations.

Performance

Electrical	
Voltage	120VAC 60 Hz
Rated Load	1000VA
Filtering	Radio Frequency Interference Filtering
Construction	Printed Circuit Board for Reliability
3rd Party Compliance	UL Listed
	CSA Certified
Controls	
Output	Safety Power Off Switch
Physical	
Size	Gangable
Heat Sink	Finned Aluminum
Wiring	6" Color-Coded Leads Pre-Stripped
Environmental	
Application	Indoor Use Only

Materials

Knob	Flame Retardant UL94 V0, UV Stable Polycarbonate
Back Body	Unbreakable ABS

Accessories

Snap-On Cover Plate	Provided
Twist Wire Connectors	Provided
Installation and Operating Instructions	Provided
1000 Watt White Cover Plate and Knob Kit	Available: DAPK1W
1500/2000 Watt White Cover Plate and Knob Kit	Available: DAPK2W
1000 Watt Brown Cover Plate and Knob Kit	Available: DAPK1
1500/2000 Watt Brown Cover Plate and Knob Kit	Available: DAPK2

Project
Location/Type

legrand®
Pass & Seymour

CABLING TIP

UTP Outlet Wiring Configurations

T568A

- Adopted by TIA/EIA and 11801 standards.
- Compatible with one- or two-pair USOC.
- May be used for ISDN.
- Supports Categories 3, 4, 5, 5e, and 6.

Pair ID	PIN Number
T1	5
R1	4
T2	3
R2	6
T3	1
R3	2
T4	7
R4	8

T568B

- Adopted by TIA/EIA and 11801 standards.
- Not compatible with one- or two-pair USOC.
- May be used for ISDN.
- Supports Categories 3, 4, 5, 5e, and 6.

Pair ID	PIN Number
T1	5
R1	4
T2	1
R2	2
T3	3
R3	6
T4	7
R4	8

USOC

- Available for 1-, 2-, 3-, or 4-pair systems.
- Maintains pair continuity in 6-position plugs configured with one, two, or three pairs.
- Inferior performance compared to T568A or T568B.
- Not cabling standard compliant.

Pair ID	PIN Number
T1	5
R1	4
T2	3
R2	6
T3	2
R3	7
T4	1
R4	8

10Base-T/100Base-T


- Eight-position jack, but only two pairs used.

Pair ID	PIN Number
T1	1
R1	2
T2	3
R2	6


Token Ring

- Uses either a six-position or eight-position jack.
- Eight-position compatible with T568A, T568B, and USOC.
- Six-position compatible with one- or two-pair USOC.


Pair ID	PIN Number
T1	5
R1	4
T2	3
R2	6

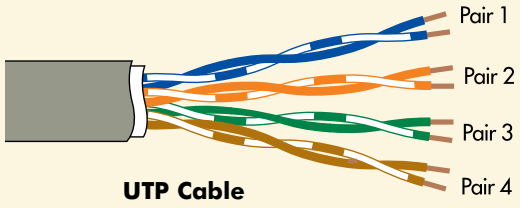


UTP Cable




T568A




T568B (AT&T)

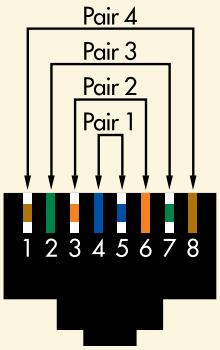


USOC 4-pair



USOC 1-, 2-, or 3-pair



10Base-T (802.3)





Token Ring (802.5)

Project	
Location/Type	

legrand®
Pass & Seymour


Technical Specifications
Universal & Six-Pin Wiring Guides & UTP Cabling Installation

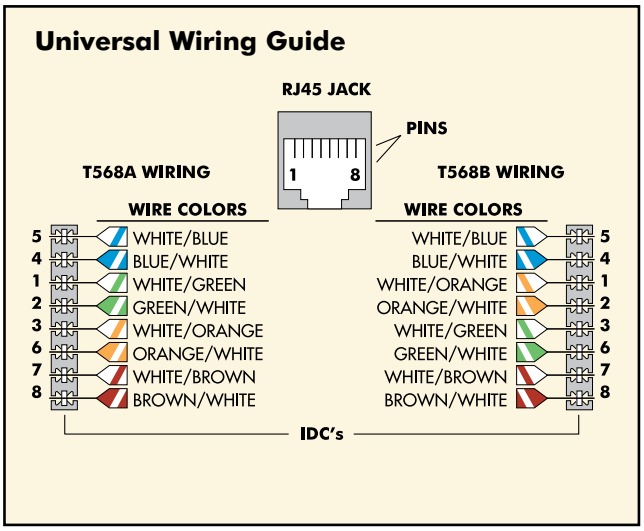

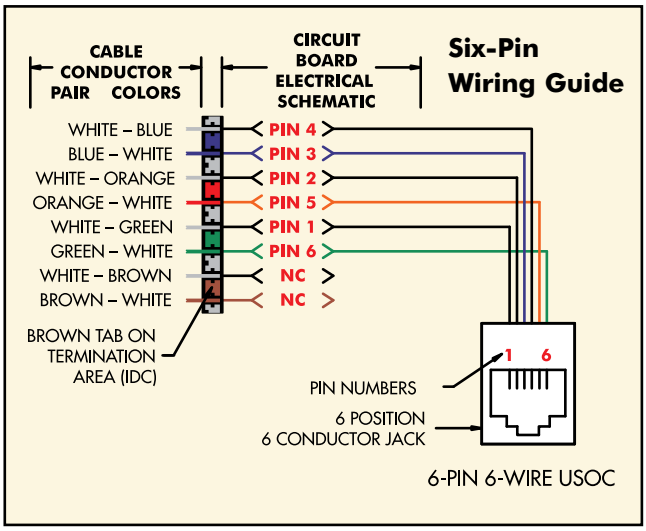

APPLICATION EXAMPLE

In some retrofit applications you may encounter quad-wire. This is the red, green, yellow, and black phone cable that was common in most phone installations before the 90's. Legrand/Pass & Seymour recommends that you remove this cable whenever possible and replace it with Category 5e cable and connectors. If removal is not possible, follow the color-code guidelines below to make connections to jacks bearing current UTP color markings.

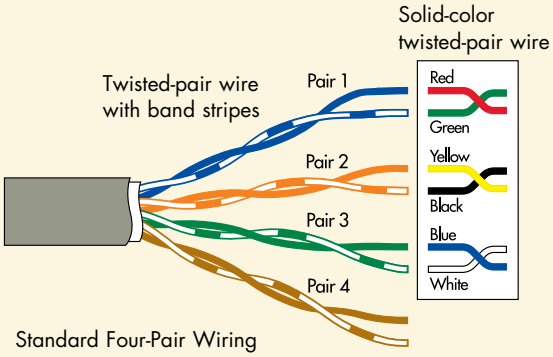

Standard Four-Pair Wiring

Pair 1	T	White/Blue	Pair 3	T	White/Green
	R	Blue/White		R	Green/White
Pair 2	T	White/Orange	Pair 4	T	White/Brown
	R	Orange/White		R	Brown/White

Basic practices for installing unshielded twisted-pair (UTP) network cabling

Minimize untwisting of twisted pairs.
When making terminations at jack modules, untwist no more than 1/2" for Category 5e cable or above; no more than 1" for Category 3. Untwisting pairs beyond these specifications can increase the risk of failed cable performance testing.

Limit cable bend radius.
Cable should not bend more sharply than four times its diameter. For Category 5e cable or above, that means a minimum bend radius of about one inch. Bending cable to tighter-than-minimum bend radius causes pairs to separate, compromising cable performance.

Observe maximum pulling tension.
Cable is commonly pulled through walls, raceways, and other passageways. No more than 25 pounds of tension should be applied. Excess pulling tension can distort twisted pairs, again posing a threat to performance.

Stay away from high-voltage and electromagnetism.
Avoid running cable in proximity to high-voltage sources or electromagnetic fields, as these can cause interference. Examples include ballasts, electric motors, transformers, and copiers.

Test to ensure performance.
Test completed cabling to ensure that customers get what they're paying for — and to prevent insufficient-performance liability. Test parameters are outlined in TIA/EIA-568-B.1 and vary depending on type of cable.

Project
Location/Type

legrand®
Pass & Seymour

Application

Legrand/Pass & Seymour's broad line of Standard Size Plastic and Metal Wall Plates features the most complete range of types, sizes, colors, and finishes available. Choose from more than 1,900 standard plates in non-combustible thermoset plastic material, self-extinguishing nylon material, screwless polycarbonate material, or attractively finished metal, for residential, commercial, institutional, and industrial applications. All plastic wall plates color match to Legrand/Pass & Seymour devices.



Thermoset Smooth

3rd Party Compliance


UL Listed, Standard UL514, Cover Plates for Flush-Mounted Wiring Devices.
Plastic Wall Plates UL File No. E143222.
Metal Wall Plates UL File No. E143223.
CSA Certified.

Thermoset Plastic Wall Plates

- Molded of non-combustible mar-proof material.
- Available in "SP" series in Standard, Junior-Jumbo, and Jumbo sizes.
- Seven standard colors available – Ivory, White, Brown, Gray, Black, Red, and Light Almond.
- Individually wrapped with color-matching screws.
- Resistant to discoloration, grease, oil, solvent and moisture.
- Nominal thickness, .070"

Materials

Wall Plate Material	Urea
Mounting Screws	Metal, oval heads painted to match plate color



TP Nylon Smooth

TradeMaster® Thermoplastic Wall Plates

- Molded of rugged, practically indestructible self-extinguishing nylon. ("TP" series only.)
- Available in "TP" series, extra 3/16" width and height than Standard size plates; and "TPJ" series, extra 3/16" width and height than Junior-Jumbo size plates.
- Available in Ivory, White, Brown, Gray, Black, Blue, Orange, Red, and Light Almond.
- Preferred for hospital, industrial, institutional, and other high-abuse applications.
- Nominal thickness, .070"

Performance

Mechanical	
Mechanical Strength	Exceeds UL514 Bend Test
Deformation	Exceeds UL514 Corner Peel
Environmental	
Chemical-Resistant	
Flammability	UL94 V2

Materials

Wall Plate Material	.070" Nylon 6
Wall Plate Finish	Matte
Mounting Screws	Steel, oval heads painted to match plate color

Project
Location/Type

legrand®
Pass & Seymour

Technical Specifications
Wall Plate Specifications



Studio Polycarbonate



Screwless Polycarbonate



302 Stainless Steel



Polished Brass



Brushed Brass



Aluminum

3rd Party Compliance

UL Listed, Standard UL514, Cover Plates for Flush-Mounted Wiring Devices.
Plastic Wall Plates UL File No. E143222.
Metal Wall Plates UL File No. E143223.
CSA Certified.

Studio Polycarbonate Wall Plates

- Wall plate and back plate made of polycarbonate Lexan 241R opaque.
- Wall plate thickness: 0.210
  Back plate thickness: 0.28

Screwless Polycarbonate Wall Plates

- Molded of .065" thick polycarbonate, matte finish.
- 2-piece plastic subplate made of polycarbonate.
- Extra 1/8" width and height than Standard size plates.
- Available in Ivory, White, Brown, Gray, Black, and Light Almond; and five metallic and three wood finishes.

Performance

Flammability	UL94 V2

Materials

Wall Plate Material	.065" Polycarbonate	Plastic Subplate Material	Polycarbonate
Wall Plate Finish	Matte		

Metal Wall Plates

- Constructed of corrosion-resistant stainless steel, brass, aluminum, chrome, brushed bronze or galvanized steel.
- Standard, Jumbo, and Tandem plates available, as well as special Panel plates up to 5-gangs high and 10-gangs wide.
- Packaged in protective film, with finish-matching screws.
- Variety of special plated finishes. Paintable to match plastic plates.
- Can be silk-screened or engraved, and custom punched with over 300 opening styles.

Materials

- Type 302 Stainless Steel, non-magnetic, .032" nominal thickness, brushed finish. This alloy contains 18% chromium and 8% nickel for superior resistance to corrosion. Recommended for use in food processing plants, dairies, chemical plants, and other industrial, institutional, and commercial applications where corrosive atmospheres exist.
- Type 430 Stainless Steel, magnetic, .032" nominal thickness, brushed finish. Less corrosion-resistant than Type 302, but ideal for general service in high abuse applications in industrial plants, commercial, and institutional buildings.
- Chrome, Brushed and Polished Brass, .040" thick. 70% copper, 30% zinc alloy gives warm, appealing finish to modern decor as well as retrofit applications. Lacquered to prevent corrosion.
- Aluminum, .040" thick. Lustrous satin finish. Lacquered to prevent corrosion.
- Galvanized Steel. Used only for Handy Box Plates.
- Brushed Bronze, .040" thick. 90% copper, 10% zinc. Lacquered to prevent corrosion.

Project
Location/Type

Technical Specifications
Wall Plate Dimensions


legrand®
Pass & Seymour

Standard Size Wall Plates

- Standard size wall plates for all applications.
- Best fit for surface mount boxes.
- Available in plastic and metal only.

Dimensions

1 gang	2.75" x 4.5"	**4 gang**	8.125" x 4.5"	**7 gang**	13.62" x 4.5"
2 gang	4.56" x 4.5"	**5 gang**	10" x 4.5"	**8 gang**	15.44" x 4.5"
3 gang	6.375" x 4.5"	**6 gang**	11.812" x 4.5"		




STANDARD

TradeMaster® Wall Plates

- Extra 3/16" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle, and decorator single gang plates.

Dimensions

1 gang	2.9375" x 4.6875"	**3 gang**	6.563" x 4.6875"	**5 gang**	10.188" x 4.6875"
2 gang	4.75" x 4.6875"	**4 gang**	8.375" x 4.6875"	**6 gang**	12" x 4.6875"




TRADEMASTER STANDARD


Studio Polycarbonate Wall Plates

- Wall plate and back plate made of polycarbonate Lexan 241R opaque.
- Wall plate thickness: 0.210
  Back plate thickness: 0.28

Wall Plate Dimensions				Back Plate Dimensions			
1 gang	2.988" x 4.901"	**3 gang**	6.613" x 4.901"	**1 gang**	3.158" x 4.97"	**3 gang**	6.783" x 4.97"
2 gang	4.80" x 4.901"	**4 gang**	8.425" x 4.901"	**2 gang**	4.97" x 4.97"	**4 gang**	8.595" x 4.97"



STUDIO




SCREWLESS

Screwless Polycarbonate Wall Plates

- Available in decorator, toggle, and duplex openings.
- Extra 1/8" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Molded of .065" thick polycarbonate.
- 2-piece plastic subplate made of polycarbonate.
- Available in five metallic and three wood finishes; and six standard colors.

Wall Plate Dimensions				Subplate Dimensions			
1 gang	3.10" x 4.87"	**3 gang**	6.724" x 4.87"	**1 gang**	2.85" x 4.62"	**3 gang**	6.474" x 4.62"
2 gang	4.912" x 4.87"	**4 gang**	8.536" x 4.87"	**2 gang**	4.662" x 4.62"	**4 gang**	8.286" x 4.62"



JUNIOR-JUMBO

Junior-Jumbo Wall Plates

- Extra 3/8" width and height than Standard size wall plates.
- Additional coverage for sheet rock gaps.
- Available in plastic and metal only.

Dimensions


1 gang	3.125" x 4.87"	**2 gang**	4.93" x 4.87"	**3 gang**	6.75" x 4.87"	**4 gang**	8.56" x 4.87"

TradeMaster Jumbo Wall Plates

- Extra 3/16" width and height than Junior-Jumbo size wall plates.
- Provide additional coverage for sheet rock gaps, matching the appearance of the TradeMaster Plates.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle, and decorator single gang plates.

Dimensions

1 gang	3.3125" x 5.0625"	**3 gang**	6.9375" x 5.0625"
2 gang	5.125" x 5.0625"	**4 gang**	8.75" x 5.0625"




TRADEMASTER JUMBO

Jumbo Wall Plates

- Extra 3/4" width and height than Standard size wall plates.
- Largest size wall plates to cover larger wall damage.
- Available in plastic and metal only.

Dimensions

1 gang	3.5" x 5.25"	**2 gang**	5.31" x 5.25"	**3 gang**	7.12" x 5.25"	**4 gang**	8.93" x 5.25"




JUMBO

Project
Location/Type

International standards

We're uniquely qualified to help you *understand* them. And *comply* with them.

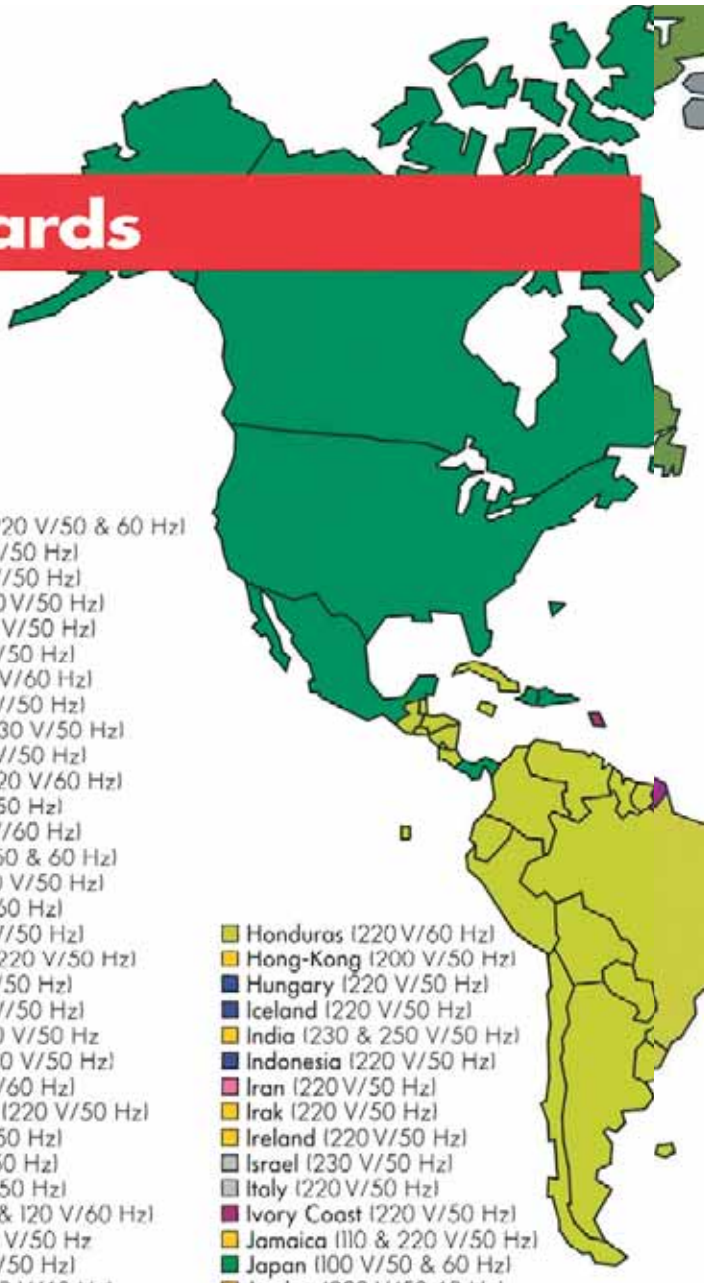


We know the rules...

As the world's largest manufacturer of wiring devices — with operations in dozens of countries, on all major continents — our engineers and scientists participate in and contribute to the formation of the world's safety and performance standards. That involvement not only helps us *build* products that meet and exceed those standards — it enables us to help *you* understand your compliance needs.

And we have the tools.

With distribution points in over 110 countries — and catalogs available in all major world languages — we are uniquely qualified to guide you in designing products for overseas markets. Whether you need components that are recognized and welcomed in distant markets...or product expertise, applications assistance, and service from a source *within* those markets... you can depend on our worldwide manufacturing and distribution network.

- Afghanistan (220 V/50 & 60 Hz)
- Algeria (220 V/50 Hz)
- Angola (220 V/50 Hz)
- Argentina (220 V/50 Hz)
- Australia (240 V/50 Hz)
- Austria (220 V/50 Hz)
- Bahamas (120 V/60 Hz)
- Bahrain (230 V/50 Hz)
- Bangladesh (230 V/50 Hz)
- Belgium (220 V/50 Hz)
- Belize (110 & 220 V/60 Hz)
- Benin (220 V/50 Hz)
- Bermuda (115 V/60 Hz)
- Bolivia (110 V/50 & 60 Hz)
- Botswana (220 V/50 Hz)
- Brazil (220 V/60 Hz)
- Bulgaria (220V/50 Hz)
- Burkina Faso (220 V/50 Hz)
- Burma (220 V/50 Hz)
- Burundi (220 V/50 Hz)
- Cambodia (120 V/50 Hz
- Cameroon (220 V/50 Hz)
- Canada (115 V/60 Hz)
- Central Africa (220 V/50 Hz)
- Chad (220 V/50 Hz)
- Chile (220 V/50 Hz)
- China (220 V/50 Hz)
- Colombia (110 & 120 V/60 Hz)
- Comoros (220 V/50 Hz
- Congo (220 V/50 Hz)
- Costa Rica (120 V/60 Hz)
- Cuba (115 & 120 V/60 Hz)
- Cyprus (240 V/50 Hz)
- Czechoslovakia (220 V/50 Hz)
- Denmark (220 V/50 Hz)
- Djibuti (220 V/50 Hz)
- Dominican Rep. (110 & 120 V/60 Hz)
- Ecuador (110 & 220 V/60 Hz)
- Egypt (220 V/50 Hz)
- El Salvador (120 & 240 V/60 Hz)
- Ethiopia (220 V/50 Hz)
- Fiji (240 V/50 Hz)
- Finland (220 V/50 Hz)
- France (230 V/50 Hz)
- French Guinea (220 V/50 Hz)
- French Polynesia (220 V/60 Hz)
- Gabon (220 V/50 Hz)
- Gambia (230 V/50 Hz)
- Germany (230 & 400 V/50 Hz)
- Ghana (250 V/50 Hz)
- Greece (220 V/50 Hz)
- Greenland (220 V/50 Hz)
- Guadeloupe (220 V/60 Hz)
- Guatemala (220 V/60 Hz)
- Guinea Bissau (220 V/50 Hz)
- Guyana (110 V/50 Hz)
- Haiti (110 V/60 Hz)
- Honduras (220 V/60 Hz)
- Hong-Kong (200 V/50 Hz)
- Hungary (220 V/50 Hz)
- Iceland (220 V/50 Hz)
- India (230 & 250 V/50 Hz)
- Indonesia (220 V/50 Hz)
- Iran (220 V/50 Hz)
- Irak (220 V/50 Hz)
- Ireland (220 V/50 Hz)
- Israel (230 V/50 Hz)
- Italy (220 V/50 Hz)
- Ivory Coast (220 V/50 Hz)
- Jamaica (110 & 220 V/50 Hz)
- Japan (100 V/50 & 60 Hz)
- Jordan (200 V/50-60 Hz)
- Kenya (240 V/50 Hz
- Korea (100 V/60 Hz)
- Kuwait (240 V/50 Hz)
- Laos (220 V/50 Hz)
- Lebanon (110 & 220 V/50 Hz
- Lesotho (230 V/50 Hz)
- Liberia (120 V/60 Hz)
- Libya (110 & 220 V/50 Hz)
- Luxembourg (220 V/50 Hz)
- Macao (220 V/50 Hz)
- Madagascar (220 V/50 Hz)
- Malawi (230 V/50 Hz)
- Malaysia (240 V/50 Hz)
- Mali (220 V/50 Hz)
- Malta (240 V/50 Hz)
- Martinique (220 V/50 Hz)
- Mauritania (220 V/50 Hz)
- Mauritius (230 V/50 Hz)
- Mexico (127 V/50 & 60 Hz)
- Mozambique (220 V/50 Hz)
- Morocco (220 V/50 Hz)
- Namibia (220 V/ 50 Hz)
- Nepal (220 V/50 Hz)
- Netherlands (220 V/50 Hz)
- New Caledonia (220 V/50 Hz)
- New Zealand (230 V/50 Hz)

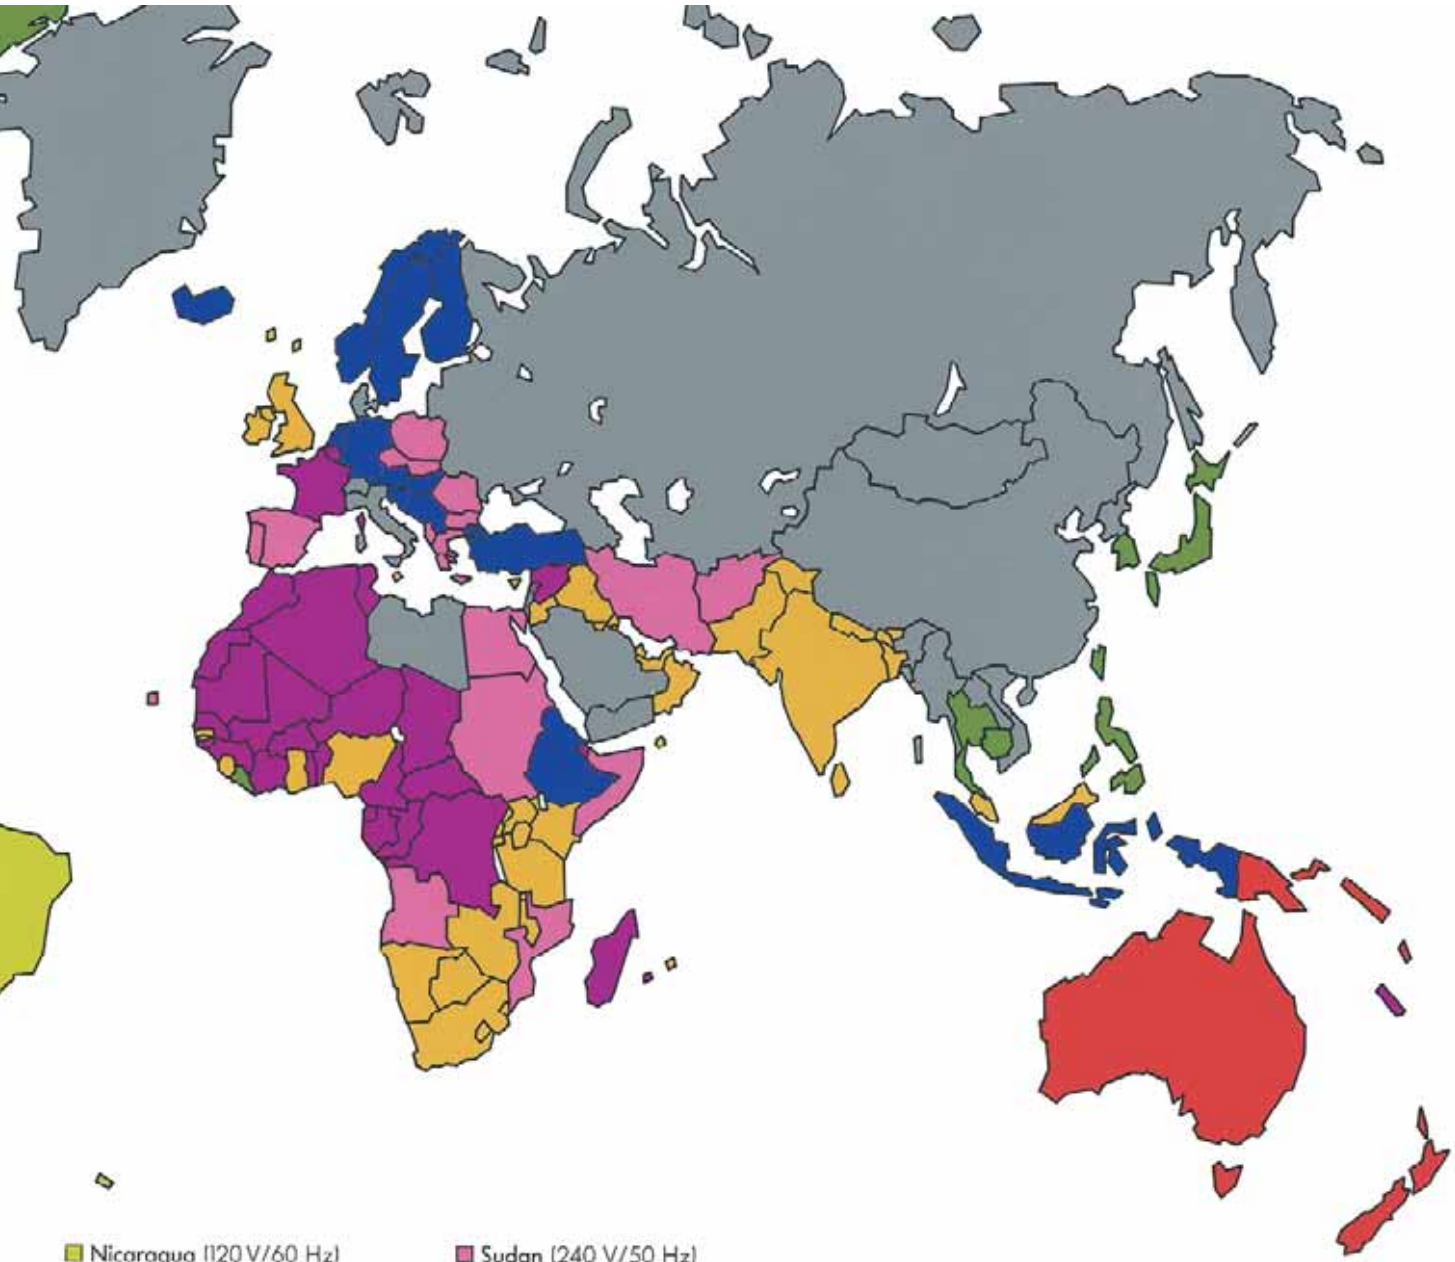

- Nicaragua (120 V/60 Hz)
- Niger (220 V/50 Hz)
- Norway (220 V/ 50 Hz)
- Oman (240 V/50 Hz)
- Pakistan (230 V/50 Hz)
- Panama (110 & 120 V/60 Hz)
- Papua (New Guinea) (240 V/ 50 Hz)
- Paraguay (220 V/50 Hz)
- Peru (220 V/60 Hz)
- Philippines (110 V/60 Hz)
- Poland (220 V/60 Hz)
- Portugal (220 V/60 Hz)
- Puerto Rico (120 V/60 Hz)
- Qatar (240 V/50 Hz)
- Reunion (220 V/50 Hz)
- Romania (220 V/50 Hz)
- Rwanda (220 V/50 Hz)
- Saudi Arabia (127 & 220 V/50 & 60 Hz
- Senegal (110 & 127 V/ 50 Hz)
- Seychelles (240 V/50 Hz)
- Sierra Leone (230 V/50 Hz)
- Singapore (230 V/50 Hz)
- Somalia (220 V/50 Hz)
- South Africa (220 V/50 Hz)
- Spain (220 V/50 Hz)
- Sri Lanka (230 V/50 Hz)
- Sudan (240 V/50 Hz)
- Swaziland (220 V/50 Hz)
- Sweden (220 V/50 Hz)
- Switzerland (220 V/50 Hz)
- Syria (220 V/50 Hz)
- Taiwan (220 V/60 Hz)
- Tanzania (230 V/50 Hz)
- Thailand (220 V/50 Hz)
- Togo (220 V/50 Hz)
- Trinidad & Tobago (115 & 230 V/60 Hz)
- Tunisia (220 V/50 Hz)
- Turkey (220 V/50 Hz)
- U.A.E. (240 V/50 Hz)
- Uganda (240 V/50 Hz)
- United Kingdom(240 V/50 Hz)
- Uruguay (220 V/50 Hz)
- U.S.A. (120 V/60 Hz)
- USSR (220 V/50 Hz)
- Vanuatu (220 V/50 Hz)
- Venezuela (120 V/60 Hz)
- Vietnam (220 V/50 Hz)
- Yemen (250 V/50 Hz)
- Yugoslavia (220 V/50 Hz)
- Zaire (220 V/50 Hz)
- Zambia (230 V/50 Hz)
- Zimbabwe (220 V/50 Hz).

For other countries, please consult us

- **American type standards**
- **British type standards**
- **French type standards**
- **German type standards**
- **Australian type standards**
- **European and American type installation habits**
- **French and German type installation habits**
- **Various standards**

British standard





Supply

Domestic installations are usually single phase 240 V ac 50 Hz. Live and neutral are supplied. Earth can be supplied or local.

House Service Cut-Out

The Electricity Board's protective device, usually a 80 A or a 100 A. HRC fuse. It is sealed in a special housing to prevent tampering.

Meter

Single (a second meter, usually white, for off-peak power, etc.) and sealed to prevent tampering.

Consumer unit


Houses the main switch which isolates the total installation and the individual circuit protection devices. The consumer unit should comply with BS 5486 pt 1 and pt 13. Circuit protection can be by means of :

- semi-enclosed fuses to BS 3036;
- cartridge fuses to BS 1361;
- miniature circuit breakers to BS 3871 pt 1.

The consumer unit may also contain one or more residual current devices protecting all or part of the installation.
RCDs should comply with BS 4293.

Power circuits

Appliances having heavy current consumption (cookers, water-heaters, etc.) should each be supplied on a specific circuit of the appropriate rating. In general, a double pole switch controls and isolates the appliance when necessary and the connection of the appliance can be made either directly to the switch or via a cable-outlet. Switches should conform to BS 3676.




Flush fitting of two gang socket

	height	width	fixing centers
1 gang	75 mm	75 mm	60.5 mm
2 gang	75 mm	135 mm	121 mm

Socket outlet circuits

Socket outlets should comply with BS 1363 and are usually of the switched type. They are usually supplied via a ring main, a circuit running from the protection device to each outlet and the returning to the protection device. Permanent connections to a ring main as well as branches off the ring are made via spur units (BS 5733). Socket outlets to BS 546 are no longer used in the UK but one still widely used in some other countries.

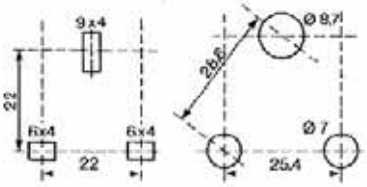

BS 1363 - 13 A BS 546-15 A

Plugs

Plugs should conform to BS 1363. They contain a fuse link to BS 1362 of a rating appropriate to the cord and appliance (max = 13 A). Because of a certain number of unscrupulous suppliers of dangerous plugs, it is wise to insist on third party certification of plugs (eg ASTA certified).

Lighting circuits

Usually a radial circuit supplying each lighting point in turn. A lighting point usually consists of a ceiling rose in which incoming, outgoing and switch connections are made and a pendant flexible cord supplying a lampholder is attached. Light switches should meet BS 3676.

Dimmers should meet BS 5518 and be complet with suppression to BS 800.

Bathrooms

The wiring regulations are very strict. Every switch or other means of electrical control or adjustment shall be so situated as to be normally inaccessible to a person using fixed bath or shower. Pull cord switches are allowed. Shaver sockets with isolating transformers are allowed but should conform BS 3052.

Outdoors

Any socket outlet outdoors or intended to supply outdoor equipment (eg electric lawnmowers) should have 30 mA RCD protection.

Earthing

All sockets to BS 1363 have provision for earthing. A protective conductor (which could also be steel conduit) is generally required for all low voltage circuits (1 000 V ac between conductors) and its continuity must be proved. All main incoming services, for example, water and gas pipes and metallic parts of the building structure, etc... must be bonded and connected to the main earthing terminal of the installation. In addition it may be necessary to supplementary bond water and waste pipes, sinks and other metallic items such as central heating radiators.

However, in rooms with a fixed bath or shower, supplementary bonding must be applied to simultaneously accessible metal parts.

Installation rules

The "Regulations for Electrical Installations" published by the Institution of Electrical Engineers. Savoy Place, London, governs all domestic electrical installations (and many other types).
Copies are available from :
I.E.E.
P.O. Box N° 8. HITCHIN.
HERTFORDSHIRE SG 5 IRS. ENGLAND.
The various British standards governing the construction of electrical equipment are available from :
B.S.I., Sales Department.
LINFORD WOOD. MK 14 6 LE.
MILTON KEYNES. ENGLAND.
B.S.I. also publishes a yearly handbook covering all British standards.

Polarity

The polarity is conserved and marked throughout the installation :

Live :

- terminals marked L (or coloured red or brown);
- solid conductors insulated in red;
- flexible conductors insulated in brown.

Neutral :

- terminals marked N (or coloured black or blue);
- solid conductors insulated in black;
- flexible conductors insulated in blue.

Earth :


- terminals marked E or ⏚ (or coloured green/yellow);
- conductors insulated green/yellow.

Cabling

Most domestic wiring is done in flat p.v.c. insulated and sheathed 3 core cable (flat twin and earth). Maximum use is made of floor and wall voids to run cables.

Surface installations are run in conduit or trunking, these can be plastic or metal. Various British standards govern the design and construction of conduits, trunking and cable.

Wiring accessories may be installed in plastic or (more often) metal flush boxes to BS 4662. Surface installations are made in appropriate proprietary boxes.

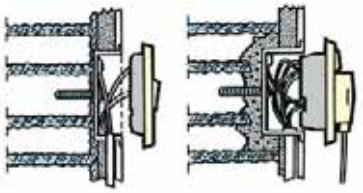

16 mm plaster-depth box 25 mm socket box

French standard



Supply

Usually single phase 230 V 50 Hz (some 120 V 50 Hz left).

Live and neutral are supplied. Earth is usually local.

An AD (accompagnement disjoncteur) fuse will be installed on the phase.

Meter

As single kWh meter is supplied. If off-peak power is used, a 2-tariff meter with pilot-line switching is installed.

Main circuit-breaker

This unit has 3 functions :

- acts as main isolator for the installation;
- limits consumption of current to a pre-set level determined by contract with electricity supply organisation;
- provides "blanket" residual current protection at 500 mA.

Compulsory protection against lightning

Installation supplied by overhead electric lines and located in areas where thunder is heard more than 25 days per year must be protected by a Search Protective Device immediately place after the main residual current circuit breaker (500 mA and recommended Type S). The Search Protective Device must be connected to the earth terminal block of the consumer unit.

Consumers distribution board

This contains distribution of power to subcircuits and circuit protection (overload and short circuit). Additionally it may contain other functions :

- residual current protection of sub-circuits;
- time switches and time delay relays;
- bell transformer;
- power relays (heating, etc.);
- latching relays for lighting;
- indicator lamps;
- daylight/dusk switches;
- dimmers;
- load-shedding relays;
- off-peak power relays;
- buzzer or bell.

The unit is usually site-assembled and "soft" wired (no busbars).

Circuit protection

Each circuit must have a suitable protection device at its source. As from 1988, this device shall insure the breaking of both phase and neutral conductors in one operation. Rewirable fuses are now prohibited. The choice must be made between HRC cartridge fuses and miniature circuit breakers.

Power circuits

All appliances having a relatively high consumption of current should be supplied on a specific circuit with appropriate protection and cabling. They will be connected either via a special plug and socket or via a cable outlet box (eg cooker, dishwasher, washing machine, water-heater, etc.).

Socket outlets

Are supplied on radial circuits provided with earth (maximum of 8 outlet points per circuit). All circuits of socket outlets are protected by 30 mA Residual Current Devices.

Socket outlets must be of the earthed type (2 P + E) up to 32 A. Shutters are mandatory for the 16 A type. 20 A and 32 A socket outlets exist for power circuits (see above).

Plugs

Can be 2 P or 2 P + E type. The flat-bodied 2 P type should have sleeved pins. Specific 20 A and 32 A plugs are also available for power circuits.

Lighting points

Are supplied by radial circuits provided with earth (max 8 points per circuit) and controlled by switches or dimmers. Note that the use of intermediate switches has virtually disappeared : multiple-point control of lighting is usually achieved using latching relays and push-buttons (See opposite page).

The use of time-lag switches to control lights in public areas is also commonplace.

Earthing

All circuits distribute a protective conductor. All services should be bonded to earth. Supplementary bonding of metal fittings in bathrooms, kitchens, etc., is also necessary.

Cabling

Most domestic wiring is run either in plastic surface trunking or in flushed-in conduit systems. Various rules govern the choice of the type of conduit to be used. Generally solid copper conductors (usually PVC insulated) are used for fixed wiring. Attention must be paid to the various rules governing cable section, voltage drop, etc.

For plastic surface trunking, protection against external influences must be ensured continuously throughout the length of conduit runs especially at angles and at entries into wiring devices.

Accessory installation

Switches, sockets, etc., should be installed in a flush or surface box or in a purpose made equipment trunking. Accessories may be either screw-fitted or provided with expanding claws which grip the walls of a circular flush box.

Installation rules

All electrical installations should comply with French standard NFC 15-100. This document lays down detailed rules governing all aspects of wiring and designing an installation. Copies of the standards, as well as other French electrical standards are available from :

BUREAU DE VENTE DE L'U.T.E.
CEDEX 64 - 92052 PARIS LA DÉFENSE

Helpful guides and information are available from :

PROMOTELEC
52, BD MALESHERBES
75008 PARIS

An English-language edition of NFC 15 100 is available from :


BSI TECHNICAL HELP TO EXPORTERS
LINFORD WOOD
MILTON KEYNES MK 14 6LC - ENGLAND

Outdoors

The use of 30 mA RCD protection is recommended. Outdoor sockets should be at least IP 44.

Bathrooms

Special rules apply to bathrooms which are divided into 4 zones.

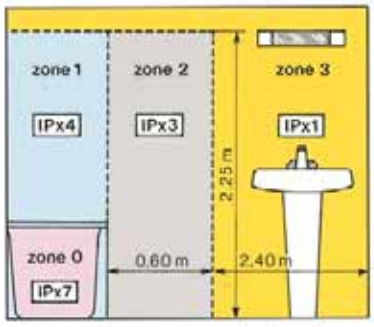

Definition of zone containing bath or shower.

Zones	0	1	2	3
Wiring systems	X (2)	II (1)	II (1)	II
Switchgear and controlgear	X	X (2)	X (2)	• Supplied individually by an isolating transformer. • Supplied by Safety Extra Low Voltage (SELV) (4) • Protected by a 30 mA RCD
Appliances	X (2)	X (2) (3)	II + 30 mA RCD (2) (3) (5)	• Supplied individually by an isolating transformer • Supplied by SELV (d) • Protected by a 30 mA RCD

X Prohibited
II Permitted for Class II.
RCD 30 mA : Protection by 30 mA residual current devices.
(1) Limited to those which are necessary to supply appliances located in this zone.
(2) Except those supplied by SELV, limited to 12 V ac or 30 V dc
(3) Water heaters permitted.
(4) No voltage limit (IEC 50 VI).
(5) Except a socket-outlet supplied by a low-power isolating transformer

German standard



Supply

May be single phase (230 V 50 Hz) or three phase (400 & 230 V 50 Hz).

Phase or phases and neutral are supplied. Earthing is local.

In general each phase is protected by a 100 A blade type NH VDE 0636. Cables are either 16 mm² or 25 mm².

There is usually 1 meter. Facilities are provided for a second meter for special tariffs, etc.

A fuse isolator unit allows all phases to be cut-off thus isolating total domestic installation.

Control Panel (Unterverteilung)

This will usually contains 500 mA Residual Current Device (D.C. sensitive) protection for the whole installation and a miniature circuit breaker for each circuit. The circuit supplying the bathroom will have 30 mA residual current protection.

Other functions are often included in the control panel: latching relays, switches, control lamps, buzzers, modular dimmers, etc.

Power Circuits

Single phase up to 3 kVA, > 3 KVA: 3 phases.


Electrical applicances having a high power consumption (cookers, washing machines, etc.) are supplied via a specific circuit and connected either via a cable outlet or via a specific socket (Perilex) or CEE 17.

It is not uncommon to find 3 phases appliances.

Protection rating and cable size of each circuit is calculated according to the appliance (min. section 1.5 mm² Cu/16 A).

General Circuits

These circuits supply both lighting points and socket outlets. The protective device is usually 16 A rating. There is no limitation of the number of outlets on the circuit. This limit is calculated according to expected/probable use of the circuit. Socket outlets are generally of the 2 P + E type "schuko" pattern. Since these plugs are reversible, no polarity is observed in connection of plugs or socket outlets. Polarity is observed for lighting points, switching on live conductor, inner contact live on Edison-type lampholders. All socket outlets are earthed, in general, the protective conductor is distributed throughout all circuits.



16 A / 250 V DIN 494 00/0873

Damp and Outdoor Installations

Special rules apply in particular IP ratings of accessories and equipment and RCD protection.

Bathrooms

Special rules apply to bathrooms. The room is divided into 4 zones (Bereich).

Bereich 0 - The structure and inner volume of the bath or shower basin.

Bereich 1 - The zone surrounding the Bereich 0, formed by the vertical planes of the edges of the bath or shower basin and shower walls to a height to 2.25 meters (or alternatively where no walls exist a radius of 0.60 meters from the shower head).

Bereich 2 - A zone 0.60 meter wide and 2.25 meters height from the floor surrounding Bereich 1.


Bereich 3 - A zone 2.4 meters wide and 2.25 meters height from the floor surrounding Bereich 2.

In practice this area is often limited by the walls of the bathroom (note the doorways into other rooms also act as limits to Bereich 3).

In bathrooms, switches and socket outlets may only be installed in Bereich 3, and sockets must have RCD protection less than or equal to 30 mA. Various other rules apply in particular to the IP rating of equipment in the arious zones.

It is not permitted to route circuits feeding other rooms, etc. through the bathroom.

Effective bonding to earth of all metal services (water-pipes, drainage, etc.) is required.



bathroom zones VDE 0100 Teil 701

Cabling

Cabling is usally flush in conduit, single PVC, insulated conductors. Other possibilities are multi-core insulated and sheathed cable installation or surface trunking installations.

The function of conductors is conserved and indicated:

PE Earth : green/yellow;
N Neutral : blue;
L Live : any other colour than green, yellow, blue or green/yellow. In practice black and/or brown are used.

Sections of conductors, should be chosen according to the various rules laid down by the regulations.

Installation Rules

All domestic electrical installations should comply with the requirements of VDE 0100 and may only be completed by registered electricians. Note that the electricity supply organisation can extend or modify requirements for electrical installations.

There are about 220 EVU organisations in Germany. (EVU = Elektrizitätsversorgungsunternehmen = Electricity supply enterprise.)

VDE Standards are available from:
VDE, Verlag GmbH
MERIANSTRASSE 29
D-6050 OFFENBACH - GERMANY


Some of the VDE-standards are available in English or French from VDE-Verlag.

The UTE publishes some French translation of VDE standards including VDE 0100.

More and more VDE-standards are translation of EN (European Standards) and IEC (International Standards).

Accessories

Should meet the appropriate VDE standards in their contructions. Flush accessories are fitted in boxes. Claw-mounting is common but screw-mounting is also used.

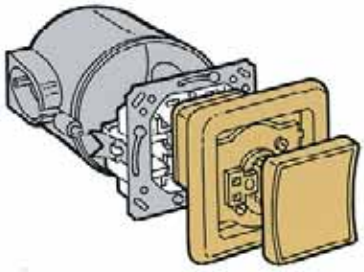

Earthing

Earthing is local usually through the foundations of the building. All services should be bonded (gas, water, heating, waste, etc.) with 10 mm², general and bathroom cross-bonding is done in 4 mm².

Neutral is re-earthed at the control panel. A protective (earth) conductor is distributed to all outlet points independantly of neutral.

A.C. (Alternating Current) – An electric current, such as normal household current, that reverses direction in a circuit at regular intervals.

A.C. Only – A device for use on alternating current (A.C.) circuits only.

Active Equipment – Energized equipment used for receiving or transmitting analog or digital signals (e.g., hubs, routers, PBXs, etc.).

Adapter – An accessory used for interconnecting non–mating devices or converting an existing device to a new or modified use.

Administration – The method for labeling, documentation, and usage needed to implement moves, additions, and changes to a telecommunications infrastructure.

AFCI – An arc-fault circuit interrupter is a device intended to provide protection from the effects of arc faults.

Air Gap Switch – A mechanical switch which is capable of creating a space between two contacts.

AL/CU – A marking designation used on certain devices to indicate their suitability for connection to either aluminum or copper conductors. Also referred to as CO/ALR.

Analog Signal – A signal that uses continuous physical variables such as voltage amplitude or frequency variations to transmit information. Contrast with Digital Signal.

Angle Plug – A plug that allows the attached flexible cord to exit at a right angle to the plug face.

ANSI (American National Standards Institute) – An organization that identifies industrial and public requirements for national consensus standards and coordinates and manages their development, resolves national standards problems, and ensures effective participation in international standardization.

ANSI/ASHRAE/IESNA Standard 90.1 – An energy standard for buildings except low-rise residential buildings, adopted by the Department of Energy as the commercial building reference standard for state building energy codes under the federal Energy Policy Act.

Asynchronous Transfer Mode (ATM) – A high-speed switching transmission protocol that uses payload packages organized into 53-byte cells to carry data.

Attenuation – The decrease in power received from power transmitted due to loss through transmission lines; measured in decibels.

Attenuation-to-Crosstalk Ratio (ACR) – The difference between attenuation and crosstalk measured in decibels (dB) at a given frequency. This difference is critical to ensure that the signal sent down the twisted-pair cable is stronger at the receiving end of the cable than any interference signals (crosstalk) from other cable pairs.

Attenuator – Electrical or optical element that reduces (attenuates) the intensity of the signal passing through it.

Automatic Grounding – A component that provides automatic grounding of an electrical wiring device when installed in a grounded metal enclosure. Eliminates the need for a bonding jumper.

AWG (American Wire Gauge) – Standard American measuring scheme for classifying wires according to the diameter of the conductors.

Auto ON/OFF - A control strategy used with occupancy sensors of turning lights on and off automatically; OFF when a space is unoccupied and ON whenever occupancy is detected.

Back Wire Terminal – A termination that can be accomplished by inserting a pre-stripped solid or stranded conductor into a wiring device terminal opening, followed by tightening the adjacent terminal screw.

Backbone Cabling – The physical interconnections between the entrance facility, equipment room, and various floors or telecommunications rooms.

Ballast – A device used with an electric-discharge lamp to obtain the necessary circuit conditions (voltage, current, and waveform) for starting and operating.

Bandwidth – A measure of the amount of information which can pass through a channel, expressed in Hertz (Hz). Higher bandwidth means greater capacity to carry data.

Bar Coil – A bar coil is constructed of a ferrite bar and is wrapped with copper wire. This device is used to reduce RFI generated by a dimmer or other electronic switching devices.

Bend Radius – The minimum radius to which a cable or fiber can be bent before excessive signal attenuation occurs.

BICSI (Building Industry Consulting Service International) – An industry association dedicated to the design and installation of communication wiring.

Bi-level Switching – A control strategy that focuses on switching individual lamps within a luminaire, or groups of luminaires to achieve a reduced, balanced lighting level.

Binding Post – Type of connecting device used in audio speaker circuits. A knurled nut is tightened over a speaker wire conductor inserted through a hole in a threaded post. Binding posts may also offer a female jack connection for use of banana-type jacks.

Bit Error Rate (BER) – The ratio of incorrectly transmitted bits to total transmitted bits. A primary specification for all transmission systems, it is usually expressed as a power of 10. The number of errors made in a digital transmission as compared to complete accuracy.

Box Mounted Dimmers/Fan Speed Control – Any dimmer or fan speed control that mounts in or on a NEMA standard switch box.

Bulb Sing (Filament Hum) – The audible noise which can come from an incandescent lamp controlled by a dimmer.

Bundle – More than one cable held in a single Grip.

Byte – A data unit made up of eight bits, sometimes referred to as an octet. Megabytes and gigabytes are commonly used measures of storage or memory capacity.

Cable – One or more electrical and/or optical conductors within a protective sheath.

Cable Assembly – A cable that has connectors installed on one or both ends. See Jumper and Pigtail.

Cable Modem – A modem used to link cable-supplied data to a computer network; for example, when a CATV provider offers high-speed, cable-based Internet service.

California Title 24 – In an effort to reduce electrical power consumption, California has enacted new requirements for residential lighting. These requirements are that all permanently installed fixtures must be either high efficacy, controlled by a manual-on/automatic-off vacancy sensor or controlled by a dimmer. Visit www.energy.ca.gov/title24 for additional information.

Campus – A complex of buildings which operates as one continuous facility – e.g., multibuilding corporate headquarters, university, military base.

Candelabra – A small screw-base threaded lampholder accepting a bulb approximately 1/2" in diameter commonly used in night lights, indicator lights and Christmas tree bulbs.

Candlepower – a measurement of light at the source, not the object you light up.

Cascade Cable – A specialized cable used to link compatible computer network hardware (usually hubs) together to form a compound device that acts as a single, larger device. In the P&S Home Network Center, a cascade cable can link two hub modules to increase the number of ports available.

legrand®
Pass & Seymour

Glossary of Terms

Category 3 – 100 ohm twisted-pair copper cable that meets or exceeds specifications in ANSI/TIA/EIA-568-B.2, Commercial Building Telecommunications Cabling Standard, and ISO/IEC 11801, Generic Cabling for Customer Premises, for transmissions up to 16 MHz.

Category 5 – 100 ohm twisted-pair copper cable that meets or exceeds specifications in ANSI/TIA/EIA-568-B.2 Annex N, Commercial Building Telecommunications Cabling Standard. Category 5 is no longer recognized for new commercial installation.

Category 5e – An enhanced form of Category 5, supporting high-speed data transmission per TIA/EIA-568-B.1.

Category 6 – 100 ohm twisted-pair copper cable that meets or exceeds specifications in ANSI/TIA/EIA-568-B.2-1, Commercial Building Telecommunications Cabling Standard, and ISO/IEC 11801, Generic Cabling for Customer Premises, for transmissions up to 250 MHz. Positive power sum attenuation-to-crosstalk ratio is characterized to 200 MHz.

Capacitor – An electronic device capable of storing an electrical charge. Used in circuits for a variety of functions often to reduce or eliminate noise.

CATV – Community Antenna Television, known as cable television.

CE Marking – A product marking required in Europe that indicates conformity to the "common level of safety" and is used to insure "free movement of goods" within the 19 countries of the European Union.

CEC – Canadian Electrical Code.

Centralized Cabling – An optical fiber cabling configuration, based on TIA/EIA-568-B.1, Optical Fiber Cabling Guidelines, from the work area to a centralized cross-connect using pull-through cables, an interconnect, or splice in the telecommunications room.

CFL – Compact fluorescent lamp. CFLs are a type of fluorescent lamp that provide similar light levels compared with incandescent lamps but offer longer lifecycles and consume less electricity.

Channel – The complete communications path between telecommunications room equipment and workstation equipment, which includes cross-connects and patch cords.

Choke – A device used to filter RFI noise generated by dimmers or other electronic switching devices.

Circuit Breaking Capability – Capability of a plug/receptacle combination to break live circuits up to their maximum load rating. Except in emergency situations, plugs and receptacles should not be engaged or disengaged while power is on.

Circuit Breaking Rating – A rating which indicates the ability of a connector to make and/or break a circuit under load. Such ratings are determined through testing by qualified laboratories.

Cladding – In fiber cable, the transparent outer concentric glass layer that surrounds the optical fiber core and has a lower index of refraction than the core. It provides total internal reflection and protects against scattering from contaminants at the core surface.

Clamping Voltage – The peak voltage that can be measured after a surge protective device has limited or "clamped" a transient voltage surge. Clamping voltage must be determined by using IEEE Standard C62 testing and evaluated by UL Standard 1449.

Clock Hanger – A single receptacle generally recessed behind a special cover plate having a hook or other means of supporting a wall-hung clock.

CO/ALR – A marking designation used on certain devices to indicate their suitability for connection to either aluminum or copper conductors.

Coaxial Cable – An electrical-transmission cable with a center conductor, insulating spacer, and an outer electrical shield. Provides high quality signal transmission for video and data applications.

Combination Wall Plates – A multiple gang wall plate with different openings in each gang for different devices.

Communications Plenum Cable (CMP) – Cable listed as suitable for use in ducts, plenums, and other spaces used for environmental air. It has adequate fire-resistant and low smoke-producing characteristics. Cables must pass required test for fire and smoke characteristics of wires and cables, NFPA 262 or UL 910.

Communications Riser Cable (CMR) – Cable listed as suitable for use in a vertical run in a shaft or from floor to floor. It has fire-resistant characteristics capable of preventing the carrying of fire from floor to floor. Cables must pass requirements of the Standard Test for Flame Propagation Height of Electrical and Optical-Fiber Cable Installed Vertically in Shafts, ANSI/UL 1666.

Configuration – A description of the arrangement, size, and number of contacts in an insert assembly. Typical configuration descriptions include the number of wires and poles and the presence of a separate grounding contact. The combination of such factors determine the connector's electrical rating.

Connecting Block – A plastic block with metal wiring clips used to establish an electrical connection.

Connector – A mechanical device used to provide a means for aligning, attaching, and achieving continuity between conductors or optical fibers.

Connector Grip – A strain-relief grip for specific customer requirements. Usually attached to a connector retaining nut.

Connector, Small Form Factor – An optical fiber duplex connector with a footprint approximating that of an 8-position outlet connector typically used with 4-pair copper connectors.

Consolidation Point (CP) – A location for interconnection between horizontal cables extending from building pathways and horizontal cables extending into furniture pathways.

Cord Connector – A portable receptacle, which is provided, with means for attachment to a flexible cord and which is not intended for permanent mounting.

Core – The central, light-carrying part of an optical fiber through which light pulses are transmitted.

Corrosion-Resistant – A device constructed of special materials and/or suitably plated to withstand corrosive environments.

Cross-Connect – System component where jumper wires and patch cords are used to rearrange communications circuits in order to administer the network. Usually located in a telecommunications room or equipment room.

Crosstalk – Undesired signal in one circuit transferred from another circuit by induction.

CSA (Canadian Standards Association) – An organization serving a function for Canadian electrical manufacturers similar to that provided in the U.S. by Underwriters Laboratories, Inc. (UL). CSA develops safety and performance standards for electrical products that parallel, but are not always identical to, UL standards. CSA tests products and grants paying clients "certification" that their products meet CSA standards.

C-UL c(UL)us **–** UL certification to CSA requirements, C-UL is a marking approved by the Standards Council of Canada. C-UL can be used on products to be installed in accordance with the Canadian Electrical Code.

Current – The flow of electrons through an electrical conductor, measured in amperes.

Daisy Chain – A cabling method (topology) of connecting devices in series. Daisy chaining is no longer recommended.

DALI – Digital Addressable Lighting Interface. A communication protocol developed primarily for fluorescent dimming systems. Part of an IEC standard.

Daylighting Control – A lighting control method that changes the amount of light provided by lighting fixtures as the contribution of ambient daylight changes.

dB (Decibel) – The standard unit of measure of signal gain or loss, used in attenuation and crosstalk measurements.

DBS (Direct Broadcast Satellite) – Satellite television service that is purchased through a subscription (DirecTV, DISH Network).

D.C. (Direct Current) – An electric current, for example, battery power, that flows only in one direction through a circuit.

Dedicated Circuit – A circuit established to provide control voltage and current to one load or one type of load, such as an electric range or a computer.

Deep Wall Plate – A wall plate that provides greater clearance for device mounting straps than standard wall plates.

Demarcation Point – The interface which marks the division between telephone company facilities and private building wiring, where ownership and operational control changes.

De-Rating – When two or more dimmers are ganged and heat sinking material is removed, it is important to "de-rate" or lower the wattage rating of the dimmer. This is due to the heat rise caused by the devices.

Digital Signal (DS) – A signal with a fixed number of discrete values. Commonly, a binary signal with two values that are used to transmit the two states (0,1) used by digital computers. Most data transmission in optical fibers is by digital optical pulses. Contrast with Analog Signal.

Dimmer – A switch with electronic components that permits variable control of lighting intensity.

Dimmer Derating – The reduced maximum load for a dimmer in a specific application. When dimmers are used in a multigang application they run hotter and therefore must be derated depending upon the number of dimmers being used and their locations within the box.

Dimming Ballast – A special ballast used with fluorescent dimmers to control the light intensity of fluorescent lamps.

DIN Rail – Metal component found in enclosures used for mounting control devices or power packs.

Direct-Buried Cable – A telecommunications cable designed to be installed under the surface of the earth, in direct contact with the soil.

Disconnect Use Only – Description of a connector not designed for engaging or disengaging under load. Such connectors are commonly used as cost-effective hard wiring alternatives.

"Disconnect Use Only" Rating – A rating of the current-carrying capability of individually engaged pin and sleeve contacts. Such ratings are established through testing for compliance with applicable standards or codes, as well as wire conductor size and insulation as defined in the National Electrical Code® (NEC®).

Dispersion – The spreading of light pulses as they travel through an optical fiber.

Door Switch – A momentary contact switch normally installed in a door-jamb. The switch is activated when the door is opened or closed.

Double Pole Switch (double-pole single-throw) – A switch that makes or breaks the connection of conductors of a single branch circuit.

Double Weave – Mesh braid with rows of two strands each.

DSL (Digital Subscriber Line) – A new digital connection method that provides high-speed Internet or other network connections over standard telephone wire.

Dual Cable Systems – CATV systems in which the incoming service is provided over two different cables, sometimes called A/B cable systems. For example, a system in which one cable (cable A) carries channels 2-50 and the other cable (cable B) carries channels 51-100. This is an older method of providing service, used when the initially installed cable lacks capacity to meet current needs.

Dual Relay – Control device containing two relays that enables simultaneous but independent control of two different loads.

Dual Technology – The combination of passive infrared and ultrasonic technologies used to detect occupancy.

Duplex Receptacle – Two receptacles in a common housing or mounting means which accepts two plugs.

Dustproof – A receptacle so constructed or protected that dust will not interfere with its operation.

DVD (Digital Video Disc) – An acronym commonly used to describe a device that plays DVD-format discs. Such devices (both dedicated DVD players and computer DVD drives) can supply video or other signals through a video or computer network.

DV/DT (Delta Voltage/Delta Time) – DV/DT is the rate of change in voltage over a certain time frame.

Electronic Dimming Ballast – A variable output electronic fluorescent ballast.

Electronic Industries Alliance (EIA) —Industry trade association which works with the Telecommunications Industry Association (TIA) in developing standards.

EMI – Electromagnetic interference or unwanted signal pick-up. One of two types of electrical "noise" caused by varying magnetic fields conducted into branch wiring from inductive load switching.

Energy – A measure of electrical power rated in joules.

Entrance Facility (EF) (telecommunications) – An entrance to a building for both public and private network service cables (including antennae) encompassing the entrance point at the building wall and continuing to the entrance room or space.

Equipment Room (ER) – A centralized space for telecommunications equipment serving one or multiple buildings. It contains more complex equipment than the telecommunications room, which serves each floor of a building.

Ethernet – The most commonly used protocol (language) in computer networking. Originally supported (and still commonly used) in 10 Mbps form (10Base-T), 100 Mbps Ethernet (Fast Ethernet or 100Base-T) is also available.

External Video – A video signal provided by an external source, such as cable, satellite, or antenna-received broadcast.

Fan Hum – Noise created by a fan motor when controlled by a standard speed control.

Far-End Crosstalk (FEXT) – Crosstalk measured at the cable end opposite from where the signal originates.

FCC – Federal Communications Commission.

F Connector – The 75 ohm radio frequency connector used with coaxial cable to attach drop cables to taps and other devices. The F connector does not have center pins. The F connector uses the solid copper center conductor of the coaxial cable itself as the center pin to establish the connection.

FDDI (Fiber Distributed Data Interface) – An ANSI standard for 100 Mbps fiber physical and data protocols, generally used in "backbone" applications.

Fed Spec – Devices which comply with Federal Specifications such as W-C-596 for connecting and W-S-896 for switches. Fed Spec Standards for switches and connecting devices include NEMA Performance Standards.

Feed Through – The practice of wiring a single branch circuit through a device and feeding power to other devices wired down-stream. (Feeding through a GFCI would provide protection to downstream receptacles.)

Fiber (Optical Fiber) – A thin filament of glass or plastic capable of carrying information in the form of light.

Fiber Optics – Communications scheme which converts electrical energy to light in order to transmit through optical fiber.

legrand®
Pass & Seymour

Glossary of Terms

Field Adjustable Trim Potentiometer – A small, typically screwdriver-adjustable, variable resistor. Used to adjust minimum level of light or speed of a fan.

Firestop – A material or device installed in a cable pathway to prevent the passage of flames, smoke, and gases.

Flanged Inlet – A plug which is intended for flush mounting on an appliance or equipment and which serves to connect utilization equipment to a cord connector.

Flanged Outlet – A receptacle which is intended for flush mounting on an appliance or equipment which is intended to establish electrical connection with an inserted plug.

Fluorescent Lamp – A glass housing that contains phosphorus in a sealed vacuum. When the phosphorus is excited from a voltage charge, it becomes ionized and gives off light.

Fluorescent Starter – A device rated in watts having a voltage-sensitive switch and a capacitor whose function is to provide a high-voltage pulse to start a fluorescent lamp.

Flush Wall Plate – A wall plate designed to mount flush with the wall surface or the plane surface of electrical equipment.

Foot-Candle – The amount of light one candle generates one foot away.

Four-Way Switch – A switch which is used in conjunction with two three-way switches to control one light or other connected equipment from three or more locations.

Floor Receptacle – A receptacle with a protective cover plate intended for mounting flush with the surface of the floor.

Frequency – The number of cycles completed by a signal in one second, expressed in Hertz.

Fresnel Lens – A lens recognized by its concentric rings that is used for passive infrared sensors.

Fusible Mechanical Interlock – A switchable IEC pin and sleeve receptacle that is mechanically interlocked to ensure that a plug cannot be engaged or disengaged under load. Fusible mechanical interlocks include a fusible disconnect switch inside a single, non-metallic enclosure. They are typically used to provide overload protection for portable equipment at the source of power access.

Fusion Splice – A permanent joint accomplished by applying localized heat sufficient to fuse or melt the ends of two optical fibers together, forming a continuous single fiber.

Gang – The space required for one wiring device, wall plate, etc.

GFCI (Ground Fault Circuit Interrupter) – A personnel protection device that detects current leakage and removes power to the receptacle.

Gigabit Ethernet – A carrier-sense multiple access with collision detection LAN standard developed by the IEEE 802 group operating at one Gb/s.

GigaHertz – A unit of frequency equal to one billion Hertz.

Grip – A flexible wire mesh cable holding device.

Ground Conductor – A conductor (identified as the bare or green conductor, normally non-current carrying) which is intentionally connected to earth ground to provide an intentional path for fault current to ground.

Grounding – A system in a connector assembly to ensure ground continuity. Ground conductors connect normally nonenergized metal components to earth and are not part of the electrical circuit.

GSA (General Services Administration, Federal Supply Service) – The U.S. Government administration responsible for the approval of Federal Specifications used in the purchase of products by all Federal agencies.

Headroom – The overhead or margin, expressed in decibels, by which a communications system exceeds minimum requirements.

Heat Sink – A metal plate used for absorbing or removing heat from the switching device (triac) in a dimmer or fan speed control.

Heat Sink Dimmer/Fan Speed Control – Any dimmer or fan speed control that mounts onto a NEMA standard switch box, but whose strap protrudes beyond the box and onto the surface of the wall itself. Heat sink dimmers and fan controls will not accept a traditional wall plate and usually are supplied with their own unique cover.

Hertz – A unit of frequency, one cycle.

Home Network Center – In the P&S Home Network Wiring System, the center point for all network cabling. The Home Network Center is configured for varying network needs, with modules.

Home Run – Also known as star topology, a cabling system where individual cables are run directly from the telecommunications room to each work area outlet.

Home Theater – Home entertainment system using television video and multi-channel audio to more closely approximate a movie theater experience. Typical home theater systems incorporate traditional front right and left audio channels, a front center channel, and a two-speaker rear channel.

Horsepower Rated – A device having a marked horsepower rating is intended for control of motor loads.

Horizontal Cabling – The portion of the wiring system extending from the workstation to the horizontal cross-connect in the telecommunications room.

Horizontal Cross-Connect – The cross-connection between horizontal and other cabling, such as backbone cabling.

Horizontal Length – The cable distance from the workstation to the telecommunications room cross-connect, a maximum of 295 ft. (100 meters).

Hospital Grade – A device constructed to meet performance requirements of high abuse areas found in hospital locations, tested to "Hospital Grade" requirements of Underwriters Laboratories Standard UL 498.

Hub – Equipment which serves as a centralized connection point for a network or a portion of network. Hubs contain multiplexing, switching, and bridging functions and are not considered part of the cabling infrastructure.

IEC (International Electrotechnical Commission) – The IEC is a worldwide standards organization having 43 countries as its members. The United States is active in many areas of the IEC and the standards it develops.

IECC – The International Energy Conservation Code, developed by the International Code Council® (ICC®), that provides the minimum energy efficiency provisions for residential and commercial buildings. It is written so that state and local jurisdictions can easily adopt the model as their energy code.

IEEE – Institute of Electrical and Electronic Engineers.

Illuminated – A device that, when connected to an electrical circuit, is lighted in the area of the face or handle.

Illumination – What results from light use. Point a flashlight on an object and you light it up or "illuminate" it.

Impedance – The resistance or opposition to the flow of alternating current within a circuit.

Impedance Matching – Matching impedances of adjoining circuit elements so that power transfer across the interface is maximized, in order to improve performance or to accomplish a specific effect.

Incandescent Lamp – A light bulb which contains a filament in a sealed vacuum. When voltage is applied to the filament, it heats, producing light.

Inductive Load – Electrical devices made of coiled or wound wire that create a magnetic field when energized. Components such as motors, solenoids and coils are all inductive loads.

Infrared (I.R.) – The invisible light emitted by all people, animals, and objects. Infrared is measured in terms of micrometers on the wavelength spectrum.

Inlet (Male Base) – A plug which is intended for flush or surface mounting on an appliance or equipment and which serves to connect utilization equipment to a connector.

Inrush Current – The maximum current drawn by a device during the starting period.

Insertion Loss – 1. The loss resulting from the insertion of a device in a transmission line. 2. In an optical fiber system, the loss of optical power caused by inserting a component, such as a connector, coupler, or splice into a previously continuous optical path.

Insulation Displacement Connection (IDC) – An electrical connection made by "punching down" a wire in a terminal, which cuts through the insulation to make contact with the conductor.

Interbuilding (Campus) Backbone – A backbone network providing communications among multiple buildings.

Interbuilding Backbone Cable – 1. Cable that runs between buildings in a campus environment. 2. Outside plant cabling.

Interchangeable – A device or combination of devices, each individually housed and having common mounting dimensions and intended for field installation on a single or multiple opening mounting strap. Also known as Despard®.

Interconnection – A connection scheme that provides for the connection of a cable to another cable or to an equipment cable.

Intermediate Cross-Connect (IC) – The cross-connection between the first and second level of backbone cabling.

Internal Video – A video signal provided by such in-home sources as a DVD player, VCR, camcorder, or video camera.

Intrabuilding Backbone Cable – Cable that runs between telecommunications rooms inside a building. Can be vertical or horizontal in physical configuration.

ISDN (Integrated Services Digital Network) – An integrated digital network in which the same time division switches and digital transmission paths are used to establish connections for different services, for example, telephony, data, telex, and fax.

Isolated Ground – A grounding type device in which the equipment ground contact and terminal are electrically isolated from the receptacle mounting means.

Jack – A device into which a plug is inserted in order to make electrical contact in a communication circuit.

Joule Rating – The measurement of a surge protective device's ability to absorb heat energy created by transient surges. Note that the Joule rating is not a part of IEEE or UL Standards. It is not as significant a specification as clamping voltage, maximum surge current and other parameters recognized by these agencies.

Jumper – 1. An assembly of twisted pairs without connectors, used to join telecommunications circuits/links at the cross-connect. 2. An optical fiber cable with connectors installed on both ends. See Cable Assembly.

Jumper Wire – A short length of twisted pair cable used to route a circuit between two cross-connect termination points.

Key – A lampholder with a means of switching the lamp on or off as part of the device.

Keyless – A lampholder with no means of switching the light on or off at the lampholder.

Lace – Strand of wire usually the same material as the mesh used to weave closed a split mesh.

Lampholder – A device that establishes mechanical and electrical connection to an inserted lamp.

LAN (Local Area Network) – A network of computers and peripheral devices with a limited area such as a department, single building, or campus environment.

Launch Cable – Length of optical fiber cable used to condition the launch of the optical time domain reflectometer test signal so that the correct results will be obtained.

LEED – Leadership in Energy and Environmental Design, a voluntary program administered by the U.S. Green Building Council. Projects achieve Certified, Silver, Gold, or Platinum ratings by satisfying standard prerequisites and going beyond this threshold to earn points in specific categories.

Lighted Handle – A switch with an integral lamp in the actuator that lights when the switch is in the "OFF" position.

Light Source – Used in conjunction with a power meter, the test equipment unit that normally contains a light-emitting diode or laser used to create a light wavelength for testing optical fiber cable loss or continuity.

Link – The basic, permanently installed, horizontal cabling path between the work area outlet and telecommunications room cross-connect. Often referred to as the contractor link.

Load Shedding – A lighting control strategy for selectively reducing the output of lighting fixtures or lamps on a temporary basis as a means to reduce peak demand charges.

Locking (Turnlok) – A device designated to lock in place when it is rotated in a clockwise direction. The device can then only be removed when turned in a counterclockwise direction.

Locking Switch – A switch with a separate actuator key, rather than a toggle, to prevent unauthorized use.

Loss – Attenuation of the optical signal, usually measured in dB.

Loss Budget – The total allowable loss between source and detector allocated among fiber, connectors, splices, and safety margin.

Low-Voltage – A device designed for use under 50 volts.

Lumen – One foot-candle falling on one square foot of area.

Lux – Luminance measured in metric units vs. English units. Lux is the measurement of actual light available at a given distance. Lux = one lumen incident per square meter of illuminated surface area.

Main Cross-Connect (MC) – A cross-connect used with first level backbone, entrance, or equipment cables.

Maintained Contact Switch – When the actuator is moved to the "ON" position, this switch makes and retains the circuit contact until the actuator is manually moved to the "OFF" position.

MAN (Metropolitan Area Network) – A data communications network that covers an area larger than a campus area and smaller than that of a wide area network. It usually interconnects two or more LANs and covers an entire metropolitan area, such as a large city and its suburbs.

Manual Controller – A horsepower rated switch without overload protection. Used for the operation of small A.C. or D.C. motors.

Maximum (Peak) Surge Current – The peak surge current a surge protective device can withstand, based on IEEE Standard C62.45 test waveforms.

Mbps (MegaBits Per Second) – One million bits per second.

Mechanical Interlock – A switchable IEC pin and sleeve receptacle that is mechanically interlocked to ensure that a plug cannot be engaged or disengaged under load. They are typically used to provide a disconnect point in power circuits supplying portable equipment.

legrand®
Pass & Seymour

Glossary of Terms

Mechanical Splicing – For optical fibers, permanently joining two fibers together by mechanical means to enable a continuous signal.

Media (telecommunications) – Wire, cable, or conductors used for telecommunications.

Medium Base (Edison) – The most common type of screw-in lampholder found in everyday lighting fixtures, table lamps and accepting incandescent bulbs with screw bases approximately 1" in diameter.

Megahertz (MHz) – A unit of frequency equal to one million cycles per second (Hertz).

Mesh – The tubular open braid portion of a wire mesh grip.

Mesh Termination – The method of securing woven strands at the ends of a wire mesh grip.

Microprocessor – Single chip computer element containing the control unit, central processing circuitry; arithmetic and logic function.

Midget – A device with a body diameter smaller than those of devices of a similar rating.

MLD (Multi-Location Dimming) – This is achieved through the use of specific components designed to interface and allow dimming control from any location, master or remote. In a true MLD situation, the master unit performs all dimming and switching functions. The remote units provide input to the master (i.e.; dim, bright, on or off, as desired).

Mode – 1. Loosely, a possible light path followed by light rays, as in multimode or single-mode. 2. Strictly, a distribution of electromagnetic energy that satisfies Maxwell's equations and boundary conditions in guided wave propagation, such as through a waveguide or optical fiber.

Modular Jack – A female telecommunications connector, which is mounted in a fixed location. Jacks are specified in IEC 603-7 and FCC Part 68 Subpart F. Also see Outlet.

Modular Plug – A male telecommunications connector, specified in IEC 603-7 and FCC Part 68 Subpart F.

Modulation – A process whereby certain characteristics of a wave, often called the carrier, are varied or selected in accordance with a modulating function. This includes amplitude, frequency or phase, and other modulation techniques.

Mogul – The largest screw-in type of lampholder accepting incandescent lamp bulbs having screw bases approximately 1-1/2" in diameter. Used in street lighting fixtures and industrial high bay fixtures.

Molded On – A connector that is factory molded to a length of flexible cord.

Momentary Contact – A switch which establishes circuit contact when its actuator is moved to, and held in, the "ON" position. The circuit is broken when the actuator is allowed to return, of itself, to the "OFF" position (such a switch may also be furnished to operate in the opposite mode).

M.O.V. – Metal Oxide Varistor, primary component of TVSS.

MTP™ – Factory-terminated multiple-termination fiber optic connector for 12-strand ribbon-fiber optic cable. Most commonly used in back-bone (riser) applications such as the P&S PFOB System. MTP is a trademark of US Conec Ltd.

Multimedia – Applications which communicate information using more than one cabling means.

Multimode Optical Fiber – An optical fiber cable that allows light to travel in many bound modes; used in LAN applications. Multimode fibers have a larger core than single-mode (core/cladding 62.5/125 micrometers).

Multiple Weave – Wire mesh grips woven utilizing single, double, and triple strands of each wire material.

Multiplexing – Combining a number of individual messages over a common path – usually by frequency division or time division.

Multi-User Telecommunications Outlet Assembly (MUTOA) – A device grouping several telecommunications outlets into one location.

Narrow Wall Plate – A cover plate designed for flush mounting on narrow partitions having a width dimension of two inches or less.

Near-End Crosstalk (NEXT) – Electrical noise coupled from one pair of wires to another, measured from where the signal is transmitted.

NEC (National Electrical Code®) – A code providing for practical safeguarding of persons and property from hazards arising from the use of electricity.

NEC Amperage Rating – The most widely recognized rating for industrial applications. A current-carrying capability of a pin and sleeve system in accordance with Underwriters Laboratories Standards and wire conductor size and insulation per the National Electrical Code. Determined by qualified laboratory testing.

NEMA (National Electrical Manufacturers' Association) – An organization of electrical manufacturers that establishes standards for manufacturing and testing of performance and reliability of electrical products. NEMA tests are often the basis or prerequisite for approval by the Federal Government and/or by Underwriters' Laboratories, Inc.

NEMA Type 1 Enclosures – Intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt in locations where unusual service conditions do not exist.

NEMA Type 3 Enclosures – Intended for outdoor use primarily to provide a degree of protection against rain, sleet, and windblown dust; and to be undamaged by the formation of ice on the enclosure. They are not intended to provide protection against conditions such as internal condensation or internal icing.

NEMA Type 3R Enclosures – Intended for outdoor use primarily to provide a degree of protection against rain and sleet; and to be undamaged by the formation of ice on the enclosure. They are not intended to provide protection against conditions such as internal condensation, or internal icing.

NEMA Type 4 Enclosures – Enclosures intended for indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, hose-directed water, and external ice formation.

NEMA Type 4X Enclosures – Enclosures intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose-directed water, and external ice formation.

NEMA Type 7 Enclosures – Intended for indoor use in locations classified as Class 1, Group A, B, C, or D, as defined in the National Electrical Code. They shall be capable of withstanding the pressures resulting from an internal explosion of specified gases, and contain such an explosion sufficient that an explosive gas-air mixture existing in the atmosphere surrounding the enclosure will not be ignited. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting explosive gas-air mixtures in the surrounding atmosphere. Enclosures shall meet explosion, hydrostatic, and temperature design tests.

NEMA Type 9 Enclosures – Intended for indoor use in locations classified as Class II, Groups E, F, or G, as defined in the National Electrical Code. They shall be capable of preventing the entrance of dust. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting or discoloring dust on the enclosure or igniting dust-air mixtures in the surrounding atmosphere. Enclosures shall meet dust penetration and temperature design tests, and aging of gaskets (if used).

NEMA Type 12 Enclosures – Intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt, and dripping non-corrosive liquids. They are not intended to provide protection against such conditions as internal condensation.

NEMA Type 13 Enclosures – Intended for indoor use primarily to provide a degree of protection against lint, dust, spraying of water, oil, and non-corrosive coolant. They are not intended to provide protection against conditions such as internal condensation.

Network – An interconnection of computers, peripherals, and data/voice communications facilities.

NFPA (National Fire Protection Association) – An organization devoted to promoting the science and improving the methods of Fire Protection. Membership is open to anyone interested. Every three years the NFPA produces a new edition of the NEC (see above). The NFPA also provides many other useful publications dealing with fire prevention.

N.P.S. – National Pipe Straight Thread.

N.P.T. – National Pipe Tapered Thread.

Occupancy Sensor – A device that switches lights on and off or dims and brightens lights based on the presence or absence of people.

OFNP (Optical Fiber Non-conductive Plenum) – NFPA designation for optical fiber cable that contains no electrically conductive components and meets fire rating requirements for plenum (backbone) applications.

Ohm – The unit of measurement for electrical resistance.

Ohm's Law – States that, in a given electrical circuit, the amount at current in amps is equal to the pressure in volts divided by the resistance in ohms. The formula is:
I (Current) = V voltage or V = I x R
R resistance or R = V/I

Open System Architecture – International standards for data networking which allow multi-vendor/multi-product applications.

Optical Fiber – A thin filament of glass or plastic capable of carrying information in the form of light.

Optical Power Meter – Test equipment that measures in dBm the strength of a light wave over a fiber cable.

Optical Time Domain Reflectometer (OTDR) – An instrument that measures transmission characteristics of fiber by measuring the backscatter and reflection of injected light as a function of time. Used to measure attenuation of fiber, splices, connectors, and locate faults.

OSHA (Occupational Safety and Health Administration) – That part of the U.S. Department of Labor responsible for assuring that employers provide safe and healthful working conditions and equipment for employees, and that employees properly avail themselves of these conditions. Note: OSHA does not approve products. Compliance with OSHA regulations is contingent on approval or listing of the product by an authorized testing laboratory, such as UL, and proper installation and/or use of the product in accordance with OSHA guidelines.

Oversized Wall Plate – A wall plate with length and width dimensions greater than standard wall plates.

Outlet – A point on the wiring system at which current is taken to supply utilization equipment.

Outlet (DataCom) – A fixed connection where horizontal cable terminates and work area equipment can be connected.

Outside Plant (OSP) – Telecommunications infrastructure designed for installation exterior to buildings.

Pair – Two wires, twisted together with a reciprocal color code.

Pair Twist – The uniform twist of an insulated copper pair that helps to improve the effects of capacitance imbalance and electromagnetic induction.

Passive Infrared-(P.I.R.) – Typically this term is used in reference to detecting infrared. A P.I.R. detector functions as a receiver of infrared emitted from a transmitter, such as the human body.

Patch Cord – A length of cable, with connectors on the ends, used to join telecommunications links at a cross-connect.

Patch Panel – Connecting hardware that can be accessed with patch cords to form cross-connection (usually located in a telecommunications room) used to modify, reconfigure, or administer communications networks.

PBX (Private Branch Exchange) – A telephone switching system serving one organization or business, which is connected to the public telephone system.

Peripherals – Devices used to extend the capability of a computer or network. These can include printers, scanners, external drives, modems, and more.

Permanent Link – The transmission path between any two interfaces of cabling, excluding patch cords, equipment, and work area cables.

Phase Control – The electronic process of chopping or turning on and off the AC line every half line cycle. It is commonly used in dimming and fan speed control applications.

Pigtail – A short length of copper or optical fiber cable that has a pre-installed connector on one end. See Cable Assembly and Jumper.

Pin and Sleeve – Industrial wiring devices utilizing round pin-shaped blades and tubular designed sleeve contacts.

Pilot Light – A switch with an integral lamp in the actuator which lights when the switch is in the "ON" position.

Plenum – A chamber which forms part of a building's air distribution system.

Plug – A device utilizing blades which, when inserted into a receptacle, establishes connection between the conductors of the attached flexible cord and the conductors connected to the receptacle.

Polarization (plugs and receptacles) – A means of assuring the mating of plugs and receptacles of the same rating in only the correct position.

Polarity – The alignment of a plug and receptacle to ensure correct connection.

Pole – The term "pole" as used in designating plugs and receptacles refers to a terminal to which a circuit conductor (always current carrying) is connected. In switches, the number of poles indicates the number of conductors being controlled.

Port – Hardware entity at the end of each link.

Potentiometer (POT) – A variable resistor, when used in a phase control it adjusts the light intensity.

Power Budget – In fiber optics, the difference between the strength of the signal transmitter and the sensitivity of the signal receiver. It represents the maximum acceptable loss for the combination of components and connectors used on a link.

Power Connector – A plug or receptacle that provides connection for distribution of secondary electrical power from a power source to electrical equipment, either portable or stationary.

Powersum – A test method for four-pair cable which compares the sum of the pair-to-pair crosstalk from three pairs to the fourth pair.

Premises Wiring – The technology of wiring buildings and equipment for data, telephone, video and other electrical/electronic functions.

Preset – The ability of a dimmer or fan speed control to "remember" a desired level of output.

Pressure Termination – An electrical connection in which a stripped cable is secured in a wire well by a set screw. The simplest method of termination.

Propagation Delay – Time between when a signal is transmitted and when it is received at the opposite end of the cable.

Protocol – A set of rules governing the transmission of information over a data channel.

legrand®
Pass & Seymour

Glossary of Terms

PDN (Public Data Network) – A network established and operated for the specific purpose of providing data transmission services to the public.

Pulling Grip – A reusable wire mesh grip for pulling cable, rope, or bare conductor.

Pulling Tension – The amount of pull (foot-pounds of tension) placed on a cable during installation.

Pull Switch – A switch with an actuator mechanism operated by a downward or outward pull.

Punchdown – Securing a conductor to a wiring terminal by placing the insulated conductor in the terminal groove and pushing down with a "punchdown" (impact) tool — creating an insulation displacement connection (IDC).

Push/Push – A means of achieving the preset features on a rotary dimmer or fan speed control. The secondary switching mechanism is activated by pushing the knob at any preset of light or speed.

RBOC – Regional Bell Operating Company, e.g., Bell Atlantic.

RCDD (Registered Communications Distribution Designer) – Professional certification granted by BICSI (Building Industry Consulting Services International).

Recessed F Connector – A type of video connector in which the termination is recessed for a smoother appearance and greater termination protection.

Receptacle – A contact device which is intended to establish electrical connection with an inserted plug.

Refractive Index – The ratio of the velocity of light in a vacuum to the velocity of light in a given material.

Relay Rack – A vertical metal frame that is equipped with threaded holes at a predefined spacing in accordance with EIA- 310-D, on the front of the rack (or on both the front and rear sides of the rack). It is used to mount termination hardware, electronic equipment, or a combination of both. It can be floor mounted (free standing) or wall mounted.

Resistive Load – A device which opposes the flow of electric current. There is a voltage drop across a resistive load, which causes the device to dissipate heat.

Response Time – The interval time required for a device to perform its stated function in reaction to specific condition(s), such as a transient voltage surge or ground fault.

Return Loss – 1. Noise or interference caused by impedance of a cable, expressed in decibels. 2. The amount of reflected power compared to the amount of incident power at an interface, expressed in dB. Return loss is a critical factor in single-mode links because reflected light can destabilize some lasers.

RF Control – Radio Frequency Control. Systems that use RF communication to propagate control messages between devices and/or throughout the system.

RFI (Radio Frequency Interference) – Electrical noise.

Ring – One of the two conductors or cable pair in a telephone circuit.

Riser – The path between floors of a building.

RJ (Registered Jack) – Telephone and data jack applications registered with FCC.

RJ31X – A specialized jack used to allow security systems to take immediate control of a phone line, even when it is already in use. The security module used in the P&S Home Network Wiring Center includes an RJ31X jack for this purpose.

R.M.S. (Root Means Square) – Used as an A.C. value of voltage or current. Expressed, for example, as 120 volts AC RMS.

Rocker Switch – A switch that is operated by a paddle-type actuator, such as a decorator switch.

RoHS – Restriction of Hazardous Substances Directive. This directive restricts the use of six hazardous materials in the manufacture of various types of electronic and electrical equipment. It has been adopted by the European Union and in modified form by some jurisdictions in the U.S.

Rotary Dimming – Is achieved through the rotation of a knob of any style to control the lighting level components.

Rough-In – Stage of network installation during which boxes are mounted and cabling is run.

Safety Switch – Common term for an enclosed switch, commonly used in service or motor-circuit disconnect applications or as a motor controller. It is typically used to provide a disconnect point in power circuits supplying stationary or permanently installed equipment. Safety switches may be either fusible or non-fusible.

Scattering – A property of a fiber that causes light to deflect from the fiber, contributing to losses.

Sectional Wall Plate – Individual section wall plates with different openings that can be field assembled into a custom multi-gang wall plate.

Self Modulating – A video device, for example, a VCR or video camera, which supplies video signals to a specified CATV or UHF channel. No separate modulator is required.

Series Circuit – A circuit in which the components are arranged end to end to form a single path for current.

Service Loop – The slack which should be left in the cable at the communications outlet to accommodate future needs.

Shield – Metallic layer placed around a conductor or group of conductors to prevent electrostatic or electromagnetic coupling between the enclosed wires and external fields.

Side Wire Terminal – A termination that can be accomplished by a 3/4" turn looping pre-stripped solid or stranded conductor under terminal screws.

Signal-to-Noise Ratio (SNR) – The ratio between the detected signal power and noise in a receiver, expressed in dB. The prime determining factor in bit error rate.

Single-Mode Fiber – An optical fiber that will allow only one mode to propagate. This fiber is typically a step index fiber.

Single Receptacle – A receptacle which accepts only one plug.

Single Pole Switch – (single-pole single-throw)-A switch that makes or breaks the connection of one conductor and controls one load from one location.

Single Weave – A wire mesh grip woven with single strands of wire material.

Slant Symbol (/) – As used in wiring device ratings, indicates that two or more voltage potentials can be used.

Slide Switch – A switch having a sliding actuating member which makes or breaks the switch contact mechanism.

Slide Dimming – Is achieved through the linear movement up and down or horizontal of a slide mechanism to control the lighting level.

Splice Tray – A container used to organize and protect fiber splices, as well as a means for storing fiber slack.

Split Circuit – A duplex receptacle that can be wired for two separate circuits.

Split Mesh – A wire mesh grip separated at one row along the wire mesh axis utilizing an additional lace or rods to weave closed around cable.

Star Wiring – Called Star Topology and Home Run, a method of cabling each telecommunications outlet directly to the horizontal cross-connect in the telecommunications room with an individual pair of cables.

Straight Blade – A plug, connector, receptacle, flanged inlet or flanged outlet providing no locking features.

Straight Tip (ST) – A type of optical fiber connector identified by its bayonet housing. The ferrule may be metallic, ceramic, or plastic.

Strain Relief Grip – A wire mesh grip used to relieve strain or stress at the transition point between relatively flexible cable or conduit and the rigid connection point.

Stranded – A number of solid wires twisted together to form a flexible conductor.

Strap Dimmer/Fan Speed Control – Any dimmer or fan speed control that will fit into a traditional NEMA standard switch box, without an external heat sink.

Subscriber Connector (SC) – A type of optical fiber identified by the square cross-section of its plastic housing.

Support Grip – A wire mesh grip used for permanent or temporary support of a length of cable.

Surface-Mounted – A device intended to be installed on the surface of a wall, panel, or equipment.

Surge-Suppression – The use of a device containing electronic components which limits peak voltage to a predetermined value when voltage spikes or surges appear on the connected line.

Switch – A device for making, breaking, or changing the connections in an electric current. An enclosed switch is located in a box or cabinet, may be fusible or non-fusible, and is commonly used in a service or motor-circuit disconnect capacity, as a disconnect when equipment is to be serviced, or as a motor controller.

"T" Rated Switch – A switch for tungsten filament lamps for both AC and DC current.

Tamper-Resistant – A receptacle which by its construction limits improper access to its energized contacts.

Tandem – A wall plate in which individual gangs are arranged vertically one above the other.

Telecommunications Room (TR) – An enclosed space for housing telecommunications equipment, cable terminations, and cross-connects. The room is the recognized cross-connect between the backbone cable and horizontal cabling.

Terminal – A terminal is a fixed location on a wiring device where a conductor is intended to be connected.

Three Position Center "OFF" – A two-circuit, three-position switch of either the maintained or momentary type, in which the "OFF" position is indicated by the centered position of the actuator.

Three-Way Switch (single-pole double-throw) – A switch which is used in pairs to control one load from two or more locations.

TIA (Telecommunications Industry Association) – Industry trade association which works with the Electronics Industry Association (EIA) in developing standards.

Tight-Buffered Cable – Type of cable construction in which each glass fiber is tightly buffered by a protective thermoplastic coating to a diameter of 900 microns. Increased buffering provides ease of handling and installing connectors.

Time Delay – A period of time when a load is energized or de-energized. At the end of the desired time period, the load changes state (i.e.; on or off).

Time Switch – An electronic or electromechanical control, used to schedule "turn on" and "turn off" time based on the time of day.

Timer – An electronic or electromechanical control, used to produce a time delay to control a load.

Tip – The positive conductor of a pair in a basic telephone circuit. The tip is grounded.

Toggle Switch – A switch having a lever-type actuating member which makes or breaks the switch contacts when its position is changed.

Toggle Dimming – Is achieved through up or down toggling of traditional switch style toggle used to control the dimming components.

Topology – The physical or geometric configuration of a local area network.

Toroid Choke – An electronic component constructed of a ferrite ring wrapped with copper wire, used to reduce RFI generated by an electronic switching device.

Touch Dimming – The ability of a dimmer to control lighting levels by sensing the touch of a hand to its sensor plate.

Transient Voltage Surge Suppressor (TVSS) – A device designed to protect sensitive electronic equipment from the harmful effects of transient voltage surges having entered the power line to which it is connected.

Transmitter (TX) – 1. An optoelectronic circuit that converts an electrical logic signal to an optical signal. 2. In fiber optics, using a source such as light-emitting diode or laser.

TRIAC (Bidirectional Triode Thyristor) – A solid-state output device capable of switching alternating current.

Trim Kit – For P&S Home Network Centers, a set of components enabling complete installation of capability-providing modules and cabling following cabinet rough-in, as well as providing a finished appearance.

Turnkey – An installation in which the user receives a complete, operational system, ready to be used.

Twisted Pair – Two insulated copper wires twisted together to reduce interference from each other.

UL (Underwriters' Laboratories, Inc.) – "An independent not-for-profit organization testing for public safety."

UL Listed – Indicates an item that has been tested and approved to the standards established by UL for safety.

UL Recognized – Refers to products that have been tested and approved to be used as component parts of equipment or products that are to be UL listed.

Ultrasonic – Technology to detect occupancy using high frequency (ultrasonic) sound waves and measuring the changes in the returning waves. Can sense around partitions.

USOC (Uniform Service Order Code) – Bell system term to denote varying pin configurations on registered jacks (RJs).

UTP (Unshielded Twisted Pair) – Twisted-pair copper cables without metallic braid shielding – capable of high-speed voice and data transmission. The most common cabling used in the U.S. in structured wiring.

Ultraviolet – The invisible rays of the spectrum of light which are at its violet end. Sometimes abbreviated U.V.

Vacancy Sensor – A device that operates as a standard ON/OFF switch that will automatically turn lights off if the space becomes vacant. Required for certain residential applications under California Title 24.

Varistor – Variable resistor.

Voltage – A difference of potential measured in volts. The electric pressure available to cause a flow of electrons.

Voltage Rating – Ratings that indicate the current-carrying capability of a connector up to a specified voltage. Voltage ratings are determined by the air gap between contacts and between contacts and the shell.

Wall Plate – A plate designed to enclose a device box, with or without a device installed in the box.

Watertight – A classification of a device and/or enclosure with design considerations for preventing water from entering under specific conditions.

legrand®
Pass & Seymour

Glossary of Terms

Wavelength – The length of a wave measured from any point on one wave to the corresponding point on the next wave, such as from crest to crest. The wavelength of light is usually measured in nanometers (nm).

WD-1 – Standards Publications by NEMA. General requirements for wiring devices.

WD-5 – Has been merged with WD-1.

WD-6 – Standards Publications by NEMA. Wiring devices — dimensional requirements.

Weatherproof – A device constructed or protected such that exposure to weather will not interfere with successful operation (N.E.C.).

Wet Location; Cover Open – A cover, UL listed, in accordance with specific test standards for use in wet and damp locations with the cover opened (plug cap inserted) or closed.

Wet Location; Only with Cover Closed – A cover, UL listed, in accordance with specific test standards for use in damp locations with the cover closed, or wet locations only when the cover is closed.

Wide-Area Network (WAN) – Computer networks where devices are connected over extended distances using telecommunications links, such as telephone lines, satellites, and microwave connections, rather than a length of cable.

Wire Size – Conductors for building wiring are available in AWG (American Wire Gauge) sizes ranging from #14 to 4/0. The larger the number size, the smaller the diameter. For example: #10 is smaller than #8. The larger the diameter of a wire, the less the resistance.

Wire Mesh Grip (Flexcor) – Woven wire mesh holding devices used to support, pull, or relieve strain exerted upon cables, conduit, tubing, and various other items.

Wiring Closet – Termination point for customer premises wiring offering access to service personnel.

Work Area Outlet – A connecting device in the work area where horizontal cable terminates and work area equipment can be connected. Also called information outlet and telecommunications outlet.

Workstation – The location where telecommunications cabling is connected to work area equipment (PCs and peripherals) by means of a telecommunications outlet. Also called work area outlet and information outlet.

Note: Some definitions courtesy of BICSI.

legrand®
Pass & Seymour

Catalog Number	Page Number
ACD1	R-11
ACD201	R-11
ACD203	R-11
ACD3	R-11
ACDAP	R-17
ACMFB	R-17
ACSAP	R-17
ACSFP	R-17
ACSWRP	R-17
AR120/277	L-16
AX30	J-22
AX60	J-22
BOX120	K-7
BOX140	K-7
BOX22	K-7
BOX30	K-7
BOX40	K-7
BOX52	K-7
BOX70	K-7
BOX94	K-7
C5EF	R-18
C25E2F	R-18
C118HAC	N-12
C118HGAC	N-12
C118RAC	N-12
C118RGAC	N-12
C118WAC	N-12
C118WACX	N-12
C118WGAC	N-12
C118WGACX	N-12
CA126GRY	P-8
CA1G	P-7
CA1GL	P-7
CA1GS	P-7
CA1U2681G	P-6
CA2G	P-8
CA2GS	P-8
CA2U2681G	P-6
CA7GV	P-6
CA8GH	P-6
CA8GJ	P-6
CA8GVFS	P-6
CA17G	P-8
CA18G	P-8
CA26GH	P-7
CA26GV	P-7
CA72G	P-8
CA78G	P-8
CA82G	P-8
CA262G	P-8
CA268G	P-8
CA721G	P-6
CA723G	P-6
CA726G	P-8
CD3FB16	D-79, M-29
CD3FB103P277	D-79, M-29
CD3FB163P	D-79, M-29
CD3FB10277	D-79, M-29
CD4FB	D-80, M-30
CD4FB3P	D-80, M-30
CD700	D-75, M-25
CD703P	D-75, M-25
CD1100	D-75, M-25
CD1103P	D-75, M-25
CD1600	D-75, M-25
CD1603P	D-75, M-25
CD2000	D-75, M-25
CD2003P	D-75, M-25
CDADAPTORKIT	D-76, M-26
CDDH16	D-81, M-31, M-38
CDFB5	D-77, M-27
CDFB8	D-77, M-27
CDFB10	D-77, M-27
CDFB16	D-77, M-27
CDFB53P	D-78, M-28
CDFB73P277	D-78, M-28
CDFB83P	D-78, M-28
CDFB103P	D-78, M-28
CDFB103P277	D-78, M-28
CDFB163P	D-78, M-28
CDFB7277	D-77, M-27
CDFB10277	D-77, M-27
CDLV700	D-76, M-26
CDLV703P	D-76, M-26
CDLV1100	D-76, M-26
CDLV1103P	D-76, M-26
CDLV1600	D-76, M-26
CDLV1603P	D-76, M-26
CDSC6	D-81, M-31, M-38
CDSC12	D-81, M-31, M-38
CG405	K-6
CG406	K-6
CG407	K-6
CG408	K-6
CG409	K-6
CG410	K-6
CG410F	K-6
CG411	K-6
CG412	K-6
CG606	K-6
CG607	K-6
CG608	K-6
CG609	K-6
CG610	K-6
CG611	K-6
CG612	K-6
CG809	K-6
CG811	K-6
CG812	K-6
CG812F	K-6
CG814	K-6
CG816	K-6
CG816F	K-6
CG1016	K-6
CG1018	K-6
CG1020	K-6
CG1022	K-6
CG1218	K-6
CG1220	K-6
CG1222	K-6
CG1422	K-6
CG1424	K-6
CG1426	K-6
CG1428	K-6
CG1430	K-6
CG1432	K-6
CG1434	K-6
CG1436	K-6
CG1438	K-6
CG1440	K-6
CG1442	K-6
CG1630	K-6
CG1634	K-6
CG1636	K-6
CG1638	K-6
CG1640	K-6
CG1642	K-6
CG1830	K-6
CG1834	K-6
CG1836	K-6
CG1838	K-6
CG1840	K-6
CG1842	K-6
CG1844	K-6
CG1846	K-6
CG1848	K-6
CG1850	K-6
CG40545	K-6
CG40590	K-6
CG40645	K-6
CG40690	K-6
CG40790	K-6
CG40890	K-6
CG40945	K-6
CG40990	K-6
CG41090	K-6
CG60845	K-6
CG60890	K-6
CG60945	K-6
CG60990	K-6
CG61090	K-6
CG61190	K-6
CG61245	K-6
CG61290	K-6
CG81245	K-6
CG81290	K-6
CG81445	K-6
CG81490	K-6
CG81645	K-6
CG81690	K-6
CG101690	K-6
CG101890	K-6
CG102245	K-6
CG122090	K-6
CG122245	K-6
CG122290	K-6
CG142290	K-6
CG142490	K-6
CG142690	K-6
CG142890	K-6
CG143090	K-6
CG143290	K-6
CR15	B-21
CR20	B-21
CR5266X	G-4
CR5269X	G-4
CR6200	B-9
CR6207	B-71
CR6300	B-9
CR6307	B-71
CR6360	H-29
CR6361	H-29
CR6364	H-30
CR6365	H-30
CR6369	H-30
CR6370	H-29
CR6375	H-30
CR6377	H-29
CR7716N	H-29, H-30, H-35
CR7717N	H-29, H-30, H-35
CRB5262	B-20
CRB5262S	B-20
CRB5362	B-20
CRB5362S	B-20
CRL515C	H-7
CRL515P	H-7
CRL520C	H-9
CRL520P	H-9
CRL520R	H-9
CRL530C	H-12
CRL530P	H-12
CRL530R	H-12
CRL620C	H-10
CRL620P	H-10
CRL630C	H-13
CRL630P	H-13
CRL1420C	H-18
CRL1420P	H-18
CRL1430C	H-19
CRL1430P	H-19
CRL2030RBC	H-35
CRL2030RBP	H-35
CS15AC1	A-7
CS15AC3	A-7
CS20AC1	A-7
CS20AC3	A-7
CS500	L-13
CS1200	L-13
CS6360	H-29
CS6361	H-29
CS6364	H-30
CS6365	H-30
CS6369	H-30
CS6370	H-29
CS6375	H-30
CS6377	H-29
CS8164	H-30
CS8165	H-30
CS8169	H-30
CS8175	H-30
CS8177	H-30
CS8264	H-29
CS8265	H-29
CS8269	H-29
CS8275	H-29
CS8364	H-30
CS8365	H-30
CS8369	H-30
CS8375	H-30
CS8464	H-29
CS8465	H-29
CS8469	H-29
CS8475	H-29
CSB15AC1	A-7
CSB15AC2	A-7
CSB15AC3	A-7
CSB15AC4	A-7
CSB20AC1	A-7
CSB20AC2	A-7
CSB20AC3	A-7

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
CSB20AC4	A-7
CSD1000	L-15
CSU600	L-14
CSU1100	L-14
CSU2200	L-14
CT1	N-7
D0531	B-72, G-13
D0533	B-72, G-13
D0551	B-72, G-13
D0553	B-72, G-13
D0631	B-72, G-13
D0633	B-72, G-13
D0651	B-72, G-13
D0653	B-72, G-13
D0731	G-13
D0751	G-13
D600MIV	D-66, M-10
D703P	D-67, M-11
D703PTC	D-67, M-11
D703PWC	D-67, M-11
D1000MIV	D-66, M-10
D1103P	D-67, M-11
D1103PTC	D-67, M-11
D1103PWC	D-67, M-11
D1861	B-72, G-13
DAPK1I	M-32, M-33, M-39
DAPK2I	M-32, M-33, M-39
DC1	H-35
DFB8P	D-68, M-12
DDH15MIV	D-66, M-10, M-34
DDH16P	D-68, M-12, M-34
DFB600MIV	D-66, M-10
DKIT	D-67, M-11
DLV600MIV	D-66, M-10
DLV703P	D-67, M-11
DLV1103P	D-67, M-11
DR703PV	D-72, M-16
DR1103PV	D-72, M-16
DRD2I	D-62, M-5
DRD3IV2	D-62, M-5
DRD4I	D-62, M-5
DRD5IV2	D-63, M-6
DRD6IV2	D-63, M-6
DRD8IV2	D-62, M-5
DRD9I	D-63, M-6
DRDH163PV	D-72, M-16, M-34
DRLV703PV	D-72, M-16
DRLV1103PV	D-72, M-16
DRMIV	D-66, M-10
DRSC53PV	D-72, M-16, M-34
EHU15AN	E-28, G-3, G-4, G-5
EXT1	N-2
EXT2	N-2
FB1TRDRB	N-13
FB1TRSRB	N-13
FB2TRDR2B	N-14
FB2TRDRKS4B	N-14
FBOX1	P-10
FC22	K-13
FC22GL	E-28, G-3, G-4, H-36, K-7
FC30	K-13
FC30GL	E-28, G-3, G-4, H-36, K-7
FC30LB	K-13
FC40	K-13
FC40GL	E-28, G-3, G-4, H-36, K-7
FC40LB	K-13
FC52	K-13
FC52GL	E-28, G-3, G-4, H-36, K-7
FC52LB	K-13
FC70	K-13
FC70GL	H-36, K-7
FC70LB	K-13
FC94	K-13
FC94GL	H-36, K-7
FC94LB	K-13
FC050LB	K-9
FC050OF	K-9
FC050U	K-9
FC050UU	K-9
FC062LB	K-9
FC062OF	K-9
FC062U	K-9
FC062UU	K-9
FC075LB	K-9
FC075OF	K-9
FC075U	K-9
FC075UU	K-9
FC100LB	K-9
FC100OF	K-9
FC100U	K-9
FC100UU	K-9
FC125LB	K-9
FC125OF	K-9
FC125U	K-9
FC125UU	K-9
FC150LB	K-9
FC150OF	K-9
FC150U	K-9
FC150UU	K-9
FC175LB	K-9
FC175OF	K-9
FC175U	K-9
FC175UU	K-9
FC200LB	K-9
FC200OF	K-9
FC200U	K-9
FC200UU	K-9
FC250LB	K-9
FC250OF	K-9
FC250U	K-9
FC250UU	K-9
FC300LB	K-9
FC300OF	K-9
FC300U	K-9
FC350LB	K-9
FC350OF	K-9
FCHL075U	K-12
FCHL075UU	K-12
FCHL100U	K-12
FCHL100UU	K-12
FCHL125U	K-12
FCHL125UU	K-12
FCHL150U	K-12
FCHL150UU	K-12
FCHL200UU	K-12
FCHL250UU	K-12
FCHL300UU	K-12
FCHL350UU	K-12
FCSD22	K-13
FCSD30	K-13
FCSD30LB	K-13
FCSD40	K-13
FCSD52	K-13
FCSD52LB	K-13
FCSD70	K-13
FCSD70LB	K-13
FCSD94	K-13
FCSD94LB	K-13
FFO18LB	K-14
FFO18U	K-14
FFO24LB	K-14
FFO24U	K-14
FFO30LB	K-14
FFO30U	K-14
FFO38LB	K-14
FFO38U	K-14
FFO46LB	K-14
FFO46U	K-14
FFO56LB	K-14
FFO56U	K-14
FFO70LB	K-14
FFO70U	K-14
FFRO18U	K-14
FFRO24U	K-14
FFRO30U	K-14
FFRO38U	K-14
FFRO46U	K-14
FFRO56U	K-14
FFRO70U	K-14
FR050LB	K-11
FR050OF	K-11
FR050U	K-11
FR050UU	K-11
FR062LB	K-11
FR062OF	K-11
FR062U	K-11
FR062UU	K-11
FR075LB	K-11
FR075OF	K-11
FR075U	K-11
FR075UU	K-11
FR100LB	K-11
FR100OF	K-11
FR100U	K-11
FR100UU	K-11
FR125LB	K-11
FR125OF	K-11
FR125U	K-11
FR125UU	K-11
FR150LB	K-11
FR150OF	K-11
FR150U	K-11
FR150UU	K-11
FR175LB	K-11
FR175OF	K-11
FR175U	K-11
FR175UU	K-11
FR200LB	K-11
FR200OF	K-11
FR200U	K-11
FR200UU	K-11
FS2	R-10
FS4	R-10
FS5	R-10
FS25	R-10
FS050LB	K-10
FS050OF	K-10
FS050U	K-10
FS050UU	K-10
FS062LB	K-10
FS062OF	K-10
FS062U	K-10
FS062UU	K-10
FS075OF	K-10
FS075U	K-10
FS100LB	K-10
FS100OF	K-10
FS100U	K-10
FS100UU	K-10
FS125LB	K-10
FS125OF	K-10
FS125U	K-10
FS125UU	K-10
FS150LB	K-10
FS150OF	K-10
FS150U	K-10
FS150UU	K-10
FS175LB	K-10
FS175OF	K-10
FS175U	K-10
FS175UU	K-10
FS200LB	K-10
FS200OF	K-10
FS200U	K-10
FS200UU	K-10
FS250LB	K-10
FS250OF	K-10
FS250U	K-10
FS250UU	K-10
FS300LB	K-10
FS300OF	K-10
FS300U	K-10
FS300UU	K-10
FS350LB	K-10
FS350OF	K-10
FS350U	K-10
FS350UU	K-10
FSHL075U	K-12
FSHL075UU	K-12
FSHL100U	K-12
FSHL100UU	K-12
FSHL125U	K-12
FSHL125UU	K-12
FSHL150U	K-12
FSHL150UU	K-12
FSHL200UU	K-12
FSHL250UU	K-12
FSHL300UU	K-12
FSHL350UU	K-12
FSHL400UU	K-12
GARD3GR	P-21
GASKET1	Q-39
GASKET2	P-23
GASKET38	P-23
GASKET3726	P-23
GASKET3780	P-23

Catalog Number	Page Number	Catalog Number	Page Number	Catalog Number	Page Number	Catalog Number	Page Number
GH5	K-13	KS426	R-16	L730FO	H-13	L1430C	H-19
HP30EX	A-11	KSBL10	R-16	L730P	H-13	L1430CGCM	H-5
HS1001	L-12	KSBNC	R-16	L730PGCM	H-5	L1430FI	H-19
IG26262	B-30, D-15, F-17	KSFF	R-16	L730R	H-13	L1430FIKIT	H-19, P-16
IG26262HG	B-30, B-33, D-15, E-12, E-15, F-17	KSFFST	R-16	L820C	H-11	L1430FO	H-19
		KSRCAB	R-16	L820FI	H-11	L1430P	H-19
IG26362	B-30, D-15, F-17	KSRCAF	R-16	L820FO	H-11	L1430PGCM	H-5
IG26362HG	B-30, B-33, D-15, E-12, E-15, F-17	KSRCAR	R-16	L820P	H-11	L1430R	H-19
		KSRCAY	R-16	L820R	H-11	L1520C	H-18
IG415	B-69	KSSC	R-16	L830C	H-14	L1520FI	H-18
IG420	B-69	KSST	R-16	L830FI	H-14	L1520FO	H-18
IG420HISP	B-69, E-29	KSSV	R-16	L830FO	H-14	L1520P	H-18
IG4700	F-19, H-7	KTPD1	R-16	L830P	H-14	L1520R	H-18
IG4710	F-19, H-7	KTPD2	R-16	L830R	H-14	L1530C	H-19
IG4760	F-19, H-8	KTPD3	R-16	L920C	H-11	L1530FI	H-19
IG5261	B-30, F-17	KTPD4	R-16	L920FI	H-11	L1530FO	H-19
IG5262	B-30, F-17	KTPD6	R-16	L920FO	H-11	L1530P	H-19
IG5262ISP	B-63, D-45, F-5	KTPDL1	R-16	L920P	H-11	L1530R	H-19
IG5361	B-30, F-17	KTPDL2	R-16	L920R	H-11	L1620C	H-18
IG5362	B-30, F-17	KTPDL3	R-16	L930C	H-14	L1620FI	H-18
IG5362SP	B-63, D-45, F-5	KTPDL4	R-16	L930FI	H-14	L1620FO	H-18
IG5662	B-30, F-17	KTPDL6	R-16	L930FO	H-14	L1620P	H-18
IG5862	B-30, F-17	L15AN	H-27, H-36	L930P	H-14	L1620R	H-18
IG8200	B-12, B-30, E-8, E-12, F-17	L15RBC	G-4, H-35	L930R	H-14	L1630C	H-20
		L15RBP	G-4, H-35	L1020C	H-16	L1630FI	H-20
IG8200ISP	B-62, D-44, E-25, F-4	L0115	H-6	L1020FI	H-16	L1630FO	H-20
IG8300	B-12, B-30, E-8, E-12, F-17	L0714	H-8	L1020FO	H-16	L1630P	H-20
		L520C	H-9	L1020P	H-16	L1630R	H-20
IG8300SP	B-62, D-44, E-25, F-4	L520CGCM	H-5	L1020R	H-16	L1730C	H-20
IG8301	B-30, E-12, F-17	L520FI	H-9	L1030C	H-17	L1730FI	H-20
IG8800	B-12, B-30, E-8, E-12, F-17	L520FO	H-9	L1030FI	H-17	L1730FO	H-20
		L520P	H-9	L1030FO	H-17	L1730P	H-20
IGL520P	F-19	L520PGCM	H-5	L1030P	H-17	L1730R	H-20
IGL520R	F-19, H-9	L520R	H-9	L1030R	H-17	L1820C	H-23
IGL530R	F-19, H-12	L530C	H-12	L1120C	H-16	L1820FI	H-23
IGL620R	F-19, H-10	L530CGCM	H-5	L1120FI	H-16	L1820FO	H-23
IGL630P	F-19	L530FI	H-12	L1120FO	H-16	L1820P	H-23
IGL630R	F-19, H-13	L530FO	H-12	L1120P	H-16	L1820R	H-23
IGL720R	F-19, H-10	L530P	H-12	L1120R	H-16	L1830C	H-24
IGL820R	F-19, H-11	L530PGCM	H-5	L1130C	H-17	L1830FI	H-24
IGL1420R	F-19, H-18	L530R	H-12	L1130FI	H-17	L1830FO	H-24
IGL1430R	F-19, H-19	L620C	H-10	L1130FO	H-17	L1830P	H-24
IGL1520R	F-19, H-18	L620CGCM	H-5	L1130P	H-17	L1830R	H-24
IGL1530R	F-19, H-19	L620FI	H-10	L1130R	H-17	L1920C	H-23
IGL1620R	F-19, H-18	L620FO	H-10	L1220C	H-16	L1920FI	H-23
IGL2120R	F-19, H-25	L620P	H-10	L1220FI	H-16	L1920FO	H-23
IGL2130R	F-19, H-26	L620PGCM	H-5	L1220FO	H-16	L1920P	H-23
IGL2220R	F-19, H-25	L620R	H-10	L1220P	H-16	L1920R	H-23
IGL2230R	F-19, H-26	L630C	H-13	L1220R	H-16	L1930C	H-24
IGL2320R	F-19, H-25	L630CGCM	H-5	L1230C	H-17	L1930FI	H-24
IGL2330R	F-19, H-26	L630FI	H-13	L1230FI	H-17	L1930FO	H-24
JP12845C5E	R-19	L630FO	H-13	L1230FO	H-17	L1930P	H-24
JP24845C5E	R-19	L630P	H-13	L1230P	H-17	L1930R	H-24
JP36845C5E	R-19	L630PGCM	H-5	L1230R	H-17	L2020C	H-23
K1	Q-19	L630R	H-13	L1330C	H-17	L2020FI	H-23
K2	Q-19	L720C	H-10	L1330FO	H-17	L2020FO	H-23
KS2BP	R-16	L720CGCM	H-5	L1330P	H-17	L2020P	H-23
K3	Q-19	L720FI	H-10	L1330R	H-17	L2020R	H-23
K4	Q-19	L720FO	H-10	L1420C	H-18	L2030C	H-24
KS6U	R-16	L720P	H-10	L1420CGCM	H-5	L2030FI	H-24
KS58AB	R-16	L720PGCM	H-5	L1420FI	H-18	L2030FO	H-24
KS68AB	R-16	L720R	H-10	L1420FO	H-18	L2030P	H-24
KS88	R-16	L730C	H-13	L1420P	H-18	L2030R	H-24
KS226	R-16	L730CGCM	H-5	L1420PGCM	H-5	L2030RBC	H-35
KS326	R-16	L730FI	H-13	L1420R	H-18	L2030RBP	H-35

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
L2120C	H-25
L2120FI	H-25
L2120FO	H-25
L2120P	H-25
L2120R	H-25
L2130C	H-26
L2130FI	H-26
L2130FO	H-26
L2130P	H-26
L2130R	H-26
L2220C	H-25
L2220FI	H-25
L2220FO	H-25
L2220P	H-25
L2220R	H-25
L2230C	H-26
L2230FI	H-26
L2230FO	H-26
L2230P	H-26
L2230R	H-26
L2320C	H-25
L2320FI	H-25
L2320FO	H-25
L2320P	H-25
L2320R	H-25
L2330C	H-26
L2330FI	H-26
L2330FO	H-26
L2330P	H-26
L2330R	H-26
L3720C	H-11
L3720CGCM	H-5
L3720FO	H-11
L3720P	H-11
L3720PGCM	H-5
L3720R	H-11
L20303AN	H-27, H-36
L203045AN	H-27, H-36
LLRKV	D-70, M-14, M-35
LRKV	D-70, M-14, M-35
LS600	D-69, M-13
LS600P	D-69, M-13
LS603P	D-69, M-13
LS1000	D-69, M-13
LS1000P	D-69, M-13
LS1003P	D-69, M-13
LSDC16V	D-71, M-15, M-35
LSDC163PV	D-71, M-15, M-35
LSDD300	D-70, M-14
LSDH16V	D-71, M-15, M-35
LSDS300P	D-70, M-14
LSDV25V	D-71, M-15, M-35
LSLV600	D-69, M-13
LSLV600P	D-69, M-13
LSLV603P	D-69, M-13
LSSC5	D-71, M-15, M-35
LSSC5P	D-71, M-15, M-35
LVDIV1	N-5
MB4S1PTSOL	B-18
MB4S1PTSTR	B-18
MB4S1SPTSOL	B-18
MB4S1SPTSTR	B-18
MB4S2PTSOL	B-18
MB4S2PTSTR	B-18
MB4S2SPTSOL	B-18
MB4S2SPTSTR	B-18
MBD4S1PTSOL	B-18
MBD4S1PTSTR	B-18
MBD4S1SPTSOL	B-18
MBD4S1SPTSTR	B-18
MBD4S2PTSOL	B-18
MBD4S2PTSTR	B-18
MBD4S2SPTSOL	B-18
MBD4S2SPTSTR	B-18
MFKIT	F-12
MKFOB	M-7
ML114	H-31
ML115	H-31
ML214	H-31
ML215	H-31
ML314	H-31
ML315	H-31
ML1113	H-31
ML1133	H-31
ML2113	H-31
ML2133	H-31
ML3113	H-31
ML3133	H-31
MR232G	M-7
MR2000	M-5
MRC1	B-18
MRC2	B-18
MRH5G	M-6
MRH6G	M-6
MRHC3G	M-7
MRIR1	M-7
MRP6W	M-6
MRP7W	M-6
MRR2G	M-7
MRRC3G	M-7
MSP025	K-19
MSP050	K-19
MSP075	K-19
MSP100	K-19
MSP125	K-19
MSP150	K-19
MSP175	K-19
MSP200	K-19
MSP250	K-19
MSPS025	K-19
MSPS050	K-19
MSPS075	K-19
MSPS100	K-19
MSPS125	K-19
MSPS150	K-19
MSPS175	K-19
MSPS200	K-19
MSPS250	K-19
MSPS300	K-19
OS300SI	D-57, L-10
OSR300SI	D-58, L-11
P100ND	N-5
P100WD	N-5
P108N	N-4
P108W	N-4
P116W	N-4
P118R	N-3
P118RN	N-3
P122B	N-6
P122C	N-3
P122N	N-3
P122R	N-3
P122RN	N-3
P235RAC	N-3
P235RACMH	N-3
P242RRD	N-8
P242SRD	N-8
P354RACMH	N-3
P0501	K-18
P0751	K-18
P0752	K-18
P1001	K-18
P1002	K-18
P1501	K-18
P1502	K-18
P2001	K-18
P2002	K-18
P2501	K-18
P2502	K-18
P3001	K-18
P3002	K-18
P3501	K-18
P3502	K-18
PAR1	P-21
PCC6	R-19
PDV2B	N-5
PF100	K-19
PF210	K-19
PF350	K-19
PF420	K-19
PF540	K-19
PF640	K-19
PH122B	N-6
PH122R	N-3
PJ1KIT	K-15
PJ25	K-15
PJ37	K-15
PJ50	K-15
PJ62	K-15
PJ75	K-15
PJ100	K-15
PJSC1I	Q-25
PJSC7I	Q-25
PJSC8I	Q-25
PJSC14I	Q-25
PJSC26I	Q-25
PJSE1I	Q-25
PJSE7I	Q-25
PJSE8I	Q-25
PJSE14I	Q-25
PJSE26I	Q-25
PL204L	C-23
PL0501	K-15
PL0621	K-15
PL0622	K-15
PL0751	K-15
PL0752	K-15
PL1001	K-15
PL1002	K-15
PL1251	K-15
PL1252	K-15
PL1501	K-15
PL1502	K-15
PL1751	K-15
PL2001	K-15
PL2002	K-15
PL2501	K-15
PL2502	K-15
PL3002	K-15
PLS182F	I-9
PLS182M	I-9
PLS1820F	I-9
PLS1820M	I-9
PLS1840F	I-9
PLS1840M	I-9
PLV1B	N-5
PLV1R	N-5
PLV1S	N-5
PLV1W	N-5
PLV2B	N-5
PLV2W	N-5
PLV3W	N-5
PM1KIT	K-16
PM037	K-16
PM050	K-16
PM075	K-16
PM100	K-16
PM125	K-16
PM150	K-16
PM0501	K-16
PM0751	K-16
PM0752	K-16
PM0753	K-16
PM1001	K-16
PM1002	K-16
PM1003	K-16
PM1501	K-16
PM1502	K-16
PM1503	K-16
PM2001	K-16
PM2002	K-16
PM2003	K-16
PM2501	K-16
PM2502	K-16
PM2503	K-16
PM3001	K-16
PM3002	K-16
PM3003	K-16
PM3501	K-16
PM3502	K-16
PM3503	K-16
PNS6	B-76, F-20
PNS7L	B-76, F-20
PNS10	B-76, F-20
PS0501	K-17
PS0502	K-17
PS0622	K-17
PS0751	K-17
PS0752	K-17
PS1	B-76, F-20
PS1P	B-76, F-20
PS3F	I-4
PS3M	I-4
PS6	B-76, F-20
PS7	B-76, F-20
PS7L	B-76, F-20
PS7P	B-76, F-20
PS8C	B-76, F-20
PS8HWLI	B-37, D-20, Q-36
PS8LM	A-23, D-9

Catalog Number	Page Number
PS8P	B-76, F-20
PS10PC	B-76, F-20
PS15AC1	A-5
PS15AC1CPL	A-5
PS15AC1CSL	A-5
PS15AC1L	A-5
PS15AC1RPL	A-5
PS15AC2	A-5
PS15AC3	A-5
PS15AC3CPL	A-5
PS15AC3CSL	A-5
PS15AC3L	A-5
PS15AC3RPL	A-5
PS15AC4	A-5
PS16CLF	I-6
PS16CLM	I-6
PS20AC1	A-5
PS20AC1CPL	A-5
PS20AC1CSL	A-5
PS20AC1KL	A-6
PS20AC1L	A-5
PS20AC1RPL	A-5
PS20AC2	A-5
PS20AC2CPL	A-5
PS20AC2HP	A-11
PS20AC2KL	A-6
PS20AC2L	A-5
PS20AC2RPL	A-5
PS20AC3	A-5
PS20AC3CPL	A-5
PS20AC3CSL	A-5
PS20AC3KL	A-6
PS20AC3L	A-5
PS20AC3RPL	A-5
PS20AC4	A-5
PS20AC4IL	A-5
PS20AC4KL	A-6
PS20FB	I-2
PS20MB	I-2
PS26W47	H-28
PS27W47	H-28
PS28W47	H-28
PS29W47	H-28
PS30AC1	A-5
PS30AC1RPL	A-5
PS30AC2	A-5
PS30AC2HP	A-11
PS30AC2RPL	A-5
PS30AC3	A-5
PS30AC3RPL	A-5
PS30FSS	J-18
PS30RSAX	J-22
PS30SS	J-22
PS30SSAX	J-22
PS30SSRC	J-22
PS40FB	I-2
PS40FC	I-4
PS40FRB	I-3
PS40FRSB	I-3
PS40MB	I-2
PS40MC	I-4
PS40MRB	I-3
PS40MRSB	I-3
PS40WTCLBK	I-5
PS40WTCMBK	I-5
PS40WTCSBK	I-5
PS55A1	D-61, L-20
PS55B1	D-61, L-20
PS55G1	D-61, L-20
PS60FSS	J-18
PS60SS	J-22
PS60SSAX	J-22
PS60SSRC	J-22
PS100FSS	J-18
PS100SS	J-22
PS100SSAX	J-22
PS100SSRC	J-22
PS154S	C-23
PS204S	C-23
PS320B6S	J-29
PS320C4S	J-29
PS320C4W	J-27
PS320C4WR	J-27
PS320C5W	J-27
PS320C5WR	J-27
PS320C6S	J-29
PS320C6W	J-27
PS320C6WR	J-27
PS320C7W	J-27
PS320C7WR	J-27
PS320P4S	J-29
PS320P4W	J-27
PS320P4WR	J-27
PS320P5S	J-29
PS320P5W	J-27
PS320P5WR	J-27
PS320P6S	J-29
PS320P6W	J-27
PS320P6WR	J-27
PS320P7W	J-27
PS320P7WR	J-27
PS320R4S	J-29
PS320R4W	J-27
PS320R4WL	J-27
PS320R5S	J-29
PS320R5W	J-27
PS320R5WL	J-27
PS320R6S	J-29
PS320R6W	J-27
PS320R6WL	J-27
PS320R7W	J-27
PS320R7WL	J-27
PS330B4S	J-29
PS330B6S	J-29
PS330B7S	J-29
PS330C4S	J-29
PS330C4W	J-27
PS330C4WL	J-27
PS330C6S	J-29
PS330C6W	J-27
PS330C6WL	J-27
PS330C6WR	J-27
PS330C7S	J-29
PS330C7W	J-27
PS330C7WL	J-27
PS330C7WR	J-27
PS330FMIR6W	J-6
PS330MIR4W	J-12
PS330P4S	J-29
PS330P4W	J-12, J-27
PS330P6S	J-29
PS330P6W	J-6, J-27
PS330P6WR	J-27
PS330P7S	J-29
PS330P7W	J-27
PS330P7WR	J-27
PS330R4S	J-29
PS330R4W	J-27
PS330R4WL	J-27
PS330R6S	J-29
PS330R6W	J-27
PS330R6WL	J-27
PS330R7W	J-27
PS330R7WL	J-27
PS360B4W	J-28
PS360B6S	J-29
PS360B6W	J-28
PS360B7S	J-29
PS360B7W	J-28
PS360C4W	J-28
PS360C4WL	J-28
PS360C4WR	J-28
PS360C6S	J-29
PS360C6W	J-28
PS360C6WL	J-28
PS360C6WR	J-28
PS360C7S	J-29
PS360C7W	J-28
PS360C7WL	J-28
PS360C7WR	J-28
PS360FMIR6W	J-6
PS360MIR6W	J-12
PS360MIR7W	J-12
PS360P4W	J-28
PS360P4WR	J-28
PS360P6S	J-29
PS360P6W	J-6, J-12, J-28
PS360P6WR	J-28
PS360P7S	J-29
PS360P7W	J-12, J-28
PS360P7WR	J-28
PS360R4W	J-28
PS360R4WL	J-28
PS360R6S	J-29
PS360R6W	J-28
PS360R7S	J-29
PS360R7W	J-28
PS360R7WL	J-28
PS420B5S	J-29
PS420B7S	J-29
PS420B9S	J-29
PS420C12S	J-29
PS420C12W	J-27
PS420C12WR	J-27
PS420C5W	J-27
PS420C7W	J-27
PS420C7WR	J-27
PS420C9S	J-29
PS420C9W	J-27
PS420C9WL	J-27
PS420C9WR	J-27
PS420FMIR12W	J-6
PS420FMIR3W	J-6
PS420FMIR5W	J-6
PS420FMIR7W	J-6
PS420FMIR9W	J-6
PS420MIR12W	J-12
PS420MIR5W	J-12
PS420MIR7W	J-12
PS420MIR9W	J-12
PS420P12S	J-29
PS420P12W	J-6, J-12, J-27
PS420P12WR	J-27
PS420P5W	J-6, J-12, J-27
PS420P5WR	J-27
PS420P7S	J-29
PS420P7W	J-6, J-12, J-27
PS420P7WR	J-27
PS420P9S	J-29
PS420P9W	J-6, J-12, J-27
PS420P9WR	J-27
PS420R12S	J-29
PS420R12W	J-27
PS420R12WL	J-27
PS420R5S	J-29
PS420R5W	J-27
PS420R7S	J-29
PS420R7W	J-27
PS420R9S	J-29
PS420R9W	J-27
PS420R9WL	J-27
PS430B12S	J-29
PS430B5S	J-29
PS430B7S	J-29
PS430B9S	J-29
PS430C12S	J-29
PS430C12W	J-27
PS430C12WL	J-27
PS430C12WR	J-27
PS430C3W	J-27
PS430C3WL	J-27
PS430C3WR	J-27
PS430C5S	J-29
PS430C5W	J-27
PS430C5WL	J-27
PS430C7S	J-29
PS430C7W	J-27
PS430C7WR	J-27
PS430C9S	J-29
PS430C9W	J-27
PS430C9WL	J-27
PS430C9WR	J-27
PS430FMIR12W	J-6
PS430FMIR3W	J-6
PS430FMIR5W	J-6
PS430FMIR7W	J-6
PS430FMIR9W	J-6
PS430MIR3W	J-12
PS430MIR5W	J-12
PS430MIR7W	J-12
PS430MIR9W	J-12
PS430P12W	J-6, J-27
PS430P12WR	J-27
PS430P3W	J-6, J-12, J-27
PS430P3WR	J-27
PS430P5S	J-29
PS430P5W	J-6, J-12, J-27
PS430P7S	J-29
PS430P7W	J-6, J-12, J-27
PS430P7WR	J-27

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
PS430P9S	J-29
PS430P9W	J-6, J-12, J-27
PS430P9WR	J-27
PS430R12S	J-29
PS430R12W	J-27
PS430R12WL	J-27
PS430R3W	J-27
PS430R3WL	J-27
PS430R5S	J-29
PS430R5W	J-27
PS430R5WL	J-27
PS430R7S	J-29
PS430R7W	J-27
PS430R7WL	J-27
PS430R9S	J-29
PS430R9W	J-27
PS430R9WL	J-27
PS460B12S	J-29
PS460B12W	J-28
PS460B5S	J-29
PS460B5W	J-28
PS460B7S	J-29
PS460B7W	J-28
PS460B9S	J-29
PS460B9W	J-28
PS460C12S	J-29
PS460C12W	J-28
PS460C12WL	J-28
PS460C12WR	J-28
PS460C5S	J-29
PS460C5W	J-28
PS460C7S	J-29
PS460C7W	J-28
PS460C9S	J-29
PS460C9W	J-28
PS460C9WR	J-28
PS460FMIR12W	J-6
PS460FMIR5W	J-6
PS460FMIR7W	J-6
PS460FMIR9W	J-6
PS460MIR12W	J-12
PS460MIR5W	J-12
PS460MIR7W	J-12
PS460MIR9W	J-12
PS460P12S	J-29
PS460P12W	J-6, J-12, J-28
PS460P12WR	J-28
PS460P5S	J-29
PS460P5W	J-6, J-12, J-28
PS460P7S	J-29
PS460P7W	J-6, J-12, J-28
PS460P9S	J-29
PS460P9W	J-6, J-12, J-28
PS460R12S	J-29
PS460R12W	J-28
PS460R12WL	J-28
PS460R5S	J-29
PS460R5W	J-28
PS460R5WL	J-28
PS460R7S	J-29
PS460R7W	J-28
PS460R9S	J-29
PS460R9W	J-28
PS515CCLB	G-14
PS515PCLB	G-14
PS520B5S	J-29
PS520B7S	J-29
PS520B9S	J-29
PS520C5S	J-29
PS520C5W	J-27
PS520C5WR	J-27
PS520C7S	J-29
PS520C7W	J-27
PS520C7WR	J-27
PS520C9S	J-29
PS520C9W	J-27
PS520C9WR	J-27
PS520CCLB	G-14
PS520P5W	J-27
PS520P5WR	J-27
PS520P7W	J-27
PS520P7WR	J-27
PS520P9W	J-27
PS520P9WR	J-27
PS520PCLB	G-14
PS520R5S	J-29
PS520R5W	J-27
PS520R7W	J-27
PS520R9S	J-29
PS520R9W	J-27
PS530B5S	J-29
PS530B7S	J-29
PS530B9S	J-29
PS530C5S	J-29
PS530C5W	J-27
PS530C5WL	J-27
PS530C5WR	J-27
PS530C7W	J-27
PS530C7WL	J-27
PS530C7WR	J-27
PS530C9S	J-29
PS530C9W	J-27
PS530C9WL	J-27
PS530C9WR	J-27
PS530FMIR7W	J-6
PS530FMIR9W	J-6
PS530MIR5W	J-12
PS530MIR7W	J-12
PS530MIR9W	J-12
PS530P5S	J-29
PS530P5W	J-12, J-27
PS530P5WR	J-27
PS530P7S	J-29
PS530P7W	J-6, J-12, J-27
PS530P7WR	J-27
PS530P9S	J-29
PS530P9W	J-6, J-12, J-27
PS530P9WR	J-27
PS530R5S	J-29
PS530R5W	J-27
PS530R5WL	J-27
PS530R7W	J-27
PS530R7WL	J-27
PS530R9S	J-29
PS530R9W	J-27
PS530R9WL	J-27
PS560B5S	J-29
PS560B5W	J-28
PS560B7S	J-29
PS560B7W	J-28
PS560B9S	J-29
PS560B9W	J-28
PS560C5S	J-29
PS560C5W	J-28
PS560C5WL	J-28
PS560C5WR	J-28
PS560C7S	J-29
PS560C7W	J-28
PS560C7WL	J-28
PS560C7WR	J-28
PS560C9S	J-29
PS560C9W	J-28
PS560FMIR5W	J-6
PS560FMIR7W	J-6
PS560FMIR9W	J-6
PS560MIR5W	J-12
PS560MIR7W	J-12
PS560MIR9W	J-12
PS560P5S	J-29
PS560P5W	J-6, J-12, J-28
PS560P5WR	J-28
PS560P7S	J-29
PS560P7W	J-6, J-12, J-28
PS560P7WR	J-28
PS560P9S	J-29
PS560P9W	J-6, J-12, J-28
PS560P9WR	J-28
PS560R5S	J-29
PS560R5W	J-28
PS560R5WL	J-28
PS560R7S	J-29
PS560R7W	J-28
PS560R7WL	J-28
PS560R9S	J-29
PS560R9W	J-28
PS615CCLB	G-14
PS615PCLB	G-14
PS862	N-15
PS862KIT	N-15
PS862TRC	N-15
PS862TRT	N-15
PS862TRTGFI	N-15
PS862TRTGFIC	N-15
PS863TRC	N-16
PS863TRGFIC	N-16
PS895C	N-16
PS895GFIC	N-16
PS895T	N-16
PS895TGFI	N-16
PS1001	K-17
PS1002	K-17
PS1251	K-17
PS1501	K-17
PS1502	K-17
PS154S	C-23
PS2001	K-17
PS2002	K-17
PS2501	K-17
PS2502	K-17
PS3001	K-17
PS3002	K-17
PS3100B6W	J-28
PS3100B7W	J-28
PS3100C4W	J-28
PS3100C4WL	J-28
PS3100C4WR	J-28
PS3100C6W	J-28
PS3100C6WL	J-28
PS3100C6WR	J-28
PS3100C7W	J-28
PS3100C7WL	J-28
PS3100C7WR	J-28
PS3100MIR6W	J-12
PS3100MIR7W	J-12
PS3100P4W	J-28
PS3100P4WR	J-28
PS3100P6W	J-12, J-28
PS3100P7W	J-12, J-28
PS3100P7WR	J-28
PS3100R4W	J-28
PS3100R4WL	J-28
PS3100R6W	J-28
PS3100R6WL	J-28
PS3100R7W	J-28
PS3100R7WL	J-28
PS3501	K-17
PS3502	K-17
PS4001	K-17
PS4002	K-17
PS4100B12W	J-28
PS4100B5W	J-28
PS4100B7W	J-28
PS4100B9W	J-28
PS4100C12W	J-28
PS4100C12WL	J-28
PS4100C12WR	J-28
PS4100C5W	J-28
PS4100C5WL	J-28
PS4100C5WR	J-28
PS4100C7W	J-28
PS4100C7WL	J-28
PS4100C9W	J-28
PS4100C9WL	J-28
PS4100C9WR	J-28
PS4100FMIR12W	J-6
PS4100FMIR5W	J-6
PS4100FMIR7W	J-6
PS4100FMIR9W	J-6
PS4100MIR12W	J-12
PS4100MIR5W	J-12
PS4100MIR7W	J-12
PS4100MIR9W	J-12
PS4100P12W	J-6, J-12, J-28
PS4100P5W	J-6, J-12, J-28
PS4100P7W	J-6, J-12, J-28
PS4100P9W	J-6, J-12, J-28
PS4100R12W	J-28
PS4100R12WL	J-28
PS4100R5W	J-28
PS4100R7WL	J-28
PS4100R9W	J-28
PS4100R9WL	J-28
PS4100R5WL	J-28
PS4100R7W	J-28
PS4502	K-17
PS4720SSAN	H-27
PS5100B5W	J-28
PS5100B7W	J-28
PS5100B9W	J-28
PS5100C5W	J-28

Catalog Number	Page Number
PS5100C5WL	J-28
PS5100C5WR	J-28
PS5100C7W	J-28
PS5100C7WL	J-28
PS5100C9W	J-28
PS5100C9WL	J-28
PS5100C9WR	J-28
PS5100FMIR5W	J-6
PS5100FMIR7W	J-6
PS5100FMIR9W	J-6
PS5100MIR5W	J-12
PS5100MIR7W	J-12
PS5100MIR9W	J-12
PS5100P5W	J-6, J-12, J-28
PS5100P5WR	J-28
PS5100P7W	J-6, J-12, J-28
PS5100P7WR	J-28
PS5100P9W	J-6, J-12, J-28
PS5100P9WR	J-28
PS5100R5W	J-28
PS5100R5WL	J-28
PS5100R7W	J-28
PS5100R7WL	J-28
PS5100R9W	J-28
PS5100R9WL	J-28
PS5262	B-10
PS5266HGAN	E-28, G-3, G-5
PS5266SSAN	G-5
PS5266X	G-4
PS5266XGCM	G-6
PS5266XGCMAN	G-6
PS5266XHG	E-28, G-3
PS5269X	G-4
PS5269XGCM	G-6
PS5269XHG	E-28, G-3
PS5362	B-10
PS5364	G-7
PS5366HGAN	E-28, G-3, G-5
PS5366SSAN	G-5
PS5366X	G-4
PS5366XGCM	G-6
PS5366XGCMAN	G-6
PS5366XHG	E-28, G-3
PS5369	G-7
PS5369X	G-4
PS5369XGCM	G-6
PS5369XHG	E-28, G-3
PS5464	G-7
PS5466HGAN	E-28, G-3, G-5
PS5466SSAN	G-5
PS5466X	G-4
PS5466XGCM	G-6
PS5466XGCMAN	G-6
PS5466XHG	E-28, G-3
PS5469	G-7
PS5469X	G-4
PS5469XGCM	G-6
PS5469XHG	E-28, G-3
PS5666	G-7
PS5666HGAN	E-28, G-3, G-5
PS5666SSAN	G-5
PS5666X	G-4
PS5666XGCM	G-6
PS5666XGCMAN	G-6
PS5666XHG	E-28, G-3
PS5669	G-7
PS5669X	G-4
PS5669XGCM	G-6
PS5669XHG	E-28, G-3
PS5766X	G-4
PS5866X	B-75
PS5866X	G-4
PS5965	G-7
PS5969	G-7
PS8115	E-28, G-3, G-7
PS8119	E-28, G-3, G-7
PS8200H	B-11, E-7
PS8200HS	B-11, E-7
PS8300H	B-11, E-7
PS8300HS	B-11, E-7
PS81120I	A-23, D-9
PS371510	A-6
PS371530	A-6
PS372010	A-6
PS372010KL	A-6
PS372010L	A-6
PS372030	A-6
PS372030L	A-6
PS430171	I-8
PS430244	I-6, I-8
PS430245	I-6
PS430246	I-8
PS500017PLT	I-6
PS500072	I-6
PS520710	I-6
PS665089V	R-19
PS811120I	A-23, D-9
PSAD301	J-36
PSAD601	J-36
PSAD1002	J-36
PSAD2034	J-36
PSAD2050	J-36
PSAD3034	J-36
PSAD3050	J-36
PSAD60125	J-36
PSAD60150	J-36
PSAD100125	J-36
PSAD100150	J-36
PSAP30CA	J-31
PSAP60HB	J-31
PSAP320CA	J-31
PSAP320HBL	J-31
PSAP420HBL	J-31
PSAP4520CA	J-31
PSAP52030HBL	J-31
PSBB1001W	J-28, J-35
PSBB1002W	J-35
PSBB201SP	J-29, J-35
PSBB201W	J-27, J-29, J-35
PSBB202W	J-27, J-29, J-35
PSBB301SP	J-29, J-35
PSBB301W	J-27, J-29, J-35
PSBB601W	J-28, J-29, J-35
PSBBN201W	J-27, J-29, J-35
PSBBN202W	J-27, J-29, J-35
PSBBN301W	J-27, J-29, J-35
PSBBN601W	J-28, J-29, J-35
PSCLSPRESS	I-6
PSDT	R-17
PSF1185825	B-18
PSF1185835	B-18
PSF1187525	B-18
PSF1187535	B-18
PSF2185825	B-18
PSF2185835	B-18
PSF2187525	B-18
PSF2187535	B-18
PSFFC	I-4
PSFS1185825	B-18
PSFS1185835	B-18
PSFS1187525	B-18
PSFS1187535	B-18
PSFS2185825	B-18
PSFS2185835	B-18
PSFS2187525	B-18
PSFS2187535	B-18
PSIG5266X	F-17
PSL515C	H-7
PSL515CGCM	H-4
PSL515P	H-7
PSL515PGCM	H-4
PSL615C	H-8
PSL615CGCM	H-4
PSL615P	H-8
PSL615PAN	H-8, H-27
PSL615PGCM	H-4
PSL715C	H-8
PSL715CGCM	H-4
PSL715P	H-8
PSL715PAN	H-8, H-27
PSL715PGCM	H-4
PSM2F	I-7
PSM2M	I-7
PSMADFM	I-7
PSMADMF	I-7
PSMFCBK	I-7
PSMFR	I-8
PSMFRS	I-8
PSMM	I-4
PSMMCBK	I-7
PSMMR	I-8
PSMMRS	I-8
PSPC5B	R-19
PSPT	I-4
PSTT	I-4
PSVT	R-17
PSW15825	B-18
PSW15835	B-18
PSW17525	B-18
PSW17535	B-18
PSW25825	B-18
PSW25835	B-18
PSW27525	B-18
PSW27535	B-18
PSWS15825	B-18
PSWS15835	B-18
PSWS17525	B-18
PSWS17535	B-18
PSWS25825	B-18
PSWS25835	B-18
PSWS27525	B-18
PSWS27535	B-18
PT15AC1	A-3
PT15AC1CSL	A-3
PT15AC3	A-3
PT15AC3CSL	A-3
PT20AC1	A-3
PT20AC1CSL	A-3
PT20AC3	A-3
PT20AC3CSL	A-3
PT1595	B-54, C-13, D-36
PT1595HG	B-55, C-14, D-37, E-20
PT1595HGNTLTRI	B-57, C-16, D-39, E-22, Q-38
PT1595HGNTLTRNAI	B-61, C-20, D-43, E-24
PT1595HGTRI	B-56, C-15, D-38, E-21
PT1595NAI	B-60, C-19, D-42
PT1595NTLTRI	B-57, C-16, D-39, Q-38
PT1595NTLTRNAI	B-60, C-19, D-42
PT1595TR	B-56, C-15, D-38
PT2095	B-54, C-13, D-36
PT2095HG	B-55, C-14, D-37, E-20
PT2095HGNAI	B-61, C-20, D-43, E-24
PT2095HGNTLTRI	B-57, C-16, D-39, E-22, Q-38
PT2095HGNTLTRNAI	B-61, C-20, D-43, E-24
PT2095HGTRI	B-56, C-15, D-38, E-21
PT2095HGTRNAI	B-61, C-20, D-43, E-24
PT2095NAI	B-60, C-19, D-42
PT2095NTLTRIP	B-57, C-16, D-39, Q-38
PT2095NTLTRNAI	B-60, C-19, D-42
PT2095TR	B-56, C-15, D-38
PT2095TRNAI	B-60, C-19, D-42
PT2601	A-14, D-3
PT2603	A-14, D-3
PT2621	A-14, D-3
PT2623	A-14, D-3
PT2625I	A-14, D-3
PT2626I	A-14, D-3
PT5262	B-14
PT5262SC	B-16
PT5262A	B-3
PT5262SP	B-65, D-47, F-7
PT5362	B-14
PT5362A	B-3
PT5362SC	B-16
PT5362SP	B-65, D-47, F-7
PT8200	B-4, E-3
PT8200IL	B-5, E-4
PT8200SP	B-66, D-48, E-26, F-8
PT8300	B-4, E-3,
PT8300IL	B-5, E-4
PT8300SP	B-66, D-48, E-26, F-8
PT26252	B-32, D-14
PT26352	B-32, D-14
PT26262HGI	B-32, D-14, E-14
PT26362HGI	B-32, D-14, E-14
PTIG5262	B-14, F-16

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
PTIG5262ISP	B-65, D-47, F-7
PTIG5362	B-14, F-16
PTIG5362ISP	B-65, D-47, F-7
PTIG8200	B-14, F-16, E-9
PTIG8200ISP	B-66, D-48, E-26, F-8
PTIG8300	B-14, F-16, E-9
PTIG8300ISP	B-66, D-48, E-26, F-8
PTIG26262	B-32, D-14, F-16
PTIG26362	B-32, D-14, F-16
PTJ	A-3, A-14, D-3
PTRA6SOL	B-3, B-54, B-55, B-61, C-13, C-14, C-20, D-36, D-37, D-43, E-14, E-20, E-24, F-16
PTRA6SOLB25	B-3, E-14
PTRA6SOLBP	B-3, E-14
PTRA6SOLG	B-3, E-14
PTRA6SOLNA	B-3, E-14
PTRA6STR	B-3, B-54, B-55, B-61, C-13, C-14, C-20, D-36, D-37, D-43, E-14, E-20, E-24, F-16
PTRA6STRB25	B-3, E-14
PTRA6STRBP	B-3, E-14
PTRA6STRG	B-3, E-14
PTRA6STRNA	B-3, E-14
PTS6SOL3	A-14, D-3
PTS6SOL3BP	A-14, D-3
PTS6SOL3277	A-14, D-3
PTS6SOL3277BP	A-14, D-3
PTS6SOL4	A-14, D-3
PTS6SOL4BP	A-14, D-3
PTS6SOL4277	A-14, D-3
PTS6SOL4277BP	A-14, D-3
PTS6STR3	A-3, A-14, D-3
PTS6STR3BP	A-14, D-3
PTS6STR3277	A-3, A-14, D-3
PTS6STR3277BP	A-14, D-3
PTS6STR4	A-3, A-14, D-3
PTS6STR4BP	A-14, D-3
PTS6STR4277	A-3, A-14, D-3
PTS6STR4277BP	A-14, D-3
PTTESTER	B-5, E-4
PTTR5262	B-15
PTTR5262SC	B-16
PTTR5262SP	B-65, D-47, F-7
PTTR5362	B-15
PTTR5362SC	B-16
PTTR5362SP	B-65, D-47, F-7
PTTR62	B-3
PTTR62H	B-4, E-3
PTTR63	B-3
PTTR63H	B-4, E-3
PTTR8200	B-15, E-9
PTTR8200SP	B-66, D-48, E-26, F-8
PTTR8300	B-15, E-9
PTTR8300SP	B-66, D-48, E-26, F-8
PTWSP250I	D-55, L-8
PWP120277	D-80, L-16 , M-30
R600IV	M-21
R600PIV	M-21
R603PIV	M-21
R1000IV	M-21
R1000PIV	M-21
R1003PIV	M-21
RC1	N-8
RC2	N-8
RRKIGV	M-21, M-33, M-39
RRKIV	M-21, M-33, M-39
RS30	J-22
RS60	J-22
RT12I	D-60, L-19
RT1I	D-59, L-18
RT24I	D-60, L-19
RW3U600I	D-53, L-6
RW3U603I	D-53, L-6
RW500BI	D-51, L-4
RW500U	D-52, L-5
RW600BTC	D-51, L-4
RWDU500I	D-54, L-7
RWU600BI	D-51, L-4
RWU600UI	D-52, L-5
S40	K-13
S80	K-13
S109FAN	N-10
S116FAN	N-10
S116W	N-4
S118B50	N-6
S118R	N-2
S118RS	N-7
S118S50	N-6
S118W	N-4
S120BFAN	N-10
S120HAC	N-11
S120HGAC	N-11
S120JAC	N-11
S120JFAN	N-10
S120JGAC	N-11
S120RAC	N-11
S120RACS	N-11
S120RFAN	N-10
S120RGAC	N-11
S122B	N-6
S122R	N-2
S122RS	N-7
S122S50	N-6
S122W	N-4
S232W	N-4
S235RAC	N-2
S235RACMH	N-2
S235RACS	N-7
S235RACSMH	N-7
S235S50AC	N-6
S352W	N-4
S354RAC	N-2
S354RACS	N-7
S354S50AC	N-6
S384C	Q-13
S468RAC	N-2
S468RACS	N-7
S468S50AC	N-6
S752WCC10	R-5
S2347	H-15
S2348DF	H-15
S3713I	B-71
S3713TRI	B-71
S3733	B-71
S3862C	Q-14
S3863C	Q-14
S4418BAC	N-8
S4421RAC	N-8
S4421SAC	N-8
S4435RAC	N-8
S4435SAC	N-8
SA1	Q-8
SA2	Q-8
SA3	Q-8
SA4	Q-8
SA7	Q-13
SA8	Q-9
SA13	Q-11
SA14	Q-12
SA23	Q-11
SA24	Q-12
SA26	D-85, Q-9
SA78	Q-17
SA82	Q-9
SA126	Q-15
SA155CC10	R-7
SA262	D-85, Q-10
SA399WCC10	R-7
SA440CC10	R-7
SA540CC10	R-7
SA716	Q-14
SA840CC10	R-7
SA993WCC10	R-7
SAN11	Q-27
SAN14	Q-27
SAN85	Q-27
SAN144	Q-27
SANK14	Q-27
SANK24	Q-27
SANK41	Q-27
SANK43	Q-27
SANK44	Q-27
SANK51	Q-27
SANK53	Q-27
SANK54	Q-27
SB1	Q-8
SB2	Q-8
SB3	Q-8
SB4	Q-8
SB5	Q-8
SB6PB	Q-8
SB7	Q-13
SB8	Q-9
SB11	Q-32
SB12	Q-32
SB13	Q-11
SB14	Q-12
SB18	Q-15
SB23	Q-11
SB24	Q-12
SB26	D-85, F-4, Q-9
SB28	Q-15
SB33PB	Q-11
SB38PB	Q-15
SB82	Q-9
SB83	Q-9
SB84PB	Q-9
SB126	Q-15
SB182PB	Q-18
SB262	D-85, Q-10
SB263	D-85, Q-10
SB264	D-85, Q-10
SB771	Q-21
SB760	Q-21
SB826PB	Q-17
SBJ1	Q-22
SBJ2	Q-22
SBJ8	Q-22
SBJ26	D-86, Q-23
SBO1	Q-22
SBO8	Q-22
SBO26	D-86, Q-23
SC600IV	D-65, M-9
SCDH15IV	D-65, M-9, M-34
SCELV300IV	D-65, M-9
SCFB600IV	D-65, M-9
SCIR	D-65, M-9
SCK0751	K-20
SCK1001	K-20
SCK1251	K-20
SCK1501	K-20
SCK1502	K-20
SCK1751	K-20
SCK2002	K-20
SCK2501	K-20
SCK2502	K-20
SCK3001	K-20
SCK3002	K-20
SCK3501	K-20
SCMC5IV	D-65, M-9
SCMCK	D-65, M-9
SCRIV	D-65, M-9
SDV2B	N-5
SF326	R-18
SH1	Q-26
SH7	Q-26
SH8	Q-26
SH13	Q-26
SH26	Q-26
SH122B	N-6
SHL20	A-23, B-28
SHL100	A-23, B-28
SL1	Q-8
SL2	Q-8
SL3	Q-8
SL4	Q-8
SL7	Q-13
SL8	Q-9
SL12	Q-32
SL13	Q-11
SL14	Q-12
SL23	Q-11
SL24	Q-12
SL26	D-85, Q-9
SL82	Q-9
SL262	D-85, Q-10
SLV1B	N-5
SLV1R	N-5
SLV1S	N-5
SLV1W	N-5
SLV2B	N-5
SLV2W	N-5
SLV3W	N-5

Catalog Number	Page Number
SMTE14I	Q-30
SP1	Q-8
SP2	Q-8
SP3	Q-8
SP4	Q-8
SP5	Q-8
SP6I	Q-8
SP7	Q-13
SP8	Q-9
SP11	Q-32
SP12	Q-32
SP13	Q-11
SP14	Q-12
SP17	Q-17
SP18	Q-15
SP21I	Q-32
SP23	Q-11
SP24	Q-12
SP26	D-85, Q-9
SP28	Q-15
SP33	Q-11
SP34	Q-12
SP38	Q-15
SP43	Q-11
SP44	Q-12
SP60I	Q-32
SP72	Q-13
SP78	Q-17
SP82	Q-9
SP83	Q-9
SP84	Q-9
SP112	Q-17, Q-34
SP126	Q-15
SP128	Q-17, Q-34
SP138	Q-17
SP147I	Q-18
SP148	Q-18
SP182	Q-18
SP226	Q-15
SP262	D-85, Q-10
SP263I	D-85, Q-10
SP264	D-85, Q-10
SP265I	D-85, Q-10
SP266	D-85, Q-10
SP326	Q-15
SP703	Q-14
SP720	Q-13
SP732	Q-32
SP826	Q-17
SP1214I	Q-17, Q-34
SP1226	Q-17, Q-34
SP1262	Q-15
SP1426	Q-18
SP2262	Q-16
SPJ1	Q-22
SPJ2	Q-22
SPJ3	Q-22
SPJ4	Q-22
SPJ7	Q-22
SPJ8	Q-22
SPJ11	Q-34
SPJ13	Q-23
SPJ18	Q-24
SPJ26	D-86, Q-23
SPJ82	Q-22

Catalog Number	Page Number
SPJ113	Q-24
SPJ126	Q-24
SPJ138	Q-24
SPJ262	D-86, Q-23
SPJ263	D-86, Q-23
SPJ264	D-86, Q-23
SPJ826I	Q-24
SPJ1426	Q-24
SPO1	Q-22
SPO2	Q-22
SPO8	Q-22
SPO13	Q-23
SPO18	Q-24
SPO23	Q-23
SPO26	D-86, Q-23
SPO82	Q-22
SPO113	Q-24
SPO138	Q-24
SPO262	D-86, Q-23
SPO1326	Q-24
SRK050OF	K-20
SRK062OF	K-20
SRK075OF	K-20
SRK100OF	K-20
SRK125OF	K-20
SRK150OF	K-20
SRK175OF	K-20
SRK200OF	K-20
SRK250OF	K-20
SRK300OF	K-20
SRK350OF	K-20
SS1	Q-8
SS1GBRED	Q-42
SS1OBRED	Q-42
SS2	Q-8
SS3	Q-8
SS4	Q-8
SS5	Q-8
SS6	Q-8
SS7	B-72, H-36, Q-13
SS8	H-36, Q-9
SS8EE	Q-41
SS8ES	Q-41
SS8IG	Q-41
SS9	Q-21
SS11	Q-32
SS12	Q-32
SS13	Q-11
SS13.5	Q-11
SS14	Q-12
SS14.5	Q-12
SS17	Q-17
SS18	Q-15
SS21	Q-32
SS22	Q-32
SS23	Q-11
SS23.5	Q-11
SS24	Q-12
SS24.5	Q-12
SS26	D-85, F-4, Q-9
SS26IG	F-4, Q-41
SS28	Q-15
SS33	Q-11
SS33.5	Q-11
SS34	Q-12

Catalog Number	Page Number
SS38	Q-15
SS43	Q-11
SS44	Q-12
SS48	Q-15
SS53	Q-11
SS63	Q-11
SS72	Q-13
SS73	Q-13
SS78	Q-17
SS82	Q-9
SS82IG	Q-41
SS83	Q-9
SS84	Q-9
SS85	Q-9
SS86	Q-9
SS113	Q-17
SS114	Q-16
SS126	Q-15
SS128	Q-17, Q-34
SS138	Q-17
SS147	Q-18
SS148	Q-18
SS182	Q-18
SS214	Q-16
SS226	Q-15
SS262	D-85, Q-10
SS263	D-85, Q-10
SS264	D-85, Q-10
SS265	D-85, Q-10
SS266	D-85, Q-10
SS267	D-85, Q-10
SS268	D-85, Q-10
SS282	Q-18
SS314	Q-16
SS326	Q-15
SS601	Q-8
SS602	Q-8
SS701	B-72, Q-14
SS702	B-72, Q-14
SS703	Q-14
SS705	Q-14
SS710	Q-14
SS716	Q-14
SS717	Q-20
SS720	H-9, H-36, Q-13
SS721	Q-13
SS723	Q-13
SS724	Q-13
SS725	Q-13
SS727	Q-20
SS730	Q-32
SS736	Q-32
SS740	Q-20
SS741	Q-34
SS742	Q-34
SS743	Q-20
SS746	Q-20
SS747	Q-20
SS748	Q-20
SS751	Q-33
SS752	Q-33
SS753	Q-33
SS754	Q-33
SS760	Q-21
SS771	Q-21

Catalog Number	Page Number
SS772	Q-21
SS785	Q-33
SS787	Q-33
SS791	Q-34
SS792	Q-34
SS826	Q-17
SS1214	Q-17, Q-34
SS1226	Q-17, Q-34
SS1262	Q-15
SS1426	Q-18
SS6013	Q-11
SS6023	Q-11
SS8148	Q-18
SS14114	Q-18
SS14814	Q-18
SSJ1	Q-22
SSJ2	Q-22
SSJ3	Q-22
SSJ7	Q-22
SSJ8	Q-22
SSJ13	Q-23
SSJ18	Q-24
SSJ26	D-86, Q-23
SSJ82	Q-22
SSJ126	Q-24
SSJ262	D-86, Q-23
SSJ263	D-86, Q-23
SSK0751	K-20
SSK1	Q-19
SSK2	Q-19
SSK3	Q-19
SSK12	Q-19
SSK13	Q-19
SSK22	Q-19
SSK32	Q-19
SSK33	Q-19
SSK1002	K-20
SSK1251	K-20
SSK1252	K-20
SSK1501	K-20
SSK1502	K-20
SSK1751	K-20
SSK2001	K-20
SSK2002	K-20
SSK2502	K-20
SSK3001	K-20
SSK3002	K-20
SSK3501	K-20
SSMF	J-22
SSN11	Q-27
SSN14	Q-27
SSN15	Q-27
SSN85	Q-27
SSN117	Q-27
SSN121	Q-27
SSN142	Q-27
SSN144	Q-27
SSNK14	Q-27
SSNK24	Q-27
SSNK34	Q-27
SSNK41	Q-27
SSNK43	Q-27
SSNK44	Q-27
SSNK51	Q-27
SSNK53	Q-27

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
SSNK54	Q-27
SSO1	Q-22
SSO2	Q-22
SSO3	Q-22
SSO4	Q-22
SSO7	Q-22
SSO8	Q-22
SSO11	Q-34
SSO12	Q-34
SSO13	Q-23
SSO14	Q-23
SSO18	Q-24
SSO23	Q-23
SSO24	Q-23
SSO26	D-86, Q-23
SSO28	Q-24
SSO33	Q-23
SSO34	Q-23
SSO82	Q-22
SSO83	Q-22
SSO114	Q-24
SSO126	Q-24
SSO138	Q-24
SSO262	D-86, Q-23
SSTK424	Q-26
STB38SF	K-8
STB50SF	K-8
STB75SF	K-8
STB100SF	K-8
STB125SF	K-8
STB150SF	K-8
STB200SF	K-8
STB250SF	K-8
STB300SF	K-8
STB4538SF	K-8
STB4550SF	K-8
STB4575SF	K-8
STB9050SF	K-8
STB9075SF	K-8
STB45100SF	K-8
STB45125SF	K-8
STB45200SF	K-8
STB45250SF	K-8
STB45300SF	K-8
STB90100SF	K-8
STB90125SF	K-8
STB90150SF	K-8
STB90200SF	K-8
STB90300SF	K-8
STBN38SF	K-8
STBN50SF	K-8
STBN75SF	K-8
STBN100SF	K-8
STBN125SF	K-8
STBN150SF	K-8
STBN200SF	K-8
SWP1	Q-6
SWP2	Q-6
SWP3	Q-6
SWP4	Q-6
SWP8	Q-6
SWP26	D-83, Q-6
SWP26BB	D-82, Q-5
SWP26BC	D-82, Q-5
SWP26BN	D-82, Q-5
SWP26BR	D-82, Q-5
SWP26MA	D-82, Q-5
SWP26MH	D-82, Q-5
SWP26SS	D-82, Q-5
SWP26WA	D-82, Q-5
SWP82	Q-6
SWP262	D-83, Q-6
SWP262BB	D-82, Q-5
SWP262BC	D-82, Q-5
SWP262BN	D-82, Q-5
SWP262BR	D-82, Q-5
SWP262MA	D-82, Q-5
SWP262MH	D-82, Q-5
SWP262SS	D-82, Q-5
SWP262WA	D-82, Q-5
SWP263	D-83, Q-6
SWP263BB	D-82, Q-5
SWP263BC	D-82, Q-5
SWP263BN	D-82, Q-5
SWP263BR	D-82, Q-5
SWP263MA	D-82, Q-5
SWP263MH	D-82, Q-5
SWP263SS	D-82, Q-5
SWP263WA	D-82, Q-5
SWP264	D-83, Q-6
SWP264BB	D-82, Q-5
SWP264BC	D-82, Q-5
SWP264BN	D-82, Q-5
SWP264BR	D-82, Q-5
SWP264MA	D-82, Q-5
SWP264MH	D-82, Q-5
SWP264SS	D-82, Q-5
SWP264WA	D-82, Q-5
T600	M-20
T600LI	M-20
T603	M-20
T603LI	M-20
T1000	M-20
T1000LI	M-20
T1003	M-20
T1003LI	M-20
TD703P	M-18
TD1103P	M-18
TDDH163P	M-19, M-36
TDFB83P	M-19
TDLV703P	M-19
TDLV1103P	M-19
TLV600I	M-20
TLV603I	M-20
TLV1000I	M-20
TLV1003I	M-20
TM8HWLCC	B-43, D-24, Q-36
TM8HWLTRCC	B-43, D-24, Q-36
TM8IDCC	A-24, D-10
TM8LMCC	A-24, D-10, D-70, M-14, M-35
TM8LOCATORI	A-28, D-13
TM811CC	A-25, D-11
TM811DTMAI	A-22, D-8
TM811DTMOI	A-22, D-8
TM813CC	A-25, D-11
TM818TRCC	A-26, D-12
TM818TRPLICC	A-26, D-12
TM833CC	A-25, D-11
TM838TRCC	A-26, D-12
TM870	A-20, D-6
TM870ISL	A-21, D-7
TM870NA	A-20, D-6
TM870S	A-21, D-7
TM870STMWCC10	A-22, D-8
TM873	A-20, D-6
TM873ISL	A-21, D-7
TM873NA	A-20, D-6
TM873S	A-21, D-7
TM874	A-20, D-6
TM874ISL	A-21, D-7
TM874S	A-21, D-7
TM885	B-41, D-23
TM885I150	B-41, D-23
TM885SI	B-41, D-23
TM1542BOX	N-17
TM1542TRCF	N-17
TM1542TRFM	N-17
TM1542TRW	N-17
TM8111CC	A-25, D-11
TM8113CC	A-25, D-11
TM8118TRCC	A-26, D-12
TM81111CC	A-25, D-11
TMHWLCC	B-43, D-24, Q-36
TMHWLECC	B-43, D-24, Q-36
TMHWLENSCC	B-43, D-24, Q-36
TMHWLLOUVCC	B-43, D-24, Q-36
TP1	Q-8
TP1ERED	Q-41
TP2	Q-8
TP2ERED	Q-41
TP3	Q-8
TP4	Q-8
TP5	Q-8
TP6	Q-8
TP7	Q-13
TP7CI	Q-42
TP7IG	Q-41
TP8	Q-9
TP8CI	Q-42
TP8EI	Q-41
TP8EMPOWER	Q-42
TP8GFI	Q-42
TP8IG	Q-41
TP11	Q-32
TP12	Q-32
TP13	Q-11
TP14	Q-12
TP18	Q-15
TP23	Q-11
TP24	Q-12
TP26	D-85, Q-9
TP26CI	Q-42
TP26ERED	Q-42
TP26IG	F-4, Q-41
TP28	Q-15
TP60I	Q-32
TP82	Q-9
TP82ERED	Q-41
TP113	Q-17
TP126	Q-15
TP138	Q-17
TP226	Q-15
TP262	D-85, Q-10
TP263	D-85, Q-10
TP264	D-85, Q-10
TP265	D-85, Q-10
TP266	D-85, Q-10
TP703	B-72, Q-14
TP720	Q-13
TP724	B-72, Q-13
TP826	Q-17
TPCATV	Q-31
TPCATV2	Q-31
TPD1	R-18
TPD2	R-18
TPD3	R-18
TPD4	R-18
TPD6	R-18
TPD9	R-18
TPJ1	Q-22
TPJ2	Q-22
TPJ3	Q-22
TPJ4	Q-22
TPJ7	Q-22
TPJ8	Q-22
TPJ13	Q-23
TPJ18	Q-24
TPJ26	D-86, Q-23
TPJ82	Q-22
TPJ113	Q-24
TPJ126	Q-24
TPJ262	D-86, Q-23
TPJ263	D-86, Q-23
TPJ264	D-86, Q-23
TPJ826	Q-24
TPTE1	Q-29
TPTE2	Q-29
TPTELTV	Q-31
TR15	B-27
TR20	B-27
TR62	B-25
TR62H	B-26, E-11
TR63	B-25
TR63H	B-26, E-11
TR5251	B-28
TR5252ISP	B-64, D-46, F-6
TR5262	B-27
TR5262SP	B-67, D-49, F-9
TR5351	B-28
TR5352ISP	B-64, D-46, F-6
TR5362	B-27
TR5362SP	B-67, D-49, F-9
TR8200SP	B-68, D-50, E-27, F-10
TR8300SP	B-68, D-50, E-27, F-10
TR26261	B-36, D-19
TR26262	B-35, D-18
TR26262HGI	B-35, D-18, E-16
TR26361	B-36, D-19
TR26362	B-35, D-18
TR26362HGI	B-35, D-18, E-16
TRIG5262	B-31, F-18
TRIG5262ISP	B-67, D-49, F-9
TRIG5362	B-31, F-18
TRIG5362ISP	B-67, D-49, F-9

Catalog Number	Page Number
TRIG8200	B-31, E-13, F-18
TRIG8200ISP	B-68, D-50, E-27, F-10
TRIG8300	B-31, E-13, F-18
TRIG8300ISP	B-68, D-50, E-27, F-10
TRIG26262	B-31, D-16, F-18
TRIG26262HG	B-31, D-16, E-13, F-18
TRIG26362	B-31, D-16, F-18
TRIG26362HG	B-31, D-16, E-13, F-18
TSC5I	M-20, M-36
TV1WTVSSW	B-44, D-25, N-18
TV1WW	B-44, D-25, N-18
TV3WTVSSW	B-44, D-25, N-18
TV3WW	B-44, D-25, N-18
VG100	P-22
VG200	P-22
VPC100G	P-22
VPC200G	P-22
VPG100	P-22
VPG200	P-22
VPP100G	P-22
VPP200G	P-22
VPW100G	P-22
VPW200G	P-22
WA1001	L-12
WDT100	D-56, L-9
WDT200	D-56, L-9
WIU10PK	P-3
WIU20PK	P-3
WIUC10DGL	P-3
WIUC10GL	P-3
WIUC10SG	P-3
WIUC20GL	P-3
WIUCAST1	P-5
WIUFC10S	P-4
WMPPSS	R-18
WMTE14I	Q-30
WP1	Q-28
WP2	Q-28
WP13	P-14
WP13FS	P-14
WP23	P-14
WP26	Q-28
WP26L	Q-28
WP5001AE	D-84, Q-7
WP5001BD	D-84, Q-7
WP5001CM	D-84, Q-7
WP5001CP	D-84, Q-7
WP5001CR	D-84, Q-7
WP5001CY	D-84, Q-7
WP5001CZ	D-84, Q-7
WP5001GB	D-84, Q-7
WP5001KK	D-84, Q-7
WP5001LA	D-84, Q-7
WP5001MS	D-84, Q-7
WP5001NV	D-84, Q-7
WP5001SD	D-84, Q-7
WP5001SP	D-84, Q-7
WP5001TI	D-84, Q-7
WP5001TP	D-84, Q-7
WP5001WH	D-84, Q-7
WP5002AE	D-84, Q-7
WP5002BD	D-84, Q-7
WP5002CM	D-84, Q-7
WP5002CP	D-84, Q-7
WP5002CR	D-84, Q-7
WP5002CY	D-84, Q-7
WP5002CZ	D-84, Q-7
WP5002GB	D-84, Q-7
WP5002KK	D-84, Q-7
WP5002LA	D-84, Q-7
WP5002MS	D-84, Q-7
WP5002NV	D-84, Q-7
WP5002SD	D-84, Q-7
WP5002SP	D-84, Q-7
WP5002TI	D-84, Q-7
WP5002TP	D-84, Q-7
WP5002WH	D-84, Q-7
WP5003AE	D-84, Q-7
WP5003BD	D-84, Q-7
WP5003CM	D-84, Q-7
WP5003CP	D-84, Q-7
WP5003CR	D-84, Q-7
WP5003CY	D-84, Q-7
WP5003CZ	D-84, Q-7
WP5003GB	D-84, Q-7
WP5003KK	D-84, Q-7
WP5003LA	D-84, Q-7
WP5003MS	D-84, Q-7
WP5003NV	D-84, Q-7
WP5003SD	D-84, Q-7
WP5003SP	D-84, Q-7
WP5003TI	D-84, Q-7
WP5003TP	D-84, Q-7
WP5003WH	D-84, Q-7
WP5004AE	D-84, Q-7
WP5004BD	D-84, Q-7
WP5004CM	D-84, Q-7
WP5004CP	D-84, Q-7
WP5004CR	D-84, Q-7
WP5004CY	D-84, Q-7
WP5004CZ	D-84, Q-7
WP5004GB	D-84, Q-7
WP5004KK	D-84, Q-7
WP5004LA	D-84, Q-7
WP5004MS	D-84, Q-7
WP5004NV	D-84, Q-7
WP5004SD	D-84, Q-7
WP5004SP	D-84, Q-7
WP5004TI	D-84, Q-7
WP5004TP	D-84, Q-7
WP5004WH	D-84, Q-7
WP7	H-36, Q-28
WP8	H-36, Q-28
WPB1	P-20
WPB2	P-20
WPB3	P-20
WPB11	P-20
WPB12	P-20
WPB13	P-20
WPB23	P-16
WPB24	P-16
WPB25	P-16
WPB26	P-16
WPB33	P-16
WPB34	P-16
WPB35	P-16
WPB36	P-16
WPB232	P-17
WPB242	P-17
WPB252	P-17
WPB262	P-17
WPB272	P-17
WPB276	P-17
WPB282	P-17
WPB287	P-17
WPB332	P-17
WPB342	P-17
WPB352	P-17
WPB362	P-17
WPB373	P-18
WPB382	P-17
WPB387	P-17
WPBD23	P-18
WPBD33	P-18
WPBD43	P-18
WPBD252	P-18
WPBD352	P-18
WPBD452	P-18
WPBJ22	P-21
WPBL100	P-23
WPBP50	P-23
WPBP75	P-23
WPBP100	P-23
WPD8	Q-28
WPEX1	P-23
WPEX2	P-23
WPEX3	P-23
WPEX4	P-23
WPEX5	P-23
WPEX6	P-23
WPFLDKIT	P-19
WPG1	G-11, H-33, H-36, P-12
WPG2	H-9, H-36, P-12
WPGAS100	P-23
WPGAS101	P-23
WPGASR101	P-23
WPGFIKIT	P-19
WPH1L	Q-28
WPH7L	Q-28
WPH8	Q-28
WPH8L	Q-28
WPH26	Q-28
WPLKIT1	P-21
WPLKIT2	P-21
WPLKIT3	P-21
WPLKIT4	P-21
WPOUTKIT	P-19
WPRB1	P-20
WPRB11	P-20
WPRB12	P-20
WPRB13	P-20
WPRB25	P-19
WPRB35	P-19
WPWIUKITC	P-19
WPWIUKITSC	P-19
WR20TR	B-29
WR5262I	B-29
WR5362I	B-29
WR5662I	B-29
WR5862I	B-29
WS700TC	D-73, M-17
WS700W	D-73, M-17
WS703PTC	D-73, M-17
WS703PW	D-73, M-17
WS1100TC	D-73, M-17
WS1100W	D-73, M-17
WS1103PTC	D-73, M-17
WS1103PW	D-73, M-17
WSKIT	D-73, M-17
WSKITP	D-73, M-17
WSLV700TC	D-73, M-17
WSLV700W	D-73, M-17
WSLV703PTC	D-73, M-17
WSLV703PW	D-73, M-17
WSP250I	D-55, L-8
WSSC53PTC	D-73, M-17, M-36
WSSC53PW	D-73, M-17, M-36
2A145C5EU	R-17
2A145CC6	R-17
2A245C5EU	R-17
2A245CC6	R-17
2ABL	R-17
4AP	B-69
4RBC	N-11
4SBC	N-8
5SC	R-9
14W33	G-9
14W47	G-9
14W48	G-9
14W49	G-9
14WPS	G-9, H-28
15W33	G-9
15W47	G-9
15W48	G-9
15W49	G-9
24W34	H-28
24W47	H-28
25W34	H-28
25W47	H-28
26CATVI	Q-31
26TE14I	Q-29
26TE16I	Q-29
26TE24I	Q-30
26TE26I	Q-30
26TELTVICC10	Q-31
50W50PS	G-9, H-28
61	R-5
63	R-8
68	R-8
69	R-8
83CC4	R-7
84BKCC20	R-7
101	R-7
111GMC	R-7
111MC	R-7
114GMC	R-7
123C3W	R-8
123P	R-7
123PQC	R-8
125	R-8
128	R-8
201	R-5
210G	R-8
220	R-2
226PA	R-9

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
240TDM	F-12
267	R-6
272	R-4
274	R-4
276WH	R-4
280WH	R-4
280WH6	R-4
282	R-4
284	R-4
288	R-4
313CC10	R-8
325	R-10
326	Q-35, R-10
327	Q-35, R-10
340	Q-35
341DU4	R-6
342	Q-35, R-12
347	Q-35, R-12
348	Q-35, R-12
384	Q-13
385	B-72
388	B-72
405RED	Q-35
406RED	Q-35
410W	R-2
415I	B-69
420H	B-69, E-29
420I	B-69
420ISP	B-69
423	R-2
464	R-3
465	R-3
466	R-3
467	R-3
480TDH	F-12
500K	A-5, R-14
509	Q-40
510	Q-40
511	Q-40
512	Q-40
513	Q-40
528I	Q-40
531S	Q-40
532S	Q-40
533D	Q-40
574T	R-2
575	R-2
614	H-8
623	R-3
653	R-2
660G	A-15
660GMH	A-15
660ISLG	A-16
660NAG	A-15
660SG	A-16
663G	A-15
663ISLG	A-16
663SG	A-16
664G	A-15
664ICN	A-15
664SG	A-16
670	A-18
670G	A-17
671	A-17
671TR	A-17
680IG	A-18
680W	A-18
681I	A-18
690	A-18
690G	A-17
691	A-17
691TR	A-17
692	A-18
692G	A-17
693	A-18
693G	A-17
695	A-18
695G	A-17
696	A-18
696G	A-17
697	R-9
697RI	R-9
699CC25	R-9
735CC10	R-9
738	R-2
746ICC10	R-9
779CC5	R-9
880	B-42
880MH	B-42
880TR	B-39, D-21
880TRWMH	B-39, D-21
885	B-41, D-23
885SI	B-41, D-23
885TR	B-39, D-21
885TRNA	B-39, D-21
885TRSI	B-39, D-21
885TRWR	B-40, D-22
911LOCATOR	A-28
975ABDCC10	R-5
1031	B-72, G-13
1033	G-13
1038	R-15
1039	R-15
1050K	R-14
1051	B-72, G-13
1053	B-72, G-13
1070B	R-14
1081	R-14
1081K	R-14
1091	R-14
1091K	R-14
1200	A-28
1201	A-28
1205	A-28
1205A	A-28
1206	A-28
1206A	A-28
1220TWES	F-12
1220TWH	F-12
1220TWH4B	F-12
1220TWHB	F-12
1220TWLI	F-12
1220TWM	F-12
1221	A-12
1222	A-12
1224SH	F-12
1224SHB	F-12
1224SL	F-12
1224SLI	F-12
1224SM	F-12
1225	A-12
1226	A-12
1227	A-12
1228	A-12
1250	A-12
1251	A-12
1255	A-12
1256	A-12
1264	R-8
1275	A-12
127	A-12
1332	R-11
1333	R-11
1354	R-12
1375	R-11
1376	R-11
1377	R-11
1403	R-8
1406	R-8
1431	B-72, G-13
1432	R-11
1433	R-11
1433P	G-8
1447	G-8
1448	G-8
1449	G-8
1451	B-72, G-13
1475	R-11
1482ICC10	R-8
1498	A-5, A-12
1498NT	A-5, A-12
1532	R-11
1533	G-8
1542TRDR	N-17
1542TRFBA	N-17
1547	G-8
1548	G-8
1549	G-8
1575	R-11
1594CMA	C-21
1594CMM	C-21
1594CS1A	C-22
1594CS1M	C-22
1594PC2A	C-22
1594PC2M	C-22
1594PC6M	C-22
1594TC2A	C-22
1594TC2M	C-22
1594TPA	C-8, D-31
1595	B-47, C-5, D-28
1595DSWRBKCC4	B-53, C-9, D-32
1595DSWRBKCC4	B-53, C-12, D-35
1595HG	B-48, C-6, D-29, E-17
1595HGNAI	B-59, C-18, D-41, E-23
1595HGNTLTR	B-51, C-10, D-33, E-19, Q-37
1595HGTR	B-46, C-4, D-27, E-17
1595NA	B-58, C-17, D-40
1595NTLTR	B-51, C-10, D-33, Q-37
1595RI	B-58, C-17, D-40
1595S	B-47, C-5, D-28
1595SWTTR	A-27, B-50,
1595TR	B-45, C-3, D-26
1595TRNA	B-58, C-17, D-40
1595TRSI	B-45, C-3, D-26
1595TRWR	B-52, C-11, D-34
2005	R-6
2006	R-6
2085	C-8, D-31
2094PC2A	C-22
2094PC2M	C-22
2094TL2A	C-22
2094TL2M	C-22
2095	B-47, C-5, D-28
2095DSWRBK	B-53, C-12, D-35
2095HG	B-48, C-6, D-29, E-17
2095HGIL	B-49, C-7, D-30, E-18
2095HGNA	B-59, C-18, D-41, E-23
2095HGNTLTRI	B-51, C-10, D-33, E-19, Q-37
2095HGTR	B-46, C-4, D-27, E-17
2095HGTRNAI	B-59, C-18, D-41, E-23
2095IL	B-49, C-7, D-30
2095NA	B-58, C-17, D-40
2095NTLTR	B-51, C-10, D-33, Q-37
2095S	B-47, C-5, D-28
2095TR	B-45, C-3, D-26
2095TRNA	B-58, C-17, D-40
2095TRS	B-45, C-3, D-26
2095TRWR	B-52, C-11, D-34
2151RED	Q-39
2152	Q-39
2156	Q-39
2200PL	Q-39
2219PL	Q-39
2220PL	Q-39
2434	H-28
2447	H-28
2534	H-28
2536	R-3
2537	R-3
2547	H-28
2601I	A-19, D-4
2603I	A-19, D-4
2604I	A-19, D-4
2621	A-19, D-4
2622	A-19, D-4
2623	A-19, D-4
2624	A-19, D-4
2625I	A-19, D-4
2626I	A-19, D-4
2628I	A-19, D-4
2629I	A-19, D-4
2748TWH	F-12
2748TWH4B	F-12
2748TWHB	F-12
2748TWLI	F-12
2748TWM	F-12
3232	B-42
3232MH	B-42
3232S	B-42
3232TR	B-38

Catalog Number	Page Number	Catalog Number	Page Number	Catalog Number	Page Number	Catalog Number	Page Number
3232TRNA	B-38	3864	B-72	5658	B-24	7556SS	H-15
3232TRS	B-38	3867	B-72, G-12	5662	B-10	7557SS	H-15
3232TRWR	B-40	3869	B-72, G-12	5666	G-10	7572G	H-15
3330	H-15	3870	B-72	5669	G-10	7580	H-15
3330G	H-15	3884	B-72	5671	B-23	7580G	H-15
3331G	H-15	3890	B-72	5678SS	G-11	7582	H-15
3331SS	H-15	3894	B-72	5679SS	G-11	7621	B-75
3333SS	H-15	3901W	R-3	5740	B-72	7764	H-30
3334SS	H-15	3911W	R-3	5741AN	B-72, G-12	7765	H-30
3335SS	H-15	4015D4F	R-6	5745AN	B-72, G-12	7770	H-29, H-30, H-36, P-12
3352F	R-5	4017CC10	R-6	5746AN	B-72, G-12	7801P	A-9
3393	P-13	4063CC10	R-6	5750	B-72	7802	A-9
3430	H-22	4155	R-6	5751AN	B-72, G-12	7802MD	A-9
3431G	H-22	4510	P-13	5760	B-72	7803	A-9
3431SS	H-22	4511	P-13	5761AN	B-72, G-12	7803MD	A-9
3433SS	H-22	4512	P-13	5762	B-75	7806P	A-9
3434SS	H-22	4515	P-14	5765	G-10	7812EX	A-9
3435SS	H-22	4515FS	P-14	5850I	B-21	7812P	A-9
3700	P-9	4515FSGAS	P-14	5851	B-24	7812PMD	A-9
3700FS	P-9	4515GAS	P-14	5858	B-24	7813EX	A-9
3703	P-9	4516	P-14	5862	B-10	7813P	A-9
3703FS	P-9	4516GAS	P-14	5862A	B-9	7813PMD	A-9
3703T	P-9	4517	P-14	5864	G-10	7830	A-9
3703TCW	P-9	4550	H-8	5866	G-10	7832	A-9
3710	P-9	4560	H-8	5871	B-23	7832MD	A-9
3710FS	H-36, P-9	4600	P-12	5890	B-19	7833	A-9
3720	P-9	4609	P-12	6098PG	R-4	7833MD	A-9
3720FS	H-36, P-9	4700	H-7	6207	B-71	7842	A-10
3722FS	H-36, P-9	4710	H-7	6307	B-71	7842MD	A-10
3723	P-9	4715SS	H-7	6810	B-75	7843	A-10
3723FS	P-9	4716SS	H-7	7088	B-75, G-12	7843MD	A-10
3724FS	P-9	4750	H-8	7070M	R-4	7860	A-11
3726SC	P-11	4760	H-8	7070PG	R-4	7862	A-11
3760	H-36, P-11	4792	H-7	7080M	R-4	7862R	A-11
3762	H-29	4867	G-10	7090M	R-4	7863	A-11
3763	P-11	4887	G-10	7090MH	R-4	7863R	A-11
3763M	H-29	5251	B-24	7090PG	R-4	7958P	H-30
3764	H-30	5251SSBKI	B-24	7101	H-6	8002M	R-4
3765	H-30	5252ISP	B-64, D-46, F-6	7102	H-6	8052CC10	R-5
3769	H-30	5258	B-24	7210	H-6	8101	R-5
3770SC	P-11	5261	B-23	7251DF	B-72, G-12	8200	B-6, E-5
3771	H-29	5262	B-19	7310	H-15	8200H	B-12, E-8
3775	H-30	5262A	B-9	7311G	H-15	8200ILI	B-6, E-5
3777	H-29	5262SP	B-63, D-45, F-5	7311SS	H-15	8200MRI	B-7, E-6
3778	P-7	5276	G-10	7311SSBK	H-15	8200SP	B-62, D-44, E-25, F-4
3780	P-11	5278SS	G-11	7313SS	H-15	8201	B-22, E-10
3780SC	P-11	5279SS	G-11	7313SSBK	H-15	8284	B-22, E-10
3780SCFBX	P-10	5290	B-19	7379	H-30	8300H	B-12, E-8
3780SCLV	P-10	5296	G-10	7408SS	H-21	8300ILI	B-6, E-5
3780SCMH	P-10	5351	B-24	7409SS	H-21	8300IMRI	B-7, E-6
3795	P-9	5352ISP	B-64, D-46, F-6	7410	H-21	8300SP	B-62, D-44, E-25, F-4
3796	P-13	5358	B-24	7410G	H-21	8302AN	B-72, G-12
3797	P-13	5361	B-23	7411G	H-21	8300	B-6, E-5
3801	B-72	5362	B-19	7411SS	H-21	8301	B-22, E-10
3802	B-72	5362A	B-9	7413G	H-21	8384	B-22, E-10
3804	B-72	5362SP	B-63, D-45, F-5	7413SS	H-21	8601	R-6
3820	B-72	5371	B-24	7420	P-13	8678	R-6
3822	B-72	5374	G-10	7427	H-31	8681	R-8
3854NA	B-72	5378SS	G-11	7506	H-6	8694	R-6
3830	B-72	5379SS	G-11	7526	H-6	8800	B-6, E-5
3852	B-72	5410	R-2	7535	H-6	8801	B-22, E-10
3854	B-72	5478SS	G-11	7547DF	H-6	9814	R-5
3860	B-72	5479SS	G-11	7554SS	H-15	9880	R-5
3861	B-72, G-12	5662A	B-9	7555G	H-15	9977	B-75, G-12
3862	Q-14	5651	B-24	7555SS	H-15	10020	R-6

legrand®
Pass & Seymour

Index

Catalog Number	Page Number
10027	R-6
10028	R-6
10045	R-5
10083M	R-4
10085	R-5
12845C5E89	R-19
13053UN	R-3
13057UN	R-3
13741	R-9
14629	G-12
15010	O-5
15040	O-5
19062	R-5
19980PG	R-4
20403N	H-33
20414	H-33
20414N	H-33
20415	H-33
20415N	H-33
20416N	H-33
20417N	H-33
20418	H-33
20443N	H-33
20444N	H-33
20445N	H-33
20446N	H-33
21414	H-33
21415	H-33
21420	H-33
21426	H-33
21426S	H-33
22200	O-2
23000	H-32
23000G	H-32
23000HG	H-32
23002N	H-32
23005N	H-32
23035N	H-32
23050	H-32
23054N	H-32
23056N	H-32
24845C5E	R-19
24845CC6	R-19
25250	H-34
25414	H-34
25414N	H-34
25415	H-34
25415N	H-34
26222HGI	B-33, D-15, E-15
26262HGI	B-33, D-15, E-15
26252	B-34, D-17
26322HGI	B-33, D-15, E-15
26352	B-34, D-17
26362HG	B-33, D-15, E-15
26415A	H-33
26400	H-33, H-34
26401	H-33, H-34
26402	H-33, H-34
26404	H-33, H-34
26414	H-33
26415	H-33
26420	H-33
26426	H-33
26427	H-33
26514	H-34
26514A	H-34
26515	H-34
26515A	H-34
26520	H-34
26526	H-34
26527	H-34
26652	B-34, D-17
26661I	B-37, D-20
26852	B-34, D-17
26861	B-37, D-20
29816C2	R-4
31528	R-5
32324	B-42
33300	O-2
33303	O-4
33310	O-2
43308	R-6
43379	G-12
43399	G-12
44400	O-4
44859	H-7
46001P	P-12
46007P	P-12
46008P	P-12
48643	R-7
48845C5E	R-19
48845CC6	R-19
51920	J-30
51940	J-30
51970	J-30
51972	J-30
51980	J-30
52022	J-30
52023	J-30
52029	J-30
52042	J-30
52043	J-30
52044	J-30
52073	J-30
52074	J-30
52079	J-31
52082	J-30
52083	J-30
52084	J-30
52172	J-30
52173	J-30
52174	J-30
52222	J-30
52223	J-30
52224	J-30
52229	J-30
52242	J-30
52243	J-30
52244	J-30
52272	J-30
52279	J-31
52282	J-30
52283	J-30
52284	J-30
52371	J-31
52402	J-31
52421	J-31
52718	J-30
52742	J-30
52743	J-30
52744	J-30
52773	J-30
52774	J-30
52782	J-30
52783	J-30
52872	J-30
52873	J-30
52942	J-30
52943	J-30
52944	J-30
52972	J-30
52982	J-30
52983	J-30
52984	J-30
53542	J-30
53582	J-30
53622	J-30
53623	J-30
53642	J-30
53643	J-30
53644	J-30
53682	J-30
53683	J-30
53684	J-30
53772	J-30
53773	J-30
53774	J-30
53823	J-30
53824	J-30
53843	J-30
53844	J-30
53879	J-31
53883	J-30
53884	J-30
53889	J-30
55015	O-4
55020	O-4
55025	O-4
55500	O-5
55501	O-3
55505	O-4
55528	O-4
65501	O-5
65505	O-5
65521	O-3
67705	O-5
77700	O-4
77702	O-3
77705	O-4
77706	O-5
77708	O-5
80700I	Q-35, R-10
83300	O-2
85502	O-3
90577	R-2
90621IV	M-22, M-32
91000I	M-32
91001I	M-32
91003I	M-32
91500I	M-32
91501I	M-32
91503I	M-32
92001I	M-32
94003I	M-23, M-37
94004I	M-23, M-37
94084I	D-73, M-17, M-36
94121I	M-33, M-39
94215I	M-23, M-37
94301I	M-33, M-39
94315I	M-23, M-37
94331I	M-23, M-37
94503I	M-33, M-39
94601I	M-33, M-39
94801I	M-33, M-39
95100I	M-32
95600I	M-22, M-32
97015I	D-61, L-20
97030I	D-61, L-20
97060I	D-61, L-20
97115I	D-61, L-20
97160I	D-61, L-20
97352I	L-20
109018V	M-23, M-37
109019V	M-23, M-37
109020V	M-23, M-37
168950	R-2
385440	B-72
388440	B-72
460026P	P-12
941904	R-9
1008316	R-4
1375220	R-11
1475277	R-11
2601347I	A-19, D-4
2603347I	A-19, D-4
2621347I	A-19, D-4
2623347I	A-19, D-4
2624347I	A-19, D-4

designed to be better.™

For additional technical or application-specific information, call 800-223-4185 or visit our website at www.legrand.us/PassandSeymour. We're eager to put our expertise to work for you.

Distributed by:

legrand®

Pass & Seymour

P.O. Box 4822
Syracuse, NY 13221-4822
800-776-4035
www.legrand.us/PassandSeymour

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195, Fax: 905.738.9721
www.legrand.ca

©2010, Legrand/Pass & Seymour PCA206F 10/10 EMA/AGI/QG