Section C Index

| B Series NEMA 12 JIC Lift-Off Cover Wall-Mount . C2 | JIC Handy Series NEMA 12 JIC Screw-Cover Wall-Mount . C14 | WA-FSD Series NEMA 12 Two Door Freestanding C27 |
|--|---|---|
| B-CH Series NEMA 12 JIC Continuous Hinge Wall-Mount | B-CHFTC Series JIC Continuous Hinge Wall-Mount C15 N12 Series | WA-FSDA Series NEMA 12 Single Door Dual Access Freestanding |
| Large B-CH Series NEMA 12 JIC Continuous Hinge | NEMA 12 Single Door Wall-Mount C16 | WA-FSDAD Series |
| Wall-Mount | WA-WF Series NEMA 12 Two Door Wall-Mount | NEMA 12 Two Door Dual Access Freestanding |
| B-CHQR Series NEMA 12 JIC Continuous Hinge | WA-FM Series | Freestanding Accessories C30 |
| Quick-Release Wall-Mount | NEMA 12 Single Door Flush Wall-Mount | WA-E Series NEMA 12 Multi-Door Freestanding C33-36 |
| B-SC Series NEMA 12 JIC Screw-Cover Wall-Mount . C10 | N12 Series | NEWA 12 Multi-book Freestanding Coo-so |
| WA-GIE Series | NEMA 12 Two Door Floor-Mount C23 | |
| NEMA 12 JIC Hinged Screw-Cover | WA-FS Series | |

NEMA 12 Single Door Freestanding C25

NEMA 12 ENCLOSURES









B080804

Industry Standards
UL 50, Type 12 & 13
(6.00" x 6.00" x 4.00" & above)
UL 508A, Type 12 & 13
(6.00" x 4.00" x 4.00" & smaller)
CSA Certified, Type 12
NEMA/EEMAC Type 12 & 13

(UL) UL Files E23553, E64791



FEATURES-SPECIFICATIONS

Applications

The B Series JIC box is a standard of the automotive industry but has wide applications in other industries. The box incorporates a chain secured lift-off cover and is designed to safeguard components against dust, dirt, oil, and water.

Construction

- Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth

- Lids are sealed with a closed cell oil resistant neoprene gasket
- External mounting plates on the top and bottom of the enclosure
- Weldnuts are provided on models 6.00" x 4.00" and larger to secure optional back panel
- External screw clamps are quick and easy to operate
- Lift-off cover design. Chain holds the cover to the box when the cover is removed
- · Grounding provisions are provided

Finish

- ANSI 61 gray polyester powder inside and out
- **Optional** back panels are painted with a white polyester powder
- Optional perforated panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24

B SERIES JIC LIFT-OFF COVER ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Back Panel Size A x B | Mounting Size C x E |
|----------------|---------------------------------|-------|-------------------------------|------------|--------------------------|------------------------|
| | HXWXD | White | "G" | Perforated | Size A X D | Size C X E |
| B040403 | 4.00x4.00x3.00 (102x102x76) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B040404 | 4.00x4.00x4.00 (102x102x102) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B060403 | 6.00x4.00x3.00 (152x102x76) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060404 | 6.00x4.00x4.00 (152x102x102) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060604 | 6.00x6.00x4.00 (152x152x102) | P0606 | P0606G | P0606PP | 4.88x4.88 (124x124) | 6.75x4.00 (171x102) |
| B080603 | 8.00x6.00x3.50 (203x152x89) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080606 | 8.00x6.00x6.00 (203x152x152) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080804 | 8.00x8.00x4.00 (203x203x102) | P0808 | P0808G | P0808PP | 6.88x6.88 (175x175) | 8.75x6.00 (222x152) |


*Back panels must be ordered separately.







B SERIES JIC LIFT-OFF COVER ENCLOSURES CONT.

| Enclosure Size Catalog Number HxWxD | | Back Panel Catalog Number* | | | Back Panel Size A x B | Mounting Size C x E |
|-------------------------------------|-----------------------------------|-------------------------------|--------|------------|--------------------------|--------------------------|
| | HXWXD | White | "G" | Perforated | Size A X D | Size C X E |
| B100804 | 10.00x8.00x4.00 (254x203x102) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B100806 | 10.00x8.00x6.00 (254x203x152) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B121005 | 12.00x10.00x5.00 (305x254x127) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B121206 | 12.00x12.00x6.00 (305x305x152) | P1212 | P1212G | P1212PP | 10.88x10.88 (276x276) | 12.75x10.00 (324x254) |
| B141206 | 14.00x12.00x6.00 (356x305x152) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B161406 | 16.00x14.00x6.00 (406x356x152) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |




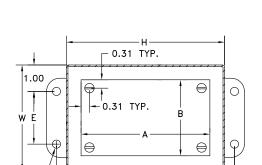




Notes:

- Panel screws are #10-32 Pan Head. Two clamps are used if W=8" or more Chain is supplied but not shown.



VIEW SHOWING CLAMP POSITION WHEN "W" IS LESS THAN 8"



VIEW SHOWING CLAMP POSITION WHEN "W" EQUALS 8" OR MORE.



ø0.31 TYP.



B-CH SERIES ENCLOSURES NEMA 12 JIC CONTINUOUS HINGE WALL-MOUNT



Industry Standards UL 50, Type 12 & 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



(UL) UL Files E6924



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Intended for use as electrical junction boxes, terminal wiring boxes, and instrument housing. Hinged door provides convenient access. Designed to provide protection from dust, dirt, oil, and water.

Construction

- · Bodies and doors are fabricated from carbon steel
- · Seams are continuously welded and ground smooth

- Lids are sealed with a closed cell oil resistant neoprene gasket
- External mounting plates on the top and bottom of the enclosure
- Weldnuts are provided on models 6.00" x 4.00" and larger to secure optional back panel
- External screw clamps are quick and easy to operate
- Continuously hinged door is removable by pulling hinge pin
- Grounding provisions are provided

Finish

- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional "G" panels are pre-galavnized steel

Accessories

- Back panels (reference table)
- See pages K1-K24

B-CH SERIES CONTINUOUS HINGE ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Back Panel Size A x B | Mounting Size C x E |
|----------------|----------------------------------|-------|-------------------------------|------------|--------------------------|-------------------------|
| | | White | "G" | Perforated | | |
| B040403CH | 4.00x4.00x3.00 (102x102x76) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B040404CH | 4.00x4.00x4.00 (102x102x102) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B060403CH | 6.00x4.00x3.00 (152x102x76) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060404CH | 6.00x4.00x4.00 (152x102x102) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060604CH | 6.00x6.00x4.00 (152x152x102) | P0606 | P0606G | P0606PP | 4.88x4.88 (124x124) | 6.75x4.00 (171x102) |
| B080603CH | 8.00x6.00x3.50 (203x152x89) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080606CH | 8.00x6.00x6.00 (203x152x152) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080804CH | 8.00x8.00x4.00 (203x203x102) | P0808 | P0808G | P0808PP | 6.88x6.88 (175x175) | 8.75x6.00 (222x152) |
| B100804CH | 10.00x8.00x4.00 (254x203x102) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B100804CHS | 10.00x8.00x4.00 (254x203x102) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B100806CH | 10.00x8.00x6.00 (254x203x152) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |






B-CH SERIES ENCLOSURES NEMA 12 JIC CONTINUOUS HINGE WALL-MOUNT


B-CH SERIES CONTINUOUS HINGE ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Back Panel Size A x B | Mounting Size C x E |
|----------------|------------------------------------|-------|-------------------------------|------------|--------------------------|--------------------------|
| | | White | "G" | Perforated | | |
| B101006CH | 10.00x10.00x6.00 (254x254x152) | P1010 | P1010G | P1010PP | 8.88x8.88 (225x225) | 10.75x8.00 (273x203) |
| B120604CH | 12.00x6.00x4.00 (305x152x102) | P1206 | P1206G | P1206PP | 10.88x4.88 (276x124) | 12.75x4.00 (324x102) |
| B121005CH | 12.00x10.00x5.00 (254x305x127) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B121005CHS | 12.00x10.00x5.00 (254x305x127) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B121008CH | 12.00x10.00x8.00 (305x254x203) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B121206CH | 12.00x12.00x6.00 (305x305x152) | P1212 | P1212G | P1212PP | 10.88x10.88 (276x276) | 12.75x10.00 (324x254) |
| B140806CH | 14.00x8.00x6.00 (356x203x152) | P1408 | P1408G | P1408PP | 12.88x6.88 (327x175) | 14.75x6.00 (375x152) |
| B141206CH | 14.00x12.00x6.00 (356x305x152) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B141206CHS | 14.00x12.00x6.00 (356x305x152) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B141208CH | 14.00x12.00x8.00 (356x305x203) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B161006CH | 16.00x10.00x6.00 (406x254x152) | P1610 | P1610G | P1610PP | 14.88x8.88 (378x226) | 16.75x8.00 (425x203) |
| B161406CH | 16.00x14.00x6.00 (406x356x152) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |
| B161406CHS | 16.00x14.00x6.00 (406x356x152) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |
| B161408CH | 16.00x14.00x8.00 (406x356x203) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |
| B161410CH | 16.00x14.00x10.00 (406x356x254) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |


^{*}Back panels must be ordered separately.









VIEW SHOWING CLAMP POSITION WHEN "H" EQUALS 8" OR MORE.







Notes:

Panel Screws are #10-32 Pan Head.
 Two clamps are used if H = 8.00" or more.





LARGE B-CH SERIES ENCLOSURES NEMA 12 JIC CONTINUOUS HINGE WALL-MOUNT



Industry Standards
UL 50, Type 12 & 13
CSA Certified, Type 12 & 13
NEMA/EEMAC Type 12



UL File E6924



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed to house electrical controls, terminals, instruments and components. Provides protection from dirt, dust, oil and water.

Construction

- Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth
- Doors are sealed with a poured in place gasket

- External screw clamps on the door
- Continuously hinged door is removable by pulling hinge pin
- Door and body stiffeners are provided in larger enclosures for added rigidity
- Collar studs for mounting **optional** back panels are provided
- External mounting feet are provided
- · Ground stud located in the door

Finish

- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional "G" are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24

LARGE B-CH SERIES JIC CONTINUOUS HINGE ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | Back Catalog I | | Back Panel Size A x B |
|----------------|-----------------------------------|---------------------|---------|--------------------------|
| | | White | "G" | |
| B201607CH | 20.00x16.00x7.00 (508x406x178) | NP2016 | NP2016G | 17.00x13.00 (432x330) |
| B202007CH | 20.00x20.00x7.00 (508x508x178) | NP2020 | NP2020G | 17.00x17.00 (432x432) |
| B242007CH | 24.00x20.00x7.00 (610x508x178) | NP2420 | NP2420G | 21.00x17.00 (533x432) |
| B242407CH | 24.00x24.00x7.00 (610x610x178) | NP2424 | NP2424G | 21.00x21.00 (533x533) |
| B302007CH | 30.00x20.00x7.00 (762x508x178) | NP3020 | NP3020G | 27.00x17.00 (686x432) |
| B362407CH | 36.00x24.00x7.00 (914x610x178) | NP3624 | NP3624G | 33.00x21.00 (838x533) |
| B201609CH | 20.00x16.00x9.00 (508x406x229) | NP2016 | NP2016G | 17.00x13.00 (432x330) |
| B202009CH | 20.00x20.00x9.00 (508x508x229) | NP2020 | NP2020G | 17.00x17.00 (432x432) |
| B242009CH | 24.00x20.00x9.00 (610x508x229) | NP2420 | NP2420G | 21.00x17.00 (533x432) |
| B242409CH | 24.00x24.00x9.00 (610x610x229) | NP2424 | NP2424G | 21.00x21.00 (533x533) |
| B302009CH | 30.00x20.00x9.00 (762x508x229) | NP3020 | NP3020G | 27.00x17.00 (686x432) |






LARGE B-CH SERIES JIC CONTINUOUS HINGE ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | Back Panel Catalog Number* | | Back Panel Size A x B |
|----------------|-------------------------------------|-------------------------------|---------|---------------------------|
| | | White | "G" | |
| B302409CH | 30.00x24.00x9.00 (762x610x229) | NP3024 | NP3024G | 27.00x21.00 (686x533) |
| B362409CH | 36.00x24.00x9.00 (914x610x229) | NP3624 | NP3624G | 33.00x21.00 (838x533) |
| B363009CH | 36.00x30.00x9.00 (914x762x229) | NP3630 | NP3630G | 33.00x27.00 (838x686) |
| B423609CH | 42.00x36.00x9.00 (1067x914x229) | NP4236 | NP4236G | 39.00x33.00 (991x838) |
| B242411CH | 24.00x24.00x11.00 (610x610x279) | NP2424 | NP2424G | 21.00x21.00 (533x533) |
| B362411CH | 36.00x24.00x11.00 (914x610x279) | NP3624 | NP3624G | 33.00x21.00 (838x533) |
| B483611CH | 48.00x36.00x11.00 (1219x914x279) | NP4836 | NP4836G | 45.00x33.00 (1143x838) |
| B302413CH | 30.00x24.00x13.00 (762x610x330) | NP3024 | NP3024G | 27.00x21.00 (686x533) |
| B363013CH | 36.00x30.00x13.00 (914x762x330) | NP3630 | NP3630G | 33.00x27.00 (838x686) |

^{*} Back panels must be ordered separately.

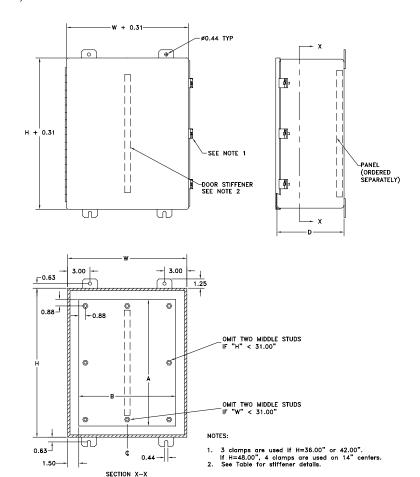





B-CHQR SERIES ENCLOSURES NEMA 12 JIC CONTINUOUS HINGE QUICK-RELEASE WALL-MOUNT



Industry Standards UL 50, Type 12 & 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



(UL) UL Files E6924



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Intended for use as electrical junction boxes, terminal wiring boxes, and instrument housing. Hinged door with quick-release latching provides convenient access. Designed to provide protection from dust, dirt, oil, and water.

Construction

- · Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth

- Lids are sealed with a closed cell oil resistant neoprene gasket
- External mounting plates on the top and bottom of the enclosure
- Weldnuts are provided on models 6.00" x 4.00" and larger to secure optional back panel
- External quick-release latches secure cover
- Continuiously hinged door is removable by pulling the hinge pin
- · Grounding provisions are provided

Finish

- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional perforated panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24


B-CHQR SERIES JIC CONTINUOUS HINGE QUICK-RELEASE ENCLOSURES


| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Back Panel Size A x B | Mounting Size C x E |
|----------------|-----------------------------------|-------|-------------------------------|------------|--------------------------|--------------------------|
| | | White | "G" | Perforated | | |
| B060403CHQR | 6.00x4.00x3.00 (152x102x76) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060604CHQR | 6.00x6.00x4.00 (152x152x102) | P0606 | P0606G | P0606PP | 4.88x4.88 (124x124) | 6.75x4.00 (171x102) |
| B080603CHQR | 8.00x6.00x3.50 (203x152x89) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B100804CHQR | 10.00x8.00x4.00 (254x203x102) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B121005CHQR | 12.00x10.00x5.00 (305x254x127) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B141206CHQR | 14.00x12.00x6.00 (356x305x152) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B161406CHQR | 16.00x14.00x6.00 (406x356x152) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |


^{*}Back panels must be ordered separately.



















VIEW SHOWING CLAMP POSITION WHEN "H" IS LESS THAN 8"





B-SC SERIES ENCLOSURES NEMA 12 JIC SCREW-COVER WALL-MOUNT



Industry Standards UL 50, Type 12 & 13 (6" X 6" X 4" & above) UL 508A, Type 12 & 13 (6" X 4" X 4" & smaller) CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



(ՍԼ) UL Files E23553, E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed for use as instrument housing, electrical control enclosures, terminal wiring boxes or electrical junction boxes. Provides protection from dirt, dust, oil and water.

Construction


- · Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth
- · Lids are sealed with a closed cell oil resistant neoprene gasket
- External mounting plates on the top and bottom of the enclosure
- Weldnuts are provided on models 6.00" x 4.00" and larger to secure optional back panel
- · Captivated cover screws are provided which thread into sealed wells to prevent leakage through the cover
- · Grounding provisions are provided


Finish


- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional perforated panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel


Accessories

- Back panels (reference table)
- See pages K1-K24













B-SC SERIES JIC SCREW-COVER ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Back Panel Size A x B | Mounting Size C x E |
|----------------|-----------------------------------|-------|-------------------------------|------------|--------------------------|--------------------------|
| | | White | "G" | Perforated | | |
| B040403SC | 4.00x4.00x3.00 (102x102x76) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B040404SC | 4.00x4.00x4.00 (102x102x102) | _ | _ | _ | _ | 4.75x2.00 (121x51) |
| B060403SC | 6.00x4.00x3.00 (152x102x76) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060404SC | 6.00x4.00x4.00 (152x102x102) | P0604 | P0604G | P0604PP | 4.88x2.88 (124x73) | 6.75x2.00 (171x51) |
| B060604SC | 6.00x6.00x4.00 (152x152x102) | P0606 | P0606G | P0606PP | 4.88x4.88 (124x124) | 6.75x4.00 (171x102) |
| B080603SC | 8.00x6.00x3.50 (203x152x89) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080606SC | 8.00x6.00x6.00 (203x152x152) | P0806 | P0806G | P0806PP | 6.88x4.88 (175x124) | 8.75x4.00 (222x102) |
| B080804SC | 8.00x8.00x4.00 (203x203x102) | P0808 | P0808G | P0808PP | 6.88x6.88 (175x175) | 8.75x6.00 (222x152) |
| B100804SC | 10.00x8.00x4.00 (254x203x102) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B100806SC | 10.00x8.00x6.00 (254x203x152) | P1008 | P1008G | P1008PP | 8.88x6.88 (226x175) | 10.75x6.00 (273x152) |
| B101004SC | 10.00x10.00x4.00 (254x254x102) | P1010 | P1010G | P1010PP | 8.88x8.88 (225x225) | 10.75x8.00 (273x203) |
| B101006SC | 10.00x10.00x6.00 (254x254x152) | P1010 | P1010G | P1010PP | 8.88x8.88 (225x225) | 10.75x8.00 (273x203) |
| B121005SC | 12.00x10.00x5.00 (305x254x127) | P1210 | P1210G | P1210PP | 10.88x8.88 (276x226) | 12.75x8.00 (324x203) |
| B121206SC | 12.00x12.00x6.00 (305x305x152) | P1212 | P1212G | P1212PP | 10.88x10.88 (276x276) | 12.75x10.00 (324x254) |
| B141206SC | 14.00x12.00x6.00 (356x305x152) | P1412 | P1412G | P1412PP | 12.88x10.88 (327x276) | 14.75x10.00 (375x254) |
| B161406SC | 16.00x14.00x6.00 (406x356x152) | P1614 | P1614G | P1614PP | 14.88x12.88 (378x327) | 16.75x12.00 (425x305) |

^{*}Back panels must be ordered separately.





WA-GIE SERIES ENCLOSURES NEMA 12 JIC HINGED SCREW-COVER WALL-MOUNT



Industry Standards UL 50, Type 12 & 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



UL File E6924



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed for use as instrument housing, electrical control enclosures, terminal wiring boxes or electrical junction boxes. Provides protection from dirt, dust, oil and water.

Construction

- Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth

- Lids are sealed with a closed cell oil resistant neoprene strip gasket
- Cover is secured by continuous hinge
- Captivated door screws thread into sealed wells
- No mounting feet or mounting holes are provided
- Weldnuts are provided to mount optional panels
- Grounding provisions are provided

Finish

- ANSI-61 gray polyester powder inside and out
- **Optional** back panels are painted with a white polyester powder
- **Optional** "G" panels are pre-galvanized

Accessories

- Back panels (reference table)
- See pages K1-K24


WA-GIE SERIES JIC HINGED SCREW-COVER ENCLOSURES


| Catalog Number | Catalog Number Enclosure Size HxWxD | | Back Panel Catalog Number* | | |
|----------------|-------------------------------------|---------|-------------------------------|--------------------------|--|
| | - HXWXD | White | " G " | Size A x B | |
| WA060604GIE | 6.00x6.00x4.00 (152x152x102) | N1P0606 | N1P0606G | 4.25x4.25 (108x108) | |
| WA080604GIE | 8.00x6.00x4.00 (203x152x102) | N1P0608 | N1P0608G | 6.25x4.25 (159x108) | |
| WA080804GIE | 8.00x8.00x4.00 (203x203x102) | N1P0808 | N1P0808G | 6.25x6.25 (159x159) | |
| WA080806GIE | 8.00x8.00x6.00 (203x203x152) | N1P0808 | N1P0808G | 6.25x6.25 (159x159) | |
| WA100804GIE | 10.00x8.00x4.00 (254x203x102) | N1P0810 | N1P0810G | 8.25x6.25 (210x159) | |
| WA100806GIE | 10.00x8.00x6.00 (254x203x152) | N1P0810 | N1P0810G | 8.25x6.25 (210x159) | |
| WA101006GIE | 10.00x10.00x6.00 (254x254x152) | N1P1010 | N1P1010G | 8.25x8.25 (210x210) | |
| WA121004GIE | 12.00x10.00x4.00 (305x254x102) | N1P1012 | N1P1012G | 10.25x8.25 (260x210) | |
| WA121006GIE | 12.00x10.00x6.00 (305x254x152) | N1P1012 | N1P1012G | 10.25x8.25 (260x210) | |
| WA121206GIE | 12.00x12.00x6.00 (305x305x152) | N1P1212 | N1P1212G | 10.25x10.25 (260x260) | |
| WA141206GIE | 14.00x12.00x6.00 (356x305x152) | N1P1214 | N1P1214G | 12.25x10.25 (311x260) | |


* Back panels must be ordered separately.






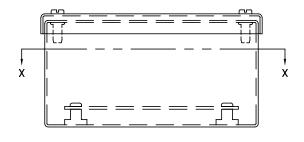

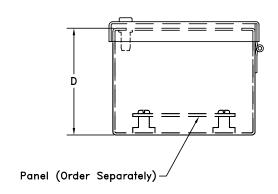

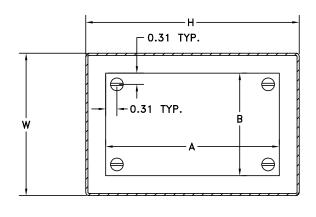





TOP VIEW COVER REMOVED





JIC HANDY SERIES ENCLOSURES **NEMA 12 JIC SCREW-COVER WALL-MOUNT**



Industry Standards UL508A, Type 12, 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



UL UL File E64791



FEATURES-SPECIFICATIONS

Applications

Ideal for use where protection from dirt, dust, oil and water is needed. Particularly suitable for use with liquid-tight flexible conduit.

Construction


- · Bodies and doors are fabricated from carbon steel
- External mounting plates on the top and bottom of the enclosure
- · Covers are sealed with a closed cell oil resistant neoprene gasket

Finish

• ANSI 61 gray polyester powder inside and out

JIC HANDY SERIES SCREW-COVER ENCLOSURES

| Catalog Number | Enclosure Size HxWxD |
|----------------|-----------------------------|
| JIC040202 | 4.00x2.00x2.00 (102x51x51) |
| JIC040302 | 4.25x2.88x2.63 (108x73x67) |
| JIC040403 | 4.00x4.00x3.00 (102x102x76) |

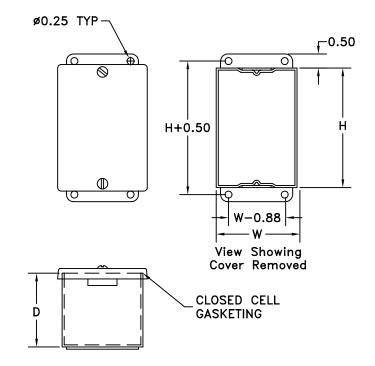







Industry Standards UL 50 Listed, 4, 12 & 13 CSA Certified, Type 12 & 13 NEMA/EEMAC Type 12 & 13



UL Files E6924



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

FTC (flange trough collar) enclosures offer unique tub flanges that maximize internal protection. Designed to provide protection from dust, dirt, oil, and water.

Construction


- · Bodies and doors are fabricated from carbon steel
- Special 360 degree tub flange design diverts contaminants away from tub opening
- Continuously hinged door is removable by pulling the hinge pin
- · Seams are continuously welded and ground smooth
- Doors are sealed with a poured in place gasket
- · External mounting plates on the top and bottom of the enclosure.
- Weldnuts are provided for mounting optional panels
- Special quick-release latches
- Grounding provisions are provided


Finish


- ANSI 61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional perforated panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel
- Back panels (reference table)
- See pages K1-K24


B-CHFTC JIC ENCLOSURES

| Catalog Number | | Back Panel Catalog Number | Enclosure Size HxWxD | |
|----------------|-------|------------------------------|-------------------------|--------------------------------|
| | White | "G" | Perforated | HXWXD |
| B0604045CHFTC | P0604 | P0604G | P0604PP | 6.00x4.00x4.50 (152x102x115) |
| B0606045CHFTC | P0606 | P0606G | P0606PP | 6.00x6.00x4.50 (152x102x115) |
| B0806045CHFTC | P0806 | P0806G | P0806PP | 8.00x6.00x4.50 (203x152x115) |
| B1008045CHFTC | P1008 | P1008G | P1008PP | 10.00x8.00x4.50 (254x203x115) |
| B1210055CHFTC | P1210 | P1210G | P1210PP | 12.00x10.00x5.50 (305x254x139) |
| B1412065CHFTC | P1412 | P1412G | P1412PP | 14.00x12.00x6.50 (356x305x166) |
| B1614065CHFTC | P1614 | P1614G | P1614PP | 16.00x14.00x6.50 (406x356x166) |









VIEW SHOWING CLAMP POSITION WHEN "H" IS LESS THAN 8.00"







Industry Standards UL 508A, Type 12 & 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



UL Files E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Intended for use in housing electrical and electronic controls, instruments, components, and associated wiring. These enclosures incorporate hinged doors which provide convenient access. Designed for indoor use in protecting components from dust, dirt, oil, and water.

Construction

- · Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth
- Door and body stiffeners are provided in larger enclosures for added rigidity

- Rolled lip on three sides of the door and all sides of the enclosure opening to exclude liquids and contaminants
- Quick and easy to operate door clamps are provided
- Continuously hinged door is removable by pulling the hinge pin
- Hasp and staple are provided for padlocking
- Doors are sealed with a poured in place gasket
- Collar studs for mounting optional back panels are provided
- · External mounting feet are provided
- Grounding provisions are provided

Finish

- ANSI-61 gray polyester powder inside and outside
- Optional back panels are painted white with a polyester powder
- Optional "G" panels are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24

N12 SERIES SINGLE DOOR ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | Number of Door Clamps | |
|----------------|--------------------------------|--------|-------------------------------|-----------------------|-----------------------|--|
| | HXWXD | White | "G" | Size A x B | | |
| N12122406 | 12.00x24.00x6.00 (305x610x152) | NP1224 | NP1224G | 9.00x21.00 (229x533) | 2 | |
| N12161206 | 16.00x12.00x6.00 (406x305x152) | NP1612 | NP1612G | 13.00x9.00 (330x229) | 2 | |
| N12161606 | 16.00x16.00x6.00 (406x406x152) | NP1616 | NP1616G | 13.00x13.00 (330x330) | 2 | |
| N12162006 | 16.00x20.00x6.00 (406x508x152) | NP2016 | NP2016G | 13.00x17.00 (330x432) | 2 | |
| N12201206 | 20.00x12.00x6.00 (508x305x152) | NP2012 | NP2012G | 17.00x9.00 (432x229) | 2 | |
| N12201606 | 20.00x16.00x6.00 (508x406x152) | NP2016 | NP2016G | 17.00x13.00 (432x330) | 2 | |
| N12202006 | 20.00x20.00x6.00 (508x508x152) | NP2020 | NP2020G | 17.00x17.00 (432x432) | 2 | |
| N12202406 | 20.00x24.00x6.00 (508x610x152) | NP2420 | NP2420G | 17.00x21.00 (432x533) | 2 | |
| N12241206 | 24.00x12.00x6.00 (610x305x152) | NP1224 | NP1224G | 21.00x9.00 (533x229) | 2 | |
| N12241606 | 24.00x16.00x6.00 (610x406x152) | NP2416 | NP2416G | 21.00x13.00 (533x330) | 2 | |
| N12242006 | 24.00x20.00x6.00 (610x508x152) | NP2420 | NP2420G | 21.00x17.00 (533x432) | 2 | |
| N12242406 | 24.00x24.00x6.00 (610x610x152) | NP2424 | NP2424G | 21.00x21.00 (533x533) | 2 | |
| N12301606 | 30.00x16.00x6.00 (762x406x152) | NP3016 | NP3016G | 27.00x13.00 (686x330) | 2 | |
| N12302006 | 30.00x20.00x6.00 (762x508x152) | NP3020 | NP3020G | 27.00x17.00 (686x432) | 2 | |
| N12302406 | 30.00x24.00x6.00 (762x610x152) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 | |
| N12362406 | 36.00x24.00x6.00 (914x610x152) | NP3624 | NP3624G | 33.00x21.00 (838x533) | 2 | |
| N12363006 | 36.00x30.00x6.00 (914x762x152) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 | |
| N12122408 | 12.00x24.00x8.00 (305x610x203) | NP1224 | NP1224G | 9.00x21.00 (229x533) | 2 | |
| N12161208 | 16.00x12.00x8.00 (406x305x203) | NP1612 | NP1612G | 13.00x9.00 (330x229) | 2 | |

*Back panels must be ordered separately.

Continued on page C17





N12 SERIES ENCLOSURES NEMA 12 SINGLE DOOR WALL-MOUNT

N12 SERIES SINGLE DOOR ENCLOSURES (CONT.)

| Catalog Number | Enclosure Size | Back Panel Catalog Number* | | Back Panel | Number of Door Clam |
|----------------|--|-------------------------------|---------|------------------------|--------------------------|
| | HxWxD | White | "G" | Size A x B | |
| N12161608 | 16.00x16.00x8.00 (406x406x203) | NP1616 | NP1616G | 13.00x13.00 (330x330) | 2 |
| N12162008 | 16.00x20.00x8.00 (406x508x203) | NP2016 | NP2016G | 13.00x17.00 (330x432) | 2 |
| N12201208 | 20.00x12.00x8.00 (508x305x203) | NP2012 | NP2012G | 17.00x9.00 (432x229) | 2 |
| N12201608 | 20.00x16.00x8.00 (508x406x203) | NP2016 | NP2016G | 17.00x13.00 (432x330) | 2 |
| N12202008 | 20.00x20.00x8.00 (508x508x203) | NP2020 | NP2020G | 17.00x17.00 (432x432) | 2 |
| N12202408 | 20.00x24.00x8.00 (508x610x203) | NP2420 | NP2420G | 17.00x21.00 (432x533) | 2 |
| N12241208 | 24.00x12.00x8.00 (610x305x203) | NP1224 | NP1224G | 21.00x9.00 (533x229) | 2 |
| N12241608 | 24.00x16.00x8.00 (610x406x203) | NP2416 | NP2416G | 21.00x13.00 (533x330) | 2 |
| N12242008 | 24.00x20.00x8.00 (610x508x203) | NP2420 | NP2420G | 21.00x17.00 (533x432) | 2 |
| N12242408 | 24.00x24.00x8.00 (610x610x203) | NP2424 | NP2424G | 21.00x21.00 (533x533) | 2 |
| N12243008 | 24.00x30.00x8.00 (610x762x203) | NP3024 | NP3024G | 21.00x27.00 (533x686) | 2 |
| N12302008 | 30.00x20.00x8.00 (762x508x203) | NP3020 | NP3020G | 27.00x17.00 (686x432) | 2 |
| N12302408 | 30.00x24.00x8.00 (762x610x203) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 |
| N12303008 | 30.00x30.00x8.00 (762x762x203) | NP3030 | NP3030G | 27.00x27.00 (686x686) | 2 |
| N12303608 | 30.00x36.00x8.00 (762x914x203) | NP3630 | NP3630G | 27.00x33.00 (686x838) | 2 |
| N12362408 | 36.00x24.00x8.00 (914x610x203) | NP3624 | NP3624G | 33.00x21.00 (838x533) | 2 |
| N12363008 | 36.00x30.00x8.00 (914x762x203) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 |
| N12363608 | 36.00x36.00x8.00 (914x914x203) | NP3636 | NP3636G | 33.00x33.00 (838x838) | 2 |
| N12422408 | 42.00x24.00x8.00 (1067x610x203) | NP4224 | NP4224G | 39.00x21.00 (991x533) | 3 |
| N12423008 | 42.00x30.00x8.00 (1067x762x203) | NP4230 | NP4230G | 39.00x27.00 (991x686) | 3 |
| N12423608 | 42.00x36.00x8.00 (1067x914x203) | NP4236 | NP4236G | 39.00x33.00 (991x838) | 3 |
| N12482408 | 48.00x24.00x8.00 (1219x610x203) | NP4824 | NP4824G | 45.00x21.00 (1143x533) | 3 |
| N12483008 | 48.00x30.00x8.00 (1219x762x203) | NP4830 | NP4830G | 45.00x27.00 (1143x686) | 3 |
| N12483608 | 48.00x36.00x8.00 (1219x914x203) | NP4836 | NP4836G | 45.00x33.00 (1143x838) | 3 |
| N12603608 | 60.00x36.00x8.00 (1524x914x203) | NP6036 | NP6036G | 57.00x33.00 (1448x838) | 3 |
| N12161210 | 16.00x12.00x10.00 (406x305x254) | NP1612 | NP1612G | 13.00x9.00 (330x229) | 2 |
| N12201610 | 20.00x16.00x10.00 (508x406x254) | NP2016 | NP2016G | 17.00x13.00 (432x330) | 2 |
| N12202010 | 20.00x20.00x10.00 (508x508x254) | NP2020 | NP2020G | 17.00x17.00 (432x432) | 2 |
| N12241210 | 24.00x12.00x10.00 (610x305x254) | NP2412 | NP2412G | 21.00x9.00 (533x229) | 2 |
| N12242010 | 24.00x20.00x10.00 (610x508x254) | NP2420 | NP2420G | 21.00x17.00 (533x432) | 2 |
| N12242410 | 24.00x24.00x10.00 (610x610x254) | NP2424 | NP2424G | 21.00x21.00 (533x533) | 2 |
| N12302010 | 30.00x20.00x10.00 (762x508x254) | NP3020 | NP3020G | 27.00x17.00 (686x432) | 2 |
| N12302410 | 30.00x24.00x10.00 (762x610x254) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 |
| N12362410 | 36.00x24.00x10.00 (914x610x254) | NP3624 | NP3624G | 33.00x21.00 (838x533) | 2 |
| N12363010 | 36.00x30.00x10.00 (914x762x254) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 |
| N12423010 | 42.00x30.00x10.00 (1067x762x254) | NP4230 | NP4230G | 39.00x27.00 (991x686) | 3 |
| N12423610 | 42.00x36.00x10.00 (1067x914x254) | NP4236 | NP4236G | 39.00x33.00 (991x838) | 3 |
| N12483010 | 48.00x30.00x10.00 (1219x762x254) | NP4830 | NP4830G | 45.00x27.00 (1143x686) | 3 |
| N12483610 | 48.00x36.00x10.00 (1219x914x254) | NP4836 | NP4836G | 45.00x33.00 (1143x838) | 3 |
| N12603610 | 60.00x36.00x10.00 (1524x914x254) | NP6036 | NP6036G | 57.00x33.00 (1448x838) | 3 |
| N12201612 | 20.00x16.00x12.00 (508x406x305) | NP2016 | NP2016G | 17.00x13.00 (432x330) | 2 |
| N12242012 | 24.00x20.00x12.00 (610x508x305) | NP2420 | NP2420G | 21.00x17.00 (533x432) | 2 |
| N12242412 | 24.00x24.00x12.00 (610x610x305) | NP2424 | NP2424G | 21.00x17.00 (533x533) | 2 |
| N12302412 | 30.00x24.00x12.00 (762x610x305) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 |
| | , | | | , , | |
| N12303012 | 30.00x30.00x12.00 (762x762x305) ordered separately. | NP3030 | NP3030G | 27.00x27.00 (686x686) | 2 Continued on page 0 |








N12 SERIES SINGLE DOOR ENCLOSURES (CONT.)

| Catalog Number | Back Panel Enclosure Size Catalog Number* | | | Back Panel | Number of Door Clamps | |
|----------------|--|--------|---------|------------------------|-----------------------|--|
| | HxWxD | White | "G" | Size A x B | | |
| N12362412 | 36.00x24.00x12.00 (914x610x305) | NP3624 | NP3624G | 33.00x21.00 (838x533) | 2 | |
| N12363012 | 36.00x30.00x12.00 (914x762x305) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 | |
| N12363612 | 36.00x36.00x12.00 (914x914x305) | NP3636 | NP3636G | 33.00x33.00 (838x838) | 2 | |
| N12423012 | 42.00x30.00x12.00 (1067x762x305) | NP4230 | NP4230G | 39.00x27.00 (991x686) | 3 | |
| N12423612 | 42.00x36.00x12.00 (1067x914x305) | NP4236 | NP4236G | 39.00x33.00 (991x838) | 3 | |
| N12483612 | 48.00x36.00x12.00 (1219x914x305) | NP4836 | NP4836G | 45.00x33.00 (1143x838) | 3 | |
| N12603612 | 60.00x36.00x12.00 (1524x914x305) | NP6036 | NP6036G | 57.00x33.00 (1448x838) | 3 | |
| N12723012 | 72.00x30.00x12.00 (1829x762x305) | NP7230 | NP7230G | 69.00x27.00 (1753x686) | 4 | |
| N12723612 | 72.00x36.00x12.00 (1829x914x305) | NP7236 | NP7236G | 69.00x33.00 (1753x838) | 4 | |
| N12242016 | 24.00x20.00x16.00 (610x508x406) | NP2420 | NP2420G | 21.00x17.00 (533x432) | 2 | |
| N12242416 | 24.00x24.00x16.00 (610x610x406) | NP2424 | NP2424G | 21.00x21.00 (533x533) | 2 | |
| N12302416 | 30.00x24.00x16.00 (762x610x406) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 | |
| N12363016 | 36.00x30.00x16.00 (914x762x406) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 | |
| N12423616 | 42.00x36.00x16.00 (1067x914x406) | NP4236 | NP4236G | 39.00x33.00 (991x838) | 3 | |
| N12483616 | 48.00x36.00x16.00 (1219x914x406) | NP4836 | NP4836G | 45.00x33.00 (1143x838) | 3 | |
| N12603616 | 60.00x36.00x16.00 (1524x914x406) | NP6036 | NP6036G | 57.00x33.00 (1448x838) | 3 | |
| N12723016 | 72.00x30.00x16.00 (1829x762x406) | NP7230 | NP7230G | 69.00x27.00 (1753x686) | 4 | |
| N12302420 | 30.00x24.00x20.00 (762x610x508) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 | |
| N12363020 | 36.00x30.00x20.00 (914x762x508) | NP3630 | NP3630G | 33.00x27.00 (838x686) | 2 | |
| N12483620 | 48.00x36.00x20.00 (1219x914x508) | NP4836 | NP4836G | 45.00x33.00 (1143x838) | 3 | |
| N12603620 | 60.00x36.00x20.00 (1524x914x508) | NP6036 | NP6036G | 57.00x33.00 (1448x838) | 3 | |
| N12302424 | 30.00x24.00x24.00 (762x610x610) | NP3024 | NP3024G | 27.00x21.00 (686x533) | 2 | |

^{*}Back panels must be ordered separately.







NOTES:

- Panels have flanges along all sides when either dimension exceeds 17".
 The number of door clamps is dependent on size of enclosure. Clamps are furnished on right side of door.
 F = 3" when W is 16" or greater other wise F = 1-1/4" when W is 12" or less.







Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12



(**UL**) UL Files E64791



SP. CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Intended for use in housing electronic controls, instruments, components, and associated wiring. These enclosures incorporate hinged doors which provide convenient access. Designed for indoor use in protecting components from dust, dirt, oil, and water.

Construction

- Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth

- Rolled lip around all sides of the enclosure opening to exclude liquids and contaminants
- Special overlapping door design eliminates the need for a center post
- 3-point latching mechanism operates with an oil-tight locking handle
- Continuously hinged door is removable by pulling the hinge pin
- Doors are sealed with a poured in place gasket
- Collar studs for mounting optional back panels are provided
- External mounting feet are provided
- Grounding provisions are provided

Finish

- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24


WA-WF SERIES TWO DOOR ENCLOSURES


| Catalog Number | Enclosure Size | Back Panel Catalog Number* | | Enclosure Size Catalog Number* | | Back Panel | С |
|----------------|--------------------------------------|-------------------------------|-----------|--------------------------------|--------------|------------|---|
| | HxWxD | White | "G" | Size A x B | | | |
| WA244208WF | 24.00x42.00x8.00 (610x1067x203) | NP4224 | NP4224G | 39.00x21.00 (991x533) | 1.50 (38) | | |
| WA244808WF | 24.00x48.00x8.00 (610x1219x203) | NP4824 | NP4824G | 21.00x45.00 (533x1143) | 1.50 (38) | | |
| WA304210WF | 30.00x42.00x10.00 (762x1067x254) | NP4230 | NP4230G | 27.00x39.00 (686x991) | 1.50 (38) | | |
| WA304810WF | 30.00x48.00x10.00 (762x1219x254) | NP4830 | NP4830G | 45.00x27.00 (1143x686) | 1.50 (38) | | |
| WA306010WF | 30.00x60.00x10.00 (762x1524x254) | NP6030 | NP6030G | 27.00x57.00 (686x1448) | 1.50 (38) | | |
| WA364212WF | 36.00x42.00x12.00 (914x1067x305) | NP4236 | NP4236G | 33.00x39.00 (838x991) | 1.50 (38) | | |
| WA364812WF | 36.00x48.00x12.00 (914x1219x305) | NP4836 | NP4836G | 33.00x45.00 (838x1143) | 1.50 (38) | | |
| WA366012WF | 36.00x60.00x12.00 (914x1524x305) | NP6036 | NP6036G | 33.00x57.00 (838x1448) | 1.50 (38) | | |
| WA424212WF | 42.00x42.00x12.00 (1067x1067x305) | NPDD4242 | NPDD4242G | 39.00x39.00 (991x991) | 1.50 (38) | | |
| WA424812WF | 42.00x48.00x12.00 (1067x1219x305) | NPDD4842 | NPDD4842G | 39.00x45.00 (991x1143) | 1.50 (38) | | |
| WA426012WF | 42.00x60.00x12.00 (1067x1524x305) | NPDD4260 | NPDD4260G | 38.00x56.00 (965x1422) | 2.00 (51) | | |
| WA484812WF | 48.00x48.00x12.00 (1219x1219x305) | NPDD4848 | NPDD4848G | 44.00x44.00 (1118x1118) | 2.00 (51) | | |


*Back panels must be ordered separately.





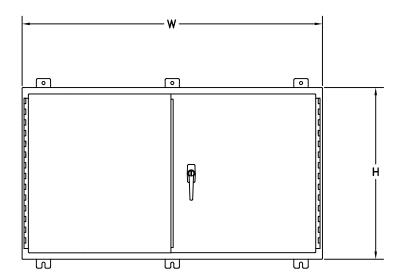



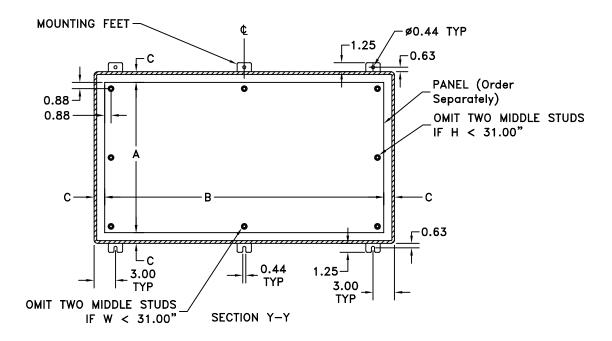







Industry Standards UL 508A, Type 12 & 13 CSA Certified, Type 12 NEMA/EEMAC Type 12 & 13



(UL) UL File E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed to house electrical controls, terminals and instruments. Provides protection from dirt, dust, oil and water. External frame allows enclosure to be recessed in a wall. Enclosure is used in applications where external space is limited or in high traffic areas.

Construction

• Bodies and doors are fabricated from carbon steel. Steel mounting frame extends completely around the enclosure

- Seams are continuously welded and ground smooth
- Rolled lip around all sides of the enclosure opening to exclude liquids and contaminants
- · Doors are held closed with captivated screws threaded into sealed wells
- Doors are sealed with a poured in place gasket
- Collar studs for mounting optional back panels are provided
- Continuously hinged door is removable by pulling the hinge pin
- Grounding provisions are provided

Finish

- ANSI 61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder

Accessories


- Back panels (reference table)
- See pages K1-K24

WA-FM SERIES FLUSH-MOUNT ENCLOSURES


| Catalog Number | Enclosure Size Back Panel HxWxD Catalog Number* | | Back Panel Size A x B |
|----------------|---|--------|--------------------------|
| WA161206FM | 16.00x12.00x6.00 (406x305x152) | NP1612 | 9.00x13.00 (229x330) |
| WA202006FM | 20.00x20.00x6.00 (508x508x152) | NP2020 | 17.00x17.00 (432x432) |
| WA242408FM | 24.00x24.00x8.00 (610x610x203) | NP2424 | 21.00x21.00 (533x533) |
| WA302408FM | 30.00x24.00x8.00 (762x610x203) | NP3024 | 21.00x27.00 (533x686) |
| WA363008FM | 36.00x30.00x8.00 (914x762x203) | NP3630 | 27.00x33.00 (686x838) |

^{*}Back panels must be ordered separately.



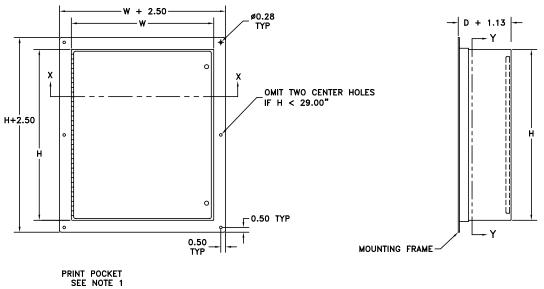



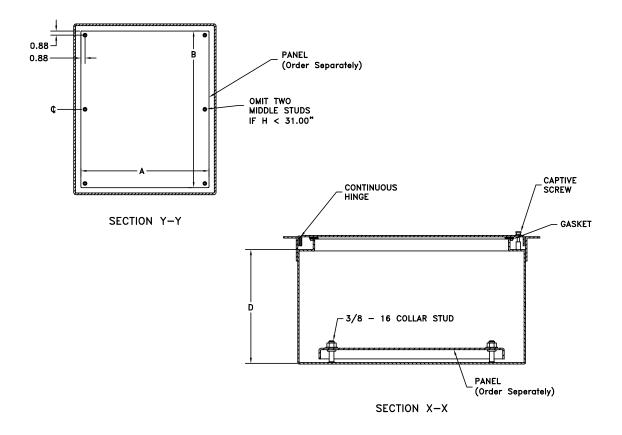







Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12



(**UL)** UL Files E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed to protect electronic controls, components, and instruments in typical industrial environments from dust, dirt, oil, and dripping water. These enclosures are used in machine tool applications for housing motor starters, drives, contactors, PLC's, as well as a wide variety of other electrical and electronic equipment found in automotive, pulp and paper, wood products, textile, and similar industries.

Construction

- · Bodies, doors, and feet are fabricated from carbon steel
- Seams are continuously welded and ground smooth

- Heavy gauge continuous hinges support each door
- Special overlapping door design eliminates the need for a center post
- 3-point Keylocking/Padlocking combo handle
- Standard 12" high floor kits are welded to the bottom of the enclosure
- · Heavy duty lifting eyes are provided
- Strong, rigid construction with body stiffeners
- Doors are sealed with a poured in place gasket
- Grounding provisions are provided
- · Back panel supports are provided
- Collar studs for mounting optional back panels are provided

Finish

- ANSI-61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional "G" panels are pre-galvanized steel

Accessories

- Back panels (reference table)
- See pages K1-K24

N12 SERIES TWO DOOR FLOOR-MOUNT ENCLOSURES

| Catalog Number | Enclosure Size HxWxD | | k Panel g Number* | Back Panel Size A x B |
|----------------|-----------------------------------|----------|----------------------|--------------------------|
| | HXWXD | White | "G" | SIZE A X D |
| N12544208 | 54.12x42.12x8.12 (1375x1070x206) | NPDD5442 | NPDD5442G | 50.00x38.00 (1270x965) |
| N12604808 | 60.12x48.12x8.12 (1527x1222x206) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) |
| N12604810 | 60.12x48.12x10.12 (1527x1222x257) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) |
| N12606010 | 60.12x60.12x10.12 (1527x1527x257) | NPDD6060 | NPDD6060G | 56.00x56.00 (1422x1422) |
| N12726010 | 72.12x60.12x10.12 (1832x1527x257) | NPDD7260 | NPDD7260G | 68.00x56.00 (1727x1422) |
| N12727210 | 72.12x72.12x10.12 (1832x1832x257) | NPDD7272 | NPDD7272G | 68.00x68.00 (1727x1727) |
| N12604812 | 60.12x48.12x12.12 (1527x1222x308) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) |
| N12606012 | 60.12x60.12x12.12 (1527x1527x308) | NPDD6060 | NPDD6060G | 56.00x56.00 (1422x1422) |
| N12726012 | 72.12x60.12x12.12 (1832x1527x308) | NPDD7260 | NPDD7260G | 68.00x56.00 (1727x1422) |
| N12727212 | 72.12x72.12x12.12 (1832x1832x308) | NPDD7272 | NPDD7272G | 68.00x68.00 (1727x1727) |
| N12604816 | 60.12x48.12x16.12 (1527x1222x409) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) |
| N12606016 | 60.12x60.12x16.12 (1527x1527x409) | NPDD6060 | NPDD6060G | 56.00x56.00 (1422x1422) |
| N12726016 | 72.12x60.12x16.12 (1832x1527x409) | NPDD7260 | NPDD7260G | 68.00x56.00 (1727x1422) |

continued on page C24







N12 SERIES TWO DOOR FLOOR-MOUNT ENCLOSURES CONT.

| Catalog Number | Enclosure Size HxWxD | | Back Panel Catalog Number* | | |
|----------------|-----------------------------------|----------|-------------------------------|-------------------------|--|
| | HXWXD | White | "G" | Size A x B | |
| N12727216 | 72.12x72.12x16.12 (1832x1832x409) | NPDD7272 | NPDD7272G | 68.00x68.00 (1727x1727) | |
| N12604820 | 60.12x48.12x20.12 (1527x1222x511) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) | |
| N12726020 | 72.12x60.12x20.12 (1832x1527x511) | NPDD7260 | NPDD7260G | 68.00x56.00 (1727x1422) | |
| N12727220 | 72.12x72.12x20.12 (1832x1832x511) | NPDD7272 | NPDD7272G | 68.00x68.00 (1727x1727) | |
| N12604824 | 60.12x48.12x24.12 (1527x1222x613) | NPDD6048 | NPDD6048G | 56.00x44.00 (1422x1118) | |
| N12606024 | 60.12x60.12x24.12 (1527x1527x613) | NPDD6060 | NPDD6060G | 56.00x56.00 (1422x1422) | |
| N12726024 | 72.12x60.12x24.12 (1832x1527x613) | NPDD7260 | NPDD7260G | 68.00x56.00 (1727x1422) | |
| N12727224 | 72.12x72.12x24.12 (1832x1832x613) | NPDD7272 | _ | 68.00x68.00 (1727x1727) | |
| | | | | | |

^{*}Back panels must be ordered separately.

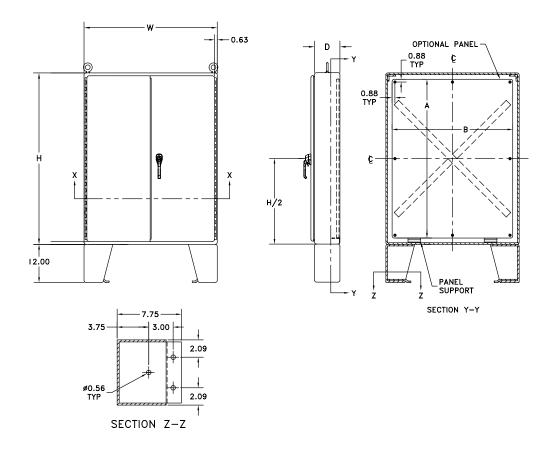

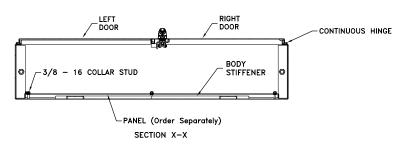







Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12



(**VL**) UL Files E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed to protect electronic controls, components, and instruments in typical industrial environments from dust, dirt, oil, and dripping water. These enclosures are used in machine tool applications for housing motor starters, drives, contactors, PLC's, as well as a wide variety of other electrical and electronic equipment. The addition of 19-inch rack mounting accessories make these enclosures ideal for providing rugged protection for sensitive rack mounted components in harsh industrial environments. The enclosures are found extensively in automotive, pulp and paper, wood products, textile, and similar industries.

Four styles are available to provide maximum flexibility:

a) Single Door Single Access (single door on front)

- b) Single Door Dual Access (single door on front and back)
- c) Two Door Single Access (overlapping doors on front)
- d) Two Door Dual Access (overlapping doors on front and back)

Construction

- · Bodies and doors are fabricated from carbon steel
- · Seams are continuously welded and ground smooth
- Heavy-duty lifting eyes for easy handling
- Heavy gauge continuous hinges support each door
- 3-point Keylocking/Padlocking combo handle
- Mounting channels are welded horizontally to the interior body to allow back panels to be positioned in the enclosure. Optional swing

- panels and rack angles can be mounted anywhere along the mounting channel
- Doors are sealed with a poured in place gasket
- Stiffeners are welded to the back of two door enclosures to maintain flatness and increase rigidity
- Grounding provisions are provided

Finish

- ANSI 61 gray polyester powder inside and out
- Optional back panels are painted with a white polyester powder
- Optional "G" are pre-galvanized steel

Accessories


See pages K1-K24


WA-FS SERIES FREESTANDING SINGLE DOOR ENCLOSURE (SEE PAGE C30 FOR BACK PANEL DIMENSIONS)


| | | | | Back Panel C | Catalog Number | |
|----------------|-------------------|----------------|-----------|--------------|----------------|------------|
| Catalog Number | Enclosu HxW | | WI | nite | Galva | nized |
| | | | Full | Half | Full | Half |
| WA602418FS | 60.12x24.12x18.12 | (1527x613x460) | WA60P24F1 | WA60P24F2 | WA60P24F1G | WA60P24F2G |
| WA722418FS | 72.12x24.12x18.12 | (1832x613x460) | WA72P24F1 | WA72P24F2 | WA72P24F1G | WA72P24F2G |
| WA723018FS | 72.12x30.12x18.12 | (1832x765x460) | WA72P30F1 | WA72P30F2 | WA72P30F1G | WA72P30F2G |
| WA723618FS | 72.12x36.12x18.12 | (1832x917x460) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA902420FS | 90.12x24.12x20.12 | (2289x613x511) | WA90P24F1 | WA90P24F2 | WA90P24F1G | WA90P24F2G |
| WA903620FS | 90.12x36.12x20.12 | (2289x917x511) | WA90P36F1 | WA90P36F2 | WA90P36F1G | WA90P36F2G |
| WA603624FS | 60.12x36.12x24.12 | (1527x917x613) | WA60P36F1 | WA60P36F2 | WA60P36F1G | WA60P36F2G |
| WA722424FS | 72.12x24.12x24.12 | (1832x613x613) | WA72P24F1 | WA72P24F2 | WA72P24F1G | WA72P24F2G |
| WA723024FS | 72.12x30.12x24.12 | (1832x765x613) | WA72P30F1 | WA72P30F2 | WA72P30F1G | WA72P30F2G |
| WA723624FS | 72.12x36.12x24.12 | (1832x917x613) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA903624FS | 90.12x36.12x24.12 | (2289x917x613) | WA90P36F1 | WA90P36F2 | WA90P36F1G | WA90P36F2G |
| WA723630FS | 72.12x36.12x30.12 | (1832x917x765) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA723636FS | 72.12x36.12x36.12 | (1832x917x917) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA903636FS | 90.12x36.12x36.12 | (2289x917x917) | WA90P36F1 | WA90P36F2 | WA90P36F1G | WA90P36F2G |
| | | | | | | |





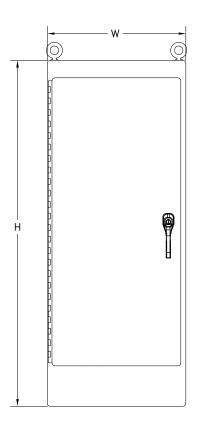

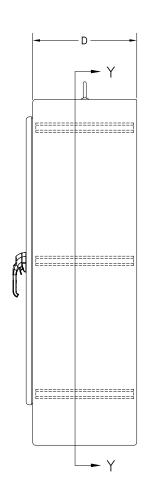

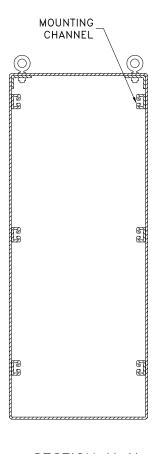

SECTION Y-Y



WA-FSD SERIES ENCLOSURES NEMA 12 TWO DOOR FREESTANDING



Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12




UL UL Files E64791




CSA File LL66078

WA-FSD SERIES FREESTANDING TWO DOOR ENCLOSURES (SEE PAGE C30 FOR BACK PANEL DIMENSIONS)

| | | | | Back Panel C | atalog Number | |
|----------------|-------------------|-----------------|-----------|--------------|---------------|------------|
| Catalog Number | Enclosu HxV | | WI | nite | Galva | nized |
| | | | Full | Half | Full | Half |
| WA604818FSD | 60.12x48.12x18.12 | (1527x1222x460) | WA60P48F1 | WA60P48F2 | WA60P48F1G | WA60P48F2G |
| WA724818FSD | 72.12x48.12x18.12 | (1832x1222x460) | WA72P48F1 | WA72P48F2 | WA72P48F1G | WA72P48F2G |
| WA726018FSD | 72.12x60.12x18.12 | (1832x1527x460) | WA72P60F1 | WA72P60F2 | WA72P60F1G | WA72P60F2G |
| WA727218FSD | 72.12x72.12x18.12 | (1832x1832x460) | WA72P72F1 | WA72P72F2 | WA72P72F1G | WA72P72F2G |
| WA904820FSD | 90.12x48.12x20.12 | (2289x1222x511) | WA90P48F1 | WA90P48F2 | WA90P48F1G | WA90P48F2G |
| WA907220FSD | 90.12x72.12x20.12 | (2289x1832x511) | WA90P72F1 | WA90P72F2 | WA90P72F1G | WA90P72F2G |
| WA724824FSD | 72.12x48.12x24.12 | (1832x1222x613) | WA72P48F1 | WA72P48F2 | WA72P48F1G | WA72P48F2G |
| WA726024FSD | 72.12x60.12x24.12 | (1832x1527x613) | WA72P60F1 | WA72P60F2 | WA72P60F1G | WA72P60F2G |
| WA727224FSD | 72.12x72.12x24.12 | (1832x1832x613) | WA72P72F1 | WA72P72F2 | WA72P72F1G | WA72P72F2G |
| WA907224FSD | 90.12x72.12x24.12 | (2289x1832x613) | WA90P72F1 | WA90P72F2 | WA90P72F1G | WA90P72F2G |
| WA726036FSD | 72.12x60.12x36.12 | (1832x1527x917) | WA72P60F1 | WA72P60F2 | WA72P60F1G | WA72P60F2G |
| WA907236FSD | 90.12x72.12x36.12 | (2289x1832x917) | WA90P72F1 | WA90P72F2 | WA90P72F1G | WA90P72F2G |

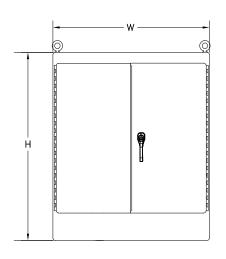

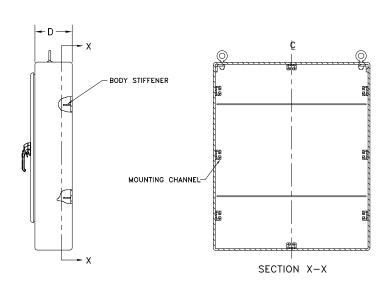





WA-FSDA SERIES ENCLOSURES NEMA 12 SINGLE DOOR DUAL ACCESS FREESTANDING



WA722424FSDA

Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12




UL Files E64791





CSA File LL66078

WA-FSDA SERIES FREESTANDING SINGLE DOOR DUAL ACCESS ENCLOSURES (SEE PAGE C30 FOR BACK PANEL DIMENSIONS)

| | | | | Back Panel Ca | atalog Number | |
|----------------|-------------------|----------------|-----------|---------------|---------------|------------|
| Catalog Number | Enclosu HxW | | Wr | nite | Galva | nized |
| | | | Full | Half | Full | Half |
| WA722424FSDA | 72.12x24.12x24.25 | (1832x613x616) | WA72P24F1 | WA72P24F2 | WA72P24F1G | WA72P24F2G |
| WA723024FSDA | 72.12x30.12x24.25 | (1832x765x616) | WA72P30F1 | WA72P30F2 | WA72P30F1G | WA72P30F2G |
| WA723624FSDA | 72.12x36.12x24.25 | (1832x917x616) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA903624FSDA | 90.12x36.12x24.25 | (2289x917x616) | WA90P36F1 | WA90P36F2 | WA90P36F1G | WA90P36F2G |
| WA722430FSDA | 72.12x24.12x30.25 | (1832x613x768) | WA72P24F1 | WA72P24F2 | WA72P24F1G | WA72P24F2G |
| WA722436FSDA | 72.12x24.12x36.25 | (1832x613x921) | WA72P24F1 | WA72P24F2 | WA72P24F1G | WA72P24F2G |
| WA723636FSDA | 72.12x36.12x36.25 | (1832x917x921) | WA72P36F1 | WA72P36F2 | WA72P36F1G | WA72P36F2G |
| WA903636FSDA | 90.12x36.12x36.25 | (2289x917x921) | WA90P36F1 | WA90P36F2 | WA90P36F1G | WA90P36F2G |

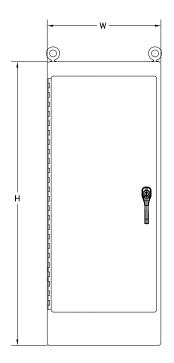

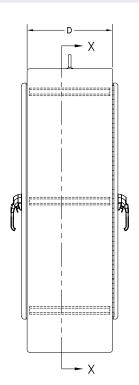

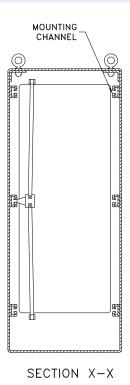





WA-FSDAD SERIES ENCLOSURES NEMA 12 TWO DOOR DUAL ACCESS FREESTANDING



WA726024FSDAD

Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12





UL UL Files E64791



WA-FSDAD SERIES FREESTANDING TWO DOOR DUAL ACCESS ENCLOSURES (SEE PAGE C30 FOR BACK PANEL DIMENSIONS)

| | Back Panel Catalog Number | | | | | |
|----------------|---------------------------|-----------------|-----------|-----------|------------|------------|
| Catalog Number | Enclosu HxV | | Wi | nite | Galva | nized |
| | | | Full | Half | Full | Half |
| WA724824FSDAD | 72.12x48.12x24.25 | (1832x1222x616) | WA72P48F1 | WA72P48F2 | WA72P48F1G | WA72P48F2G |
| WA726024FSDAD | 72.12x60.12x24.25 | (1832x1527x616) | WA72P60F1 | WA72P60F2 | WA72P60F1G | WA72P60F2G |
| WA727224FSDAD | 72.12x72.12x24.25 | (1832x1832x616) | WA72P72F1 | WA72P72F2 | WA72P72F1G | WA72P72F2G |
| WA907224FSDAD | 90.12x72.12x24.25 | (2289x1832x616) | WA90P72F1 | WA90P72F2 | WA90P72F1G | WA90P72F2G |
| WA726036FSDAD | 72.12x60.12x36.25 | (1832x1527x921) | WA72P60F1 | WA72P60F2 | WA72P60F1G | WA72P60F2G |

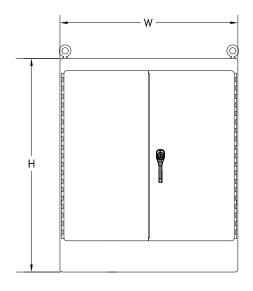

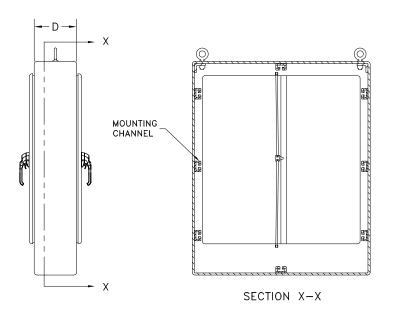





REGULAR PANELS ONLY (FULL & HALF) NEMA 4 & 12 SINGLE DOOR


| Catalog | Number | Panel Size A x B |
|-----------|------------|-------------------------|
| White | "G" | |
| WA60P24F1 | WA60P24F1G | 48.00x20.00 (1219x508A) |
| WA60P24F2 | WA60P24F2G | 24.88x20.00 (632x508A) |
| WA72P24F1 | WA72P24F1G | 60.00x20.00 (1524x508A) |
| WA72P24F2 | WA72P24F2G | 30.88x20.00 (784x508A) |
| WA90P24F1 | WA90P24F1G | 78.00x20.00 (1981x508A) |
| WA90P24F2 | WA90P24F2G | 39.88x20.00 (1013x508A) |
| WA72P30F1 | WA72P30F1G | 60.00x26.00 (1524x660) |
| WA72P30F2 | WA72P30F2G | 30.88x26.00 (784x660) |
| WA60P36F1 | WA60P36F1G | 48.00x32.00 (1219x813) |
| WA60P36F2 | WA60P36F2G | 24.88x32.00 (632x813) |
| WA72P36F1 | WA72P36F1G | 60.00x32.00 (1524x813) |
| WA72P36F2 | WA72P36F2G | 30.88x32.00 (784x813) |
| WA90P36F1 | WA90P36F1G | 78.00x32.00 (1981x813) |
| WA90P36F2 | WA90P36F2G | 39.88x32.00 (1013x813) |
| | | |

NOTE: If used in a Two Door Enclosure, a center panel support must be ordered. (See page C31)

REGULAR PANELS ONLY (FULL & HALF) NEMA 4 & 12 DOUBLE DOOR

| Cat | talog Number | Panel Size A x B |
|------------|--------------|-------------------------|
| White | "G" | |
| WA60P48F1 | WA60P48F1G | 48.00x44.00 (1219x1118) |
| WA60P48F2 | WA60P48F2G | 24.88x44.00 (632x1118) |
| WA72P48F1 | WA72P48F1G | 60.00x44.00 (1524x1118) |
| WA72P48F2 | WA72P48F2G | 30.88x44.00 (784x1118) |
| WA72P60F1 | WA72P60F1G | 60.00x56.00 (1524x1422) |
| WA72P60F2 | WA72P60F2G | 30.88x56.00 (784x1422) |
| WA72P72F1 | WA72P72F1G | 60.00x68.00 (1524x1727) |
| WA72P72F2 | WA72P72F2G | 30.88x68.00 (784x1727) |
| WA90P48F1 | WA90P48F1G | 78.00x44.00 (1981x1118) |
| WA90P48F2 | WA90P48F2G | 39.88x44.00 (1013x1118) |
| WA90P72F1 | WA90P72F1G | 78.00x68.00 (1981x1727) |
| WA90P72F2 | WA90P72F2G | 39.88x68.00 (1013x1727) |
| NOTE O . D | | |

NOTE: Center Panel support is supplied with a regular Two Door Enclosure Panel. This support is used only as a brace. It is not intended to be used as a support for Single Door Panels, relay racks, etc.

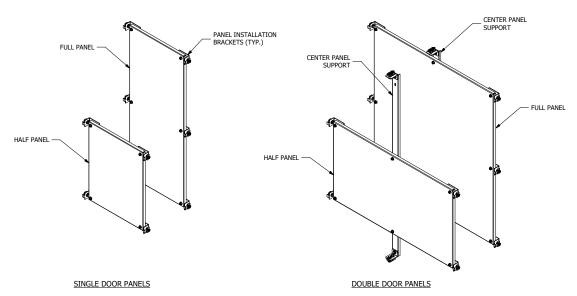





SWING OUT PANELS ONLY (FULL & HALF) NEMA 4 & 12 SINGLE OR DOUBLE DOOR

| Catalog Number | | Panel Size A x B |
|----------------|-------------|------------------------|
| White | "G" | |
| WA60SP24F3 | WA60SP24F3G | 48.00x19.00 (1219x483) |
| WA60SP24F4 | WA60SP24F4G | 24.88x19.00 (632x483) |
| WA72SP24F3 | WA72SP24F3G | 60.00x19.00 (1524x483) |
| WA72SP24F4 | WA72SP24F4G | 30.88x19.00 (784x483) |
| WA72SP30F3 | WA72SP30F3G | 60.00x25.00 (1524x635) |
| WA72SP30F4 | WA72SP30F4G | 30.88x25.00 (784x635) |
| WA60SP36F3 | WA60SP36F3G | 48.00x31.00 (1219x787) |
| WA60SP36F4 | WA60SP36F4G | 24.88x31.00 (632x787) |
| WA72SP36F3 | WA72SP36F3G | 60.00x31.00 (1524x787) |
| WA72SP36F4 | WA72SP36F4G | 30.88x31.00 (784x787) |
| WA90SP36F3 | WA90SP36F3G | 78.00x31.00 (1981x787) |
| WA90SP36F4 | WA90SP36F4G | 39.88x31.00 (1013x787) |

NOTE: If used in a Two Door Enclosure, a center panel support must be ordered.



SIDE MOUNT PANELS ONLY (FULL & HALF) NEMA 4 & 12 SINGLE OR DOUBLE DOOR

| Catalog Number | | Panel Size A x B | | |
|----------------|------------|-------------------------|--|--|
| White | "G" | | | |
| WA60SMP14 | WA60SMP14G | 48.00x14.00 (1219x356) | | |
| WA72SMP14 | WA72SMP14G | 60.00x14.00 (1524x356) | | |
| WA72SMP20 | WA72SMP20G | 60.00x20.00 (1524x508A) | | |
| WA90SMP14 | WA90SMP14G | 78.00x14.00 (1981x356) | | |
| WA90SMP20 | WA90SMP20G | 78.00x20.00 (1981x508A) | | |



CENTER PANEL SUPPORTS

| Catalog Number | Description |
|----------------|--|
| WA60FSCPS | Center panel support for 60" high enclosures |
| WA72FSCPS | Center panel support for 72" high enclosures |
| WA90FSCPS | Center panel support for 90" high enclosures |

CLAMP NUTS

| Catalog Number | Description |
|----------------|--------------------------------|
| WAPS1420CN | Clamp nut for mounting channel |
| WAPS3816CN | Clamp nut for mounting channel |






RELAY RACK ANGLES (FULL OR HALF) SINGLE OR DOUBLE DOOR

| Catalog Number | Length "L" | |
|----------------|--------------|--|
| WA60RP24F5 | 49.00 (1245) | |
| WA60RP24F6 | 26.25 (667) | |
| WA72RP24F5 | 61.25 (1556) | |
| WA72RP24F6 | 31.50 (800) | |
| WA72RP30F5 | 61.25 (1556) | |
| WA72RP30F6 | 31.50 (800) | |
| WA90RP24F5 | 78.75 (2000) | |
| WA90RP24F6 | 40.25 (1022) | |

RELAY RACK ANGLES WITH THRU HOLES (TYPE RA)

| Catalog Number | Fits Enclosure HxW | Rack Size | Angle Length "L" |
|----------------|------------------------|-------------|------------------|
| WA60RA19TH | 60.00x24.00 (1524x610) | 19.00 (483) | 49.00 (1245) |
| WA72RA19TH | 72.00x24.00 (1829x610) | 19.00 (483) | 61.25 (1556) |
| WA72RA24TH | 72.00x30.00 (1829x762) | 24.00 (610) | 61.25 (1556) |
| WA90RA19TH | 90.00x24.00 (2286x610) | 19.00 (483) | 78.78 (2001) |


NOTE: If used in a Two Door Enclosure, a center panel support must be ordered. (See page C31)



SWING OUT RACK MOUNTING FRAMES

| Catalog Number | Fits Enclosure HxW | Rack Size | Angle Length "T" |
|----------------|------------------------|-------------|------------------|
| WA7230S0F19 | 72.00x30.00 (1829x762) | 19.00 (483) | 57.88 (1470) |
| WA7236S0F19 | 72.00x36.00 (1829x914) | 19.00 (483) | 57.88 (1470) |
| WA9036S0F19 | 90.00x36.00 (2286x914) | 19.00 (483) | 75.38 (1915) |

NOTE: If used in a Two Door Enclosure, a center panel support must be ordered. (See page C31)

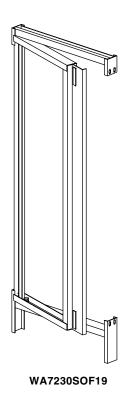







Industry Standards UL 508A, Type 12 CSA Certified, Type 12 NEMA/EEMAC Type 12



UL File E64791



CSA File LL66078

FEATURES-SPECIFICATIONS

Applications

Designed to protect electronic controls, components, and instruments in typical industrial environments from dust, dirt, oil, and dripping water. These enclosures are used in machine tool applications for housing motor starters, drives, contactors, PLC's, as well as a wide variety of other electrical and electronic equipment found in automotive, pulp, and paper, wood products, textile, and similar industries. Select from three, four, or five door options to best meet your application requirements.

Construction

- Bodies and doors are fabricated from carbon steel
- Seams are continuously welded and ground smooth
- Stiffeners are welded to the back to maintain flatness and increase rigidity
- Heavy-duty removable lifting eyes are installed for easy handling
- 3-point Keylocking/Padlocking combo handle
- Light fixture mounting channel is provided
- Doors are supported by heavy gauge steel continuous hinges

- Doors are sealed with a closed cell neoprene gasket
- Removable back panels and back panel supports are provided
- Grounding provisions are provided

Finish

- ANSI 61 gray polyester powder inside and out
- Back panels are painted with a white polyester powder

Accessories

• See pages K1-K24


N12 SERIES FLOOR-MOUNTED ENCLOSURES


| Catalan Number | Number of Doors | Enclosure Size HxWxD | Back Panel Size⁺ | | |
|----------------|-----------------|------------------------------------|-----------------------------|-----|----------------------------|
| Catalog Number | Number of Doors | | AxB | | AxB |
| WA86M3E | 3 | 86.13x112.13x14.13 (2188x2848x359) | (1) 78.00x70.00 (1981x1778) | and | (1) 78.00x34.00 (1981x864) |
| WA86M4E | 4 | 86.13x149.13x14.13 (2188x3788x359) | (2) 78.00x70.00 (1981x1778) | and | No Panel |
| WA86M5E | 5 | 86.13x187.13x14.13 (2188x4753x359) | (2) 78.00x70.00 (1981x1778) | and | (1) 78.00x34.00 (1981x864) |
| WA86M3E20 | 3 | 86.13x112.13x20.13 (2188x2848x511) | (1) 78.00x70.00 (1981x1778) | and | (1) 78.00x34.00 (1981x864) |
| WA86M4E20 | 4 | 86.13x149.13x20.13 (2188x3788x511) | (2) 78.00x70.00 (1981x1778) | and | No Panel |
| WA86M5E20 | 5 | 86.13x187.13x20.13 (2188x4753x359) | (2) 78.00x70.00 (1981x1778) | and | (1) 78.00x34.00 (1981x864) |

^{*}Back panels are furnished with enclosures.



3-DOOR




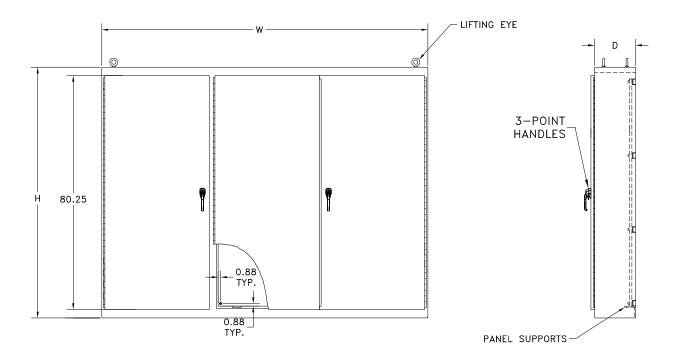






4-DOOR



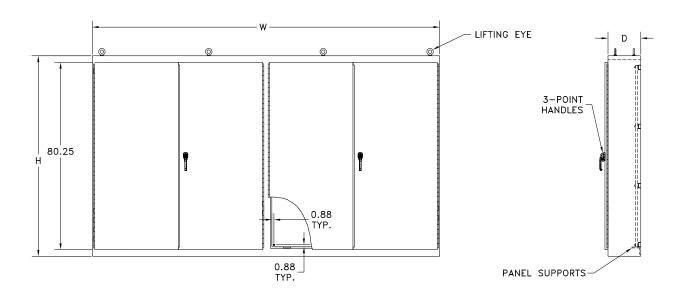





5-DOOR



