


**INSTRUCTIONS**  
For Assembling and Installing Fixtures in Canada  
Pour L'assemblage et L'installation Au Canada

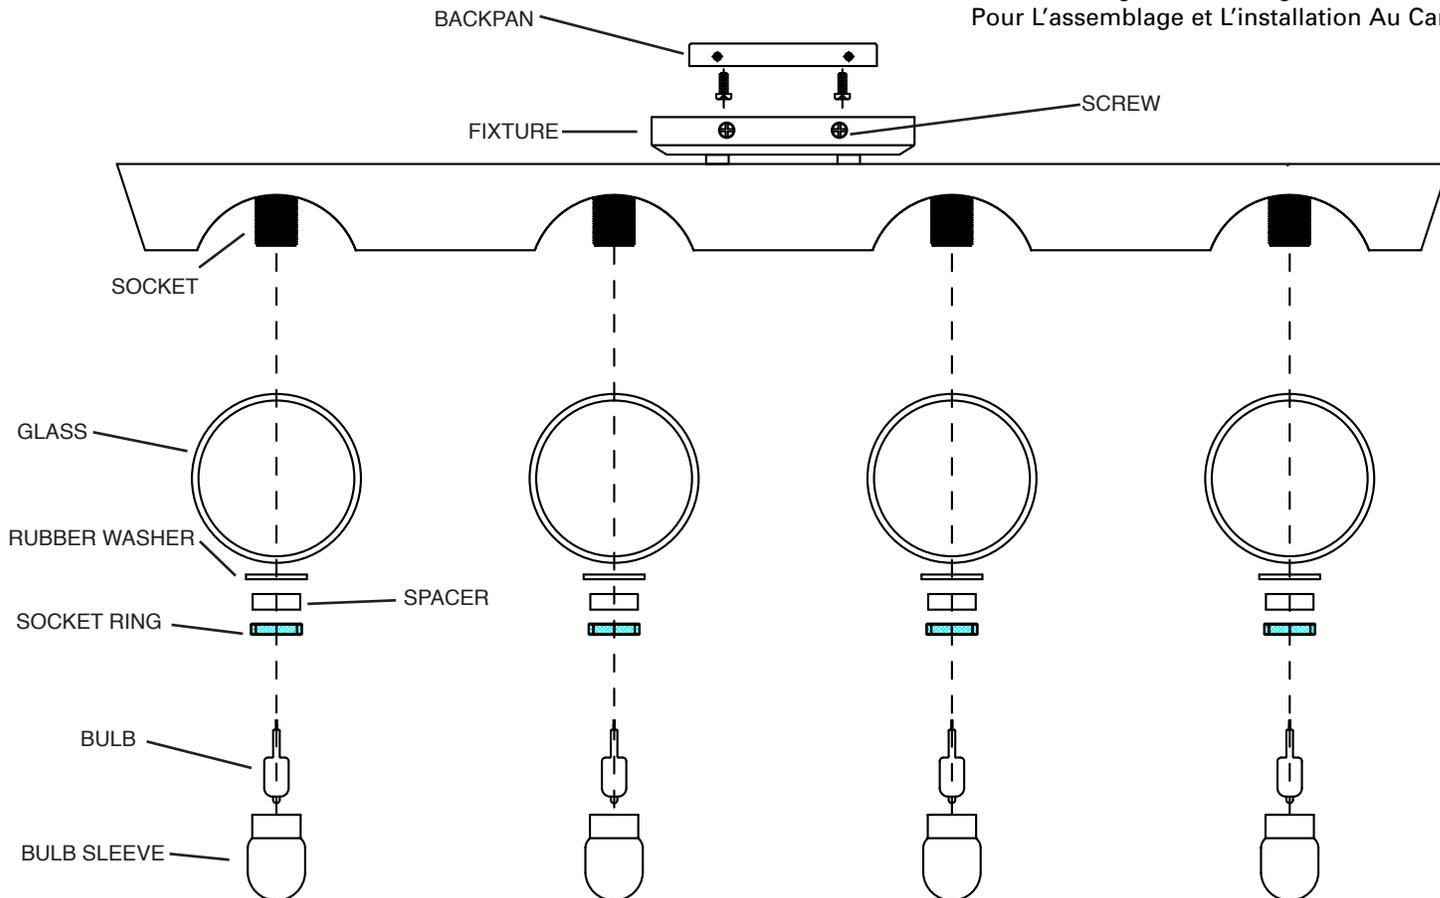

**IMPORTANT SAFETY INSTRUCTIONS**  
**LIGHTED BULB IS HOT!**


**WARNING:** To reduce the risk of FIRE or INJURY TO PERSON:

- Turn off and allow to cool before replacing bulb.
- Bulb gets HOT QUICKLY! Contact switch only when turning off.
- DO NOT remain in light if skin feels warm. (Light is intense, may cause "sunburn")
- DO NOT look directly at lighted bulb.
- Keep materials away from bulb that may burn.
- Use ONLY with wattage specified or lower.
- DO NOT touch bulb at any time, use a soft cloth. Oil from skin may damage bulb.
- DO NOT operate fixture with missing or damaged glass.

- 1) Turn off power.
- 2) Attach backpan to outlet box. (Screws not provided).
- 3) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 4) Push fixture to wall, aligning holes on top of fixture with holes on top edge of backpan.
- 5) Attach fixture to backpan with screws.
- 6) Set glass over socket.
- 7) Slip rubber washer then spacer over socket.
- 8) Screw socket ring onto socket.
- 9) Insert recommended bulb. **CAUTION:** DO NOT touch bulb with bare hands. If this happens, clean bulb with denatured alcohol and a lint free cloth.
- 10) Slip glass sleeve over bulb.