

INSTALLATION INSTRUCTION

Merlin - Low Voltage Quick Connect™ Fixtures

QF-185

WAC LIGHTING

Responsible Lighting®

Read all instructions before installing.

Disconnect power before installing or re-lamping.


OVERVIEW

Fixtures are designed for use with all WAC quick connect adapters. They may also be used on other manufacturers brand of quick connect (consult factory for compatibility). This fixture may be mounted to Monorail, Monopoints, or standard track, by coupling to a female quick connect adapter.

The lens ring allows the use of MR16 accessory lenses.

INSTALLING LAMP:

1. Loosen the two thumbscrews holding the rods
2. Remove the rods and lens ring as one piece.
3. Insert the lamp into the fixture by aligning the pins with the socket holes, and gently pushing until lamp seats.
4. Use an MR16 lamp, 50 watt maximum (12 or 24 volt depending on power supply).
5. Replace the lens ring and rod assembly and tighten thumbscrews.

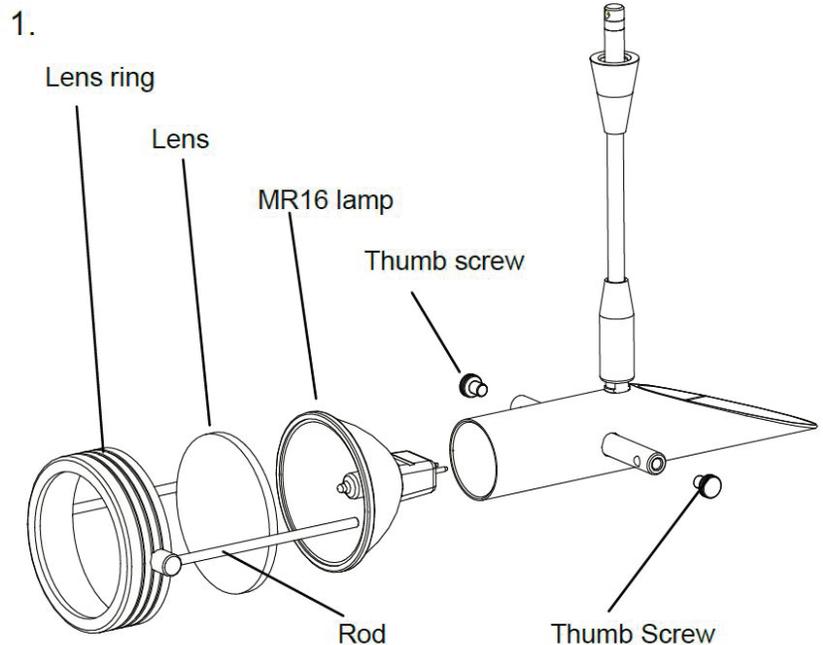


INSTALLING THE QUICK CONNECT:

1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it seats with the adapter.
3. Adjust fixture position, use caution not to loosen the conical section.

ACCESSORIES:

Accepts all MR16 colored or textured lenses, as well as the honeycomb louver.

Installing to quick connect adapter

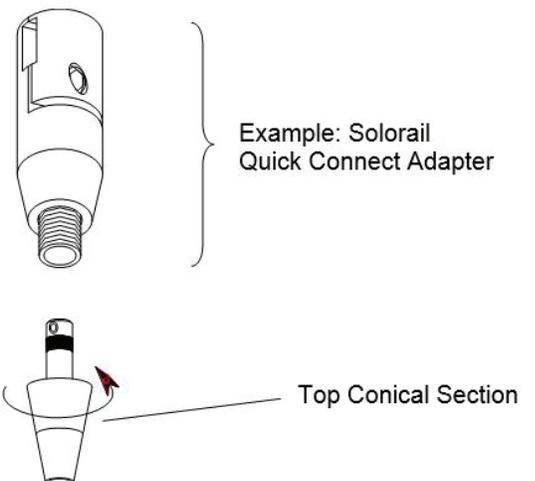

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Ave • Ontario, CA 91761
Phone (800) 526.2588 • Fax (800) 526.2585