



GE
Lighting

16053 - GE Blax® T6 - Facilities. Retail Display. Hospitality. Office.
Restaurant. Warehouse

F18BX/SPX35 10PK

Product Photo



GENERAL CHARACTERISTICS

Base Type	Pin/Plug-In
Mercury Content	4 mg
Rated Life Hours-nominal	10000 h
Starting Temp (MIN) C-degrees	-4 °C
Base Description	4-Pin
Mercury-Picogram per mean lm hr	370.4
Primary Application	Facilities Retail Display Hospitality Office Restaurant Warehouse
Product Technology	Compact Fluorescent
Base	2G11
Bulb Shape	T6

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	1080 lm
Nominal Initial Lumen per Watt	67
Initial Lumens-nominal	1200 lm
Color Rendering Index-CRI	82
Color Temperature	3500 K

PRODUCT INFORMATION

Product Code	16053
Description	F18BX/SPX35 10PK
Alternative Unit Of Measure	EACH
Standard Package Quantity	40
Ean UPC	043168160537
Standard Package GTIN	00043168160537
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
Sales Unit	Each
UCC	043168160537
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168160537
Standard Package GTIN	10043168160534
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168160537
Alternative Unit Of Measure	PACK
Standard Package Quantity	
Ean UPC	043168160537
Standard Package GTIN	30043168160538
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Inner Pack
UCC	043168160537

DIMENSIONS

Nominal Length	9.0 in
Bulb Max Overall Length-MOL	9.0 in

ELECTRICAL CHARACTERISTICS

Equivalent Incandescent Watts	65 W
Rated power (Watts)	18 W

CAUTIONS & WARNINGS


Caution

Lamp may shatter and cause injury if broken

Remove and install by grasping only plastic portion of the lamp.

NOTES

4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).

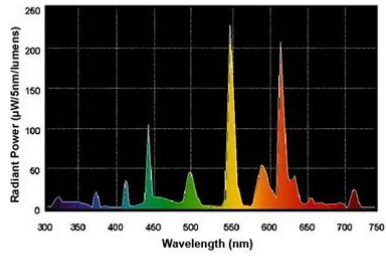

Jan 6, 2017 10:57:33 AM For additional information, visit www.gelighting.com