



Call Us: [718.259.6100](tel:718.259.6100) (tel:718.259.6100) or [800.626.1223](tel:800.626.1223) (tel:800.626.1223)


RIGID-IMC FITTINGS

Malleable Iron Threaded Conduit Bodies

[Download Specification Sheet](https://www.sepco-usa.com/wp-content/uploads/2017/03/page_033.pdf)
(https://www.sepco-usa.com/wp-content/uploads/2017/03/page_033.pdf)



[Print](#)

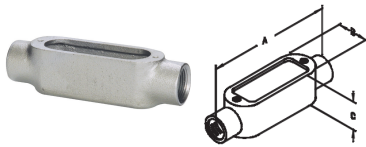

C7

Trade Size	2-1/2"
Dim A	15.000
Dim B	4.313
Dim C	3.875
MAX WIRE SIZE	3 #250 MCM
VOL. CU.IN.	138.00
Unit Pack	—
Master Pack	1
Lbs. / 100 Pcs.	1216
UPC	43070 250-M, C- 67, C250M, C250M,
Competitor	LCM-250,
Part Number	C-250, C77,

**C77,
C250M-TB,
C7M**

APPLICATION FEATURES

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

Tapered threaded hubs (NPT) Flat back design for easy mounting close to walls Suitable for use in concrete

STANDARD MATERIALS STANDARD FINISH

Malleable Iron Zinc Plated

UL LISTED E198259 OPTIONAL FINISH



For additional corrosion protection, specify Hot Dipped Galvanized. Add suffix 'G' to Malleable Iron catalog number. Example LB1G. For

more
information,
see page
11.
