1 of 2

GENERAC® ACCESSORIES

GENERAC®

Smart Management Modules (SMM)

Model 006873-0





DESCRIPTION

Generac's Smart Power Management System is designed to optimize the performance of a standby generator. The system can consist of up to 8 individual Smart Management Modules (SMM). Unlike other load management systems that depend on another control device, the SMM modules are actually selfaware and operate autonomously.

Frequency is the true measure of generator engine performance and does not need to factor in increased ambient temperatures, elevation changes or generator fuel type. The modules monitor the frequency (Hz) of the power being produced by Generac's standby generators and if it falls below a certain threshold, the module will automatically follow a power management algorithm to ensure that the generator is not overloaded.

The modules can be set to a load priority between 1-8 or be set in a lock out only mode for loads that just simply do not need to run in an outage, therefore reducing the necessary size of the generator for a more cost effective solution.

SMM SPECIFICATIONS


over Supply Source	ut)
upported Voltages	AĊ
ontactor Coil Voltage	AC
oil VA Inrush	30
pil VA Sealed	3.5
oles	2
esistive Amps	50
'L Inductive Amps	40
ocked Rotor Amps	0V
l 50	es/
nclosure Rating NEMA	3R





2 of 2

Smart Management Modules (SMM)


Dimensions and UPC

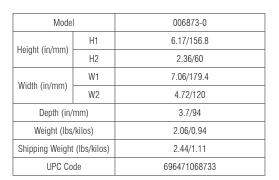

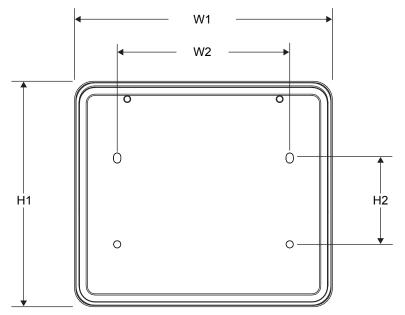

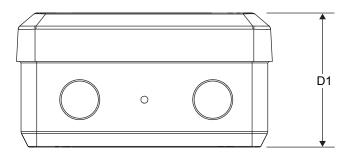

SMM Controls (located behind the cover of the module)

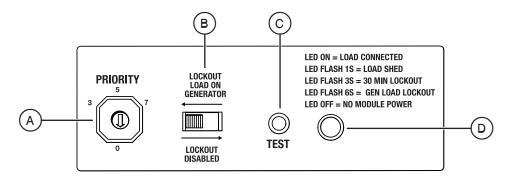

Priority Dial (A) -Sets module priority.

Lockout Switch (B) -Prevents load from operating when system is operating under generator power.

Test Button (C) -Disables contactor output for a specified time.

Provides module status with easy viewing through the external viewing window LED (D) -

located in the upper right corner of the module.

