




KT-LED45HID-E26-840-D /G2

HID REPLACEMENT LED LAMP

DESCRIPTION

45W HID Replacement LED Lamp | 4000K | >80 CRI | IP64 Rated

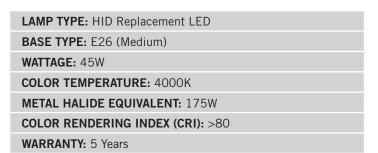



C(UL)US LISTED

RoHS Compliant

PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed

- Operating Temperature: -40°C/-40°F to 60°C/140°F
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 4kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Suitable for Use in Fully Enclosed Fixture

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

| Input | Voltage | Power Consumption | Power Factor | Input Current |
|-------|---------|-------------------|--------------|------------------------------|
| 120-2 | 277Vac | 45W | >0.9 | 0.38A @ 120V 0.16A @ 277V |


RATED LIFE

| L70 (Hours) | 50,000 |
|-------------|--------|


PHOTOMETRIC CHARACTERISTICS

| Color Temperature (CCT) | 4000K | |
|-----------------------------|----------|--|
| Luminous Flux | 6570 lm | |
| Color Rendering Index (CRI) | >80 | |
| Efficacy | 146 lm/W | |
| Visible Light Area | 360° | |

SPECTRAL DISTRIBUTION



LUX DISTANCE CURVE







KT-LED45HID-E26-840-D /G2

HID REPLACEMENT LED LAMP

WIRING DIAGRAM

STEP 1


Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.


STFP 2


Rewire for line voltage to the lamp socket.


STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.











PHYSICAL CHARACTERISTICS





LAMP DIMENSIONS

| A (Illuminated Length) | 5.07" |
|------------------------|-------|
| B (Body Length) | 9.13" |
| C (Diameter) | 3.34" |

BASE TYPE: E26 (Medium)

ORDERING INFORMATION

| ORDER CODE | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|------------------------------|---------------------------------------|-----------|-------------|
| KT-LED45HID-E26-840-D /G2-DP | Distributor Pack (Individual Cartons) | 16 | Quick Ship |

CATALOG NUMBER BREAKDOWN

