

AETHER - Adjustable

R3ARAT, R3ASAT

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- 0° - 30° adjustable range
- Designed to fit in tight plenum
- Damp location listed for trims
- 3.5" trim aperture, 3.5" housing height
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty

Title 24 Compliant

SPECIFICATIONS

Construction: Die-cast aluminum trim with extruded aluminum heat sink

Dimming: 100% - 0% with 0-10V dimmer (120V - 277V)

100% - 5% with Electronic Low Voltage (ELV) dimmer (120V only)

Input: 120V-277V AC

Power: 15.5W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated white and black, white, enamel coated haze

Standards: ETL & cETL Listed, damp location listed trims

IC-rated airtight housing with available Chicago plenum version

Ceiling thickness: ½" - 1½"

TRIM (SEE NEXT PAGE FOR HOUSING)	Beam	Color Temp	CRI	Lumen	CBCP	Finish	Interior/Trim
R3ARAT Round 	S 15°	827 2700K	85	1060	5295	HZWT WT BKWT	Haze/White White Black/White
		927 2700K	90	880	4415		
		830 3000K	85	1105	5515		
		930 3000K	90	920	4590		
		835 3500K	85	1135	5675		
	N 25°	840 4000K	85	1150	5740	HZWT WT BKWT	Haze/White White Black/White
		827 2700K	85	1110	4020		
		927 2700K	90	925	3350		
		830 3000K	85	1160	4190		
		930 3000K	90	965	3485		
	F 50°	835 3500K	85	1190	4310	HZWT WT BKWT	Haze/White White Black/White
		840 4000K	85	1205	4360		
		827 2700K	85	1050	1760		
		927 2700K	90	875	1465		
		830 3000K	85	1095	1835		
	S 15°	930 3000K	90	910	1525	HZWT WT BKWT	Haze/White White Black/White
		835 3500K	85	1125	1885		
		840 4000K	85	1140	4360		
		827 2700K	85	990	5610		
		927 2700K	90	830	4675		
	N 25°	830 3000K	85	1040	5845	HZWT WT BKWT	Haze/White White Black/White
		930 3000K	90	865	4860		
		835 3500K	85	1070	6010		
		840 4000K	85	1080	6075		
		827 2700K	85	1045	4000		
	F 50°	927 2700K	90	870	3335	HZWT WT BKWT	Haze/White White Black/White
		830 3000K	85	1090	4170		
		930 3000K	90	905	3470		
		835 3500K	85	1120	4290		
		840 4000K	85	1135	4335		
	S 15°	827 2700K	85	990	1775	HZWT WT BKWT	Haze/White White Black/White
		927 2700K	90	820	1480		
		830 3000K	85	1030	1850		
		930 3000K	90	855	1540		
		835 3500K	85	1055	1900		
	N 25°	840 4000K	85	1070	1923	HZWT WT BKWT	Haze/White White Black/White
		827 2700K	85	990	1775		
		927 2700K	90	820	1480		
		830 3000K	85	1030	1850		
		930 3000K	90	855	1540		
	F 50°	835 3500K	85	1055	1900	HZWT WT BKWT	Haze/White White Black/White
		840 4000K	85	1070	1923		
		827 2700K	85	990	1775		
		927 2700K	90	820	1480		
		830 3000K	85	1030	1850		

R3A _AT- _ - _

Example: R3ARAT-N930-HZ

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

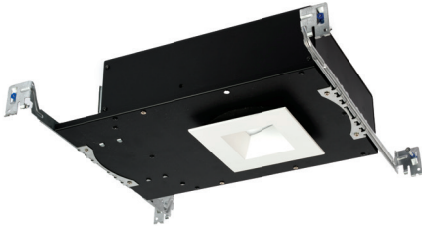
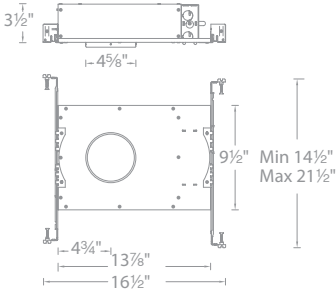
Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

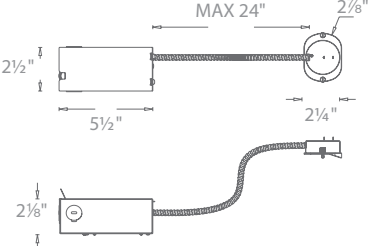
AETHER - Housing
HR-3LED-H17A

HOUSING		Model	
 <i>Shown with open square white trim</i>		HR-3LED-H17A	<i>New Construction IC-rated, Airtight</i>
		HR-3LED-H17AC	<i>New Construction IC-rated, Airtight Chicago Plenum</i>

HR-3LED-H17_____

Example: **HR-3LED-H17A**

AETHER - Housing
HR-3LED-R20

HOUSING		Model	
		HR-3LED-R20	<i>Remodel Non IC - Rated</i>

HR-3LED-R20_____