

## 7765C






**UPC Code**: 07847780442

Country of Origin: Mexico - \*Eligible for ARRA funded projects > \$7,443,000

#### Configuration:





# **Locking Wiring Devices**

#### **Brand Features**

Leviton's Black & White 50 Amp, Non-NEMA line of industrial grade locking blade devices feature rugged construction that resists impact, sunlight, chemicals and rough use. All contacts and blades are solid one-piece construction for superior conductivity. Corrosion resistant versions feature nickel plated contacts and blades, plus stainless steel shrouds and screws. The ergonomic, fluted-body design with radial gripping edge is ideal for gripping and pulling. The unique cord clamp accepts a wide range of cord sizes, providing a secure grip without damaging the cord. And, they are backed by a limited lifetime warranty.

#### **Item Description**

50Amp, 250V DC/600V AC, Non-NEMA, 3P, 4W, Black & White Locking Plug, Industrial Grade, Grounding – BLACK-WHITE

#### **Technical Information**

Electrical Specifications
Grounding: Grounding
Amperage: 50 Amp

Voltage: 250 Volt DC/600 Volt AC

Pole: 3 Wire: 4

Dielectric Voltage Withstand: 2000V

minimum per UL 498

Maximum Working Voltage: 250V

DC/600V AC as rated

Current Interrupting: Certified for current

interrupting at full rated current

Temperature Rise: Max 30°C temp rise at full-rated current after 150 cycles of OL at

150% rated DC current

Environmental Specifications Flammability: UL94V-2

Operating Temperature: -40deg.C to

75deg.C (-40deg.F to 167deg.F)

Material Specifications

Face Module: Nylon
Wiring Chamber: Nylon
Assembly Screws: Brass
Housing Material: Nylon
Dust Shield: Santoprene TPE

Terminal Block: 0.062inch thick Copper Terminal Set Screw: SS 302/304

Ground Shunt: Bronze
Ground Post: Brass

Plug Blade: 0.1000inch thick Brass Plug Blade Shroud: SS 302/304 Standard Cable Clamp: Nylon Cable Clamp Screw: Philips Head, SS

304

Color: Black-White

Mechanical Specifications

Terminal ID: X, W, Y, Z and Green for

ground

Terminal Accom.: #10 min to #4max

AWG Solid or Stranded Wire

**Product ID:** Ratings and Catalogue No. molded into face and stamped into shroud

Cord Range: .680 - 1.125

**Product Features** 

NEMA: Non-NEMA

Color: Black-White


Standards and Certifications

UL 498: File E13399

CSA C22.2 No. 42: File 152105

NOM: 057
RoHS: Compliant

Warranty: Lifetime Limited

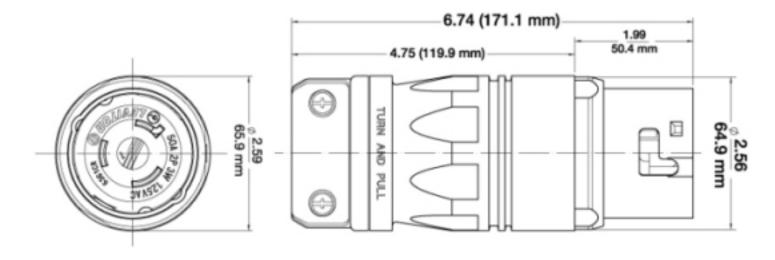

### SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

**Leviton Manufacturing Co., Inc.**201 North Service Road, Melville, NY 11747
Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 · FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2012-2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

\*Buy American Compliant Logo -- The American Recovery And Reinvestment Act of 2009 ("ARRA") provides federal grants and loans for projects throughout the country. Section 1605 of the Act, named the "Buy American" provision, requires that certain materials and manufactured products used in projects funded by the Act be manufactured in the United States. The appearance of the Recovery Act Logo in relation to a Leviton product is only intended to reflect that such product may be used in an ARRA funded project. It does not mean that such product or Leviton is sponsored or endorsed by, or that Leviton receives funds from, the federal government or the Recovery Accountability and Transparency Board. Nothing in Leviton's use of the logo is intended to suggest anything regarding the requirements for funding under ARRA.

