

Strippers, Cutters & Crimpers

Manufactured with the needs of the professional tool user in mind, Klein strippers, cutters, and crimpers are designed to get jobs done with precision and quality.

For Professionals...
Since 1857™



Wire Strippers/Cutters

KLEIN-KURVE™

Features:

KLEIN-KURVE™

Klein-Kurve®
comfort grip handles.

Wire looping and bending holes.

Strong gripping
serrated nose for easy
bending, shaping,
and pulling of wire.

Screw shearing holes.

Coil spring provides
fast self-opening action.

Double dipped
comfort grips.



Handy closure lock for convenient storage.

Precision ground stripping holes.

Wire Strippers/Cutters

Additional Features:

- Easy-to-read markings.
- Precision shear-type blades.
- Cleanly shears 6-32 and 8-32 screws.
- Cat. No. 11054GLW features glow in the dark grips to easily locate your tool in dark or low lit areas.



11054



11054GLW

Glow in the Dark Grips

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Screw Shearing	Weight (lbs.)
11053	blue/red	7-1/8" (181 mm)	6 - 12 AWG stranded (10 mm ² - 2.5 mm ²)	6-32 & 8-32	.34
11054	blue/white	7-1/8" (181 mm)	8 - 16 AWG solid (8.4 mm ² - 1.3 mm ²) & 10 - 18 AWG stranded (5.3 mm ² - .82 mm ²)	6-32 & 8-32	.34
11054GLW	glow	7-1/8" (181 mm)	8 - 16 AWG solid (8.4 mm ² - 1.3 mm ²) & 10 - 18 AWG stranded (5.3 mm ² - .82 mm ²)	6-32 & 8-32	.34
11055	blue/yellow	7-1/8" (181 mm)	10 - 18 AWG solid (4.0 mm ² - .75 mm ²) & 12 - 20 AWG stranded (2.5 mm ² - .50 mm ²)	6-32 & 8-32	.34
11057	blue/red	7-1/8" (181 mm)	20 - 30 AWG solid (.50 mm ² - .14 mm ²) & 22 - 32 AWG stranded (.34 mm ² - .05 mm ²)	6-32 & 8-32	.32

Dual NM Cable Strippers/Cutters

Additional Features:

- 12/2 and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 12 and 14 AWG solid wire.
- Precision shear-type blades for square, clean cuts on solid copper wire.
- Narrow nose fits into tight places.



K1412



Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
K1412	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.


Wire Strippers/Cutters

Dual NMD-90 Cable Strippers/Cutters KLEIN-KURVE™

Additional Features:

- Quickly removes outer jacket of **Canadian** NMD-90 Romex® Cable.
- Strips, cuts, and loops 12 & 14 AWG solid wires.
- Strips, cuts, and loops 14 & 16 AWG stranded wires.
- Cleanly shears 6-32 and 8-32 screws.

Romex® is a registered trademark of Southwire Company.



K1412CAN

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NMD-90 Cable	Screw Shearing	Weight (lbs.)
K1412CAN	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²) 14 & 16 AWG stranded (1.5 mm ² & 1.0 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

Romex® is a registered trademark of Southwire Company.

Features:

Textured handles provide a firm, comfortable grip.


Spring loaded for self-opening action.

Wire looping and bending holes.

Black-oxide finish resists corrosion.

Easy-to-read wire gauge markings on both sides for stripping in either direction.

Precision-ground stripping holes for easy removal of insulation.

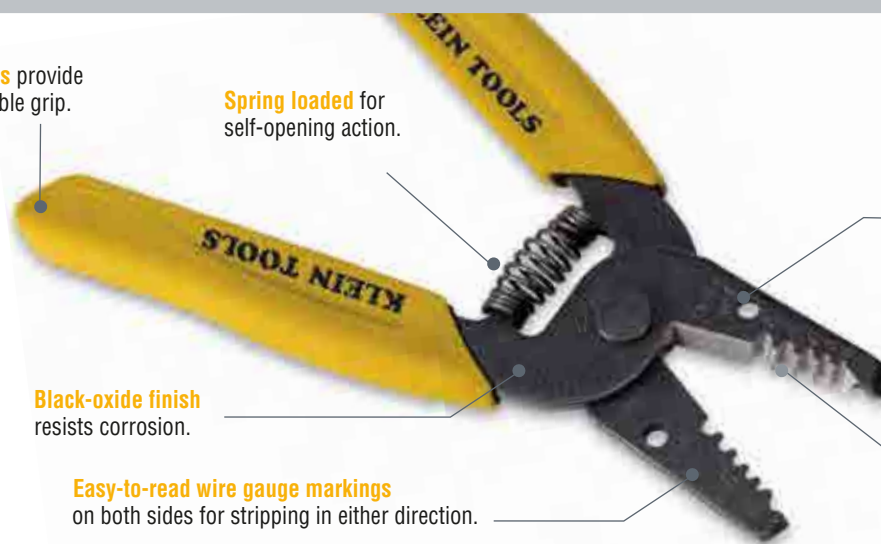

Wire Strippers/Cutters

Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do NOT use for cutting steel wire or screws.

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11045	yellow	6-1/4" (159 mm)	10 - 18 AWG solid (4.0 mm ² - .75 mm ²)	.27
11046	red	6-1/4" (159 mm)	16 - 26 AWG stranded (1.0 mm ² - .14 mm ²)	.27
11047	yellow	6-1/4" (159 mm)	22 - 30 AWG solid (.34 mm ² - .05 mm ²)	.27
11049	red	6-1/4" (159 mm)	8 - 16 AWG stranded (6 mm ² - 1.0 mm ²)	.27



11045

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

Wire Strippers/Cutters

Dual-Wire Stripper/Cutter

Additional Features:

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do NOT use for cutting steel wire or screws.

Cat. No.	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
11048	10, 12, 14 AWG solid (4.0 mm ² , 2.5 mm ² , 1.5 mm ²)	yellow	6-1/4" (159 mm)	.27



11048

Wire Stripper/Cutters

- Strips six standard wire sizes without nicking wire.
- Scissors action of 1/2" (13 mm) wide cutter makes clean cuts with little effort.
- Serrated nose jaws to bend, shape or pull wire; holes for looping wire ends.
- Spring-loaded for self-opening action.
- Comfortable, plastic-covered handles.

Cat. No.	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
1011	10 – 20 AWG solid (4.0 mm ² – .50 mm ²) 12 – 22 AWG stranded (2.5 mm ² – .34 mm ²)	blue	6-1/8" (156 mm)	.23
1011M	0.15 – 4.0 mm ² stranded wire	blue	6-1/8" (156 mm)	.23



1011

Adjustable Wire Strippers/Cutters – Solid and Stranded Wire

- A handy, light, compact tool for stripping insulation.
- Convenient hole for looping or bending wire.
- Black-oxide finish with plastic-dipped handles.
- Cuts, strips, and loops 12-26 solid and stranded wire.
- Adjustable slide stop with set screw for repeat stripping work.

Cat. No.	Hold-Open Spring	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
1004	yes	12 – 26 AWG solid & stranded (2.5 mm ² – 0.14 mm ²)	yellow	5" (127 mm)	.18
1003	no	12 – 26 AWG solid & stranded (2.5 mm ² – 0.14 mm ²)	yellow	5" (127 mm)	.14



1004

Adjustable Wire Stripper/Cutter – Solid and Stranded Wire

- Simply dial desired wire size for fast, easy stripping.
- Adjustable tool makes short work of cutting and stripping operations.
- Finely honed nose cutter easily gets into tight areas.
- Wire gauge dial sets stripping dies to proper size, helps prevent nicked wire.
- Black-oxide finish with plastic-dipped handles.
- Spring-loaded design – tool opens automatically after each action.

Cat. No.	Strips and Cuts	Handle Color	Overall Length	Weight (lbs.)
74007	12 – 24 AWG solid & stranded (2.5 mm ² – .25 mm ²)	yellow	5-1/8" (130 mm)	.15



74007

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

Wire Strippers/Cutters

Katapult® Wire Stripper/Cutter KATAPULT®

- Quick and easy wire stripping and cutting.
- Compound action wire stripping: grip and strip via single action squeezing motion.
- Precision machined stripping holes easily remove jacket insulation without damaging the wire.
- Removes up to 1" (24 mm) in length of the insulation layer (jacket layer) in a single step.
- Tension loaded wire-grip gently holds the cable in place while retaining the cable geometry.
- Recoil spring design returns tool to ready position upon cycle completion.
- Cast alloy chassis with heavy-duty Ecoat finish for corrosion resistance and durability.
- Additional precision machined steel cutting blades available.

Cat. No.	Handle Color	Strips	Overall Length	Weight (lbs.)
11063W	blue/black	8-22 AWG solid (6 mm ² – .34 mm ²) 10-22 AWG stranded (6 mm ² – .34 mm ²)	6.6" (168 mm)	.75



SOLID
8 – 22 AWG

STRANDED
10 – 24 AWG

11063W

Cat. No.	Weight
Replacement Blades Sets	
VDV110-046	RG6 coaxial cable replacement blades .01
11082	10 AWG max wire cutting blades .01
11073	8 – 22 AWG (6.0 mm ² – .34 mm ²) .01
11074	16 – 26 AWG (1.0 mm ² – .14 mm ²) .01
11063KNF	0.15 mm – 4.0 mm .01
Wire Stop/Gauge	
11081	adjustable wire stop .01

Self-Adjusting Wire Stripper/Cutter

- Strips 10-20 AWG solid, 12-22 AWG stranded, and 12/2 & 14/2 Romex® wire.
- Adjustable stopper to control the length of the core strip.
- Convenient wire cutter in handle.
- Grooved grips are designed for added comfort.



SOLID
10 – 20 AWG

STRANDED
12 – 22 AWG

11061

Cat. No.	Strips / Cuts	Handle Color	Overall Length	Weight (lbs.)
11061	10-20 AWG solid 12-22 AWG stranded 12/2 & 14/2 Romex®	blue/black	8.25" (210 mm)	0.79

Romex® is a registered trademark of Southwire Company.

NM Cable Ripper

- Easy-to-use cable ripper.
- Slit the outer jacket of Romex® cable (all sizes) and other nonmetallic (type NM) sheathed cable.
- Measure conductor wire gauge.



74017

Cat. No.	Overall Length	Slits	Measures Wire Gauge	Weight (lbs.)
74017	4" (102 mm)	all sizes of Romex® and NM	8 – 14 AWG (6 mm ² – 1 mm ²)	.08

Romex® is a registered trademark of Southwire Company.



All dimensions are in inches and (millimeters).

www.kleintools.com

See page 296 for additional information on warnings.



Combination Wire-Stripping and Cutting Tools

Multi-Purpose 6-in-1 Tool

- Cleanly shears bolts.
- Easily cuts and strips wire.
- Measures stud sizes.
- Gauges wire sizes.
- Crimps insulated terminals.
- Comfortable plastic-covered handles.

SOLID
8-22 AWG

STRANDED
10-26 AWG



1000

Cat. No.	Strips and Cuts	Bolt Sizes	Handle Color	Overall Length	Weight (lbs.)
1000	8-22 AWG solid (6.0 mm ² - .34 mm ²), 10-26 AWG stranded (4.0 mm ² - 0.14 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	7-3/4" (197 mm)	.44

Multi-Purpose Electrician's Tool

- Two wire cutters—one at tip, the other halfway back near stripping holes—double the utility of this tool.
- Color-coded crimping dies for 8-22 AWG insulated and non-insulated terminals.
- Cleanly shears bolts.
- Pivot nut adjusts tension.
- Wire-looping holes near tip.
- Full-sized, plastic-covered cushioned handles for comfort.

SOLID
8-26 AWG

STRANDED
10-26 AWG



1001

Cat. No.	Strips and Cuts	Bolt Sizes	Handle Color	Overall Length	Weight (lbs.)
1001	8-22 AWG solid (6.0 mm ² - .34 mm ²) 10-26 AWG stranded (4.0 mm ² - 0.14 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	8-1/2" (216 mm)	.47

Long-Nose Multi-Purpose Tool

- Easily cuts and strips wire.
- Narrow, serrated pliers nose to pull, loop, and bend wire.
- Long, curved cutting blade.
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places.
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals.
- Cleanly shears bolts.
- Plastic-covered cushioned handles for comfort.

SOLID
10-20 AWG

STRANDED
12-22 AWG



1010

Cat. No.	Strips and Cuts	Bolt Sizes	Connectors	Handle Color	Overall Length	Weight (lbs.)
1010	10-22 AWG (4.0 mm ² - .34 mm ²) 12-24 AWG (2.5 mm ² - .34 mm ²)	4-40, 5-40, 6-32, 8-32, 10-32, 10-24	10-22 gauge	blue	8-1/4" (210 mm)	.43

Crimping Tools

Crimping/Cutting Tools – Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



1005

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
1005	10-22 AWG	red	9-3/4" (248 mm)	.80
Journeyman™ Series – Dual-material handles				
J1005	10-22 AWG	red/black	9-3/4" (248 mm)	.84

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

Crimping Tools

Crimping/Cutting Tool – Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Hot-riveted joint for smooth action and no handle wobble.




1006

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
1006	10 – 22 AWG	black	9-3/4" (248 mm)	.85

Large Crimp Tool –Compound-Action

- Crimps #6-4/0 AWG battery lugs and terminals.
- Ultra-comfortable hand grips for easy use.
- All-in-one, integral crimp nest. No removable parts or rotating dies.
- High-leverage handles and compound-action mechanism for superior mechanical advantage.
- Adjustment screw allows user to control crimp depth.

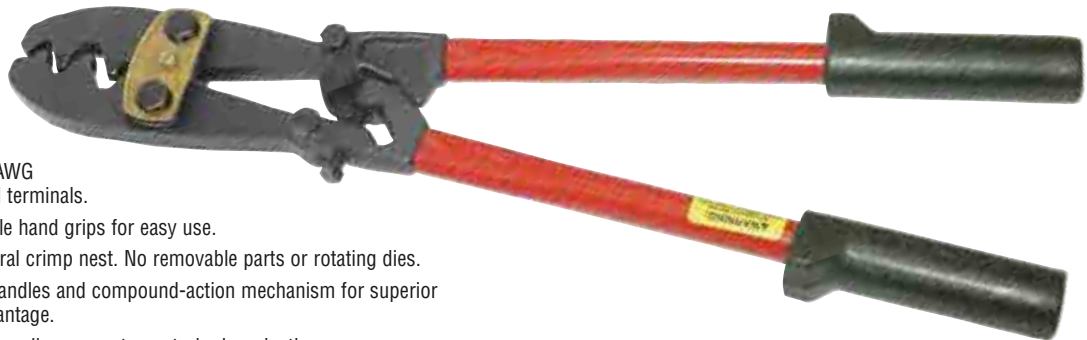

2006

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
2006	#6 – 4/0 AWG battery lugs and terminals	red	19-1/2" (495 mm)	3.80

Ratcheting Crimpers

Ratcheting Crimper – Insulated Terminals

- Cat. No. T1715 full cycle ratcheting crimper crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Cat. No. T1710 compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Cat. No. T1710 features special locator to quickly position terminal to double crimp.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.



T1715



T1710

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
T1715	22 – 10 AWG	black	9" (229 mm)	1.05
T1710	10 – 22 AWG	black	9" (229 mm)	1.05

All dimensions are in inches and (millimeters).



www.kleintools.com

See page 296 for additional information on warnings.

