

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	LED				Fluorescent			
1085 Perma White	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Ceiling Type	Lamping	Height
	<b>1001LED</b> <b>1001LEDEM</b> <b>1000LEDREM</b> <b>L56LED</b>	Non-IC Non-IC EM Non-IC Remodeler Non-IC Retrofit	LED LED LED LED	6 7/8" 6 7/8" 6 7/8" 6 7/8"	<b>1001F13U Series</b>	UniFrame™ Non-IC	(1) Triple 13W (GX24q-1)	6"
		Incandescent			<b>1001F18U Series</b>	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	6"
	<b>1000P1</b> <b>1002P1</b> <b>1003R</b>	Non-IC Non-IC Non-IC Remodeler	60W A19	6 7/8" 6 7/8"	<b>1004F13 Series</b>	IC	(1) Quad/Triple 13W (GX24q-1)	7 1/2"
	<b>1000IC</b> <b>1000AICM</b> <b>1004ICX/N</b>	IC AirSeal® IC AirSeal® IC	40W A19	7 5/16" 7 5/16" 7 1/4"	<b>1004F18 Series</b>	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	<b>1004IC/N</b> <b>1004ICR</b> <b>1004SIC/N</b> <b>1004SICR</b>	Non-IC Non-IC Remodeler Shallow Non-IC Shallow Non-IC Remodeler	40W A19	7 1/2" 7 1/2" 5 1/2" 5 1/2"	<b>1004F26 Series</b>	IC	(1) Quad/Triple 26W (GX24q-3)	7 1/2"
					<b>1001F13ICU/N</b>	Performance IC	(1) Triple 13W (GX24q-1)	7 1/4"
					<b>1001F18ICU/N</b>	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
					<b>1910XFH1</b>	Conversion Kit	(1) Quad 13W (GX23-2)	7 1/2"

### Features

- Reflector:** Hydroformed aluminum, .040" thick (18 ga.) non-yellowing resistant, scratch resistant Perma White finish, 88% reflectance; provides smooth wash of light over wall surface without scallops or shadows; white trim flange.
- Aperture Plate:** Molded high heat polymer white finish.
- Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

### Options & Accessories


**Spread Lens:** L56WWLENS - Proprietary spread lens for use with combination of wall washer optics and LED Frame-In Kits.

### Labels

UL (Suitable for Damp Locations), I.B.E.W.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2011 Philips Group • 01111

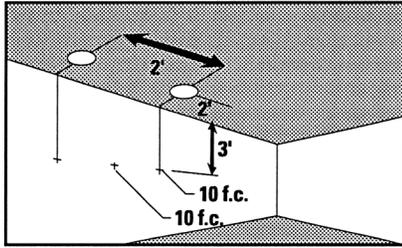

### LIGHTING DATA

EXAMPLE: Multiple 60W A19 units, located 2' from wall and 2' on center, provided illumination on the wall 3' down from the ceiling of 10 f.c. beneath and 10 f.c. between the fixtures.

### FOOTCANDLES ON WALL FROM MULTIPLE UNITS

		60W A19					
		UNITS 2 FEET FROM WALL			UNITS 3 FEET FROM WALL		
		1	2	3	1	2	3
DISTANCE FROM CEILING, FT.	1	9	8	9	6	5	6
	2	11	11	11	8	7	8
	3	10	10	10	7	7	7
	4	8	8	8	6	6	6
	5	6	5	6	4	4	4
	6	4	4	4	3	3	3
	7	3	3	3	2	2	2
	8	2	2	2	2	2	2
	9	2	1	2	1	1	1

		13W Quad Tube					
		UNITS 2 FEET FROM WALL			UNITS 3 FEET FROM WALL		
		1	2	3	1	2	3
DISTANCE FROM CEILING, FT.	1	6	5	6	5	3	5
	2	10	10	10	7	6	7
	3	8	8	8	6	5	6
	4	6	6	6	4	4	4
	5	4	4	4	3	3	3
	6	3	2	3	2	2	2
	7	2	2	2	1	1	1
	8	1	1	1	1	1	1
	9	1	1	1	1	1	1

Footcandle values are averaged and rounded off and are based on a minimum of five units.

For fixture-to-wall distance, other than those shown, use maximum of 1 of 1 spacing (distance between fixtures not more than distance to wall) for best results.

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle values by the ratio of the lumens of the two lamps.

Job Information	Type:
-----------------	-------

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 Philips Group • N0708