




# PIR Occupancy / Vacancy Sensor Switch

for 120V

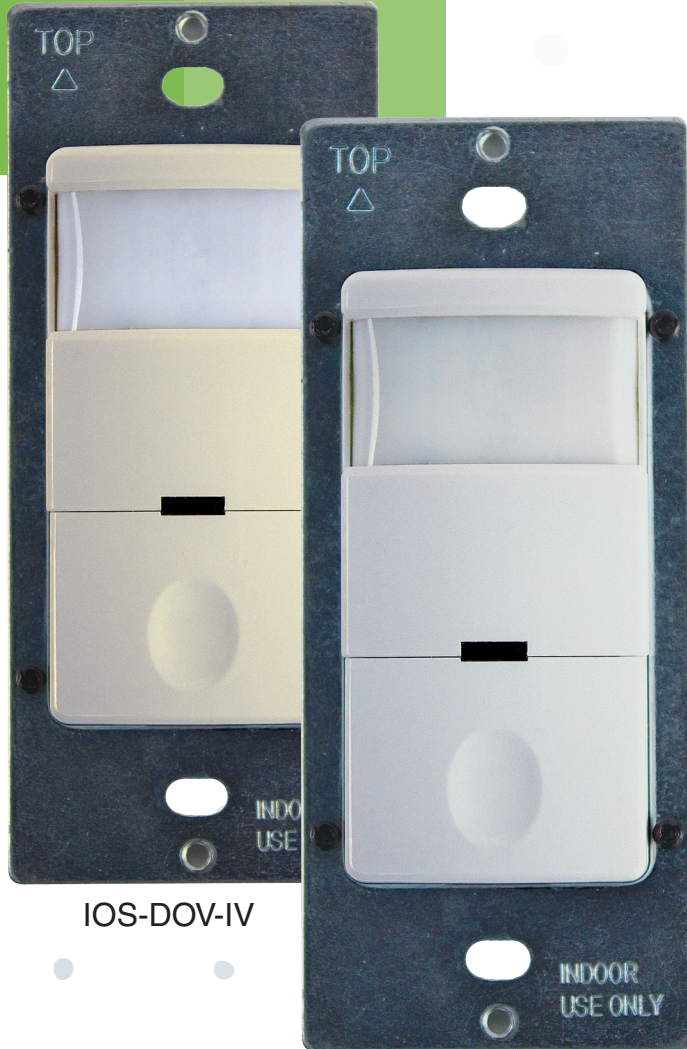

IOS-DOV-IV

IOS-DOV-WH

## Features:



- Zero crossing function increases longevity
- Automatic ON/OFF Control
- Push button ON/OFF
- Time delay OFF ranging from 15 seconds to 30 minutes
- Passive Infrared technology
- Adjustable sensitivity settings
- Standard decorator wall plate included
- ISO9001 Registered manufacturing facility
- Meets California Title 24 Requirements
- UL/cUL Listed device
- Five Year Limited Warranty



### *Ideal for:*

Offices, Copy Rooms, Break Rooms  
Storage Closets, Small Restrooms,  
Small Conference Rooms,  
Maintenance Closets



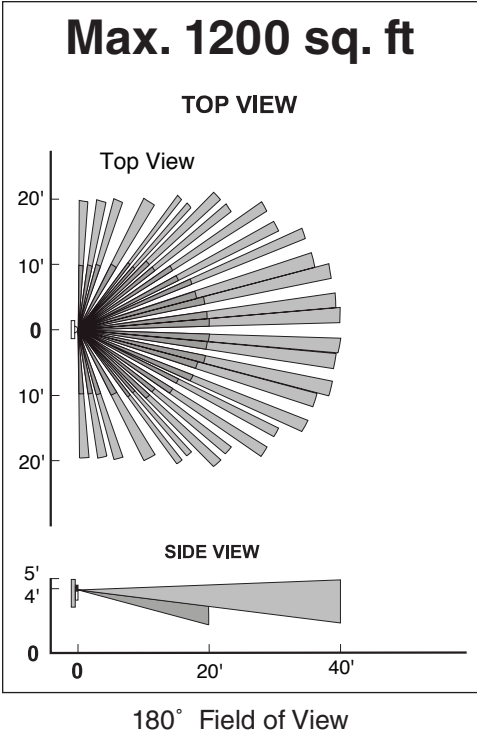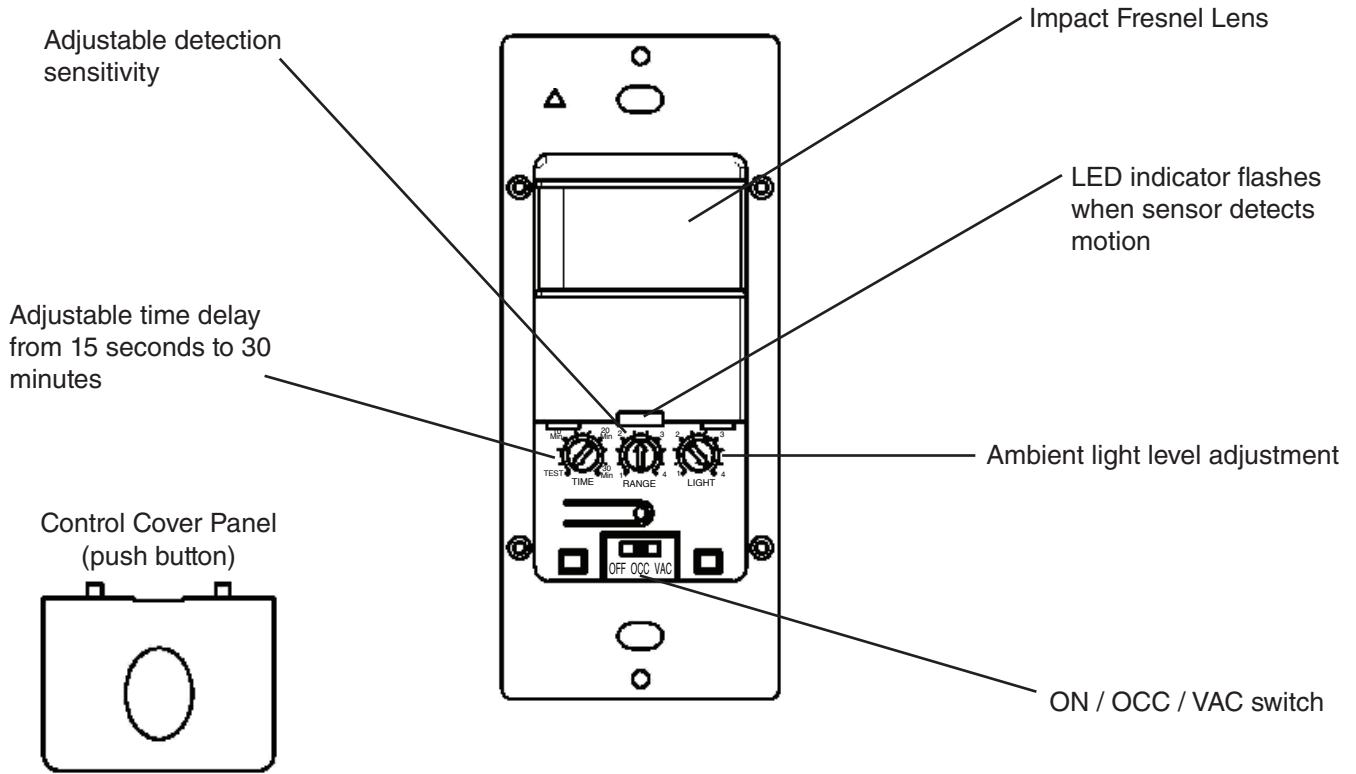

**Part #** IOS-DOV

---

**Desc** Single Pole, Decorator Wall Switch  
PIR Occupancy / Vacancy Sensor for 120V

**Rating** Incandescent / Tungsten: 800W-120VAC  
Resistive load: 800W-120VAC  
Fluorescent / Ballast: 800VA-120VAC  
Motor: 1/4HP-120VAC  
Time Delay: 15 Sec to 30 Min  
Light Level: 30 Lux-Daylight  
Operation Temperature: 32°F--131°F / 0-55°C  
No minimum Load required.  
**Can be used with electronic fluorescent ballasts**

**Coverage** 180°, Max 1200sq. ft

**Color** White, Ivory

**Five Year Limited Warranty**

**Model Ordering Info:**

Series	Style	Type	Finish
IOS	D	OV	WH
Intermatic	Decorator	Occupancy/	White
Occupancy	Plate	Vacancy	
Sensor			

**IV**  
Ivory