

FEATURES & SPECIFICATIONS

INTENDED USE — Ideal for applications requiring attractive, thin-profile, die-cast aluminum signage. **CONSTRUCTION** — Die-cast aluminum housing, thin profile. Clear lacquer, brushed aluminum inhibits fingerprints and other surface contaminants. Also available with white finish.

Universal directional chevron knockouts are completely concealed and easily removed.

Letters are 6" high with 3/4" stroke, with 100 ft. viewing distance rating, based upon UL924 standards.

OPTICS — The typical life of the exit LED lamp is 10 years.

Low energy consumption: one watt (120/277V).

ELECTRICAL — Dual-voltage input capability 120 or 277 VAC. Emergency models are provided with test switch, status indicator and a battery that automatically recharges when normal power is restored. Battery: Emergency model provided with sealed, maintenance-free, nickel-cadmium battery that delivers 90 minutes of emergency power.

INSTALLATION — Universal mounting (top, end or back). Mounting knockouts and hole plugs are easily removed. Die-cast aluminum canopy is provided.

LISTINGS — UL Listed standard. Damp location listing 32°F to 122°F (0°C to 50°C) standard. Meets UL 924, NFPA 101 (current Life Safety Code), NFPA 70-NEC and OSHA illumination standards.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





Thin Die-Cast Aluminum Exit



	L
	Г

LED Lamps



Example: TLE 1 R EL N

ORDERING INFORMATION All configurations of this product are considered "standard" and have short lead times.

TLE				
Family	Housing color	Number of faces	Letter color	Operation
TLE	(blank) Brushed aluminum W White	 Single face Double face 	R Red G Green	(blank)AC only; 120/277VEL N120/277 VAC input with nickel-cadmium battery back-up

Туре

Accessories: Order as separate catalog number.		
ELA WG1 ELA WGEXT ELA WGEXE	Back-mount wireguard ¹ Top-mount wireguard ¹ End-mount wireguard ¹	

SPECIFICATIONS

ELECTRICAL

Primary Circuit				
Туре	Typical LED life	Supply voltage	Input watts	Max. amps
Red LED, AC only	10 years	120	1	0.1
		277	1	0.1
Green LED, AC only	10 years	120	1	0.1
		277	1	0.1
Red LED, emergency	10 years	120	1	0.1
		277	1	0.1
Green LED, emergency	10 years	120	1	0.1
		277	1	0.1

BATTERY (EL N option)

Sealed Nickel-Cadmium			
Shelf life ²	Maintenance ³	Optimum temperature ⁴	
3 years	None	32° - 122°F (0° - 50°C)	

Notes


1 Based on continuous operation. The typical life of the exit LED lamp is 10 years.

2 At 77°F (25°C).

- 3 All life safety equipment, including emergency lighting path of egress, must be maintained, serviced and tested in accordance with all National Fire Protection Association and local codes. Failure to perform the required maintenance, service or testing could jeopardize the safety of occupants and will void all warranties.
- 4 Optimum ambient temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity.

MOUNTING All dimensions are inches (centimeters).

Shipping weight: 3 lbs. (1.3 kgs.).

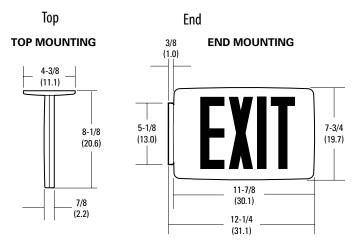

Backplate

BACK MOUNTING

