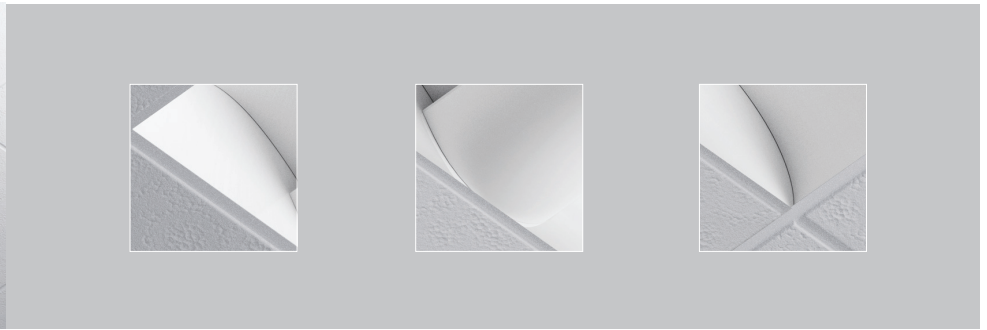
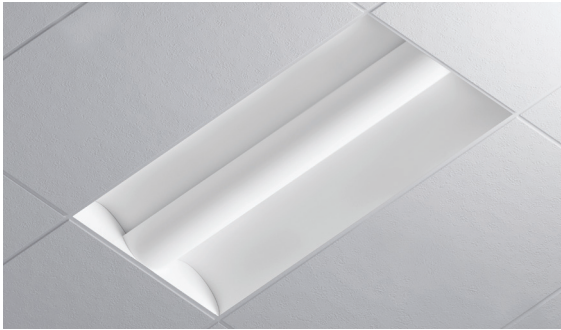


FEATURES

The ODVH-LED blends the traditional look of an architectural volumetric troffer with a center acrylic diffuser, resulting in unmatched optical performance that delivers the latest in LED technology and lens innovation. The integrated LEDs are strategically angled behind the center indirect acrylic diffuser to maximize lumen output and provide even illumination across the full face of the luminaire. The consistency of the volumetric effect results in optimized visual comfort, enhancing the quality of illumination. The combination of energy savings and optical performance creates the ideal choice for educational, medical, office and retail spaces.

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
10000	10116	82.1 W
9000	8780	71.8 W
8000	7647	59.4 W
6000	6256	50 W
5000	5336	42.2 W
4000	4366	33.9 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

LUMENS	4000, 5000, 6000, 8000, 9000, 10000
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	90+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4', 1'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFTB, LUT2W, DIMST, ELDO10.1, ELDO10.1, DALI.1
EMERGENCY	10W - Up to 1000L output (Bodine BSL310) 20W - Up to 2000L output (Bodine BSL20)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The center acrylic diffuser can be removed, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only. Available on all luminaires up to 40 watts.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%. Available on all luminaires up to 100 watts.

DALI - DALI DT6, DT8 dimming down to 1%. Available on all luminaires up to 100 watts.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%. Available on all luminaires up to 100 watts.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)



LED DYNAMIC PLATFORM OPTIONS

Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.

Listed for DLC, California Title 24 compliant.

Example: **24-ODVH-LED-4000L-DIM10-MVOLT-30K-85**

24	ODVH	LED								
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS	
24 - 2' X4'	ODVH - LED Volumetric Troffer	LED	4000L - 4000 lumens 5000L - 5000 lumens 6000L - 6000 lumens 8000L - 8000 lumens 9000L - 9000 lumens 10000L - 10000 lumens	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLume LUT2W - Lutron 2Wire LUTFTB - Lutron Fade to Black ELDO10.1 - EldoLED 0-10V ELDODALI - EldoLED DALI ELDODMX - EldoLED DMX	MVOLT 347* *Consult factory for details	30K 35K 40K 50K	90	0-EMG-LED-10W 0-EMG-LED-20W	24FK - 2'x4' Flange Kit FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance FS-PPV2 - Fixture Sensor Power Pack FD-301 - Daylight Dimming Photosensor FS-305RC - Low Voltage Motion Sensor FS-355 - Line Voltage Motion Sensor LMFC-011 - Digital Lighting Manager	

24-ODVH-LED-4000L-DIM10-MVOLT-40K-85

INPUT WATTS: **33.9**

LUMENS: **4366**

CRI: **90**


EFFICACY: **129**

CCT: **4000K**

TEST NO.: **EL121818**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	493.39	N.A.	11.30
0-30	1052.95	N.A.	24.10
0-40	1738.83	N.A.	39.80
0-60	3174.72	N.A.	72.70
0-80	4179.08	N.A.	95.70
0-90	4333.48	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1663	1812	1960
55	1576	1841	2074
65	1487	1919	2249
75	1314	2087	2568
85	959	2406	2854

Lumens Per Zone

Zone	Lumens
0-10	127.38
10-20	366.01
20-30	559.55
30-40	685.89
40-50	733.99
50-60	701.89
60-70	591.52
70-80	412.84
80-90	154.40

Candela Tabulation

0	1	2	3	4	5	6	7	8	9
0	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
10	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
20	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
30	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
40	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
50	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
60	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
70	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
80	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02
90	1345.82	1339.68	1286.44	1186.82	1042.25	874.72	672.41	467.53	253.02

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
	1	107	102	97	93	104	100	95	91	95	91	88	91	88	85	87	85	83	80	
	2	97	88	80	74	94	86	79	73	82	76	71	79	74	70	75	71	68	66	
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	54	
	4	80	67	58	51	78	66	57	51	63	56	50	61	54	49	59	53	48	46	
	5	73	60	51	44	71	59	50	43	57	49	43	54	48	42	52	46	42	39	
	6	68	54	44	38	66	53	44	38	51	43	37	49	42	37	47	41	36	34	
	7	63	49	40	33	61	48	39	33	46	38	33	45	38	32	43	37	32	30	
8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	33	29	27		
9	54	41	32	26	53	40	32	26	39	31	26	38	31	26	37	30	26	24		
10	51	37	29	24	50	37	29	24	36	29	24	35	28	24	34	28	23	22		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-ODVH-LED-5000L-DIM10-MVOLT-40K-85

INPUT WATTS: **42.2**

LUMENS: **5336**

CRI: **90**


EFFICACY: **126**

CCT: **4000K**

TEST NO.: **EL121815**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	603.98	N.A.	11.30
0-30	1288.89	N.A.	24.20
0-40	2128.34	N.A.	39.90
0-60	3879.66	N.A.	72.70
0-80	5106.88	N.A.	95.70
0-90	5295.34	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2399	2184	1989
55	2538	2216	1888
65	2752	2310	1744
75	3138	2528	1495
85	3480	3120	881

Lumens Per Zone

Zone	Lumens
0-10	155.93
10-20	448.05
20-30	684.91
30-40	839.44
40-50	896.39
50-60	854.94
60-70	722.78
70-80	504.43
80-90	188.46

Candela Tabulation

0	1	2	3	4	5	6	7	8	9
0	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
10	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
20	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
30	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
40	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
50	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
60	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
70	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
80	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230
90	1647.545	1642.570	1599.700	1520.170	1407.270	1261.830	1083.080	865.090	604.230

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAPACITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	107	102	97	93	104	100	95	91	95	91	88	91	88	85	87	85	83	80			
	2	97	88	80	74	94	86	79	73	82	76	71	79	74	70	75	71	68	66			
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	54			
	4	80	67	58	51	78	66	57	51	63	56	50	61	54	49	59	53	48	46			
	5	73	60	51	44	71	59	50	43	57	49	43	54	48	42	52	46	42	39			
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	47	41	36	34			
	7	63	49	40	33	61	48	39	33	46	38	33	45	38	32	43	37	32	30			
	8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	33	29	27			
	9	54	41	32	26	53	40	32	26	39	31	26	38	31	26	37	30	26	24			
	10	51	37	29	24	50	37	29	24	36	29	24	35	28	24	34	28	23	22			

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-ODVH-LED-6000L-DIM10-MVOLT-40K-85

INPUT WATTS: **50**

LUMENS: **6256**

CRI: **90**


EFFICACY: **125**

CCT: **4000K**

TEST NO.: **EL121813**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	708.78	N.A.	11.30
0-30	1512.46	N.A.	24.20
0-40	2497.47	N.A.	39.90
0-60	4550.26	N.A.	72.70
0-80	5987.39	N.A.	95.70
0-90	6208.26	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2812	2563	2335
55	2976	2599	2216
65	3227	2709	2047
75	3676	2966	1748
85	4084	3671	1021

Lumens Per Zone

Zone	Lumens
0-10	182.99
10-20	525.79
20-30	803.68
30-40	985.01
40-50	1051.79
50-60	1001.00
60-70	845.63
70-80	591.50
80-90	220.87

Candela Tabulation

	0
0	1933.518
5	1927.410
15	1876.630
25	1783.290
35	1650.870
45	1479.240
55	1269.720
65	1014.570
75	707.810
85	264.800
90	29.740

24-ODVH-LED-8000L-DIM10-MVOLT-40K-85

TEST NO.: **EL121809**

INPUT WATTS: **59.4**

LUMENS: **7647**


CRI: **90**

EFFICACY: **129**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	865.33	N.A.	11.30
0-30	1847.51	N.A.	24.20
0-40	3052.45	N.A.	39.90
0-60	5565.9	N.A.	72.80
0-80	7319.64	N.A.	95.70
0-90	7589.54	N.A.	99.30

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2922	3248	3469
55	2806	3321	3672
65	2635	3491	3979
75	2368	3837	4553
85	1770	4734	4867

Lumens Per Zone

Zone	Lumens
0-10	223.28
10-20	642.04
20-30	982.18
30-40	1204.94
40-50	1287.71
50-60	1225.74
60-70	1031.7
70-80	722.04
80-90	269.90

Candela Tabulation

0	0
0	2358.962
5	2359.680
15	2269.180
25	2092.890
35	1840.500
45	1537.060
55	1197.100
65	828.510
75	455.890
85	114.790
90	12.940

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	80			
	2	97	88	80	74	94	86	79	73	82	76	71	79	74	70	75	71	68	66			
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	54			
	4	80	67	58	51	78	66	57	51	63	56	50	61	54	49	59	53	48	46			
	5	74	60	51	44	71	59	50	43	57	49	43	54	48	42	52	46	42	39			
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	47	41	36	34			
	7	63	49	40	33	61	48	39	33	46	38	33	45	38	32	43	37	32	30			
	8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	37	29	27			
	9	54	41	32	27	53	40	32	26	39	31	26	38	31	26	37	30	26	24			
	10	51	37	29	24	50	37	29	24	36	29	24	35	28	24	34	28	23	22			

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-ODVH-LED-9000L-DIM10-MVOLT-40K-85

TEST NO.: **EL121807**

INPUT WATTS: **71.8**

LUMENS: **8780**


CRI: **90**

EFFICACY: **122**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	993.64	N.A.	11.30
0-30	2121.44	N.A.	24.20
0-40	3505.05	N.A.	39.90
0-60	6391.49	N.A.	72.80
0-80	8402.48	N.A.	95.70
0-90	8713.71	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3362	3732	3990
55	3225	3816	4217
65	3034	4010	4574
75	2719	4412	5224
85	2039	5360	5577

Lumens Per Zone

Zone	Lumens
0-10	256.36
10-20	737.28
20-30	1127.8
30-40	1383.61
40-50	1478.78
50-60	1407.66
60-70	1183.22
70-80	827.75
80-90	311.24

Candela Tabulation

0	0
0	2708.517
5	2713.709
15	2609.280
25	2406.048
35	2118.019
45	1768.627
55	1376.141
65	954.010
75	523.584
85	132.182
90	15.197

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	80			
	2	97	88	80	74	94	86	79	73	82	76	71	79	74	70	75	71	68	66			
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	54			
	4	80	67	58	51	78	66	57	51	63	56	50	61	54	49	59	53	48	46			
	5	74	60	51	44	71	59	50	43	57	49	43	54	48	42	52	46	42	39			
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	47	41	36	34			
	7	63	49	40	33	61	48	39	33	46	38	33	45	38	32	43	37	32	30			
	8	58	44	36	30	57	44	35	29	42	35	29	41	34	29	40	33	29	27			
	9	54	41	32	27	53	40	32	26	39	31	26	38	31	26	37	30	26	24			
10	51	37	29	24	50	37	29	24	36	29	24	35	28	24	34	28	23	22				

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

24-ODVH-LED-10000L-DIM10-MVOLT-40K-85

TEST NO.: **EL101875**

INPUT WATTS: **82.1**

LUMENS: **10116**


CRI: **90**

EFFICACY: **123**

CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1158.95	N.A.	11.50
0-30	2470.78	N.A.	24.40
0-40	4073.58	N.A.	40.30
0-60	7384.47	N.A.	73.00
0-80	9674.33	N.A.	95.60
0-90	10038.17	N.A.	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3875	4274	4611
55	3654	4295	4829
65	3385	4437	5221
75	2840	4863	5957
85	1838	5267	5694

Lumens Per Zone

Zone	Lumens
0-10	299.32
10-20	859.63
20-30	1311.83
30-40	1602.8
40-50	1702.46
50-60	1608.43
60-70	1345.89
70-80	943.97
80-90	363.83

Candela Tabulation

0	0
0	3164.074
5	3170.790
15	3039.720
25	2793.750
35	2441.460
45	2038.120
55	1559.050
65	1064.330
75	546.810
85	119.160
90	6.830

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 0.20

RC		80%				70%				50%				30%			10%			0%
RW		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	101	101	101	99
	1	107	102	97	93	104	100	95	91	95	92	88	91	88	85	87	85	83	83	80
	2	97	88	81	74	94	86	79	73	82	76	72	79	74	70	76	72	68	66	
	3	88	77	68	61	85	75	67	60	72	65	59	69	63	58	66	61	57	55	
	4	80	68	58	51	78	66	58	51	64	56	50	61	55	49	59	53	48	46	
	5	74	60	51	44	71	59	50	44	57	49	43	55	48	42	53	47	42	40	
	6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	41	37	34	
	7	63	49	40	33	61	48	39	33	46	39	33	45	38	33	43	37	32	30	
	8	58	45	36	30	57	44	35	30	42	35	29	41	34	29	40	34	29	27	
	9	55	41	32	27	53	40	32	27	39	32	26	38	31	26	37	31	26	24	
10	51	38	30	24	50	37	29	24	36	29	24	35	28	24	34	28	24	22		

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

INTEGRATED SENSOR AND CONTROL OPTIONS

With the integration of controls, Elite Lighting now offers its products with controls-ready performance that increases energy efficiency, smarter space planning, and the enhancement of safety and productivity in the workplace. By utilizing these controls, Elite Lighting luminaires enable your customer's facility to run smarter, with the use of an easily controlled system through any platform.

Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON	PHILIPS	legrand
POWER PACK	☐ LEDRU - LED Relay Zone Controller 0-10V	☐ Lutron Vive FCJS-010 - Individual Fixture Control, 0 to 10 v	☐ CU-E3-1R	☐ ZL027-NOW - Power control module	☐ SRB	☐ LMFC-011
	☐ LEDDU - LED Zone Controller 0-10V	☐ Lutron Vive FCJS-ECO - Individual Fixture Control, Eco System	☐ SR Driver		☐ Philips Driver	☐ FS-PP-V2
REMOTE SENSOR			☐ SU-4E-01	☐ ZL00J-DOW - Sensor control module (Downlight Luminaires)	☐ SNS200-CMP	
			☐ SU-5E-CL			