



PRODUCT GUIDE



YOUR BEST SOLUTION™



CRC, one of the world's leading manufacturers of chemical maintenance products for over 55 years, has made a commitment to provide the best solutions for our customers. CRC can help meet the challenges of today's highly regulated environment by offering a full line of specialty chemical products custom-matched to meet every application need.

CRC always has the right solution for our customers' MRO challenges because we offer a broad range of products. We have over 800 SKUs in product categories including Precision Cleaners, Degreasers, Lubricants, Corrosion Inhibitors, and Sealants. Again and again, more professionals look to CRC for quality products and innovative solutions.

CRC is the only company in the industry to offer the **S.D.[L.]® – a Safety Data Sheet** printed on the reverse side of the product label. Of course, the information that starts with our label never stops. Just call our toll-free technical service line (800) 521-3168 or visit our website, www.crcindustries.com, for more product information and training.



The quality of our information is matched by the quality of our products. As an ISO-9001:2008 certified manufacturer, CRC places strict controls on every step of our product development and manufacturing process; starting with the finest raw materials and continuing with our consistent, quality manufacturing techniques. Becoming certified to ISO standards is not a requirement, but meeting ISO standards and continually gaining re-certification is an excellent example of our commitment to quality and consistency.

CRC has grown by addressing the needs of our customers, and our commitment to innovation and quality service will allow us to continue to be the one you call when you want the best. This **Product Guide** offers a look at quality products and problem solving programs offered by CRC.


TABLE OF CONTENTS

	Industrial Cleaners..... 6		Tool & Equipment Oils 48
	Industrial Precision Cleaners..... 6		Greases 50
	Heavy Duty Degreasers..... 9		Mold Releases 53
	HydroForce® Aqueous Cleaners 12		Insecticides 55
	Green Force® Aqueous Cleaners 14		Specialty Testing..... 56
	SmartWasher® Parts Cleaning System 16		Industrial Hand Cleaners 57
	Lubricants..... 18		Equipment..... 58
	Corrosion Inhibitors..... 30		Paints & Coatings..... 59
	Electrical Maintenance 32		Aviation Maintenance..... 61
	Electrical Precision Cleaners 32		Vehicle Maintenance..... 62
	Heavy Duty Degreasers..... 35		Marine Maintenance..... 66
	Electrical Cable Cleaners 37		Glossary of Term 71
	Electrical Lubricants 39		NSF Category Codes 72
	Metalworking 41		Indices 73
	Towels & Wipes..... 43		
	Sealants & Adhesives 44		
	Threadlockers 47		


PACKAGE SIZE GUIDE				
 6, 8, 12, 16, 20 & 24 oz aerosol can	 16 oz bottle	 2 oz & 4 oz tube	 8 oz spout can	 6 oz & 8 oz pressurized tube with Select-a-Bead™
 12, 16 & 20 oz aerosol trigger can	 16 oz stick	 6 oz & 8 oz pressurized tube	 1 & 5 gallon pail 35 pound pail	 16 oz & 20 oz aerosol can with Perma-Lock® actuator
 16 oz & 32 oz trigger spray bottle	 1 quart bottle	 12 oz & 16 oz cartridge	 55 gallon drum 400 pound drum	
 16 oz non-aerosol can w/trigger	 1 gallon bottle	 carded	 120 pound keg 275 gallon tote	 Repair Patches 3" x 6" 6" x 9" 9" x 12"
 16 oz non-aerosol spray bottle	 8 oz & 16 oz brush-top can	 wipes	 1 gallon tip & pour bottle	

CRC®, Sta-Lube®, K&W®, Marykate® and products denoted w/™ and ® are trademarks or registered trademarks of CRC Industries, Inc. SmartWasher® is a registered trademark of Chem-Free Corporation


LOOKING FOR A PRECISION CLEANER?

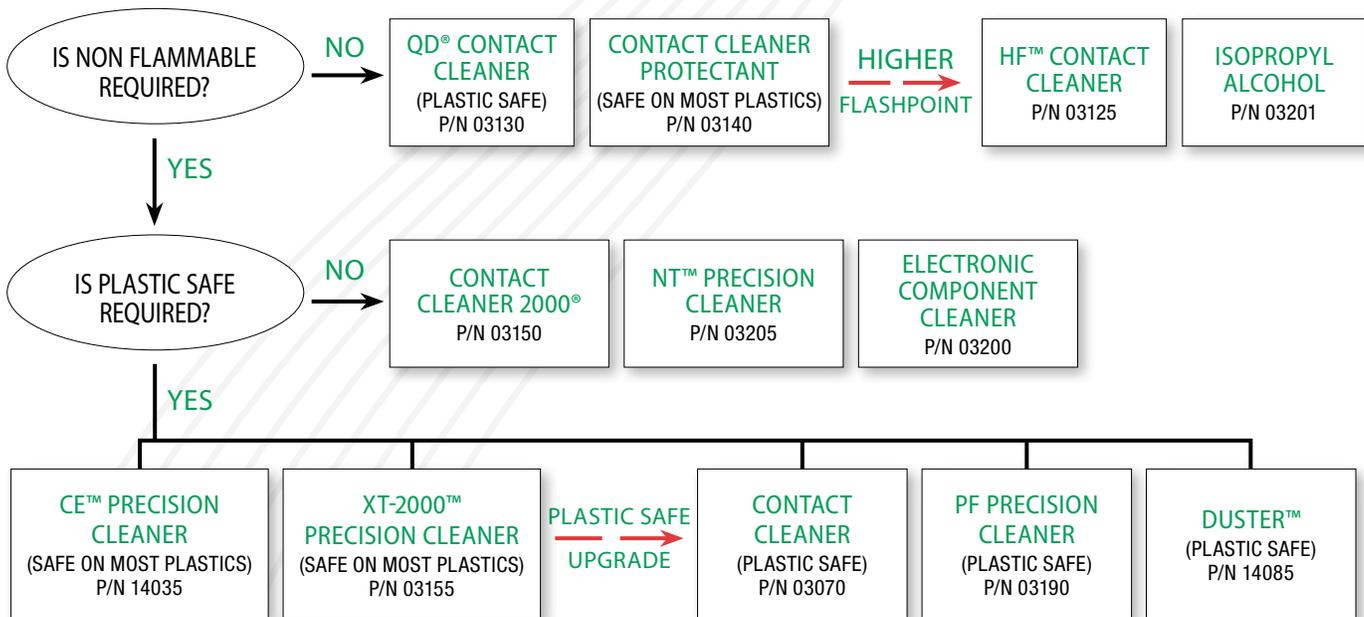


LOOKING FOR A HEAVY DUTY DEGREASER?

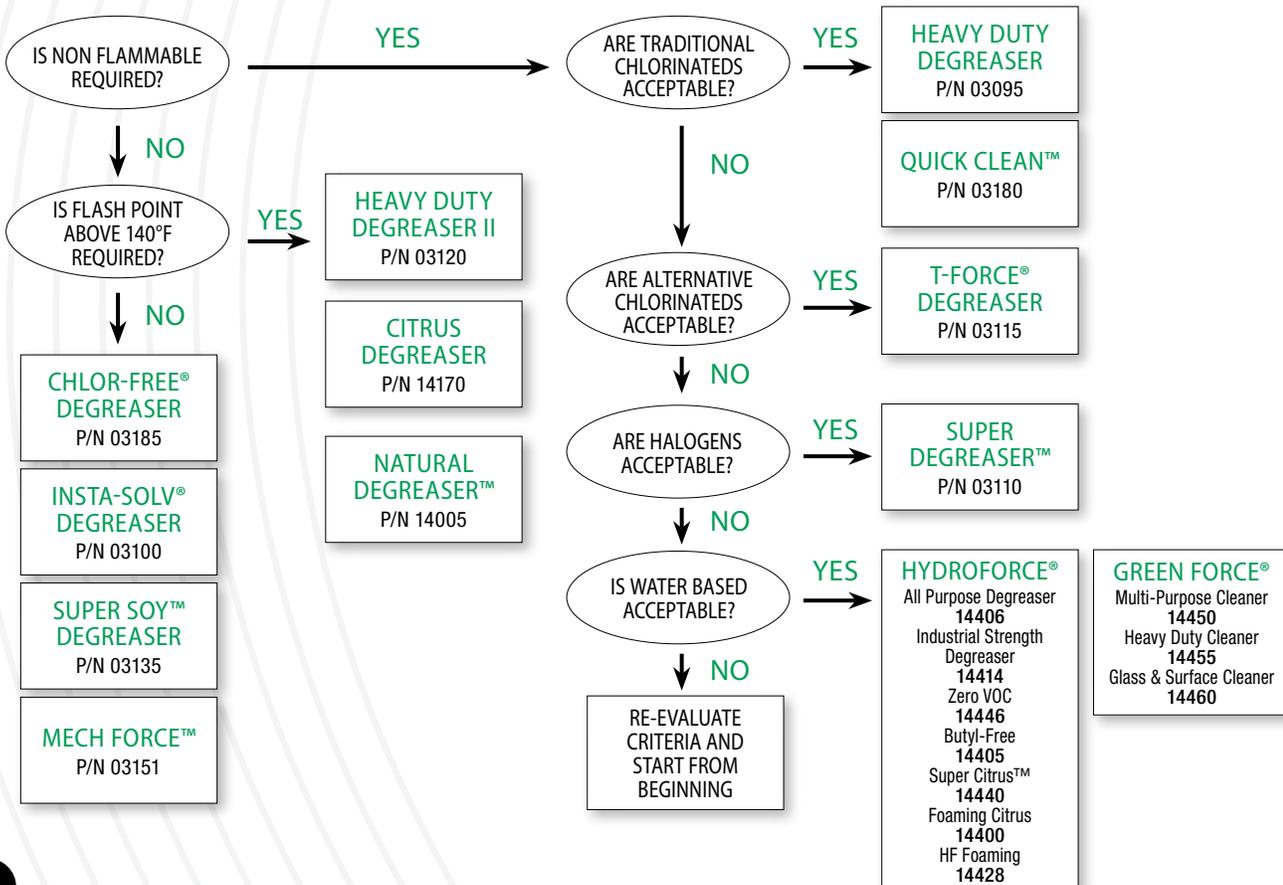

LOOKING FOR A PRECISION CLEANER?

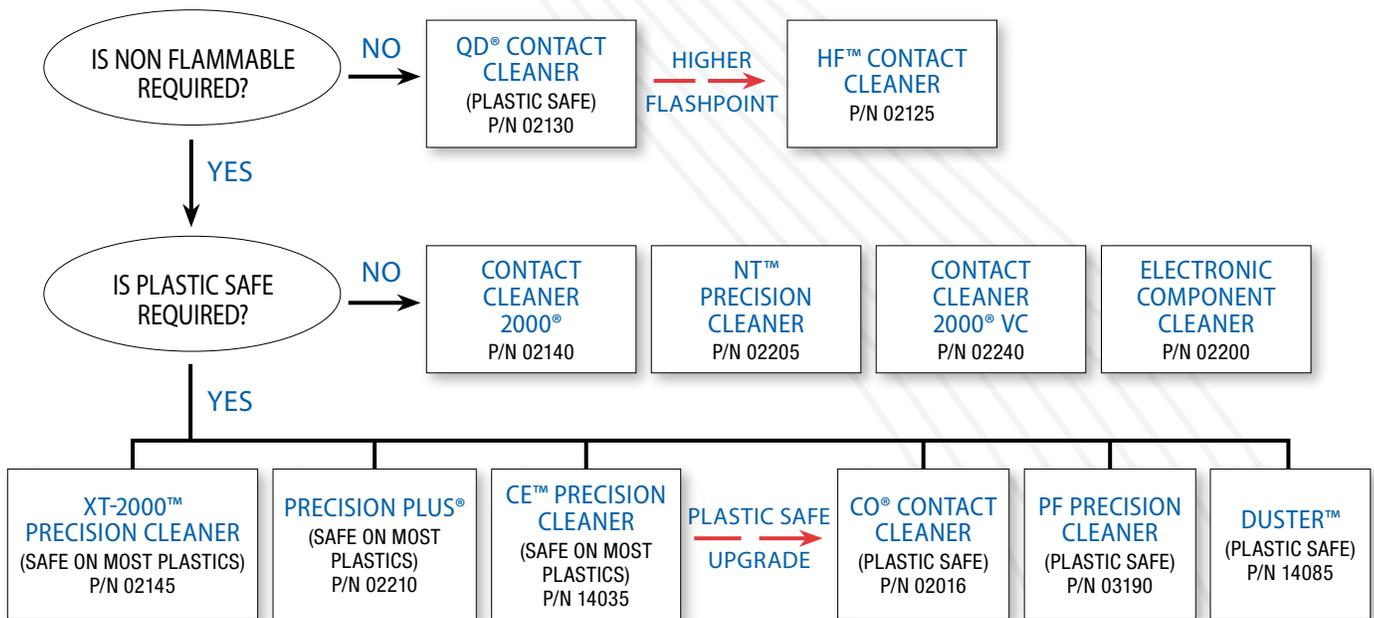

LOOKING FOR A HEAVY DUTY DEGREASER?

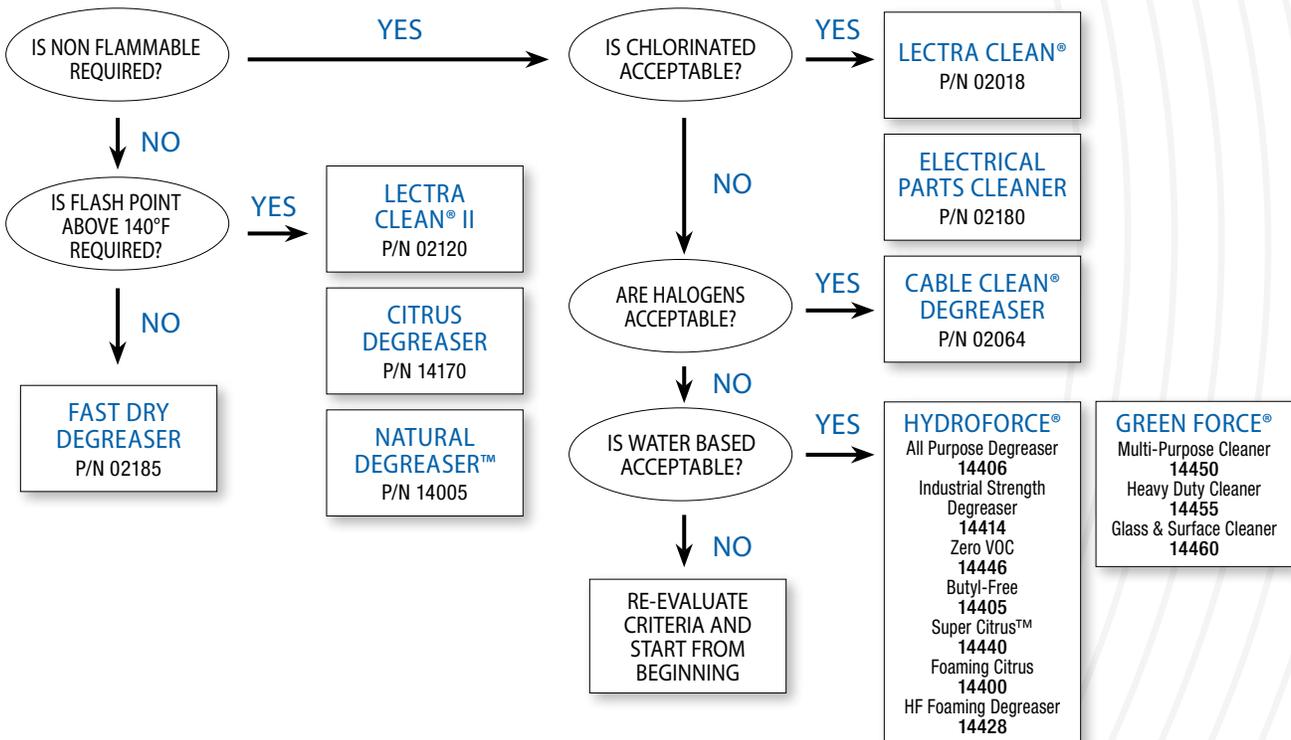

CONTACT CLEANER 2000®

Precision Cleaner

An aggressive general purpose precision cleaner that effectively removes dirt, light oils and other contaminants. It evaporates quickly, leaves no residue, has no flash point. Not recommended for use on Noryl® or polycarbonate type plastics.

Part Number	Container Size	Units Per Case
03150 ①	16 oz aerosol	12
03152 ¹	5 gallon pail	1
03153 ¹	55 gallon drum	1



PF PRECISION CLEANER

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part Number	Container Size	Units Per Case
03190 ①	16 oz aerosol	12



NT™ PRECISION CLEANER

Patented formula NT Precision Cleaner relies on advanced COzol® technology to effectively remove dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NT Precision Cleaner has no flash point and contains no Class I or Class II Ozone Depleting Chemicals and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern.

Part Number	Container Size	Units Per Case
03205 ①	16 oz aerosol	12
03207 ¹	5 gallon pail	1
03208 ¹	55 gallon drum	1



ELECTRONIC COMPONENT CLEANER

Precision Cleaner

Aggressive cleaner for use on electronic components in industrial, electrical, and aviation applications. Its high purity, fast penetrating formula aggressively dissolves dust, lint, dirt, oils, polar soils, and other contaminants from most non-plastic surfaces. It evaporates very rapidly and leaves no residue.

Part Number	Container Size	Units Per Case
03200 ①	16 oz aerosol	12



XT-2000™ PRECISION CLEANER

A non-flammable, low odor, rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment.

Part Number	Container Size	Units Per Case
03155 ①	16 oz aerosol	12



QD® CONTACT CLEANER

A petroleum distillate and alcohol blended precision cleaner suitable for cleaning sensitive electronics. QD evaporates quickly, leaves no residue and is safe to use on all plastics. QD Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

Part Number	Container Size	Units Per Case
03130 ①*	16 oz aerosol	12
03134*	1 gallon can	4
03131*	5 gallon pail	1
03132*	55 gallon drum	1



CONTACT CLEANER

Advanced Technology Formula Contact Cleaner does not contain known ozone depleting substances or VOCs. It provides an optimal alternative to CFC, HCFC, and flammable contact cleaners. Regular use will help prevent electrical failure, increase performance and prolong equipment life. Contact Cleaner will not damage sensitive modern plastics such as Noryl®, ABS and Lexan®.

Part Number	Container Size	Units Per Case
03070 ①	16 oz aerosol	12



CE™ PRECISION CLEANER

Azeotropic blend designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CE Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue.

Part Number	Container Size	Units Per Case
14035 ①	16 oz aerosol	12



① – Item restricted from sale in some states. See product page on CRC website for specific restrictions. Noryl® and Lexan® are registered trademarks of General Electric Corporation

① – 360° spray valve can be sprayed in the UP or DOWN position.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

ISOPROPYL ALCOHOL

Precision Cleaner

A quick drying light-duty precision cleaner for use in electronic and aviation applications. Its 99% pure formula aggressively dissolves grease, dust, dirt, lint, oils and flux.

Part Number	Container Size	Units Per Case
03201	16 oz aerosol	12



DUSTER™

Aerosol Dust Removal System

Safely removes dirt and dust from energized equipment without damaging sensitive components or surface finish. CRC Duster™ penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast of product to remove embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only.

Part Number	Container Size	Units Per Case
14085	12 oz aerosol trigger	12



HF™ CONTACT CLEANER

Petroleum distillate-based precision cleaner that offers the safety of a high flashpoint without leaving a residue. It may be used on most plastic materials. HF Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

Part Number	Container Size	Units Per Case
03125 	16 oz aerosol	12
03126	5 gallon pail	1



DUSTER™

Moisture-Free Dust & Lint Remover

Effectively removes dirt, dust, lint and other contaminants with a dry blast of air. Safely eliminates debris from sensitive electronics, appliances and equipment.

Part Number	Container Size	Units Per Case
05185	16 oz aerosol trigger	12



CONTACT CLEANER & PROTECTANT

High purity precision cleaner that helps make equipment perform like new. Penetrates surface pores, cleans away contaminants and leaves a fine microscopic corrosion resistant film.

Part Number	Container Size	Units Per Case
03140*	16 oz aerosol	12



FREEZE SPRAY

Aerosol coolant system that instantly freezes surfaces to -60°F, dissipating heat and cooling equipment. Freeze Spray also assists in locating thermal intermittent components, failures and shorts. Safe to use on sensitive components and all surface finishes. Freeze Spray comes with an extension tube for precise application of the product.

Part Number	Container Size	Units Per Case
14086	12 oz aerosol trigger	12



 - 360° spray valve can be sprayed in the UP or DOWN position.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

PRECISION CLEANERS TECHNICAL INFORMATION

Product	Type of Cleaner	Contains ODCs	Flash Point	Drying Time	Dielectric Strength (Volts)	Safe On Plastics	S.D.I.L. [®]	NSF Registration	VOC g/L [∞]	Cleaning Strength (Kb)	Faxback SDS#	Container Size
Contact Cleaner 2000 [®]	HFC/COzol [®]	None	None	Fast	30,800	May be harmful to some plastics	Yes	K2	730.3 768.4	45	3150 (aerosol) 3152 (bulk)	16 5 55
XT-2000 [™] Precision Cleaner	HFC/COzol [®]	None	None	Fast	30,200	Safe on most plastics	Yes	K2	324.3	24	3155 (aerosol)	16
Contact Cleaner	HFC	None	None	Fast	27,600	Yes	Yes	K2	0	<10	3070	16
PF Precision Cleaner	HFC	None	None	Fast	31,500	Yes	Yes	K2	90.6	8.5	3190	16
Electronic Component Cleaner	HFC/COzol [®]	None	None	Fast	30,800	May be harmful to some plastics	Yes	K2	730.3	45	3200	16
NT [™] Precision Cleaner	HFC/COzol [®]	None	None	Fast	30,800	May be harmful to some plastics	Yes	K2	730.3 768.4	45	3205 (aerosol) 3207 (bulk)	16 5 55
QD [®] Contact Cleaner	Petroleum Distillate/ Alcohol	None	<0°F TCC	Fast	36,700	Yes	Yes	K2	495 552	27	3130 (aerosol) 3131 (bulk)	16 1 5 55
CE [™] Precision Cleaner	HFC/COzol [®]	None	None	Slow	28,400	Safe on most plastics	Yes	K2	221.7	16	14035	16
Isopropyl Alcohol Precision Cleaner	Alcohol	None	54°F TCC	Fast	8,300	Safe on most plastics	Yes	K1 K2	591.7	>200	3201	16
HF [™] Contact Cleaner	Petroleum Distillate	None	205°F PMCC	Slow	45,700	May be harmful to some plastics	Yes	K2	0	25	3125 (aerosol) 3126 (bulk)	16 5
Contact Cleaner & Protectant	Hydrocarbon Solvent/ Silicone	None	<0°F TCC	Fast	350	Safe on most plastics	Yes	K2	479.2	27	3140	16
Duster [™] Aerosol Dust Removal System	HFC	None	None	Fast	ND	Yes	No	K2	0	<10	14085	12
Duster [™] Moisture-Free Dirt & Lint Remover	HFC	None	-58°F TCC	Fast	ND	Yes	No		0	<11	5185	16
Freeze Spray	HFC	None	None	Fast	ND	Yes	No		0	ND	14086 (bulk)	12

ODC = Ozone Depleting Compounds; TCC = Tag Closed Cup; PMCC = Pensky-Martens Closed Cup; ND = Not Determined

[∞] – VOC g/L as defined by Consumer Products VOC regulations

SUPER DEGREASER™

Non-chlorinated, non-conductive, non-corrosive, non-staining and with no flash point. Advanced Technology Formula Super Degreaser™ quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Super Degreaser™ evaporates rapidly and leaves no residue. It is an optimal alternative to 1,1,1-Trichloroethane products. Use caution on plastics.

Part Number	Container Size	Units Per Case
03110 ¹	20 oz aerosol	12
03910 ³	20 oz aerosol	12
03111 ³	1 gallon can	4
03112 ³	5 gallon pail	1
03113 ³	55 gallon drum	1
03114 ³	16 oz non-aerosol can w/trigger	12



HEAVY DUTY DEGREASER

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances to increase operating efficiency of equipment. Heavy Duty Degreaser offers quick and efficient degreasing action and fast evaporation with no residue and no flash point. Use caution on plastics.

Part Number	Container Size	Units Per Case
03095 ¹	20 oz aerosol	12
03095T ¹	20 oz aerosol w/ trigger	12
03995 ³	20 oz aerosol	12
03096 ³	1 gallon bottle	4
03097 ³	5 gallon pail	1
03098 ³	55 gallon drum	1



T-FORCE® DEGREASER

Utilizes revolutionary technology that combines the power of a high performance, industrial strength degreaser with lower VOCs. T-Force® Degreaser is non-conductive, non-corrosive, non-staining and has no flash point. It quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. T-Force® Degreaser evaporates rapidly, leaves no residue and has a good health and safety profile. Does not contain nPB, TCE or Perc.

Part Number	Container Size	Units Per Case
03115 ¹	20 oz aerosol	12
03116 ³	1 gallon bottle	4
03117 ³	5 gallon pail	1
03118 ³	55 gallon drum	1
03915 ³	20 oz aerosol	12



QUICK CLEAN™

Safety Solvent and Degreaser

Effective heavy duty degreaser provides strong degreasing action, fast evaporation and no residue. It is non-flammable, does not contain VOCs, and contains no Class I or Class II Ozone Depleting Chemicals. Use caution on plastics and paints. Test on a small area before use.

Part Number	Container Size	Units Per Case
03180 ¹	20 oz aerosol	12
03183 ³	5 gallon pail	1
03184 ³	55 gallon drum	1



MECH FORCE™

Industrial Degreaser

An innovative, non-chlorinated, heavy duty degreaser that removes oil, grease and other contaminants. This fast evaporating solvent is excellent for use where rapid turnaround is necessary and low flashpoint solvents can be used. It offers a high permissible exposure limit.

Part Number	Container Size	Units Per Case
03151 ¹	20 oz aerosol	12



CITRUS DEGREASER

A unique heavy duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use caution on plastics and paints.

Part Number	Container Size	Units Per Case
14170 ¹	20 oz aerosol	12
14970 ³	20 oz aerosol	12
14171 ³	16 oz non-aerosol can w/trigger	12
14172 ³	1 gallon bottle	4
14173 ³	5 gallon pail	1
14174 ³	55 gallon drum	1



NATURAL DEGREASER™

Citrus Based Degreaser

Specially formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ contains no Class I or Class II Ozone Depleting Chemicals or chlorinated solvents. Use caution on plastics and paints.

Part Number	Container Size	Units Per Case
14005	20 oz aerosol	12
14007 ¹	5 gallon pail	1
14008 ¹	55 gallon drum	1



GASKET REMOVER

Paint and Decal Remover

Solvent-based, high strength cleaner that removes baked-on fiber gaskets, gasket adhesives and sealants. Dissolves and aids removal of paints, lacquers, and varnish. Removes graffiti from metal and stone.

Part Number	Container Size	Units Per Case
03017	16 oz aerosol	12



¹ – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

³ – 360° spray valve can be sprayed in the UP or DOWN position. ³ – Not for retail sale, for use in manufacturing establishments only.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

HEAVY DUTY DEGREASERS AND CLEANERS

HEAVY DUTY DEGREASER II

An excellent alternative for cleaning applications where chlorinated solvents are not acceptable. Heavy Duty Degreaser II effectively removes soils and cleans surfaces without residue build-up. Use caution on plastics.

Part Number	Container Size	Units Per Case
03120	20 oz aerosol	12
03121	1 gallon bottle	4
03122	5 gallon pail	1
03123	55 gallon drum	1

SUPER-SOY™ DEGREASER



A unique, biodegradable, heavy duty degreaser extremely effective in dissolving and removing grease, oil, lubricants, adhesives and tar. Specially formulated with soy bean and corn based solvents, which are renewable resources that conserve non-renewable resources such as petroleum.

Part Number	Container Size	Units Per Case
03135	20 oz aerosol	12

INSTA-SOLV® DEGREASER

An extremely low VOC content, non-chlorinated degreaser for use in industrial and electrical applications. Its fast evaporating formula aggressively dissolves grease, dirt, and oils from most non-plastic surfaces.

Part Number	Container Size	Units Per Case
03100*	20 oz aerosol	12

CHLOR-FREE® DEGREASER

Innovative heavy duty non-chlorinated degreasing solvent that removes oil, grease and other contaminants. Excellent for use where rapid turn-around is necessary and low flashpoint solvents can be used. Use caution on plastics.

Part Number	Container Size	Units Per Case
03185 ^{1*}	20 oz aerosol	12
03985 ^{3*}	20 oz aerosol	12
03187 ^{3*}	5 gallon pail	1
03188 ^{3*}	55 gallon drum	1
03189 ^{3*}	16 oz non-aerosol w/trigger	12

BATTERY CLEANER

Water soluble formula designed to remove corrosion quickly and economically while neutralizing acid spills. Use to restore battery output and reduce voltage leakage due to contaminants.

Part Number	Container Size	Units Per Case
03176	12 oz aerosol	12

☉ – 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

GRAFFITI REMOVER

CRC Graffiti Remover is a solvent-based, high strength cleaner that removes vandal marks from different types of surfaces. It quickly dissolves and aids in the removal of paints, pen marks, crayon, ink, lipstick, scuff marks, lacquers, and varnishes. CRC Graffiti Remover contains no methylene chloride.

Part Number	Container Size	Units Per Case
03194	16 oz aerosol	12

COIL CLEANER

A versatile, chlorinated solvent-based cleaner that is extremely effective in removing grease and dirt on air conditioning and refrigeration coils. It aggressively dissolves grease, oil, and sludge for more efficient operation of mechanical equipment. Coil Cleaner evaporates quickly, and is non-corrosive, non-conductive, and non-staining.

Part Number	Container Size	Units Per Case
03195	20 oz aerosol	12

FOAMING COIL CLEANER

High performance, heavy duty foaming detergent designed to clean evaporator and condenser coils. The aggressive alkaline detergent blend quickly cuts through dirt, grease, oil and other types of residue. A low odor formula that does not require rinsing in most coil cleaning applications.

Part Number	Container Size	Units Per Case
03196☉	20 oz aerosol	12

INDUSTRIAL ADHESIVE REMOVER

Ideal for removing adhesive residue, tar, wax or other contaminants. Its penetrating formula can help remove stubborn labels and tape from multiple surfaces. VOC compliant in all 50 states[∞].

Part Number	Container Size	Units Per Case
03250	20 oz aerosol	12
03251	1 gallon bottle	4

NEW

CARB & CHOKE CLEANER

Low VOC formula designed to maximize carburetor performance, improve fuel system performance and ensure maximum fuel economy.

Part Number	Container Size	Units Per Case
03077*	16 oz aerosol	12

∞ – As defined by Consumer Products VOC regulations.

3 – Not for retail sale, for use in manufacturing establishments only.



HEAVY DUTY DEGREASERS

Product	Type of Cleaner	Cleaning Strength (KB)	Flash Point	Drying Time	Dielectric Strength (Volts)	Odor	VOC g/L [∞]	NSF Registration S.D.L. [®]	Faxback SDS#	Container Size
Super Degreaser™	Halogenated	125	None	Fast	26,800	Strong	665 (aerosol) 1300 (bulk) 1265 (MUO)	K1 Yes	3110 (aerosol) 3111 (bulk) 3910 (MUO)	
Heavy Duty Degreaser	Chlorinated	105	None	Fast	39,200	Moderate	123.2 (aerosol) 126.4 (bulk) 123.2 (MUO)	K1 Yes	3095 (aerosol) 3096 (bulk) 3995 (MUO)	
T-Force® Degreaser	HFC/CO ₂ ®	97	None	Fast	39,000	Faint Ethereal	541.0 (aerosol) 1084.6 (bulk) 1042.5 (MUO)	K1 Yes	3115 (aerosol) 3116 (bulk) 3915 (MUO)	
Quick Clean™	Chlorinated	95	None	Fast	37,500	Moderate	0	K1 Yes	3180 (aerosol) 3182 (bulk)	
Mech Force™	Blend of Organic Solvents	>200	<0°F	Fast	6,600	Moderate	368	K1 Yes	3151	
Citrus Degreaser	d-Limonene & Petroleum Distillate	32 54	172°F TCC (aerosol) 110°F (bulk & MUO)	Slow	58,600 (aerosol) 35,000	Light Citrus	79.4 (aerosol) 820 (bulk) 790 (MUO)	C1 Yes	14170 (aerosol) 14171 (bulk) 14970 (MUO)	
Natural Degreaser™	Terpene/ Glycol Ether	>200 111	151°F TCC (aerosol) 172°F (bulk)	Moderate	28,600 (aerosol) 45,700	Citrus	89.8 (aerosol) 35.2 (bulk)	C1 Yes	14005 (aerosol) 14007 (bulk)	
Gasket Remover	Organic Solvents	NA	56°F TCC	Moderate	NA	Moderate	352.4	C3 Yes	3017	
Heavy Duty Degreaser II	Petroleum Distillate/ Glycol Ether	75	185°F TCC	Slow	42,100	Moderate	0	K1 K2 Yes	3120 (aerosol) 3121 (bulk)	
Super-Soy™ Degreaser	Methyl Ester	ND	84°F TCC	Slow	18,900	Mild	73.3	K1 Yes	3135	
Insta-Solv® Degreaser	Organic Solvents	112	<0°F TCC	Fast	6,300	Moderate	21.3	K1 Yes	3100	
Chlor-Free® Degreaser	Blend Of Organic Solvents	106	<0°F TCC	Fast	6,000 (aerosol) 20,800	Moderate	333 (aerosol) 767 (bulk) 736 (MUO)	K2 Yes	3185 (aerosol) 3187 (bulk) 3985 (MUO)	
Battery Cleaner	Aqueous	NA	None	Moderate	NA	Low	82.16	Yes	3176	
Graffiti Remover	Organic Solvents	ND	56°F	Moderate	NA	Moderate	352.4	C3 Yes	3194	
Coil Cleaner	Chlorinated	105	None	Fast	39,200	Strong	123.2	Yes	3195	
Foaming Coil Cleaner	Aqueous	NA	None	Slow	NA	Low	113.4	C1 A1 Yes	3196	
Industrial Adhesive Remover	Pertroleum Distillate	75	185°F	Slow	42,100	Moderate	0	K3 Yes	3250 (aerosol) 3251 (bulk)	
Carb & Choke Cleaner	Organic Solvents	>200	<0°F TCC	Fast	6,300	Moderate	70.2	Yes	3077	

TCC = Tag Closed Cup; NA = Not Applicable; KB = Kauri Butanol; ND = Not Determined

∞ – VOC g/L as defined by Consumer Products VOC regulations

Customer Care: (800) 272-4620 • Technical Assistance: (800) 521-3168 **More product information a click away at www.crcindustries.com**

HYDROFORCE® INDUSTRIAL STRENGTH DEGREASER

Aqueous degreaser with the powerful performance of a solvent. Upon contact, HydroForce® Industrial Strength instantly begins to hunt-down, break-up and lift-off heavy deposits of grease, oil and dirt. It exhibits a unique spreadability that cleans up to four times the surface area of competitive products. Perfect for facilities seeking an alternative to traditional solvents.

Part Number	Container Size	Units Per Case
14414	20 oz aerosol	12
14415 ¹	32 oz trigger spray bottle	12
14416	1 gallon bottle	4
14417	5 gallon pail	1
14418	55 gallon drum	1



HYDROFORCE® BUTYL-FREE ALL PURPOSE CLEANER

Butyl-free cleaner that is versatile enough for all of your cleaning tasks, but strong enough to attack and remove tough dirt, dust and grime deposits. HydroForce® Butyl-Free outcleans many competing aqueous cleaners containing butyl. Perfect for facilities seeking an efficacious all-purpose cleaner with maximum regulatory compliance.

Part Number	Container Size	Units Per Case
14405	20 oz aerosol	12
14401	32 oz trigger spray bottle	12
14402	1 gallon bottle	4
14403	5 gallon pail	1
14404	55 gallon drum	1



HYDROFORCE® ALL PURPOSE DEGREASER

Versatile enough to use for all degreasing tasks. HydroForce® All Purpose breaks-up and lifts-off grease, oil and dirt deposits. HydroForce® All Purpose exhibits a unique spreadability that cleans up to three times the surface area as competing aqueous degreasers. Perfect for facilities seeking an improvement over their current all-purpose aqueous degreaser.

Part Number	Container Size	Units Per Case
14406	20 oz aerosol	12
14407 ¹	32 oz trigger spray bottle	12
14408	1 gallon bottle	4
14409	5 gallon pail	1
14410	55 gallon drum	1
14421	275 gallon tote	1



HYDROFORCE® GLASS CLEANER Professional Strength

Versatile enough to use on your most delicate glass surfaces, but strong enough to quickly cut through the toughest dirt, dust, fingerprint and haze deposits without streaking. Its ammonia-fortified formula contains a foaming agent for greater coverage and less run-off when cleaning vertical surfaces. HydroForce® Glass Cleaner is nearly twice as effective at eliminating streaks as other leading brands.

Part Number	Container Size	Units Per Case
14412	20 oz aerosol	12
14411	32 oz trigger spray bottle	12
14413	1 gallon bottle	4
14427	55 gallon drum	1



HYDROFORCE® ZERO VOC General Purpose Cleaner

Provides maximum regulatory compliance without performance compromises. It is strong enough to attack and remove tough dirt, dust and grime deposits; yet its moderate pH formula, biodegradability and zero VOC content make it versatile and safe enough to use daily for all your cleaning tasks. Formulated with a special polymer that keeps dirt and greasy soils from returning to surfaces.

Part Number	Container Size	Units Per Case
14446	32 oz trigger spray bottle	12
14447	1 gallon bottle	4
14448	5 gallon pail	1
14449	55 gallon drum	1
14444	275 gallon tote	1



¹ – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

HYDROFORCE® SUPER CITRUS™

Heavy Duty Degreaser

Naturally formulated degreaser that offers the superb cleaning power of citrus. HydroForce® Super Citrus™ dissolves grease, oil, ink, tar, asphalt and many other industrial residues.

Part Number	Container Size	Units Per Case
14440	20 oz aerosol	12
14441	1 gallon bottle	4
14442	5 gallon pail	1
14443	55 gallon drum	1
14453	275 gallon tote	1



HYDROFORCE® FOAMING CITRUS ALL PURPOSE CLEANER

Rich, foamy, aqueous-based cleaner with a citrus scent. HydroForce® Foaming Citrus clings to tough, stubborn stains on vertical or inverted surfaces without runs or drips. Its foaming action instantly begins to lift-off and eliminate dirt, dust, ink and grime deposits.

Part Number	Container Size	Units Per Case
14400	20 oz aerosol	12



HYDROFORCE® GERMICIDAL FOAM CLEANER

Cleans, disinfects and deodorizes in one easy step. The rich, foamy aqueous based formula clings to vertical or inverted surfaces without runs or drips. HydroForce® Germicidal Foam Cleaner contains powerful cleaning agents that instantly lift off and eliminate dirt, dust, grease and grime. For sale in US, Puerto Rico and Mexico only.

Part Number	Container Size	Units Per Case
14430	20 oz aerosol	12



HYDROFORCE® STAINLESS STEEL CLEANER & POLISH

Using an exclusive ultra shine formula, HydroForce® Stainless Steel Cleaner & Polish eliminates dirt, dust, fingerprints and watermarks and leaves behind a protective, non-greasy barrier that resists the return of these stains. Created specifically for industrial applications, Stainless Steel Cleaner is formulated with powerful cleaning agents designed to out-clean, out-shine and out-perform competing janitorial stainless steel cleaners.

Part Number	Container Size	Units Per Case
14424	20 oz aerosol	12



HYDROFORCE® SURFACE SANITIZER

A quaternary based, no mix, ready-to-use, no rinse product. When used as directed, HydroForce® Surface Sanitizer will sanitize previously cleaned and rinsed non-porous food contact surfaces in 60 seconds. Recommended for the sanitation of hard, non-porous food contact surfaces and non-food contact surfaces in food processing plants and food service establishments. Kills 99.99% of bacteria in 60 seconds.

Part Number	Container Size	Units Per Case
14465	32 oz trigger spray bottle	12



HYDROFORCE® FOAMING DEGREASER

A rich, foamy, aqueous based degreaser that removes dirt, dust, grease, ink and grime with a powerful cleaning agent that clings to vertical or inverted surfaces without runs or drips. It is aggressive enough to remove rubber marks but remains gentle enough for use on painted and plastic surfaces.

Part Number	Container Size	Units Per Case
14428	20 oz aerosol	12



NEW

DRAIN MAINTENANCE

HYDROFORCE® DRAIN RE-NU™

A fast acting alkaline based drain cleaner. Quickly acts to unclog drains and is completely soluble in water. Easy to measure tip & pour spout makes certain you are dosing the correct amount for maximum effectiveness. Formula is non-fuming, non-toxic, low odor, and non-acid. Works through standing water.

Part Number	Container Size	Units Per Case
14125	1 gallon bottle	4



HYDROFORCE® DRAIN MAINTAINER

Natural, non-toxic, non-pathogenic bacteria formula helps keep drains clear. Consumes oils and greases to keep drains flowing free when used on a regular basis. This industrial strength, ready to use formula is safe and easy to dose. It uses natural microbes to consume waste.

Part Number	Container Size	Units Per Case
14130	1 gallon bottle	4



GREEN FORCE® MULTI-PURPOSE CLEANER

Formulated to meet strict environmental requirements without sacrificing performance. Green Force® Multi-Purpose Cleaner is a safe and versatile product for all cleaning needs. It effectively cuts greasy films and soils, leaving surfaces sparkling clean.

Part Number	Container Size	Units Per Case
14450	1 gallon bottle	4
14451	5 gallon pail	1



GREEN FORCE® GLASS & SURFACE CLEANER

Green Force® Glass & Surface Cleaner is ideally suited to clean soiled glass and other hard surfaces. Effectively cuts greasy films and soils leaving surfaces sparkling clean.

Part Number	Container Size	Units Per Case
14460	32 oz spray bottle (RTU)	12
14461	1 gallon bottle	4



GREEN FORCE® HEAVY DUTY CLEANER

An environmentally preferable alternative to conventional water based solvent cleaners and degreasers. It quickly removes petroleum based soils such as grease, grime and oil found in manufacturing and warehouse environments. Green Force® Heavy Duty Cleaner is also extremely effective against protein type soils found in food processing plants and institutional kitchens.

Part Number	Container Size	Units Per Case
14455	1 gallon bottle	4
14456	5 gallon pail	1
14458	55 gallon drum	1



VISICLEAR® DISPLAY & ELECTRONIC SCREEN CLEANER

Safely cleans TFT, LCD, Plasma, CRT and Touch Screens. This unique foam cleaner clings, won't drip, and is alcohol and ammonia free. Product is applied with a clean microfiber cloth or sprayed directly onto the display surface.

Part Number	Container Size	Units Per Case
05131	8 oz aerosol	12



AQUEOUS CLEANERS

Product	Type of Cleaner	pH	MSF Registration	Flash Point	Biodegradable	Odor	Faxback SDS #	Container Size
HydroForce® Industrial Strength Degreaser	Alkaline H ₂ O Surfactant	13.2 (aerosol) 13.1 (bulk)	C1	None	No	Pleasant	14414 (aerosol) 14415 (bulk)	
HydroForce® All Purpose Degreaser	H ₂ O Surfactant	10.7 (aerosol) 10 (bulk)	C1	None	Yes	Pleasant	14406 (aerosol) 14407 (bulk)	
HydroForce® Zero VOC General Purpose Cleaner	H ₂ O Surfactant	10.3	A1	None	Yes	Mild	14446	
HydroForce® Butyl-Free All Purpose Cleaner	H ₂ O Surfactant	11 (aerosol) 10.5 to 12.2 (bulk)	A1, C1	None	Yes	Pleasant	14405 (aerosol) 14401 (bulk)	
HydroForce® Super Citrus™ Heavy Duty Degreaser	Solvent in H ₂ O Emulsion (aerosol) Solvent Based Dilutable in H ₂ O (bulk)	10 (aerosol)	C1	None (aerosol) 190°F TCC (bulk)	No (bulk) Yes (aerosol)	Citrus	14440 (aerosol) 14441 (bulk)	
HydroForce® Glass Cleaner Professional Strength	H ₂ O Surfactant	10.5 (aerosol) 10 (bulk)	C1	None	Yes	Ammonia	14412 (aerosol) 14413 (bulk)	
HydroForce® Germicidal Foam Cleaner	H ₂ O Surfactant	11.8 to 12.8	C1	None	No	Floral/ Ammonia	14430	
HydroForce® Surface Sanitizer	Quaternary Ammonium Chloride	8.4	D2	None	No	Mild	14465	
HydroForce® Foaming Citrus All Purpose Cleaner	H ₂ O Surfactant	10.9	C1	None	Yes	Citrus	14400	
HydroForce® Stainless Steel Cleaner & Polish	Solvent/Oil in H ₂ O Emulsion	10.5	C1	None	No	Slight Petroleum	14424	
HydroForce® Foaming Degreaser	H ₂ O Surfactant	9.1	C1	None	No	Mild	14428	
Green Force® Multi-Purpose Cleaner	H ₂ O Surfactant	10 to 11	C1	None	Yes	Citrus	14450	
Green Force® Heavy Duty Cleaner	H ₂ O Surfactant	3.5 to 4.5	C1	None	Yes	Citrus	14455	
Green Force® Glass & Surface Cleaner	H ₂ O Surfactant	7.3 to 7.9	A1 (RTU) C1 (bulk)	>212°F TCC	Yes	Bland	14460	
VisiClear® Display Cleaner	H ₂ O/Surfactant	9 to 10	No	None	No	Odorless	5131	
HydroForce® Drain Re-Nu™	Alkaline	14	No	>200°F	Yes	Ammonia	14125	
HydroForce® Drain Maintainer	H ₂ O Microbial/ Surfactant	8	No	>200°F	Yes	Pleasant	14130	

TCC = Tag Closed Cup

SmartWasher®

BIOREMEDIATING parts washing system

GET CLEAN AND BE GREEN

SMARTWASHER: a green alternative to a conventional petroleum-based parts washing system. Through the process of bioremediation, the SMARTWASHER constantly maintains the cleanliness of the OZZYJUICE® cleaning/degreasing solution without the need for hauling, skimming or evacuating the unit.

WHAT IS OZZYJUICE®?

OZZYJUICE is a powerful, aqueous based degreasing solution that is pH-neutral, non-irritating, non-flammable, and non-toxic. Armed with superior cleaning capability, the OZZYJUICE solutions will match or surpass the performance of a premium solvent without all the associated risks. All OZZYJUICE solutions are certified by both NSF and SCAQMD.



MODELS						
14161	14145	14711	14144	14710	14162	
SW-23 Mobile Parts/ Brake Washer	SW-25 Signature Parts Washer	SW-25C Combo Brake/ Parts Washer	SW-28 SuperSink Parts Washer	SW-28XE SuperSink XE Parts Washer	SW-37 Mobile Heavyweight Parts Washer	
OVERALL DIMENSIONS						
43" x 27" x 42"	35.5" x 26.5" x 40"	35.5" x 26.5" x 42"	47" x 38" x 42"	47" x 38" x 42"	48" x 35" x 45"	
SINK DIMENSIONS						
27" x 23" x 8"	27" x 17.5" x 8.5"	27" x 17.5" x 8.5"	41" x 26" x 8"	41" x 26" x 8"	33" x 27" x 8"	

SmartWasher® is a registered trademark of ChemFree Corporation
Chemfree Corporation is a subsidiary of CRC Industries.

OZZYS KEEP SOLUTION CLEAN & STRONG

Microbes (OZZYS), introduced into the SMARTWASHER system through the OZZYMAT, eat the grease, oil and other contaminants, cleaning off the dirty parts, creating the harmless by-products of carbon dioxide and water. The OZZYJUICE is heated to encourage OZZY microbe growth.

CLEAN OZZYJUICE MEANS CLEAN PARTS

The OZZYJUICE cleaning/degreasing solution cleans the dirty parts and the OZZY microbes clean the OZZYJUICE leaving it strong and clean for every use. You should never need to haul away dirty parts cleaning fluid again, if the unit is maintained properly, and according to the operating instructions.

OZZYMAT™

FL-4 14124
Multi-Layer Filter
(recommended for normal to heavy parts cleaning applications)
6-Pack

FL-3 14149
Single Layer Filter
(recommended for light parts cleaning applications)
6-Pack



OZZYJUICE

SW-1 Degreasing Solution 5 Gallon Jug	14156
SW-3 Truck Grade Solution 5 Gallon Jug	14720
SW-4 Heavy Duty Solution 5 Gallon Jug	14148
SW-6 Select Metals Solution 5 Gallon Jug	14158
SW-7 Parts/Brake Solution 5 Gallon Jug	14721
SW-8 Aircraft & Weapon Solution 5 Gallon Jug	14722
SW-LF Low Foam Solution 5 Gallon Jug	14159
OZZY Booster™ Microbial Enhancer 250ml Bottle – 6 Per Case	14131



SMARTWASHER START-UP KITS

SW-423 Mobile Parts Washer Kit	1 SW-23 Unit + 3 Pails SW-4 OZZYJUICE Fluid + 1 FL-4 OZZYMAT Filter	14740
SW-437 Mobile Heavyweight Parts Washer Kit	1 SW-37 Unit + 5 Pails SW-4 OZZYJUICE Fluid + 1 FL-4 OZZYMAT Filter	14741
SW-737 Mobile Heavyweight Parts Washer Kit	1 SW-37 Unit + 5 Pails SW-7 OZZYJUICE Fluid + 1 FL-4 OZZYMAT Filter	14742
SW-723 Mobile Heavyweight Parts Washer Kit	1 SW-23 Unit + 3 Pails SW-7 OZZYJUICE Fluid + 1 FL-4 OZZYMAT Filter	14743
SW-323 Mobile Parts Washer Kit	1 SW-23 Unit + 3 Pails SW3 OZZYJUICE Fluid + 1 F-L4 OZZYMAT Filter	14744

PENETRATING

KNOCK'ER LOOSE®

Penetrating Solvent

An industrial strength, low viscosity lubricant and penetrant designed to quickly loosen and free seized, bound or frozen fasteners. It quickly dissolves rust, scale, gum, grease and corrosion with a formula that creeps into cracks, seams, threads and joints better than the competition. Knock'er Loose® eases the disassembly of machinery, tools and equipment for routine maintenance and emergency repairs.

Part Number	Container Size	Units Per Case
03016	6 oz aerosol	12
03020	16 oz aerosol	12
03021	1 gallon bottle	4
03022	5 gallon pail	1
03023	55 gallon drum	1
03024	16 oz non-aerosol can w/trigger	12
03025	8 oz spout can	24




KNOCK'ER LOOSE® PLUS

Penetrating Solvent

A unique penetrant that immediately drops the temperature of the area in contact with the spray. The freeze shock action cracks rusted surfaces allowing Knock'er Loose® Plus to reach deeper and work more effectively than other penetrants.

Part Number	Container Size	Units Per Case
03027	20 oz aerosol	12



SCREWLOOSE® SUPER PENETRANT

Screwloose® quickly penetrates through rust and corrosion to rapidly free corroded bolts, screws, fasteners, pins and bound mechanisms. Eases disassembly of mechanical equipment, fittings and fixtures.

Part Number	Container Size	Units Per Case
03060	16 oz aerosol	12
03062	1 gallon bottle	4
03064	55 gallon drum	1



MULTI-PURPOSE

3-36®

Multi-Purpose Lubricant and Corrosion Inhibitor

Multi-purpose lubricant, penetrant and corrosion inhibitor forms a clear, thin film that lubricates, prevents corrosion, displaces moisture and penetrates. 3-36® drives out moisture and leaves a thin, long lasting film to protect against corrosion.

Part Number	Container Size	Units Per Case
03004	6 oz aerosol	12
03005	16 oz aerosol	12
03007	16 oz trigger bottle	12
03006	1 gallon bottle	4
03009	5 gallon pail	1
03011	55 gallon drum	1



ULTRA-LITE 3-36®

An ultra-thin, non-staining dry film lubricant that resists oil, dust and dirt build-up. Penetrates into the most minute openings, sealing out moisture and preventing corrosion with an ultra-light protective film.

Part Number	Container Size	Units Per Case
03160	16 oz aerosol	12
03161	1 gallon bottle	4
03162	5 gallon pail	1
03163	55 gallon drum	1



INDUSTRIAL SILICONE

Multi-purpose silicone spray for industrial applications. It forms a colorless, odorless, non-staining film that lubricates and protects in most metal-to-non-metal applications. Silicone film eliminates binding and sticking, while protecting surfaces. In addition, it may be used as a release agent.

Part Number	Container Size	Units Per Case
03032	16 oz aerosol	12



Product	Type	Type of Film	Color	360° Spray	Falx (In Pounds)	Flash Point	NSF Registration	S.D.[L.]®	Faxback SDS #	Container Size
Knock'er Loose®	Petroleum	Non-Drying	Reddish	Yes	NA	147°F TCC	H2	Yes	3020 (aerosol) 3021 (bulk)	6 16 16 8 1 5 55
Knock'er Loose® Plus	Petroleum	Non-Drying	Reddish	Yes	NA	147°F TCC	H2	Yes	3027	20
Screwloose® Super Penetrant	Petroleum	Non-Drying	Light Amber	Yes	NA	141°F TCC	H2	Yes	3060 (aerosol) 3062 (bulk)	16 1 55

TCC = Tag Closed Cup; NA = Not Applicable

☉ – 360° spray valve can be sprayed in the UP or DOWN position.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

MULTI-PURPOSE

TECHNICAL GRADE 3-36®

Multi-Purpose Precision Lubricant

Multi-purpose, plastic safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Technical Grade 3-36® drives out moisture and leaves a thin, long lasting film to protect against corrosion. Excellent for use around modern plastics and insulators.

Part Number	Container Size	Units Per Case
03003 	16 oz aerosol	12



ROLL-UP DOOR LUBRICANT

Superior lubricant that prevents friction and wear on all roll-up and overhead door assemblies. Its unique viscosity allows it to cover more surface area and penetrate deep into the surface of all metal components found in roll-up and overhead doors. Roll-Up Door Lubricant displaces moisture and leaves a thin, long-lasting film to protect against rust and corrosion.

Part Number	Container Size	Units Per Case
03029 	16 oz aerosol	12



DRY PTFE LUBE

A multi-purpose, micro-thin film containing PTFE. Dry PTFE Lube penetrates and bonds to most surfaces including metal, wood, rubber, plastic and glass. It forms a micro-thin film that prevents sticking, reducing friction and wear.

Part Number	Container Size	Units Per Case
03044	16 oz aerosol	12



LUBRICANTS

Product	Type	Type of Film	Color	360° Spray	Fallex (In Pounds)	Flash Point	NSF Registration	S.D.[L.]#	Feedback SDS #	Container Size
3-36®	Petroleum	Non-Drying	Blue-Green	Yes	1000	192°F TCC	H2	Yes	3005 (aerosol) 3006 (bulk)	
Ultra-Lite 3-36®	Petroleum	Dry, Ultra-Thin	Amber	Yes	1000	172°F TCC	H2	Yes	3160 (aerosol) 3161 (bulk)	
Industrial Silicone	Silicone	Dry	Clear Water-White	Yes	NA	<0°F	H1	Yes	3032	
Technical Grade 3-36®	Petroleum	Non-Drying	Amber	Yes	1500	200°F TCC	H2	Yes	3003	
Dry PTFE Lube	PTFE	Dry, Micro-Thin	White	No	NA	<20°F TCC	H2	Yes	3044	
Roll-Up Door Lubricant	Petroleum	Non-Drying	Blue-Green	Yes	1000	192°F TCC	H2	Yes	3029	

TCC = Tag Closed Cup; NA = Not Applicable

 - 360° spray valve can be sprayed in the UP or DOWN position.

Customer Care: (800) 272-4620 • Technical Assistance: (800) 521-3168 **More product information a click away at www.crcindustries.com**

FOOD GRADE: NSF® H1 REGISTERED

FOOD GRADE SILICONE

Multi-purpose silicone spray for food processing and handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates in most metal to non-metal applications. Silicone film eliminates binding and sticking, while protecting most surfaces. In addition, it may be used as a release agent.

Part Number	Container Size	Units Per Case
03039 ^{3*}	16 oz non-aerosol trigger can	12
03040 [*]	16 oz aerosol w/Perma-Lock®	12
03041 ^{3*}	5 gallon pail	1
03042 ^{3*}	55 gallon drum	1



FOOD GRADE MACHINE OIL

Extremely efficient and effective general purpose lubricant for use on food processing equipment. Food Grade Machine Oil penetrates and loosens rust, scale, dirt and corrosion to free parts and fasteners.

Part Number	Container Size	Units Per Case
03081	16 oz aerosol w/Perma-Lock®	12



FOOD GRADE PENETRATING OIL

An effective and efficient general purpose penetrant for use on food processing equipment. The highly refined white mineral oil is colorless, odorless and tasteless to meet NSF and FDA standards. Food Grade Penetrating Oil can be used to loosen rust, scale and corrosion around fasteners and hose fittings on food processing equipment.

Part Number	Container Size	Units Per Case
03086	16 oz aerosol w/Perma-Lock®	12
03087	1 gallon bottle	4
03088	5 gallon pail	1
03089	55 gallon drum	1



FOOD GRADE WHITE GREASE

A high purity, high quality aluminum complex grease that provides superior lubrication and durability in many food and pharmaceutical processing applications. Designed for heavy load applications requiring a long grease life. Protects equipment against rust, oxidation and wear.

Part Number	Container Size	Units Per Case
03038 [*]	16 oz aerosol w/Perma-Lock®	12



SYNTHA-TECH™ LUBRICANT WITH PTFE

A non-flammable, zero VOC[∞], unique blend of synthetic lubricants that utilizes PTFE, anti-wear and extreme pressure additives to increase equipment life and performance. This food grade synthetic lubricant is NSF H1 Registered for use in meat and poultry facilities. Additionally, its long lasting film minimizes surface contact thereby extending lubricating intervals.

Part Number	Container Size	Units Per Case
03054	16 oz aerosol w/Perma-Lock®	12



FOOD GRADE CHAIN LUBE

A special blend of synthetic lubricants and mineral oil, designed to keep roller drive and conveyor chains lubricated. It is specifically designed to provide the convenience of aerosol application where incidental food contact may occur. Food Grade Chain Lube penetrates, lubricates and protects moving parts by reducing friction and wear.

Part Number	Container Size	Units Per Case
03055	16 oz aerosol w/Perma-Lock®	12



FOOD GRADE BELT DRESSING

Provides a temporary, food grade, synthetic treatment for worn belts. Extends belt life by reducing slippage, hardening, glazing, dirt build-up and friction. Belt Dressing can be used on leather, rubber, canvas or fabric, and is ideally suited for flat, round and V-belts. Improves traction and reduces belt tension, relieving stress on motors, shafts and wheels for improved operating efficiency.

Part Number	Container Size	Units Per Case
03065 [*]	16 oz aerosol w/Perma-Lock®	12



WATER BASED SILICONE

Non-flammable, NSF H1 Registered multi-purpose silicone spray for food processing and handling applications. It forms a white emulsion that is odorless and non-staining. It lubricates and protects in most metal to non-metal applications. Water Based Silicone is a silicone rich formula that eliminates binding and sticking, while protecting most surfaces.

Part Number	Container Size	Units Per Case
03035	16 oz aerosol w/Perma-Lock®	12



**PREVENTION.
NOT
DETECTION.®**

LOCKED IN FOR SAFETY INTEGRATED DESIGN POINTS:

- Secure Spray Straw Locks into Place
- Convenient No-Slip Grip
- Useful Catch Curb
- Wide Spray in the "Down" Position
- Precision Spray in the "Up" Position

3 – Not for retail sale, for use in manufacturing establishments only.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

∞ – As defined by Consumer Products VOC regulations.

FOOD GRADE DIELECTRIC GREASE

Lubricates, waterproofs and insulates with a thin, non-curing silicone compound. Dielectric Grease also provides an exceptional lubricant for fasteners used to support temporary electrical work. Excellent for lubricating and sealing rubber and plastic parts – including o-rings. Great for use in food processing environments where there may be a chance of incidental food contact.

Part Number	Container Size	Units Per Case
03085	6 oz pressurized tube	12



FOOD GRADE AIR TOOL OIL

A fully synthetic food grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment.

Part Number	Container Size	Units Per Case
SL2300	1 quart bottle	6



Product	Type	Type of Film	Color	Perma-Lock® Actuator	Flash Point	NSF Registration	S.D.I.L.™	Payback SDS #	Container Size
Food Grade Silicone	Silicone	Non-Drying	Clear	Yes	<0°F TCC	H1	Yes	3040 (aerosol) 3041 (bulk)	
Food Grade Machine Oil	Mineral Oil	Non-Drying	Clear	Yes	200°F TCC	H1	Yes	3081	
Food Grade Penetrating Oil	Mineral Oil	Non-Drying	Clear	Yes	200°F TCC	H1	Yes	3086	
Food Grade White Grease	Aluminum Complex	Non-Drying Grease	White	Yes	20°F TCC	H1	Yes	3038	
Syntha-Tech™ Lubricant with PTFE	Polyolefin/PTFE	Non-Drying	White	Yes	253°F (seta)	H1	Yes	3054	
Food Grade Chain Lube	Mineral Oil	Non-Drying Ultra-Thin	Clear	Yes	370°F COC	H1	Yes	3055	
Food Grade Belt Dressing	Polyisobutene	Tacky	Light Amber	Yes	<0°F	H1	Yes	3065	
Water-Based Silicone	Silicone	Non-Drying	White	Yes	None	H1	Yes	3035	
Food Grade Dielectric Grease	Silicone-Based	Grease	White	No	>500°F TCC	H1	Yes	3085	
Food Grade Air Tool Oil	Synthetic	Non-Drying	Clear	No	473°F	H1	No	42300	

TCC = Tag Closed Cup; COC = Cleveland Open Cup

FOOD GRADE: NSF® H1 REGISTERED

FOOD GRADE COMPRESSOR FLUSH

For cleaning out system prior to changing oil

A synthetic flushing fluid designed to remove varnish and sludge from compressors. It may be used as an intermediary step when transitioning from non-food grade to NSF H1 oils. May be used as a lubricant for up to 500 hours.

NEW

ISO Grade	Product #	Container Size
46	04584	5 gallon
	04585	55 gallon

FOOD GRADE REFRIGERATION COMPRESSOR OILS

Custom blended polyalphaolefin synthetic hydrocarbon fluid with additional seal treating properties. Conditions o-rings in ammonia systems and compatible with mineral oils. Applications include ice making machines, cold storage facilities and low temperature ammonia refrigeration systems.

NEW

ISO Grade	Product #	Container Size
32	04560	5 gallon
	04561	55 gallon
68*	04564	5 gallon
	04565	55 gallon

*Contains Seal Conditioner

DIRECT FOOD CONTACT WHITE OILS

NSF 3H White Oils are purified mineral oils that are edible, colorless, odorless, and tasteless. These products are useful in coating and release applications.

NEW

ISO Grade	Product #	Container Size
Pan Divider Oil ISO15	04590	5 gallon
	04591	55 gallon
22	04592	5 gallon
	04593	55 gallon
46	04594	5 gallon
	04595	55 gallon
100	04596	5 gallon
	04597	55 gallon



FOOD GRADE CHAIN LUBES

High Temp Synthetic PAG Oils are biodegradable and have much higher load and wear properties than H1 White Oils or PAOs.

ISO Grade	Product #	Container Size	Chain Lubes
100	04261	5 gallon	Food Grade Proofer Chain Lube (USP White Oil) (-22 to 248°F)
	04262	55 gallon	
100	04264	5 gallon	Food Grade Synthetic Chain Lube PAO (-5 to 450°F)
	04265	55 gallon	
100	04269	5 gallon	Food Grade Chain Lube (Mineral Oil) (Up to 325°F)
	04270	55 gallon	
220	04267	5 gallon	Food Grade High Temp Synthetic Chain Lube (-5 to 600°F)
	04268	55 gallon	
130	04580	5 gallon	NEW Food Grade Synthetic PAG Chain Oil
	04581	55 gallon	
220	04582	5 gallon	
	04583	55 gallon	



FOOD GRADE AIR TOOL OIL

Formulated with high quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment. Formulated with high performance antioxidants and anti-wear additives to meet the challenges of industrial environments.

ISO Grade	Product #	Container Size
32	SL2300	1 quart
	04258	5 gallon

FOOD GRADE SYNTHETIC COMPRESSOR OIL

High quality PAO base oils are used to provide long life in compressors. Typically 6,000 plus service hours in rotary screw compressors.

ISO Grade	Product #	Container Size
32/46	04202	5 gallon
	04203	55 gallon
68	04206	5 gallon
	04207	55 gallon
100	04543 NEW	5 gallon
	04544	55 gallon



FOOD GRADE HYDRAULIC OILS

ISO Grade	Container Size	Mineral Base Oil	Synthetic PAO
22	5 gallon	04218	04545
	55 gallon	04219	NEW 04546
32	5 gallon	04220	04547
	55 gallon	04221	NEW 04548
46	5 gallon	04222	04212
	55 gallon	04223	04213
68	5 gallon	04226	04216
	55 gallon	04227	04217
100	5 gallon	04228	NEW 04549
	55 gallon	04229	04550
150	5 gallon	04230	
	55 gallon	04231	



FOOD GRADE GEAR OILS

PAG Gear Oils are engineered to provide significantly improved wear, oxidation, and lubricity versus PAO and mineral based gear oils. Typical industrial applications include sperm helical, bevel, and worm gears.

ISO Grade	Container Size	Mineral Base Oil	Synthetic PAO	High Performance Synthetic PAG
150	5 gallon		NEW 04551	NEW 04570
	55 gallon		04552	NEW 04571
220	5 gallon	04246	04232	NEW 04572
	55 gallon	04247	04233	NEW 04573
320	5 gallon	04250	04236	NEW 04574
	55 gallon	04251	04237	NEW 04575
460	5 gallon	04254	04242	NEW 04576
	55 gallon	04255	04243	NEW 04577
680	5 gallon	NEW 04555	NEW 04553	NEW 04578
	55 gallon	04556	04554	NEW 04579



FOOD GRADE BULK LUBRICANTS TECHNICAL INFORMATION

NSF Registration	CRC Product Name	P/N	Container Size	ISO Grade	Viscosity@40°C/100°C	Viscosity Index	Flashpoint °F	Pour Point °F	Specific Gravity	
H1	Food Grade Compressor Flush	04584	5 gallon	46	46 / 8.0	135	518	-22	0.95	
		04585	55 gallon							
H1	Food Grade Refrigeration Compressor Oil	04560	5 gallon	32	29.6 / 6.3	168	481	-90	0.83	
		04561	55 gallon							
H1			04564	5 gallon	68	66.98 / 10.98	148	495	-63	0.84
			04565	55 gallon						
H1	Food Grade Synthetic Hydraulic Oil	04545	5 gallon	22	22 / 4.5	116	465	-76	0.82	
		04546	55 gallon							
H1			04547	5 gallon	32	31.4 / 5.6	117	465	-86	0.82
			04548	55 gallon						
H1			04212	5 gallon	46	46 / 7.9	127	500	-70	0.83
			04213	55 gallon						
H1			04216	5 gallon	68	68.8 / 10.5	141	500	-55	0.84
			04217	55 gallon						
H1			04549	5 gallon	100	93.6 / 12.9	136	500	-44	0.84
			04550	55 gallon						
H1	Food Grade Synthetic Gear Oil	04551	5 gallon	150	147 / 17.6	132	460	-35	0.85	
			04552							55 gallon
H1			04232	5 gallon	220	225.1 / 23.4	128	504	-44	0.85
			04233	55 gallon						
H1			04236	5 gallon	320	319 / 30.5	132	518	-40	0.85
			04237	55 gallon						
H1			04242	5 gallon	460	461 / 39.1	130	518	-36	0.85
			04243	55 gallon						
H1			04553	5 gallon	680	683 / 52	130	518	-29	0.85
			04554	55 gallon						
H1	Food Grade Synthetic PAG Gear Oil	04570	5 gallon	150	150 / 28.99	234	544	-40	1.05	
			04571							55 gallon
H1			04572	5 gallon	220	220 / 36.8	218	544	-40	1.05
			04573	55 gallon						
H1			04574	5 gallon	320	320 / 53.8	233	544	-40	1.05
			04575	55 gallon						
H1			04576	5 gallon	460	460 / 77.3	248	554	-36	1.06
			04577	55 gallon						
H1			04578	5 gallon	680	650 / 128.5	299	554	-36	1.06
			04579	55 gallon						
H1	Food Grade Synthetic – PAG Chain Oil ISO 130	04580	5 gallon	130	130 / 22	198	560	-38	0.99	
			04581							55 gallon
H1	Food Grade Synthetic – PAG Chain Oil ISO 220	04582	5 gallon	220	224.3 / 32.8	192	540	-20	0.99	
			04583							55 gallon
3H	Pan Divider Oil ISO 15	04590	5 gallon	15	No Odor NF White Oil		359.6	-18	0.85	
			04591							55 gallon
3H	Direct Food Contact White Oil ISO 22	04592	5 gallon	22	No Odor NF White Oil		413.6	-18	0.85	
			04593							55 gallon

FOOD GRADE BULK LUBRICANTS TECHNICAL INFORMATION

NSF Registration	CRC Product Name	P/N	Container Size	ISO Grade	Viscosity@40°C/100°C	Viscosity Index	Flashpoint °F	Pour Point °F	Specific Gravity	
3H	Direct Food Contact White Oil ISO 46	04594	5 gallon	46	No Odor USP White Oil		410	-15	0.85	
		04595	55 gallon							
3H	Direct Food Contact White Oil ISO 100	04596	5 gallon	100	No Odor USP White Oil		505.4	-12	0.86	
		04597	55 gallon							
H1	Food Grade Synthetic Compressor Oil (Mineral Oil)	04202	5 gallon	32/46	42 / 7.6	150	501	-58	0.85	
		04203	55 gallon							
H1			04206	5 gallon	68	59.7 / 9.8	150	501	-53	0.87
			04207	55 gallon						
H1			04543	5 gallon	100	98.7 / 14	145	526	-48	0.85
				04544						
H1	Food Grade Multi-Purpose Hydraulic Oil (Mineral Oil)	04218	5 gallon	22	20.8 / 4.2	106	410	-49	0.87	
										04219
H1	Food Grade Hydraulic Oil (Mineral Oil)	04220	5 gallon	32	34 / 5.8	112	420	-41	0.86	
							04221	55 gallon	420	-41
H1			04222	5 gallon	46	47.3 / 7.2	112	450	-31	0.88
				04223				55 gallon	450	-31
H1			04226	5 gallon	68	71.0 / 9.2	106	500	-27	0.87
				04227				55 gallon	500	-27
H1			04228	5 gallon	100	103 / 11.8	104	505	-24	0.88
				04229				55 gallon	505	-24
H1			04230	5 gallon	150	154 / 14.7	93	505	-20	0.89
				04231				55 gallon	505	-20
H1		Food Grade Air Tool Oil	SL2300	1 Quart	32	32 / 6.0	135	473	-58	0.83
H1										
H1	Food Grade Proofer Chain Lube	04261	5 gallon	100	100 / 15	158	370	5	0.88	
										04262
H1	Food Grade Synthetic Chain Lube	04264	5 gallon	100	100 / 8.5	130	460	-35	0.85	
										04265
H1	Food Grade High Temperature Synthetic Chain Lube	04267	5 gallon	220	223 / 26.9	154	537	-31	0.98	
										04268
H1	Food Grade Chain Lube	04269	5 gallon	100	100 / ND	ND	>370	ND	0.87	
										04270
H1	Food Grade Gear Oil SAE 90	04246	5 gallon	150 / 220	190 / 18.3	97	374	-14	0.88	
										04247
H1	Food Grade Gear Oil SAE 85W-140	04250	5 gallon	320	313.4 / 24.9	102	464	-11	0.88	
										04251
H1	Food Grade Gear Oil SAE 140	04254	5 gallon	460	452.6 / 33.7	110	374	-9	0.89	
										04255
H1	Food Grade Gear Oil SAE 250	04555	5 gallon	680	640 / 43	111	446	-4	0.90	
										04556

HEAVY DUTY

POWER LUBE®

High-Performance Lubricant w/PTFE

High performance, multi-purpose lubricant with the benefits of PTFE to provide long lasting lubrication and protection against friction, wear and corrosion. Power Lube® will increase the life and operating efficiency of parts and equipment, as well as withstand extreme load carrying situations.

Part Number	Container Size	Units Per Case
03045*	16 oz aerosol	12



EXTREME DUTY SILICONE

Premium grade silicone fluid that exhibits superior lubrication and temperature viscosity characteristics. Use Extreme Duty Silicone on all metallic and non-metallic surfaces. Clear, non-staining, odorless and reduces friction and galling.

Part Number	Container Size	Units Per Case
03030 ①	16 oz aerosol	12



CHUTE LUBE®

Silicone Lubricant

Chute Lube® helps boxes glide down chutes and rails on package handling and sorting conveyors. Silicone spray for package handling applications minimizes corrosion and provides excellent lubricity. Its colorless, odorless, non-staining film lubricates and protects in most metal to non-metal applications. Eliminates the binding and sticking of packages and boxes, while protecting most surfaces even in wet conditions.

Part Number	Container Size	Units Per Case
03204*	20 oz aerosol	12
03220	16 oz non-aerosol	12
03222	5 gallon pail	1
03223	55 gallon drum	1



CHAIN & WIRE ROPE LUBRICANT

Specifically formulated blend of synthetic lubricants and an organic molybdenum, anti-wear additive that penetrates deep, and leaves a tough film that lubricates and protects. Chain & Wire Rope Lube extends the working life of chains and wire rope and reduces wear caused by friction and corrosion.

Part Number	Container Size	Units Per Case
030501*	16 oz aerosol	12
030521*	5 gallon pail	1
030531*	55 gallon drum	1



PARCEL GLIDE® SILICONE LUBRICANT

Silicone spray for package handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates most metal to non-metal applications. Silicone film eliminates binding and sticking, while protecting most surfaces.

Part Number	Container Size	Units Per Case
03139*	16 oz non-aerosol spray can	12



EXTREME DUTY OPEN GEAR & CHAIN LUBE

A tough, tacky, solid film lubricant used for reducing friction and wear. It is a heavy-duty compound with exceptional "stay-put" characteristics. It provides maximum lubrication and shock protection, reduces gear noise, lubricates, prevents scoring and welding of gear teeth.

Part Number	Container Size	Units Per Case
03058¹	16 oz aerosol	12



HEAVY DUTY CLEAR PENETRATING GREASE

High tack, clear lubricating gel provides superior lubrication and withstands high temperatures and pressures. Penetrates deep to form a tenacious, long-lasting film and is resistant to acids, alkalis, salt, oxidation, weather and steam. This heavy duty clear penetrating gel can extend the operating service life of equipment and reduce wear, galling and scarring.

Part Number	Container Size	Units Per Case
030561*	20 oz aerosol	12



DRY MOLY LUBE

Specially formulated dry film lubricant incorporating a concentrated dispersion of Molybdenum Disulfide (MoS₂). Dry Moly Lube lowers friction, prevents galling and helps to reduce torque and energy consumption.

Part Number	Container Size	Units Per Case
03084*	16 oz aerosol	12



QUICK DRY MOLY LUBE

A dry film lubricant fortified with Molybdenum Disulfide (MoS₂) that reduces friction and improves overall operating performance. Quick Dry Moly Lube bonds instantly to metal, rubber, plastic and most substrates to form a dirt repelling barrier that lubricates and protects the surface from pressure and friction.

Part Number	Container Size	Units Per Case
03043	16 oz aerosol	12



① – 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

DRY GRAPHITE LUBE

A dry film lubricant that is ideal for applications where petroleum products must be avoided. Dry Graphite Lube bonds instantly to metal, rubber, plastic and most substrates to form a dirt repelling barrier that lubricates and protects the surface from pressure and friction. Withstands temperatures up to 850°F and extreme pressures, as well as water and chemical attack.

Part Number	Container Size	Units Per Case
03094*	16 oz aerosol	12



INNER SLIDE LUBE

Lubricates and increases slide motion, extending forklift equipment life. Fortified with Molybdenum Disulfide and extreme pressure additives. Resists pound out under severe lubrication requirements. Adheres to metal surfaces and protects against rust and corrosion.

Part Number	Container Size	Units Per Case
05305*	16 oz aerosol	12



RED GREASE

Heavy-duty, NLGI Grade 2 aluminum complex based grease that provides superior lubrication and withstands high temperature and high pressure. It penetrates deep to form a tenacious, long lasting thick film. Red Grease is waterproof and resistant to acids, alkalis, salt, oxidation, weather and steam. It can extend the operating service life of equipment and reduce wear, galling and scoring.

Part Number	Container Size	Units Per Case
03079*	16 oz aerosol	12



WELDER'S ANTI-SPATTER

Prevents spatter from adhering to surrounding metal surfaces during welding. Eliminates the need to chisel, grind or wire brush after welding. Water-based formula allows easy clean-up without the use of solvent cleaners.

Part Number	Container Size	Units Per Case
03083	16 oz aerosol	12



WHITE LITHIUM GREASE

High-purity, high-quality, NLGI Grade 2 white lithium-based aerosol grease that provides superior lubrication and durability in any weather or temperature. Excellent as a break-in lubricant for bearings, and for general purpose lubrication and corrosion protection of machinery, tools and equipment.

Part Number	Container Size	Units Per Case
03080*	16 oz aerosol	12



COPPER ANTI-SEIZE & LUBRICATING COMPOUND

General purpose anti-seize lubricant that prevents seizing and galling caused by high temperature, heavy loads, vibration and corrosion. This unique formula has a smooth texture, fine particle sizing and familiar copper color, making it an excellent choice for closely fitted parts needing extreme lubrication.

Part Number	Container Size	Units Per Case
SL35901	8 oz brush top bottle	12
SL35903	16 oz brush top bottle	12
14095*	16 oz aerosol	12



DI-ELECTRIC GREASE

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Di-Electric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

Part Number	Container Size	Units Per Case
03082*	16 oz aerosol w/Perma-Lock®	12



PURE NICKEL ANTI-SEIZE & LUBRICATING COMPOUND

A premium, pure nickel flake based lubricating compound that protects fasteners and metal surfaces from seizing caused by temperature, heavy loads, vibration and corrosion. Nuclear specified material. Protects to 2600°F.

Part Number	Container Size	Units Per Case
14097*	16 oz aerosol	12



TAC 2® ADHESIVE CHAIN LUBRICANT

Low viscosity formula provides the ability to penetrate and thoroughly coat vital chain pin and bushing areas. Contains Molybdenum which provides cling-ability to avoid sling-off or excess dripping. High temperature stability (up to 350°F continuous). Blue color allows instant identification of lubricated parts and equipment.

Part Number	Container Size	Units Per Case
03076**	16 oz aerosol	12



1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

NICKEL ANTI-SEIZE & LUBRICATING COMPOUND

Nickel-based formulation that is free of copper, lead, sulfides and chlorides. Protects metal-to-metal applications from seizing and galling caused by high temperatures, heavy loads, vibration, chemicals and corrosion. Protects parts up to 2400°F.



Part Number	Container Size	Units Per Case
SL35911	8 oz brush top bottle	12
SL35913	16 oz brush top bottle	12

THREAD LUBRICANT

A general purpose lubricant that prevents seizing caused by corrosion. Thread Lubricant aids assembly and disassembly, prevents rust and corrosion, and helps reduce costly downtime and breakage. This unique formula has a smooth texture, and fine particle sizing making it an excellent choice for closely fitted parts that need lubrication.



Part Number	Container Size	Units Per Case
SL35924	2 oz tube	50
SL35925	8 oz brush-top bottle	6

NUCLEAR GRADE ANTI-SEIZE & LUBRICATING COMPOUND

A premium high temperature lubricant that offers superior protection against rust and corrosion. This product contains chemically-pure nickel flake in an ashless synthetic fluid thickened by water-resistant complex soap and high carbon synthetic graphite, which has the additional benefit at high temperatures of providing lower torques for easy disassembly. Nuclear Grade Anti-Seize contains no copper, lead, sulfur, halogens, or other ingredients that may poison reactor catalyst beds.



Part Number	Container Size	Units Per Case
SL35920	8 oz brush-top bottle	12
SL35921	16 oz brush-top bottle	12

FOOD GRADE ANTI-SEIZE & LUBRICATING COMPOUND

A premium quality anti-seize compound developed specifically for use in applications where incidental food contact is possible and is composed entirely of ingredients that meet NSF H1 requirements. This aluminum complex based anti-seize protects metal parts from seizure, galling, rust, corrosion, and heat freeze by tenaciously adhering to the metal surface.



Part Number	Container Size	Units Per Case
SL35905	8 oz brush-top bottle	12
SL35906	16 oz brush-top bottle	12



Product	Type	Type of Film	Color	360° Spray	Falex (In Pounds)	Flash Point	NSF Registration S.D.L.I.®	Faxback SDS #	Container Size
Power Lube®	Petroleum/PTFE	Non-Drying	Dark Amber	No	4500	<20°F TCC	H2 Yes	3045	
Extreme Duty Silicone	Silicone	Dry	Clear	Yes	NA	<0°F TCC	H2 Yes	3030	
Chute Lube®	Silicone	Non-Drying	Clear Light Yellow	No	NA	<0°F TCC (aerosol) 113°F Setaflash (bulk)	H2 Yes	3204 (aerosol) 3220 (bulk)	   
Chain & Wire Rope Lubricant	Organic Molybdenum	Non-Drying	Clear	No	NA	<0°F TCC	H2 Yes	3050 (aerosol) 3053 (bulk)	  
Parcel Glide®	Silicone	Non-Drying	Clear	No	NA	<0°F TCC	H1 Yes	3139	
Extreme Duty Open Gear & Chain Lube	Parafinic Oil	Non-Drying	Black	No	NA	>599°F TCC	Yes	3058	
Heavy Duty Clear Penetrating Grease	Petroleum	Oily	Clear	No	NA	<20°F TCC	H2 Yes	3056	
Dry Moly Lube	Organic Molybdenum	Dry	Black	No	NA	<0°F TCC	Yes	3084	
Quick Dry Moly Lube	Organic Molybdenum	Dry	Black	No	NA	ND	Yes	3043	
Dry Graphite Lube	Graphite	Dry	Black	No	NA	-20.2°F PMCC	Yes	3094	
Red Grease	Aluminum	Red Grease	Red	No	NA	<20°F TCC	Yes	3079	
White Lithium Grease	Lithium Soap	White Grease	White	No	NA	<0°F TCC	H2 Yes	3080	
Di-Electric Grease	Silicone-Based	Grease	White	No	NA	<20°F TCC (aerosol)	H1 Yes	3082	
TAC 2® Adhesive Chain Lubricant	Hydrocarbon w/ Moly	Soft Film	Blue	Yes	NA	<0°F TCC	H2 Yes	3076	
Inner Slide Lube	Hydrocarbon	Non-Drying	Black	No	NA	20°F TCC	No	5305	
Welder's Anti-Spatter	Water Based	Non-Drying	White	No	NA	>265°F	Yes	3083	
Copper Anti-Seize	Copper	Non-Drying	Copper	No	NA	>167°F (aerosol) 430°F COC	Yes	14095 (aerosol) 435901 (bulk)	  
Pure Nickel Anti-Seize	Nickel	Non-Drying	Silver	No	NA	>449.6°F	Yes	14097	
Nickel Anti-Seize	Nickel	Non-Drying	Silver-Gray	NA	NA	430°F COC	No	435911	 
Nuclear Grade Anti-Seize	Nickel	Non-Drying	Silver-Gray	NA	NA	430°F COC	No	435920	 
Food Grade Anti-Seize	Aluminum Complex	Non-Drying	White	NA	NA	>400°F TCC	H1 No	435905	 
Thread Lubricant	Lithium	Grease	Amber	NA	NA	334°F COC	No	435924	 

TCC = Tag Closed Cup; COC = Cleveland Open Cup; NA = Not Applicable; PMCC = Pensky-Martens Closed Cup

SP-250™

Corrosion Inhibitor

Thin-film, water displacing, corrosion inhibitor that will not emulsify, even in the presence of alkali. Use for process parts drying and protection of all metals, protection for parts subjected to high humidity conditions, anti-corrosion coating for shrink wrapped parts, and moisture displacement for finished parts.

Part Number	Container Size	Units Per Case
03226	5 gallon pail	1
03228	55 gallon drum	1

SP-300™

Corrosion Inhibitor

Unique blend of solvents, oils and corrosion inhibitors that quickly displaces moisture, excess water-based coolants and grinding compounds. Short-to-medium term protection. Non-drying film protects indoors up to 9 months.

Part Number	Container Size	Units Per Case
03246	5 gallon pail	1
03248	55 gallon drum	1

SP-350™

Corrosion Inhibitor

Provides protection for metal parts and assemblies that are stored indoors or in shipment. SP-350™ promotes easy start-up of stored equipment.

Part Number	Container Size	Units Per Case
03262	16 oz aerosol	12
03266	5 gallon pail	1
03268	55 gallon drum	1

SP-400™

Corrosion Inhibitor

Long-term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Provides protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

Part Number	Container Size	Units Per Case
03282*	16 oz aerosol	12
03286	5 gallon pail	1
03288	55 gallon drum	1

BATTERY TERMINAL PROTECTOR

Apply to battery terminals to provide a soft, dry, lead-free protective coating that keeps moisture, salts and road grime from corroding metal contacts. Enhances battery life and power by preventing corrosion-related leakage.

Part Number	Container Size	Units Per Case
03175*	12 oz aerosol	12



STEEL RE-NU®

Stainless Steel Coating

Quick-drying, 100% #316L stainless steel coating provides corrosion resistance and protection against weather, sunlight, oil and water, in a variety of environments including marine, utility, chemical processing, food manufacturing and general maintenance repair.

Part Number	Container Size	Units Per Case
18211*	16 oz aerosol	6



ZINC-IT®

Instant Cold Galvanize

High-performance coating of >93% pure zinc that electrochemically bonds with ferrous metals to form a galvanic cell. Zinc-It® is an excellent touch-up for damaged galvanized coatings.

Part Number	Container Size	Units Per Case
18412*	16 oz aerosol	12
18413†	1 gallon can	1



BRIGHT ZINC-IT®

Instant Cold Galvanize

Epoxy-ester based, light duty sacrificial zinc coating that inhibits corrosion and provides the beauty of a high shine bright metallic finish. Recommended for touch-up and repair of bright finish, hot-dip galvanized surfaces.

Part Number	Container Size	Units Per Case
18414*	16 oz aerosol	12



SEAL COAT®

Urethane Coating

Urethane Seal Coat® provides a conformal polyurethane coating that insulates electrical equipment and seals out water and moisture. Clear allows for visualization of equipment; Red provides striking contrast. Clear formulation is an excellent insulator of PC boards, since it allows visualization of circuit paths.

Part Number	Container Size	Units Per Case
18410*	Red 16 oz aerosol	12
18411*	Clear 16 oz aerosol	12



RUST CONVERTER

CRC Rust Converter neutralizes rust and converts it to a tough, black primer in one easy step. Fast drying coating can be painted over. Prevents future rusting by sealing out moisture and other outside elements with oil-based paint. Applications include vehicles, trailers, railings, bridges, equipment, storage tanks, transmission towers, etc.

Part Number	Container Size	Units Per Case
18418	1 quart bottle	12
18419	1 gallon bottle	4
14610	20 oz aerosol	12



RUST REMOVER

CRC Rust Remover is a safe, effective, fast acting formula that removes rust, not metal. It leaves metal clean and ready to paint, plate or powder coat. No heavy wire brushing or sand blasting required. CRC Rust Remover removes only the rust and will not damage metal surfaces.

Part Number	Container Size	Units Per Case
18420	1 quart bottle	12
18421	1 gallon bottle	4



⊖ – 360° spray valve can be sprayed in the UP or DOWN position.

† – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Product	Film Type	Application	Corrosion Protection	Drying Time (to touch)	Specifications	S.D.I.L.®	Faxback SDS #	Container Size
SP-250™	Ultra Thin, Non-Staining, Dry	Indoors – Up To 9 Months	Light	1 Hour	NSF H2 Registered, Meets requirements of MIL-PRF-16173 Grade 3, Class I (corrosion test only)	No	3226	
SP-300™	Ultra Thin	Indoors – Up To 9 Months	Light	Non-Drying	NSF H2 Registered	No	3246	
SP-350™	Thin Oil	Indoors – Up to 2 Years	Moderate	Non-Drying	NSF H2 Registered	Yes	3262 (aerosol) 3266 (bulk)	
SP-400™	Transparent, Amber, Waxy	Indoors & Outdoors – Up to 2 Years	Heavy	1 Hour	Meets requirements of MIL-C-16173 Grade 4, Class I	Yes	3282 (aerosol) 3286 (bulk)	
Battery Terminal Protector	Soft, Visible Waxy	Indoors – Up to 2 Years	Moderate to Heavy	Non-Drying	—	Yes	3175	
Steel Re-Nu®	Steel, Dry	Outdoors – Up to 1 Year	Light	20 Minutes	NSF R2 Registered	Yes	18211	
Zinc-It®	Zinc, Dry	Outdoors – 1-2 Years	Heavy	15-30 Minutes	Aerosol: Meets requirements of MIL-P-21035B, MIL-P-26915, MIL-P-46105 Bulk: Meets requirements of MIL-P- 46105, MIL-P-26915	Yes	18412 (aerosol) 18413 (bulk)	
Bright Zinc-It®	Zinc, Dry	Outdoors – Up to 1 Year	Moderate	15-30 Minutes	ASTM-A-750-93	Yes	18414	
Seal Coat® Red	Brick Red, Dry	Electrical	Light	15-30 Minutes	—	Yes	18410	
Seal Coat® Clear	Clear, Dry	Electrical	Light	15-30 Minutes	—	Yes	18411	
Rust Converter	Milky Emulsion	Outdoors – Up to 2 Year	Heavy	24 Hours	—	No	14610 (aerosol) 18418 (bulk)	
Rust Remover	Clear Liquid	NA	NA	NA	—	No	18420	

CONTACT CLEANER 2000®

Precision Cleaner

Provides fast cleaning action for the removal of dirt, light oils and other contaminants. It evaporates quickly, leaves no residue, has no flash or fire point, and contains no Class I or Class II Ozone Depleting Chemicals. Not recommended for use on Noryl® or polycarbonate type plastics.

Part Number	Container Size	Units Per Case
02140  1	16 oz aerosol	12
02142 ¹	5 gallon pail	1
02143 ¹	55 gallon drum	1



XT-2000™ PRECISION CLEANER

A non-flammable, low odor, rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment. It is safe on most plastics and has no flash point.

Part Number	Container Size	Units Per Case
02145 	16 oz aerosol	12



NT™ PRECISION CLEANER

Patented formula NT Precision Cleaner relies on advanced COzol® technology to effectively remove dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NT Precision Cleaner has no flash point and contains no Class I or Class II Ozone Depleting Chemicals and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics aren't an issue.

Part Number	Container Size	Units Per Case
02205  1	16 oz aerosol	12
02207 ¹	5 gallon pail	1
02208 ¹	55 gallon drum	1



CO® CONTACT CLEANER

Advanced Technology Formula CO Contact Cleaner does not contain known ozone depleting substances and is VOC exempt. Its blend of HFE and HFC solvents provide an optimal alternative to CFC, HCFC and flammable contact cleaners. Regular use of CO Contact Cleaner will help prevent electrical failures, increase performance and prolong equipment life by dissolving and rinsing away contaminants.

Part Number	Container Size	Units Per Case
02016 	16 oz aerosol	12
02017 ¹	16 oz non-aerosol can w/trigger	12



CONTACT CLEANER 2000® VC

Precision Cleaner

Contact Cleaner 2000® VC is an aggressive advanced COzol® technology alternative precision cleaner designed to remove contaminants from electronic equipment. It provides an effective alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern. Contains no Class I or Class II Ozone Depleting Chemicals. It is VOC compliant in all 50 states[∞].

Part Number	Container Size	Units Per Case
02240 	16 oz aerosol	12



PF PRECISION CLEANER

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue in electronic cleaning applications. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part Number	Container Size	Units Per Case
02190 	16 oz aerosol	12



PRECISION PLUS® CLEANER

A revolutionary contact cleaner with an aggressive, fast penetrating, high purity formula that is VOC exempt. Its unique HCFC and COzol® technology formula is non-flammable, chemically stable, non-conductive and non-corrosive. It helps prevent contact failure or malfunction by dissolving and rinsing away dust, lint, dirt, light oils and other contaminants as well as removing Krytox® and other fluorinated greases from delicate electronic equipment. Precision Plus Cleaner contains HCFC-225 which may only be sold to commercial users for applications consistent with the regulation.

Part Number	Container Size	Units Per Case
02210 	16 oz aerosol	12
02211 	12 oz aerosol	12



QD® CONTACT CLEANER

A petroleum distillate and alcohol blended precision cleaner suitable for sensitive electronics. QD evaporates quickly, leaves no residue and is safe to use on all plastics. QD Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals. Ideal for applications where lower flash point solvents can be used.

Part Number	Container Size	Units Per Case
02130  *	16 oz aerosol	12
02131 ¹ *	5 gallon pail	1
02132 ¹ *	55 gallon drum	1
02133 ¹ *	16 oz non-aerosol can w/trigger	12



 – 360° spray valve can be sprayed in the UP or DOWN position. Noryl® is a registered trademarks of General Electric Corporation

¹ – Item restricted from sale in some states. See product page on CRC website for specific restrictions. ∞ – As defined by Consumer Products VOC regulations.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

ELECTRONIC COMPONENT CLEANER

Precision Cleaner

Aggressive precision cleaner for use on electronic components in industrial, electrical, and aviation applications. Its high purity, fast penetrating formula aggressively dissolves and rinses away dust, lint, dirt, oils, polar soils, and other contaminants from most non-plastic surfaces. It evaporates very rapidly, leaves no residue, and has no flash point.

Part Number	Container Size	Units Per Case
02200 	16 oz aerosol	12



HF™ CONTACT CLEANER

Petroleum distillate-based precision cleaner that offers the safety of a high flashpoint without leaving a residue. It may be used on most plastic materials. HF Contact Cleaner contains no Class I or Class II Ozone Depleting Chemicals.

Part Number	Container Size	Units Per Case
02125 	16 oz aerosol	12



HOT LINE TOOL CLEANER & PROTECTANT WIPES

These pre-moistened, disposable wipes are saturated with a special cleaner and protectant designed to effectively clean dirty fiberglass hot line tools while leaving behind a protectant to help keep them clean. The convenient 8" x 10.5" wipes allow for easy one-time use and eliminates the need for rags and storing bulk chemicals.

Part Number	Container Size	Units Per Case
04110	Box of 50 wipes	1



DUSTER™

Aerosol Dust Removal System

Safely removes dirt and dust from energized equipment without damaging sensitive components or surface finish. CRC Duster™ penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast of product to remove embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only.

Part Number	Container Size	Units Per Case
14085	12 oz aerosol trigger	12



CE™ PRECISION CLEANER

Azeotropic blend designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CE Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue. Low odor.

Part Number	Container Size	Units Per Case
14035 	16 oz aerosol	12



 – 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

Krytox® is a registered trademark of DuPont Corporation

ELECTRICAL PRECISION CLEANERS

Product	Type of Cleaner	Flash Point	Drying Time	Dielectric Strength (Volts)	Safe On Plastics	S.D.L. [®]	NSF Registration	VOC g/L [∞]	Fairbairn SDS #	Container Size
Contact Cleaner 2000 [®]	HFC/COzol [®]	None	Fast	30,800	May be harmful to some plastics	Yes	K2	730.3	2140 (aerosol) 2142 (bulk)	  
NT [™] Precision Cleaner	HFC/COzol [®]	None	Fast	30,800	May be harmful to some plastics	Yes	K2	730.3	2205 2207 (bulk)	  
Contact Cleaner 2000 [®] VC	HFC/COzol [®]	None	Fast	30,800	No	Yes	K2	388.2	2240	
Precision Plus [®] Cleaner	COzol [®] HCFC/HFC Blend	None	Fast	35,000	Yes	Yes	K2	0	2210	 
XT-2000 [™] Precision Cleaner	HFC/COzol [®]	None	Fast	30,200	No	Yes	K2	324.3	2145 (aerosol) 2147 (bulk)	 
CO [®] Contact Cleaner	HFC	None	Very Fast	27,600	Yes	Yes	K2	0	2016 (aerosol) 2017 (bulk)	 
PF Precision Cleaner	HFC	None	Very Fast	31,500	Yes	Yes	K2	90.6	2190 (aerosol)	
QD [®] Contact Cleaner	Petroleum Distillate/ Alcohol	<0°F TCC	Very Fast	36,700 30,500 (bulk)	Yes	Yes	K2	495	2130 (aerosol) 2131 (bulk) 2133 (non-aerosol spray)	   
Electronic Component Cleaner	HFC/COzol [®]	None	Fast	30,800	No	Yes	K2	730.3	2200	
Hot Line Tool Cleaner & Protectant Wipes	Alcohol/ Silicone	57°F TCC*	Moderate	10,900	Safe on most Plastics	No	No	694	4110	
CE [™] Precision Cleaner	HFC/COzol [®]	None	Controlled	28,400	Safe on most Plastics	Yes	K2	221.7	14035	
HT [™] Contact Cleaner	Petroleum Distillate	205°F PMCC	Moderate– Slow	45,700	May be harmful to some plastics	Yes	K2	0	2125	
Duster [™] Aerosol Dust Removal System	HFC	None	Fast	ND	Yes	No	K2	0	14085	

TCC = Tag Closed Cup; PMCC = Pensky-Martens Closed Cup; ND = Not Determined

*Liquid expressed from wipes

[∞] – VOC g/L as defined by Consumer Products VOC regulations

LECTRA CLEAN®

Heavy Duty Electrical Parts Degreaser for Energized Equipment

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances from energized electrical equipment to increase operating efficiency. Lectra Clean® offers quick & efficient degreasing action, fast evaporation and no residue. With no flash point, it is an excellent alternative to 1,1,1-based cleaning products. Use caution near plastics. Designed specifically to be safe for use on energized electrical equipment.

Part Number	Container Size	Units Per Case
02018	20 oz aerosol	12
02020	1 gallon bottle	4
02021	5 gallon pail	1
02023	55 gallon drum	1

LECTRA CLEAN® II

An excellent alternative for cleaning electric motors and equipment where chlorinated solvents are not acceptable. Lectra Clean® II effectively removes soils and cleans surfaces without residue build-up. Use caution on plastics. Non-conductive, non-corrosive, low odor.

Part Number	Container Size	Units Per Case
02120	20 oz aerosol	12
02121	1 gallon bottle	4
02122	5 gallon pail	1
02124	55 gallon drum	1

ELECTRICAL PARTS CLEANER for Energized Equipment

Effective heavy duty degreaser provides strong degreasing action, fast evaporation and no residue when cleaning energized electrical parts and equipment. It is non-flammable, VOC exempt and contains no Class I or Class II Ozone Depleting Chemicals. Use caution near plastics and paints. Designed specifically to be safe for use on energized electrical equipment.

Part Number	Container Size	Units Per Case
02180	20 oz aerosol	12
02183	5 gallon pail	1
02184	55 gallon drum	1

FAST DRY DEGREASER

Innovative heavy duty non-chlorinated degreasing solvent. Excellent for cleaning electrical equipment where rapid turn-around is necessary and low flashpoint solvents can be used. Use caution on plastics.

Part Number	Container Size	Units Per Case
02185 ¹	20 oz aerosol	12
02188 ³	55 gallon drum	1



LECTRA FORCE™

Electrical Cleaner

Lectra Force™ utilizes revolutionary technology that combines the power of a high performance, industrial strength degreaser with lower VOCs. It quickly dissolves grease, oil and sludge for more efficient operation of electrical equipment. Lectra Force™ evaporates rapidly, leaves no residue, and has a good health and safety profile.

Part Number	Container Size	Units Per Case
02115 ¹	20 oz aerosol	12



CITRUS DEGREASER

A unique, heavy duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use caution on plastics and paints.

Part Number	Container Size	Units Per Case
14170 [Ⓢ]	20 oz aerosol	12
14970 ³	20 oz aerosol	12
14171 ³	16 oz non-aerosol can w/trigger	12
14172 ³	1 gallon bottle	4
14173 ³	5 gallon pail	1
14174 ³	55 gallon drum	1



NATURAL DEGREASER™

Citrus-Based Degreaser

Naturally formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ contains no Class I or Class II Ozone Depleting Chemicals or chlorinated solvents. Use caution on plastics and paints.

Part Number	Container Size	Units Per Case
14005	20 oz aerosol	12
14007 ¹	5 gallon pail	1
14008 ¹	55 gallon drum	1



ELECTRICAL MAINTENANCE

[Ⓢ] – 360° spray valve can be sprayed in the UP or DOWN position.

¹ – Item restricted from sale in some states. See product page on CRC website for specific restrictions. ³ – Not for retail sale, for use in manufacturing establishments only.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

HEAVY DUTY DEGREASERS

Product	Type of Cleaner	Cleaning Strength (KB)	Flash Point	Drying Time	Dielectric Strength (Volts)	VOC g/L [∞]	Odor	NSF Registration S.D.[L.] [®]	Faxback SDS #	Container Size	
Lectra Clean [®]	Chlorinated	95	None	Fast	50,500	0	Moderate	K2	Yes	2018 (aerosol) 2020 (bulk)	20 1 5 55
Lectra Clean [®] II	Petroleum Distillate/ Glycol Ether	75	185°F TCC	Slow	42,100	0	Low	K1, K2	Yes	2120 (aerosol) 2121 (bulk)	20 1 5 55
Electrical Parts Cleaner	Chlorinated	95	None	Fast	37,500	0	Moderate	K2	Yes	2180 (aerosol) 2183 (bulk)	20 5 55
Fast Dry Degreaser	Blend Of Organic Solvents	106	<0°F TCC	Fast	6,000 20,800	333 767	Moderate	K2	Yes	2185 (aerosol) 2188 (bulk)	20 55
Lectra Force [™]	Proprietary/ COzol [™]	97	None	Fast	39,000	541	Moderate	K2	Yes	2115	20
Citrus Degreaser	d-Limonene & Petroleum Distillate	32 54	170°F TCC 100°F TCC	Controlled	58,600 35,000	79.4 820	Light Citrus	C1	Yes	14170 (aerosol) 14171 (trigger) 14172 (bulk)	20 16 1 5 55
Natural Degreaser [™]	Terpene/ Glycol Ether	>200 111	150°F TCC 172°F TCC	Slow	28,600 45,700	89.8 35.2	Citrus	C1	Yes	14005 (aerosol) 14007 (bulk)	20 5 55

KB = Kauri Butanol; TCC = Tag Closed Cup

[∞] – VOC g/L as defined by Consumer Products VOC regulations



CABLE CLEAN® DEGREASER High Voltage Splice Cleaner

Advanced technology that combines the power of a high performance, high voltage splice and termination cleaner with a non-chlorinated, industrial strength degreaser. Cable Clean® Degreaser helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions by quickly removing grease, oil, wax, dirt, silicone lubricants and other contaminants.

Part Number	Container Size	Units Per Case
02064	20 oz aerosol	12
02066	1 gallon can	4
02067	5 gallon pail	1



CABLE CLEAN® RD™ (Rapid Dry) High Voltage Splice Cleaner

Chlorinated solvent-based cleaner for the removal of contaminants from the semi-conductive core of high voltage cables. Offers effective cleaning action with the benefits of non-flammability, no residue and fast evaporation. Cable Clean® RD™ can be used to replace 1,1,1-Trichloroethane without sacrificing performance. It contains no known Ozone Depleting Chemicals.

Part Number	Container Size	Units Per Case
02150	16 oz aerosol	12
02152	1 gallon bottle	4



CABLE CLEAN® High Voltage Splice Cleaner

HFC/CO₂ based cleaner that aggressively removes contaminants from the semi-conductive core of high voltage cables during splicing and termination. Cable Clean® helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions.

Part Number	Container Size	Units Per Case
02069	20 oz aerosol	12



CABLE CLEAN® HF™ (High Flash) High Voltage Cable Cleaner

High flashpoint, petroleum distillate-based cleaner for the removal of contaminants from the semi-conductive core of high voltage cables. Cable Clean® HF™ provides an alternative to chlorinated, ozone depleting or terpene-based cable cleaning products.

Part Number	Container Size	Units Per Case
02170	16 oz aerosol	12



CABLE CLEAN® NT™ High Voltage Splice Cleaner

An HFC solvent-based cleaner with advanced CO₂ technology for the removal of contaminants from high voltage cables. Cable Clean® NT™ offers effective cleaning action with the benefits of non-flammability, no residue and fast evaporation. Cable Clean® NT™ can be used to replace 1,1,1-Trichloroethane and HCFC 141b without sacrificing performance. The rapid evaporation makes it safe on virtually all cable substrates.

Part Number	Container Size	Units Per Case
02040	16 oz aerosol	12



ELECTRICAL CABLE CLEANERS

Product	Type of Cleaner	Contains ODCs (Class I or Class II)	Cleaning Strength (KB)	Flash Point	Drying Time	Dielectric Strength (Volts)	Odor	NSF Registration	S.D.L.®	Faxback SDS #	Container Size
Cable Clean® Degreaser	Brominated	No	125	None	Fast	26,800	Strong	K2	Yes	2064 (aerosol) 2066 (bulk)	20 1 5
Cable Clean®	HFC/COzol®	No	97	None	Fast	39,000	Faint Ethereal	None	Yes	2069	20
Cable Clean® NT™	HFC/COzol®	No	45	None	Fast	30,800	Faint Ethereal	K2	Yes	2040	16
Cable Clean® RD™	Chlorinated	No	96	None	Fast	41,100	Strong	K2	Yes	2150 (aerosol) 2152 (bulk)	16 1
Cable Clean® HF™	Petroleum Distillate	No	25	204°F TCC	Slow	45,700	Low	None	Yes	2170	16

ODC = Ozone Depleting Compounds; TCC = Tag Closed Cup; KB = Kauri Butanol



2-26®

Multi-Purpose Precision Lubricant

Multi-purpose, plastic safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. 2-26® drives out moisture and leaves a thin, long lasting film to protect against corrosion. Excellent for use around modern plastics and insulators.

Part Number	Container Size	Units Per Case
02004 	6 oz aerosol	12
02005 	16 oz aerosol	12
02007	16 oz trigger bottle	12
02006	1 gallon bottle	4
02009	5 gallon pail	1
02011	55 gallon drum	1



LECTRA SHIELD™

Long Term Corrosion Inhibitor

Long term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Lectra Shield™ is an easily removable film that will provide protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

Part Number	Container Size	Units Per Case
02031*	16 oz aerosol	12



ELECTRICAL SILICONE LUBRICANT

Lubricates, waterproofs, and protects with a thin, clear, non-staining dry film. Designed specifically for electrical applications. Eliminates binding and sticking while protecting most surfaces. Low surface tension permits better coverage and deeper penetration.

Part Number	Container Size	Units Per Case
02094*	16 oz aerosol	12
02096*	5 gallon pail	1
02097*	55 gallon drum	1



SMART METER LUBE

Smart Meter Lube is a non-flammable lubricant and corrosion resistant grease for lubricating smart meter contacts. It penetrates to coat contacts and provides corrosion protection on smart meter mechanisms. PowerJet® Technology spray nozzle allows penetration from a greater distance. For professional use only.

Part Number	Container Size	Units Per Case
02019	16 oz aerosol	12



STOR & LUBE®

Corrosion Inhibitor

Provides both superior lubrication and heavy duty corrosion protection for metal parts and assemblies that are stored indoors. Promotes easy start-up of stored equipment. Will also lubricate moving metal parts subject to constant wear.

Part Number	Container Size	Units Per Case
02061 	16 oz aerosol	12



HV SWITCHGEAR LUBRICANT

One step lubricant and corrosion inhibitor for metering, distribution and substation class switchgear contacts. Penetrates to coat contacts and provides corrosion protection on switchgear mechanisms. The PowerJet® spray nozzle allows application from greater distance overhead with a Hot Line tool adapter. High Voltage Switchgear Lubricant contains HCFC-225 which has use restrictions and may only be sold to professional users for applications consistent with the regulation.

Part Number	Container Size	Units Per Case
02060	16 oz aerosol	12



DIELECTRIC GREASE

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

Part Number	Container Size	Units Per Case
02083*	16 oz aerosol	12
02085	6 oz pressurized can w/Select-A-Bead	12
05107	carded	12
05109	carded	12



HOT LINE TOOL CLEANER & PROTECTANT WIPES

These pre-moistened, disposable wipes are saturated with a special cleaner and protectant designed to effectively clean dirty fiberglass hot line tools while leaving behind a protectant to help keep them clean. The convenient 8" x 10.5" wipes allow for easy one-time use and eliminate the need for rags and storing bulk chemicals.

Part Number	Container Size	Units Per Case
04110	Box of 50 wipes	1



 - 360° spray valve can be sprayed in the UP or DOWN position.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Product	Type	Type of Film	Color	Flash Point	Dielectric Strength (Volts)	NSF Registration	S.D.I. [L]	Faxback SDS #	Container Size
2-26®	Petroleum	Non-Drying	Amber	200°F TCC	51,300	H2	Yes	2004 (aerosol) 2006 (bulk)	6 16 16 1 5 55
Electrical Silicone Lubricant	Silicone	Dry	Clear	<0°F TCC	350	H1	Yes	2094 (aerosol) 2096 (bulk)	16 5 55
Stor & Lube®	Petroleum	Non-Drying	Amber	144°F TCC	ND	H2	Yes	2061	16
Dielectric Grease	Silicone-Based	Grease	White	<20°F TCC >572°F COC	500 >450	H1	Yes	2083 (aerosol) 2085 (bulk)	6 16
Lectra Shield™	Petroleum Distillate	Transparent Waxy	Amber	<0°F TCC	ND	No	Yes	2031	16
Smart Meter Lube	Silicone Based	Grease	White	None TCC	28,000	No	Yes	2019	16
HV Switchgear Lubricant	Silicone	Non-Drying	Translucent	None TCC	28,000	No	Yes	2060	16
Hot Line Tool Cleaner & Protectant Wipes	Alcohol/Silicone	Transparent	Clear	57.2°F TCC*	10,000	No	No	4110	50

TCC = Tag Closed Cup; COC = Cleveland Open Cup

*Liquid expressed from wipes



TRUETAP® HD

Cutting Fluid

Designed as a heavy duty cutting fluid for use in severe applications, TrueTap® HD is a thick fluid that clings to the cutting tool throughout the operation. Contains no 1,1,1-Trichloroethane.

Part Number	Container Size	Units Per Case
03400 ²	16 oz bottle	12
03403 ²	55 gallon drum	1



CUTTING OIL

Superior thread cutting lubricant for use on all types of both ferrous and non-ferrous metals, including brass, copper and aluminum.

Part Number	Container Size	Units Per Case
14050 ²	16 oz aerosol	12
14051 ²	1 gallon bottle	4



TRUETAP® FOAMY

Cutting Fluid

Excellent extreme duty cutting fluid developed for ease of application. Works well on both ferrous and non-ferrous metals and can be applied before or during cutting operation. Foaming action penetrates deep into the cut to extend cutting tool life and promote a superior finish.

Part Number	Container Size	Units Per Case
03410 ²	16 oz aerosol	12



HONING & CUTTING OIL

All-purpose, non-chlorinated, metal cutting/machining oil extends tool life and improves the finish of machined surfaces. It contains extreme pressure, anti-weld, lubricity, wetting agent and anti-corrosion additives to allow higher machine speeds and feed rates. Better Falex values than those produced by Sulfur-Chlorine systems.

Part Number	Container Size	Units Per Case
SL2523 ²	1 gallon bottle	4



TRUETAP® AQUA

Cutting Fluid

A suitable replacement for solvent or oil-based cutting fluids. TrueTap® Aqua is a water-soluble cutting fluid that exhibits excellent cooling and lubrication properties. Works exceptionally well in machine tools containing water-soluble coolants. Emulsifies with the coolant without causing contamination.

Part Number	Container Size	Units Per Case
03440 ²	16 oz bottle	12
03442 ²	5 gallon pail	1



SOLUBLE OIL

Improves wetting, cleaning and lubricating during metal cutting and grinding operations. It prevents rust, corrosion and rancidity.

Part Number	Container Size	Units Per Case
SL2512	1 quart bottle	12
SL2513	1 gallon bottle	4
SL2515	5 gallon pail	1



TRUETAP® WAX STICK LUBRICANT

Innovative, multi-purpose lubricant stick that effectively removes heat and lubricates. Capable of withstanding extreme pressure. Convenient stick is easy to use and mess-free.

Part Number	Container Size	Units Per Case
03480	16 oz stick	10



BLUE LAYOUT FLUID

Applies a smooth even coat for all layout work. The dark blue fluid dries very quickly, sticks to both metal and glass and allows you to scribe sharp precise lines.

Part Number	Container Size	Units Per Case
03066*	16 oz aerosol	12



LAYOUT FLUID REMOVER

Specifically formulated to remove layout fluids quickly and effectively from metal or glass.

Part Number	Container Size	Units Per Case
03069*	16 oz aerosol	12



2 – Item restricted from sale in SCAQMD

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Product	Type	Color	Metal Compatibility	Faxback SDS#	Container Size
TrueTap® HD Cutting Fluid	Natural Oil, w/EP Additives	Light Amber	All Metals	3400	16 55
TrueTap® Foamy Cutting Fluid	Natural & Mineral Oils w/ EP Additives	Clear	All Metals	3410	16
TrueTap® Aqua Cutting Fluid	Water-Based	Blue	All Metals except Magnesium	3440	16 5
TrueTap® Wax Stick	Wax-Based	Amber	All Metals	3480	16
Cutting Oil	Petroleum	Amber	All Metals	14050 (aerosol) 14051 (bulk)	16 1 5
Honing & Cutting Oil	Mineral Oil	Red	All Metals	42523	1
Soluble Oil	Mineral Oil	Amber	All Metals	42512	1 1 5
Blue Layout Fluid	Organic Solvents/Alcohol	Blue	All Metals	3066	16
Layout Fluid Remover	Organic Solvents/Alcohol	Clear	All Metals	3069	16





HAND CLEANER TOWELS

These shop-sized pre-moistened, heavy duty towels with pumice scrubbing power work fast to loosen, dissolve and absorb dirt and grease. Hand Cleaner Towels are absorbent, non-scratching, easy to use and are fortified with emollients for the skin.



Part Number	Towel Size	Towels per Container	Containers per Case
04100	10.5" x 12.25"	72	6

HOT LINE TOOL CLEANER & PROTECTANT WIPES

These pre-moistened, disposable wipes are saturated with a special cleaner and protectant designed to effectively clean dirty fiberglass hot line tools while leaving behind a protectant to help keep them clean. The convenient 8" x 10.5" wipes allow for easy one-time use and eliminate the need for rags and storing bulk chemicals.



Part Number	Container Size	Units Per Case
04110	Box of 50 wipes	1

SUNSCREEN TOWEL

Sunscreen Towels combine a unique SPF30+ liquid sunscreen formula and a large, lint free wipe. Water and sweat resistant towels provide UVA/UVB protection that is greaseless and PABA-free.



Part Number	Towel Size	Towels per Container	Containers per Case
04105	8" x 10"	1	100

RTV SILICONE ADHESIVE/SEALANTS

CRC Room Temperature Vulcanizing (RTV) Adhesive/Sealants are designed for a wide range of sealing, bonding, protecting and waterproofing. They cure at room temperature – no special curing methods required. The chemically stable formulations show little change in physical properties after exposure to rain, snow, temperature extremes and weathering.

- Clear: Forms a barely visible water-tight seal
- White: Designed for high moisture, indoor/outdoor applications
- Blue: Heavy duty industrial gasket sealant
- Red: High temperature, low odor, non-corrosive gasket sealant
- Black: High pressure, low odor, non-corrosive gasket sealant
- Gray: Forms a visible, water-tight seal



RTV SILICONE PRESSURIZED TUBES



Revolutionary packaging with Select-a-Bead™ nozzle – allows user to control bead width. Dispenses a uniform bead for consistent results. Pressurized package keeps silicone fresh so it won't dry out. Self-sealing plug – Simply pull out to re-use the product. VOC compliant.∞

Part Number	Container Size	Units Per Case
14055	Clear 8 oz tube	12
14056	White 8 oz tube	12
14057	Blue 8 oz tube	12
14059	Red 8 oz tube	12
14072	Black 8 oz tube	12

RTV SILICONE CARTRIDGES

Economical for large jobs. Convenient screw-on nozzle. Fast dispensing for applications that require less precision. VOC compliant.∞

Part Number	Container Size	Units Per Case
14073	Clear 12 oz cartridge	12
14074	White 12 oz cartridge	12
14075	Red 12 oz cartridge	12
14079	Gray 12 oz cartridge	12



NEW

FOOD ZONE SILICONE SEALANTS

NSF Certified for sealing, bonding, protecting and water-proofing in food plants. They show little change in physical properties after exposure to moisture and temperature extremes.

Part Number	Container Size	Units Per Case
14082	White 12 oz cartridge	12
14083	Clear 12 oz cartridge	12
14087	Gray 12 oz cartridge	12
14088	Aluminum 12 oz cartridge	12



SILICONIZED ACRYLIC LATEX CAULK

A white latex caulk designed for a wide range of sealing, bonding, protecting and waterproofing. It is based on a 100% acrylic emulsion and is modified with special additives to optimize resistance to oxidation, UV degradation and cold temperatures. It bonds to all common building materials and is flexible enough to be used on moving parts.

Part Number	Container Size	Units Per Case
14108	12 oz cartridge	12

∞ – As defined by Consumer Products VOC regulations.

SPRAY ADHESIVE

General purpose, quick tack adhesive especially formulated to bond to many foils, plastics, papers, foams, metals, cardboards and cloths. Compare to 3M® Super 77™ Adhesive.

Part Number	Container Size	Units Per Case
03018	24 oz aerosol	12



PIPE THREAD SEALANT

Non-toxic, non-drying thread sealing compound consisting of a blend of non-matting grease, PTFE, and other inert compounds to produce a leak proof seal.

Part Number	Container Size	Units Per Case
SL35401	8 oz aerosol	6



FIRE BLOCK FOAM

Flame Resistant Sealant

Fire Block Foam is an approved foam insulation for sealing air penetrations. By blocking air flow, it effectively slows the spread of fire and smoke. Its advanced formula is tinted orange for easy visual identification by building code officials and inspectors. The reusable foam saver nozzle keeps the product usable for up to 1 month. Self-extinguishing formula meets key building code requirements. UL94 Flammability Test – pass best rating V-0.

Part Number	Container Size	Units Per Case
14084	16 oz aerosol	12



MINUTE MEND™ Multi-Purpose Epoxy Putty

A two-part epoxy putty packaged in a convenient one piece stick. Permanently repairs scratches, gouges and holes in drums, tanks, pipes, castings, molds, sinks, tubs and leaky gaskets. Perform routine electrical jobs such as mounting terminal blocks, packing wires and repairing breaker boxes. Ideal for stopping leaks, can even be used under water. Can be used in plumbing, electrical, ceramic, vehicle and machinery repair. Ready to use in less than one minute after mixing.

Part Number	Container Size	Units Per Case
14070	4 oz stick	24
14071	2 oz stick	40



FOAM

Minimal Expansion

Polyurethane foam designed to fill, seal, bond, retrofit, insulate and deaden sound in and around cracks and cavities. It forms a permanent, waterproof and airtight bond to masonry, wood, glass, metal and most plastics. Stops drafts, dust, moisture, insects and rodents. When cured, foam can be sanded, painted or stained. The low expansion formula expands 50% when fully cured. Cured foam insulates to R-5 for each inch of foam. UL® classified as a caulking sealant. Foam and propellant are non-flammable. Reusable for up to 30 days after initial use.

Part Number	Container Size	Units Per Case
14077 	16 oz aerosol	12



PERMA-MEND™ UV Curable Repair Patch

A fiberglass reinforced, self-adhesive repair patch that is flexible, waterproof and UV resistant. Easy to use, no mixing required. Can be painted after curing. Rated up to 2200 psi when properly applied.

Part Number	Container Size	Units Per Case
14089	3" x 6" Patch	48
14094	6" x 9" Patch	12
14096	9" x 12" Patch	12
14098	UV Flashlight	1



 – 360° spray valve can be sprayed in the UP or DOWN position.

UL® is a registered trademark of UL LLC. 3M® and Super 77™ are trademarks of 3M Company

SEALANTS & ADHESIVES

Product	Room Temp. Curing	Corrosive to Metals	Temperature Range	Elongation % (ASTM D 412 DIE C)	Dielectric Strength (Volts/mm)	Tensile Strength (Lap Shear)	Conforms to Specifications	Faxback SDS#	Container Size
Food Zone Silicone Sealant White	Yes	Yes	-70°F to 400°F	400%	25 KV/mm	250 psi	Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600	14082	
Food Zone Silicone Sealant Clear	Yes	Yes	-70°F to 400°F	400%	25 KV/mm	250 psi	Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600	14083	
Food Zone Silicone Sealant Gray	Yes	Yes	-70°F to 400°F	400%	25 KV/mm	250 psi	Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600	14087	
Food Zone Silicone Sealant Aluminum	Yes	Yes	-70°F to 400°F	400%	25 KV/mm	250 psi	Meets NSF/ANSI#51 FDA Reg. 21 CFR-177.2600	14088	
RTV Silicone Adhesive/Sealant Clear	Yes	Yes	-76°F to 400°F 400°F Interm.	400%	25 KV/mm	250 psi	MIL A-46106 TT-S-00230C TT-S-001543A FDA 21 CFR-175.105	14055	 
RTV Silicone Adhesive/Sealant White	Yes	Yes	-76°F to 400°F 400°F Interm.	400%	25 KV/mm	250 psi	MIL A-46106 TT-S-00230C TT-S-001543 FDA 21 CFR-175.105	14056	 
RTV Silicone Adhesive/Sealant Blue	Yes	Yes	-60°F to 450°F	500%	25 KV/mm	250 psi	MIL A-46106 TT-S-00230C TT-S-001543A FDA 21 CFR-175.105	14057	
RTV Silicone Adhesive/Sealant Red	Yes	No	-80°F to 500°F 600°F Interm	400%	18 KV/mm	250 psi	MIL A-46106 TT-S-001543A TT-S-00230C	14059	 
RTV Silicone Adhesive/Sealant Black	Yes	No	-30°F to 450°F	500% +25%	18 KV/mm	250 psi	MIL A-46106 TT-S-001543A TT-S-00230C	14072	
RTV Silicone Adhesive/Sealant Gray	Yes	Yes	-70°F to 400°F	400%	25 KV/mm	250 psi	TT-S-001543A TT-S-00230C MIL-A-46106 FDA 21 CFR-175.105	14079	
Siliconized Acrylic Latex Caulk	Yes	No	-20°F to 180°F	500% +/-50	---	41 psi	ASTM C-834-76	14108	
Spray Adhesive	Yes	No	-20°F to 123°F	---	---	---	---	3018	 
Pipe Thread Sealant	NA	No	-35°F to 550°F	---	---	---	ASTM B-117	435401	
Fire Block Foam	Yes	No	-200°F to 200°F (cured foam)	---	---	---	UL R14175	14084	
Foam Minimal Expansion	Yes	No	-200°F to 200°F (cured foam)	---	---	---	Insulates to R-5 UL R14175	14077	
Minute Mend™	Yes	No	-40°F to 250°F 350°F Interm.	---	300 V/mil	500 lbs. to 900 lbs.	---	14070	 
Perma-Mend™	Yes UV Cure	No	-40°F to 392°F	---	9 KV/mm	2200 psi	---	14089 14094 14096	  

NUT LOCK

Medium Strength Threadlocker (Blue)

Medium Strength general purpose threadlocker designed for fasteners between 1/4" to 3/4" (6 mm to 20 mm). Disassembly is possible with hand tools. Eliminates the need for lock washers and lock nuts. Prevents parts from loosening due to vibration. Compare to Loctite® 242®.

Part Number	Container Size	Units Per Case
04505	4 oz bottle	10
04507	1 oz bottle	10
04506	16 oz bottle	10



STUD LOCK

High Strength Threadlocker (Red)

Excellent for heavy duty applications. Permanently locks studs up to 1" (25 mm). Use to replace snap rings and set screws. Compare to Loctite® 271.

Part Number	Container Size	Units Per Case
04515	4 oz bottle	10
04516	16 oz bottle	10



BOLT LOCK

Shock Resistant Threadlocker (Red)

High Strength for permanent applications. High viscosity allows for easy application control. Excellent for large diameter fasteners between 3/8" to 1" (10 mm to 25 mm). Designed for use in harsh environments where heavy shock and vibration are common. Compare to Loctite® 262.

Part Number	Container Size	Units Per Case
04512	1 oz bottle	10
04510	4 oz bottle	10
04511	16 oz bottle	10



LARGE DIAMETER

High Strength Threadlocker (Red)

Ideal for sealing and locking threaded assemblies 1" (25 mm) or larger in diameter. Resists temperature up to 475°F. High viscosity allows for easy application control. Compare to Loctite® 277.

Part Number	Container Size	Units Per Case
04520	4 oz bottle	10



Product	CRC Part Number	Unit of Measure	Color	Fasteners	Break/Prevail	Cure Time 20% (Full)	Temp Range	Viscosity	Conforms to Specifications	Shear Strength	Compare to Loctite® Part Numbers	SDS #
Nut Lock	04507	(.34 fl oz / 10mL)	Blue	1/4" to 3/4"	100/75	10-30 min (24 hours)	-75°F to 300°F	1000cP	Mil-S-46163A Type II, Grade N	1200 psi	242	4505
	04505	(1.69 fl oz / 50mL)										
	04506	(8.45 fl oz / 250mL)										
Bolt Lock	04512	(.34 fl oz / 10mL)	Red	3/8" to 1"	150/200	10-30 min (24 hours)	-75°F to 300°F	2500cP	Mil-S-46163A Type II, Grade O	3000 psi	262	4510
	04510	(1.69 fl oz / 50mL)										
	04511	(8.45 fl oz / 250mL)										
Stud Lock	04515	(1.69 fl oz / 50mL)	Red	Up to 1"	220/200	10-30 min (24 hours)	-75°F to 300°F	550cP	Mil-S-46163A Type II, Grade K	3000 psi	271	4515
	04516	(8.45 fl oz / 250mL)										
Large Diameter	04520	(1.69 fl oz / 50mL)	Red	1" and larger	250/250	10-30 min (24 hours)	-75°F to 475°F	7000cP	Mil-S-46163A Type II, Grade K	4000 psi	277	4520

Loctite® and 242® are registered trademarks of Henkel Corporation

Customer Care: (800) 272-4620 • Technical Assistance: (800) 521-3168 **More product information a click away at www.crcindustries.com**

THREADLOCKERS

AIR TOOL OIL

SAE 10

Lubricates and protects pneumatic equipment. Increases torque; assures long tool life. Reduces rust, varnish, sludge and acids.

Part Number	Container Size	Units Per Case
SL2531	15 oz bottle	12
SL2533	1 gallon bottle	4

Faxback SDS # 42531



UNIVERSAL 2-CYCLE OIL

Extends engine service life. Minimizes plug fouling, port plugging and ring sticking. Clean burning with minimal smoke. Protects against heat, corrosion and rust.

Part Number	Container Size	Units Per Case
SL2261	15 oz bottle	12
SL2262	1 quart bottle	12

Faxback SDS # 42261



HYDRAULIC & JACK OIL

SAE 20

Protects all parts in hydraulic jacks over a wide temperature range. Prevents foaming, rust, oxidation, corrosion and seal swell.

Part Number	Container Size	Units Per Case
SL2621	15 oz bottle	12
SL2552	1 quart bottle	12
SL2553	1 gallon bottle	4
SL2555	5 gallon pail	1

Faxback SDS # 42552



FOOD GRADE AIR TOOL OIL

NSF H1 Registered for incidental food contact. A fully synthetic food grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment. Provides lubrication for all air line equipment used in food processing plants.

Part Number	Container Size	Units Per Case
SL2300	1 quart bottle	6
04258	5 gallon pail	1

Faxback SDS # 42300 & 4258



BAR & CHAIN LUBRICANT

Reduces wear and friction. Remains fluid in cold temperatures. Performs well on equipment subjected to loads, water and high speeds.

Part Number	Container Size	Units Per Case
SL2612	1 quart bottle	12

Faxback SDS # 42612



GL-4 MULTI-PURPOSE GEAR OIL

SAE 85W90

Provides lubrication over a wide temperature range. Protects against corrosion in industrial drives, worm and hypoid gear sets. Good high temperature properties. Reduces wear; extends life of gear teeth.

Part Number	Container Size	Units Per Case
SL24229	1 quart bottle	12
SL24239	1 gallon bottle	4
SL24259	5 gallon pail	1



COMPRESSOR OIL

SAE 30

Helps promote longer life in all types of reciprocating and rotary compressors. Solvent refined and clay filtered for long lasting, anti-foul operation. Cleans valve seat deposits as they form. Prevents ring sticking and reduced wear.

Part Number	Container Size	Units Per Case
SL22131	1 quart bottle	12
SL22133	1 gallon bottle	4

Faxback SDS # 422131



GL-4 MULTI-PURPOSE GEAR OIL

SAE 140

Contains anti-rust, anti-oxidation, anti-wear and extreme pressure additives. Provides the corrosive protection and film strength needed in industrial drives, worm and hypoid gear sets. Wide temperature range. Extends life of gear teeth.

Part Number	Container Size	Units Per Case
SL24228	1 quart bottle	12
SL24238	1 gallon bottle	4
SL24258	5 gallon pail	1



GL-5 PLUS NEW GENERATION™

Heavy Duty Limited Slip Gear Oil SAE 85W140

Meets many military and commercial specifications and service requirements. Excellent for use where seasonal temperatures fluctuate widely. Minimum viscosity change during service. Superior performance in extreme pressure and high load conditions.

Part Number	Container Size	Units Per Case
SL2432	1 quart bottle	12
SL2433	1 gallon bottle	4
SL2435	5 gallon pail	1



GL-5 PLUS NEW GENERATION™

Limited Slip Gear Oil SAE 80W90

Thermally stable, high-quality, multi-purpose automotive and truck lubricant with extreme pressure properties. Especially suited for use in high performance differentials. Assures absolute lubrication and protection against shock loading, gear scoring; prevents chatter, noise and vibration in limited-slip axles. Contains rust and corrosion inhibitors. Provides protection for operations under both high speed/low torque and low speed/high torque conditions.

Part Number	Container Size	Units Per Case
SL2472	1 quart bottle	12
SL2473	1 gallon bottle	4
SL2475	5 gallon pail	1



GL-5 PLUS NEW GENERATION

Heavy Duty Limited Slip Gear Oil SAE 75W90

Protects against corrosion, seal damage, oxidation and wear. Provides better protection and extended drain intervals in new cars, 4-WDs, high performance vehicles, and domestic and import cars and trucks with limited-slip, sure-grip and posi-traction type differential systems. Excellent performance over a wide range of temperatures. Provides protection for operations under both high speed/low torque and low speed/high torque conditions.

Part Number	Container Size	Units Per Case
SL2462	1 quart bottle	12
SL2463	1 gallon bottle	4



SYN-GO® OEM GRADE Synthetic Gear Oil SAE 75W140

Excellent performance and reliability under the most demanding and harsh operating conditions. Enhances transmission and differential life and reduces maintenance costs and downtime. Dramatically extends drain and fill intervals. Improves fuel efficiency. Provides superior lubrication protection from -40°F to 350°F.

Part Number	Container Size	Units Per Case
SL2495	1 quart bottle	6
SL2496	1/2 gallon bottle	4



Product	Vis @ 40°C c.s.t.	Vis @ 100°C c.s.t.	Base	AGMA	Feedback SDS #	MIL Spec
GL-4 Multi-Purpose Gear Oil 85W90	200	17	Mineral Oil	5 EP	424229	MIL-PRF-2105
GL-4 Multi-Purpose Gear Oil 140	400	28	Mineral Oil	8 EP	424228	MIL-PRF-2105
GL-5 Plus New Generation™ Heavy Duty Gear Oil w/Limited Slip 85W140	334	25	Mineral Oil	7 EP	42432	MIL-PRF-2105E
GL-5 Plus New Generation™ Gear Oil w/Limited Slip 75W90	101	14.5	Mineral Oil	6 EP	42462	MIL-PRF-2105E
GL-5 Plus New Generation™ Heavy Duty Gear Oil w/Limited Slip 80W90	138	14.5	Mineral Oil	4 EP	42472	MIL-PRF-2105E
Syn-Go® Synthetic Gear Oil 75W140	156	25	Synthetic Fluid	6 EP	42495	---

LITHIUM-BASED

SUPER WHITE™

Multi-Purpose Grease

Meets late-model high-tech specifications. NLGI-2 lithium base. Wide temperature range of 0°F to 300°F.

Part Number	Container Size	Units Per Case
SL3150	14 oz cartridge	10
SL3151	14 oz can	12
SL3155	35 lb pail	1
SL3360	10 oz tube	6
SL3361	1.75 oz squeeze tube	24



Extreme Pressure ENGINE ASSEMBLY LUBE

Prevents friction, galling and wear on all types of engine components during assembly, start-up and break-in periods.

Part Number	Container Size	Units Per Case
SL3331	10 oz tube	6
SL3333	2.75 oz tube	12



Extreme Pressure STA-PLEX™ PREMIUM RED GREASE

A superior multi-purpose certified lithium complex based NLGI-2 GC-LB grease. Contains extreme pressure, anti-wear, and anti-oxidation additives. Ideal for high temperature and performance applications. Drop point: 500°F.

Part Number	Container Size	Units Per Case
SL3190	14 oz cartridge	10
SL3191	14 oz can	12
SL3195	35 lb pail	1
SL3197	120 lb keg	1



LITHIUM GENERAL PURPOSE GREASE

Lithium base NLGI-2 grease designed for light duty applications. Use on motor bearings, pump bearings and light duty applications. Drop point: 340°F.

Part Number	Container Size	Units Per Case
SL3310	14 oz cartridge	10
SL3311	14 oz can	12
SL3315	35 lb pail	1
SL3317	120 lb keg	1



SYNTHETIC-BASED

SILARAMIC® Brake System Grease

Protects all moving caliper hardware, mating surfaces and backing plates with the latest rust, oxidation and anti-wear additives to provide lasting protection against friction, wear and corrosion. Ideal for high performance or racing applications.

Part Number	Container Size	Units Per Case
05361	5 oz tube	12



NEW GENERATION™ WHEEL BEARING GREASE

For Disc and Drum Brakes

Meets late-model high-tech specifications. NLGI-2 GC-LB lithium complex base. Wide temperature range of -40°F to 325°F. Use on late-model wheel bearings, chassis and suspension points.

Part Number	Container Size	Units Per Case
SL3110	14 oz cartridge	10
SL3111	14 oz can	12



CONSTANT VELOCITY (C.V.) JOINT GREASE

Extremely stable lithium base grease with molybdenum disulfide; extends the life of C.V. joints. Will not attack or run out of C.V. boot. Protects against rust and oxidation. Contains extreme pressure and anti-wear additives.

Part Number	Container Size	Units Per Case
SL3174	4 oz tube (carded)	12



PERMATHERM™ High Temp Synthetic Grease

High performance, synthetic NLGI-1.5 grease. Contains rust and oxidation inhibitors to increase service life and protect against corrosion. Withstands constant operating temperature up to 400°F and intermittent temperatures of 500°F- 600°F. Beyond 600°F, base fluid slowly evaporates with no carbon residue.

Part Number	Container Size	Units Per Case
SL3580	14 oz cartridge	10
SL3585	35 lb pail	1



SYNTHETIC BRAKE & CALIPER GREASE

Synthetic grease prevents caliper binding, vibration and corrosion. Contains molybdenum, PTFE and graphite for an extreme temperature range of -30°F to 600°F. Eliminates uneven pad wear.

Part Number	Container Size	Units Per Case
05351	2.5 oz. tube	6
05352	1/3 oz. carded packets	12
05353	12 oz. tub	12
05359	8 fl. oz. bottle	6
SL3301	2.5 oz. tube	6
SL3302	1/3 oz. carded packets	12
SL3303	12 oz. tub	12



MOLY-GRAPH®

Extreme Pressure Multi-Purpose Grease

Molybdenum and graphite establish a fine micron plating on all surfaces. Lithium base NLGI-2 grease with drop point of 350°F. Great for use on ball joints, chassis points, bushings and roller bearings.

Part Number	Container Size	Units Per Case
SL3141	14 oz can	12
SL3144	3/3 oz cartridges	6
SL3145	35 lb pail	1
SL3146	7 lb pail	4
SL3330	14 oz cartridge	10



LITHIUM COMPLEX-BASED

DRILLER RED GREASE

Premium quality lithium complex, Extreme Pressure (EP) grease with an industry high 80+ lb Timken OK load. Driller Red Grease is designed to withstand greater amounts of pressure, especially in oil and gas applications. It offers superior wear and shock load protection to applications with high axial or thrust loads.

Part Number	Container Size	Units Per Case
SL3640	14 oz cartridge	10
SL3650	35 lb pail	1



POLYUREA-BASED

**LECTRA LUBE™
ELECTRIC MOTOR
GREASE**

Lectra Lube™ is a premium long-life grease with excellent thermal stability. This grease has excellent water resistance and will not washout. It maintains its consistency under severe working conditions and resists oxidation.



Part Number	Container Size	Units Per Case
SL3586	14 oz cartridge	10

SODIUM-BASED

**HEAVY DUTY
DRUM BRAKE**

Wheel Bearing Grease

For drum brakes and slow speed bearings. NLGI-2.5 sodium base. Ideal for use where heavy loads and slow speeds are prevalent. Drop point: 360°F.



Part Number	Container Size	Units Per Case
SL3131	14 oz can	12
SL3135	35 lb pail	1
SL3136	7 lb pail	4

ALUMINUM COMPLEX-BASED

**BALL & ROLLER
BEARING**

Hi-Temp Grease

NLGI-2 grease. Made to handle high loads and high temperatures inherent in bearing applications. Combines moderately high oil viscosity with low temperature pumpability to provide high performance in a wide operating range. Won't wash out, splatter or run out under the heaviest loads. Resists mild detergent and alkaline wash.



Part Number	Container Size	Units Per Case
SL3630	14 oz cartridge	10
SL3635	35 lb pail	1

**MULTI-PURPOSE
FOOD GRADE
GREASE**

NSF H1 Registered. Aluminum complex, NLGI-2 grease. Meets FDA regulation 21 CFR 178.3570 for incidental food contact. Appropriate for food processing and handling equipment. Will not pound out of bearings and bushings during shock loads.



Part Number	Container Size	Units Per Case
SL35600	14 oz cartridge	10
SL35605	35 lb pail	1
SL35607	120 lb keg	1
SL35609	400 lb drum	1

**HI-TEMP DISC
BRAKE**

Wheel Bearing Grease

For high temperature, high speed bearings. NLGI-2 aluminum complex base. For use on disc brake systems, chassis points and suspension systems. Drop point: 500°F.



Part Number	Container Size	Units Per Case
SL3160	14 oz cartridge	10
SL3161	14 oz can	12
SL3165	35 lb pail	1
SL3166	7 lb pail	4

**MARINE BOAT
TRAILER AND 4x4
WHEEL BEARING
GREASE**

Aluminum complex, NLGI-2 grease. Excellent water resistance. Superior rust and corrosion protection. Typical drop point: 500°F.



Part Number	Container Size	Units Per Case
SL3120	14 oz cartridges	10
SL3121	14 oz can	12
SL3125	35 lb pail	1
SL3127	120 lb keg	1
SL3184	3-3 oz cartridge	6

SILICA

**SYNTHETIC FOOD
GRADE GREASE**

NSF H1 Registered for incidental food contact. NLGI-2 lubricating grease formulated with the highest quality synthetic NSF registered raw materials available. Performs extremely well in cold temperature applications as the base fluid exhibits a very low pour point. Resists rust and oxidation. Water wash-down resistant. Wide Temperature Range – provides superior lubrication from -20°F to 350°F.



Part Number	Container Size	Units Per Case
SL35610	14 oz cartridge	10
SL35611	35 lb pail	1
SL35612	120 lb keg	1
SL35613	400 lb drum	1

CALCIUM SULFONATE

**EXTREME DUTY
FOOD GRADE
GREASE**

NSF H1 Registered for incidental food contact. NLGI-2 high performance lubricating grease excels in applications where resistance to water washout and broad operating temperatures are absolutely necessary. Provides unsurpassed resistance to extreme pressures and corrosion, including salt spray. Timken OK Load of 65 lbs. Wide Temperature Range – provides superior lubrication from -20°F to 400°F.



Part Number	Container Size	Units Per Case
SL35615	14 oz cartridge	10
SL35616	35 lb pail	1

NSF H1 Food Grade Grease	NSF Registration	NLGI Grade	Base Oil	Base Oil Viscosity@40°C	Thickener	Drop Point °F	Worked Penetration	Faxback SDS#
Multi-Purpose Food Grade Grease	H1	2	Mineral	64-70	Aluminum Complex	500	265-295	435600
Synthetic Food Grade Grease	H1	2	PAO	60-65	Silica	650	265-295	435610
Extreme Duty Food Grade Grease	H1	2	Mineral	100-120	Overbased Calcium Sulfonate	572	265-295	435615

Product	Grease Type	NLGI Grade	Color	Working Temperature	Water Resistance	Timken OK Load	4 Ball EP Weld	Additives	Faxback SDS #
Super White™ Multi-Purpose Grease	Lithium	2	White	0°F to 300°F	Good	25 lbs	ND	Whitening Agents, Anti-Rust, Anti-Oxidant, Anti-Wear	43150
Lithium General Purpose Grease	Lithium	2	Amber	0°F to 250°F	Very Good	30 lbs	ND	NA	43310 43311
Driller Red Grease	Lithium Complex	2	Red	-10°F to 400°F	Excellent	80 lbs	315	Anti-Rust, Anti-Wear, Extreme Pressure	43640
Constant Velocity Joint Grease	Lithium	1	Black	10°F to 275°F	Good	50 lbs	ND	Extreme Pressure, Anti-Wear, Rust and Oxidation Inhibitors	43174
Moly-Graph® Extreme Pressure Multi-Purpose Grease	Lithium	2	Black	-25°F to 250°F	Very Good	45 lbs	250	Extreme Pressure, Molybdenum Disulfide, Anti-Wear, Anti-Rust, Anti-Oxidant	43141
Extreme Pressure Engine Assembly Lube	Lithium	0.5	Black	0°F to 250°F	Good	NA	ND	Extreme Pressure, Molybdenum Disulfide, Anti-Rust, Anti-Wear, Tackifier, Anti-Oxidant	43331
Silaramic® Brake System Grease	Synthetic	2	Off White	-50°F to 3000°F	Excellent	NA	NA	Anti-Wear, Anti-Rust	5361
Permatherm™ High Temp Synthetic Grease	Synthetic	1.5	Amber	-40°F to 400°F	Very Good	50 lbs	ND	Anti-Wear, Anti-Oxidant, Anti-Rust	43580
Sta-Plex™ Extreme Pressure Premium Red Grease	Lithium Complex	2	Red	-20°F to 325°F	Excellent	60 lbs	500	Extreme Pressure, Anti-Wear, Anti-Rust, Anti-Oxidant, Tackifier	43190
New Generation™ Wheel Bearing Grease for Disc and Drum Brakes	Lithium Complex	2	Amber	-40°F to 325°F	Very Good	50 lbs	250	Extreme Pressure, Anti-Wear, Anti-Rust, Tackifier	43110
Synthetic Brake Caliper Grease	Synthetic	2	Black	-30°F to 600°F	Good	60 lbs	ND	Molybdenum Disulfide, Extreme Pressure, Anti-Seize Polymers, Lubrication Fortifiers including PTFE	5351 43301
Lectra Lube™ Electric Motor Grease	Polyurea	2	Blue Green	-40°F to 400°F	Excellent	50 lbs.	400	Extreme Pressure, Anti-Wear	43586
Heavy Duty Drum Brake Wheel Bearing Grease	Sodium	2.5	Dark Amber	10°F to 250°F	Moderate	ND	ND	Anti-Oxidant	43131
Ball & Roller Bearing Hi-Temp Grease	Aluminum Complex	2	Dark Gray	0°F to 325°F	Excellent	40 lbs	250	Extreme Pressure, Molybdenum Disulfide, Anti-Wear, Anti-Rust, Anti-Oxidant	43630 43635
Hi-Temp Disc Brake Wheel Bearing Grease	Aluminum Complex	2	Dark Gray	0°F to 325°F	Excellent	60 lbs	315	Rust and Oxidation Inhibitors, Anti-Wear, Extreme Pressure, Molybdenum Disulfide, Graphite	43160
Marine Boat Trailer and 4x4 Wheel Bearing Grease	Aluminum Complex	2	Blue	0°F to 325°F	Excellent	ND	ND	Anti-Rust, Polymer Adhesives	43120

NA = Not Applicable; ND = Not Determined

GENERAL PURPOSE SILICONE MOLD RELEASE

A general purpose mold release used for a variety of applications including injection molding, compression molding, blow molding, and extruding. Provides fast and easy part removal from molds. Medium duty silicone content 3.5%. Ideal for use on cold and hot metals.

Part Number	Container Size	Units Per Case
03300	16 oz aerosol	12



LECITHIN MOLD RELEASE

Non-silicone mold release helps assure multiple releases and will not interfere with parts to be painted, bonded, heat sealed or laminated. Lecithin Mold Release imparts a smooth dry, non-toxic film. No special cleaning required before part decoration.

Part Number	Container Size	Units Per Case
03306	16 oz aerosol	12



FOOD GRADE SILICONE MOLD RELEASE

Formulated to be used for light duty applications. Contains the same high-quality ingredients as our General Purpose Silicone Mold Release. Light duty silicone content 3%. NSF M1 Registered

Part Number	Container Size	Units Per Case
03301	16 oz aerosol	12



BORON NITRIDE MOLD RELEASE

Ideal when working with the latest high temperature resins. It is also an excellent release for die-casting of low melting point metals such as lead, zinc and aluminum. Forms a non-reacting layer with molten metals, salts, fluxes and slags. High electrical resistance and thermal conductivity.

Part Number	Container Size	Units Per Case
03310*	16 oz aerosol	12



HEAVY DUTY SILICONE MOLD RELEASE

Superior lubrication that provides maximum releases. Formulated for difficult to remove molded parts. Heavy duty silicone content 5%. Helps avoid molding material build-up.

Part Number	Container Size	Units Per Case
03302	16 oz aerosol	12



HEAVY DUTY MOLD CLEANER

Safety-solvent designed to quickly dissolve and remove silicone, grease, oil and residue on mold surfaces. Fast evaporating formulation is ideal for cleaning cold molds. Non-flammable, chemically stable, non-conductive and non-corrosive.

Part Number	Container Size	Units Per Case
03315	16 oz aerosol	12



FOOD GRADE MOLD RELEASE WO

Silicone-free, paintable mold release is perfect for use in medical and food packaging applications. The pure white oil based formula makes it an excellent all-purpose mold release. NSF H1, M1 Registered. Safe for use on most plastics.

Part Number	Container Size	Units Per Case
03311	16 oz aerosol w/Perma-Lock®	12



*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

MOLD RELEASE CHARACTERISTICS	#03300 General Purpose	#03301 Food Grade	#03302 Heavy Duty	#03311 Food Grade WO	#03306 Lecithin	#03310 Boron Nitride
No ozone depleting chemicals	◆	◆	◆	◆	◆	◆
Will not interfere with bonding				◆	◆	
Ultrasonic welding compatible				◆	◆	◆
Recommended for medical molding				◆	◆	
Safe on solvent sensitive plastics	◆	◆	◆	◆	◆	◆
Odorless	◆	◆	◆	◆	◆	◆

MOLD RELEASE / RESIN RECOMMENDATION	#03300 General Purpose	#03301 Food Grade	#03302 Heavy Duty	#03311 Food Grade WO	#03306 Lecithin	#03310 Boron Nitride
ABS	◆	◆	◆	◆	◆	◆
Acetal	◆	◆	◆	◆	◆	◆
Acrylic	◆	◆	◆	◆	◆	◆
Noryl®	◆		◆	◆		
Nylon	◆	◆	◆	◆	◆	
Polycarbonate	◆	◆	◆	◆	◆	◆
Polyethylene				◆	◆	
Polypropylene				◆	◆	
Polystyrene	◆	◆	◆	◆	◆	◆
Polysulfone	◆	◆	◆	◆	◆	
Rubber	◆	◆	◆	◆	◆	
Wax	◆	◆	◆	◆		

This release/resin recommendation chart is intended to be a general guide based on field testing performed over the last 45 years. Always pre-test any release with a particular resin. Mold configuration and conditions can greatly affect part release ability.

Product	Type	Type of Film	Drying Time	Paint Compatible	Temperature Range	S.D.(L)®	Backpack SDS#	Container Size
General Purpose Silicone Mold Release	Silicone	Non-Drying	Fast	No	Up to 600°F	Yes	3300	
Food Grade Silicone Mold Release	Silicone	Non-Drying	Fast	No	Up to 600°F	Yes	3301	
Heavy Duty Silicone Mold Release	Silicone	Non-Drying	Fast	No	Up to 600°F	Yes	3302	
Food Grade Mold Release WO	Mineral Oil	Non-Drying	Fast	Yes	Up to 400°F	Yes	3311	
Lecithin Mold Release	Lecithin	Non-Drying	Fast	Yes	Up to 500°F	Yes	3306	
Boron Nitride Mold Release	Boron Nitride	Dry	Fast	Yes	Up to 800°F	Yes	3310	
Heavy Duty Mold Cleaner	Chlorinated	NA	Fast	NA	NA	Yes	3315	

NA = Not Applicable

Noryl® is a registered trademarks of General Electric Corporation

WORKER SAFETY

FIRE ANT KILLER

Fast-acting, highly effective insecticide used to kill fire ants. Product offered in an aerosol version or long-lasting granules. The aerosol version kills on contact, is safe on most plastics, contains no chlorinated solvents. High dielectric strength of 47,600 volts.

Part Number	Container Size	Units Per Case
14037 ¹	20 oz aerosol	12

Faxback SDS # 14037

The granules are ready to use and kill the queen within 24 hours. Prevents new fire ant mounds from forming. Non-corrosive, non-conductive. 4 oz. single-use pouch treats up to 12" x 12" area.

Part Number	Container Size	Units Per Case
14039 ¹	4 oz packet	40

Faxback SDS # 14039

WASP & HORNET KILLER PLUS™

Insecticide

Fast acting, high strength insecticide that knocks down and kills wasps, hornets, fire ants, black widow spiders and scorpions on contact. Contains no chlorinated solvents. Safe on most plastics. CRC trigger provides a dense, accurate spray that will reach up to 20 feet to drench harmful insects and their nests. High dielectric strength of 47,600 volts. Extension tube doubles as a locking mechanism

Part Number	Container Size	Units Per Case
14010	20 oz aerosol trigger	12

Faxback SDS # 14010



BEE BLAST®

with Residual Wasp & Hornet Killer

Fast-acting, high strength insecticide that instantly soaks harmful insects and their nests with a high output 20' jet blast. Bee Blast® contains no chlorinated solvents and is safe on most plastics. High output 20' jet blast kills wasps, hornets, yellow jackets and bees on contact. Safety Data Label S.D.[L.]® right on the can – a CRC exclusive. High dielectric strength of 47,300 volts. Kills with residual action as wasps and hornets return to nests.

Part Number	Container Size	Units Per Case
14009	20 oz aerosol	12

Faxback SDS # 14009



FR (FLAME RESISTANT) CLOTHING INSECT REPELLENT

NEW

Repellent for the treatment of flame resistant clothing. Provides a protective barrier against mosquitoes, gnats, chiggers, ticks, biting flies and other flying insects. Contains Permethrin which is a contact insecticide that not only repels but also kills insects. It will not damage or negatively affect the protection properties of flame resistant clothing. Binds to fabric and protects up to two weeks, even through washing. Convenient aerosol package provides easy and controlled application of product. Conforms to ASTM F2621-06 Standard Practice for Determining Response Characteristics and Design Integrity of Arc Rated Finished Products in Electric Arc Exposure. Non-flammable, non-DEET formula is safe for clothing. Do not apply to skin.

Part Number	Container Size	Units Per Case
14036	8 oz aerosol	12

Faxback SDS # 14036



INSECT REPELLENT

Insect Repellent uses a high strength formula to repel mosquitoes, gnats, chiggers, fleas, ticks, biting flies and other biting insects up to twice as long as common consumer insect repellents. Insect Repellent protects outdoor workers by reducing the risk of contracting Lyme Disease from ticks when sprayed on exposed skin and clothing.. Convenient aerosol package. Contains 25% active ingredient (DEET). The only insect repellent in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Safe on most plastics.

Part Number	Container Size	Units Per Case
14011	8 oz aerosol	12

Faxback SDS # 14011



14010, 14009, 14037, 14039, 14036 and 14011 are not registered outside the United States and Puerto Rico. 1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

INSECTICIDES

TESTING

SMOKE TEST®

Smoke Detector Tester

Convenient, easy and safe product to test the functional ability of a smoke detector. Smoke Test® also checks for obstructions or debris, which clog detector vents and prevents smoke from properly entering the sensing chamber. Simulates smoke to provide a true, functional test for smoke detectors. Aerosol spray extends user reach up to 6', allows testing to be done while standing safely on the floor. No harmful residue, plastic safe, non-staining. Contains no Class I or Class II Ozone Depleting Chemicals. UL® Listed.

Part Number	Container Size	Units Per Case
02105*	6 oz aerosol	12

Faxback SDS # 2105

AEROSOL LEAK DETECTOR

CRC Leak Detector is formulated for the quick and easy site detection of gas leaks and air leaks. Reliably locates gas leaks and pressure losses in pipes and pressurized systems by forming highly visible bubbles when applied over any leak. The water-based formula contains no oils, silicones or harmful solvents. Highlights all leaks, even under low pressure. Non-flammable aerosol package enables fast and easy application with no waste or spillage. No odor. NSF P1 Registered.

Part Number	Container Size	Units Per Case
14503	20 oz aerosol	12

Faxback SDS # 14503



WELD CHECK®

A 3-part system used to detect cracks & imperfections on welded surfaces and structures. Consisting of a quick drying cleaner, penetrant & developer, this system is used for the non-destructive testing of metal surfaces by liquid penetration method.

Weld Check® Weld Cleaner & Penetrant Remover

A fast drying, powerful solvent blend cleaner designed for the pre-treatment of a weld surface, prior to liquid penetration inspection, and to remove all visible, colored traces of penetrant from weld.

Part Number	Container Size	Units Per Case
03108*	16 oz aerosol	12

Faxback SDS # 3108

Weld Check® Penetrant

A red-dye liquid penetrant for seeking out and identifying cracks and imperfections, when used in conjunction with Weld Check® Developer. Many cracks in welded materials can be deep in spite of having a very small opening width on the surface and can cause very serious defects. By normal visual inspection, such cracks may be very difficult to detect, but penetrant flaw detection is an extension of the visual inspection method.

Part Number	Container Size	Units Per Case
03106*	16 oz aerosol	12

Faxback SDS # 3106

Weld Check® Developer

A quick drying developer draws penetrant out of the imperfections of the surface with a dispersion of a white powder in a fast evaporating solvent. With visible dyes, the vivid color contrast between the penetrant and the developer makes the 'bleed-out' easy to see.

Part Number	Container Size	Units Per Case
03107*	16 oz aerosol	12

Faxback SDS # 3107



UL® is a registered trademark of UL LLC.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.





INDUSTRIAL CHERRY & GRAPE HAND CLEANERS & WALL MOUNT

CRC's Industrial Hand Cleaners contain premium cleansing agents which quickly remove the toughest dirt. Pumice scrubbing particles safely and effectively remove dirt, grease, resin, ink, paint, and glue.

Part Number	Fragrance	Container Size	Units Per Case
SL1218	Cherry	1 gallon hand pump	4
SL1219	Cherry	1 gallon refill	4
SL1220	Grape	1 gallon hand pump	4
SL1221	Grape	1 gallon refill	4
SL1222	NA	hand cleaner wall mount	1

Faxback SDS # 41218, 41220

LANOLIN CREAM HAND CLEANER

A gentle, odorless soap that removes grease, oil, ink, grime, paint, carbon stains, tar, pitch and other stubborn stains from hands. For use in industrial plants, farms, mines, construction sites and anywhere hands get dirty and soiled. Can be used with or without water.

Part Number	Container Size	Units Per Case
SL1211	14 oz can	12

Faxback SDS # 41211

LANOLIN CREAM & PUMICE HAND CLEANER

An extra-tough formula with buffing-grade pumice for deep-cleaning power. Use with or without water. For use in industrial plants, farms, mines, construction sites and anywhere hands get dirty and soiled. Leaves hands feeling clean with lanolin and lemon scent.

Part Number	Container Size	Units Per Case
SL1621	14 oz can	12

Faxback SDS # 41621

MECHANIX ORANGE™ Citrus Lotion Hand Cleaner with Pumice

Formulated with the natural cleaning power of citrus. This fast, yet gentle hand cleaner is pH balanced, highly concentrated and very effective at cleaning the toughest soil, grime, ink, oil and paint. Use with or without water. Contains no harsh solvents. Biodegradable formula has a fresh citrus scent.

Part Number	Container Size	Units Per Case
SL1712	16 fl oz bottle	12
SL1719	1 gallon bottle w/pump	4

Faxback SDS # 41712

SPECIALTY TESTING

INDUSTRIAL HAND CLEANERS



SURE SHOT® REUSABLE SPRAYER

An all-metal, one quart, reusable air-pressurized sprayer. For use with most bulk lubricants, solvents and corrosion inhibitors.

Part Number	Units Per Case
14016	1

GREASE GUN FLEX HOSE

Replacement flexible hose in 12" length. For pistol grip or lever type grease guns. Working pressure 3,000 psi.

Part Number	Units Per Case
SL46022	10

EMPTY TRIGGER BOTTLE

New 24 oz design improves stability while Level III fluorination provides maximum durability. Features blank lines and charts for product and safety information.

Part Number	Units Per Case
14021	12

LONG HANDLED MARKING WAND

Constructed of durable, rugged plastic and light weight steel. Equipped with a comfortable pistol grip for easy handling and marking. Long handle eliminates back pain.

Part Number	Units Per Case
18351	1

FLUID OIL PUMP

Constructed of durable PVC plastic. For all fluid reservoirs including differentials, transmissions and gear cases. Dispenses 1fl.oz. of product with each depression. Designed to fit all Sta-Lube quart, half-gallon and gallon containers. Not for use with brake fluid.

Part Number	Units Per Case
SL4344	6

SHORT HANDLED MARKING WAND

Constructed of durable, rugged plastic and light weight steel. Equipped with a comfortable pistol grip for easy handling and marking. Perfect for job sites requiring occasional marking applications.

Part Number	Units Per Case
18353	1

HEAVY DUTY LEVER GREASE GUN

3-way easy loading for standard 14 oz cartridges. Provides 10,000 lbs of pressure. Short stroke feature for confined areas. Sure-grip knurled barrel. Heavy duty thick wall steel construction.

Part Number	Units Per Case
SL37019	1

POLY TANK SPRAYER

Designed for professional use. Easy to use, holds 1 gallon. Excellent corrosion resistance. High density polyethylene. Equipped with a 3/6" reinforced multi-layer PVC braided hose and adjustable nozzle. Replacement parts available.

Part Number	Units Per Case
MK1991	1

SureShot® is a registered trademark of Milwaukee Sprayer Mfg. Co.


ALL-PURPOSE ENAMEL SPRAY PAINT

Remarkably versatile, general purpose, quick-dry, non-fading coating for use in exterior and interior applications. Recommended for general use in every day factory and contractor applications.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Resistant to heat up to 180°F (82°C). Dries tack free in 10 to 20 minutes and fully dry in less than 1 hour. Recoat within 2 hours or after 24 hours. Yellows and reds cover 10-12 sq. ft. per can, others cover 16-22 sq. ft. per can. Good resistance to abrasion and corrosion; fair resistance to solvents.

Available in a wide range of colors. Compliant with state and federal aerosol coatings VOC regulations. Vinyl toluene oil enamel resin system.

SPRAY PAINT COLORS

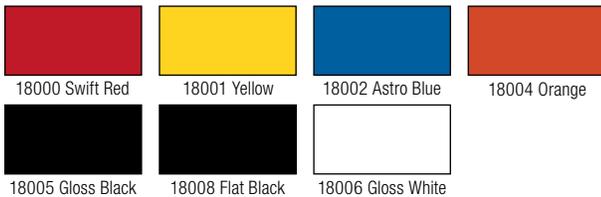

Part Number	Color	Container Size	Units Per Case
18000*	Swift Red	16 oz aerosol	6
18001*	Yellow	16 oz aerosol	6
18002*	Astro Blue	16 oz aerosol	6
18004*	Orange	16 oz aerosol	6
18005*	Gloss Black	16 oz aerosol	6
18006*	Gloss White	16 oz aerosol	6
18008*	Flat Black	16 oz aerosol	6



RUST PROOF ENAMEL SPRAY PAINT & PRIMER


Rust resistant, premium quality alkyd enamel, and the premier corrosion fighter in the marketplace. Rust Proof Enamel is designed for moderate to severe corrosive environments and is specially formulated to resist rusting, peeling and fading. Fights weathering, salt spray and the most severe and demanding industrial conditions.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. Dries tack free in 15 to 30 minutes and fully in 1 hour, recoat anytime. Resistant to heat up to 300°F (149°C).

Yellows and reds cover 15-18 sq. ft. per can, others cover 22-30 sq. ft. per can. Coverage increases when CRC Rust Proof Enamel Primer is used. Excellent resistance to corrosion and solvents and good resistance to abrasion. CRC Rust Proof Primers seal out moisture and fill hairline cracks and other slight surface imperfections to provide a uniform basecoat for CRC Rust Proof Enamels.

Available in a wide range of colors including OSHA and machinery matches. Compliant with state and federal aerosol coatings VOC regulations. Modified chain stop alkyd enamel resin system.

SPRAY PAINT COLORS

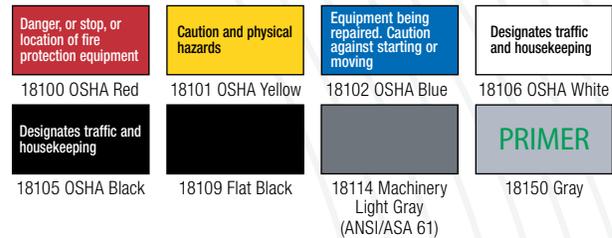

Part Number	Color	Container Size	Units Per Case
18100*	OSHA Red	20 oz aerosol	6
18101*	OSHA Yellow	20 oz aerosol	6
18102*	OSHA Blue	20 oz aerosol	6
18105*	OSHA Black	20 oz aerosol	6
18106*	OSHA White	20 oz aerosol	6
18109*	Flat Black	20 oz aerosol	6
18114*	Machinery Light Gray	20 oz aerosol	6
18150*	Gray Primer	20 oz aerosol	6




*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

UPSIDE DOWN MARKING PAINT

These paints clearly and effectively mark the location of underground utilities and are the professionally preferred markers at construction sites. Colors meet the A.P.W.A One Call International Color Standards. Particularly safe on turf grass, fields and golf courses.

The only paint in the industry with CRC's S.D.[L.]®, a current SDS printed on the reverse side of the product label. One can covers up to 700 linear feet with a 1 to 3 inch bright vivid line width. Lead free formula won't harm grass. Non-clogging nozzle & unique spray head is easy to use, less finger fatigue. Twist cap prevents accidental discharge. Dries fast and tack free in 2 to 5 minutes.

SPRAY PAINT COLORS

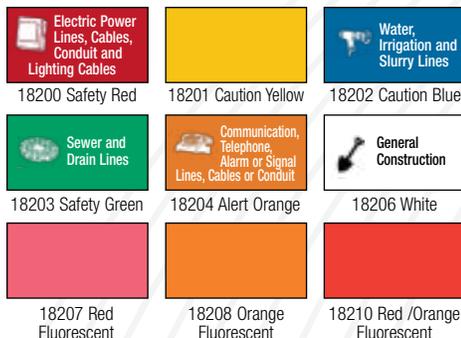

Part Number	Color	Container Size	Units Per Case
18200*	Safety Red	20 oz aerosol	6
18201*	Caution Yellow	20 oz aerosol	6
18202*	Caution Blue	20 oz aerosol	6
18203*	Safety Green	20 oz aerosol	6
18204*	Alert Orange	20 oz aerosol	6
18206*	White	20 oz aerosol	6
18207*	Red Fluorescent	20 oz aerosol	6
18208*	Orange Fluorescent	20 oz aerosol	6
18210*	Red/Orange Fluorescent	20 oz aerosol	6

The Occupational Safety and Health Act (OSHA) stipulates that industrial plants provide color coded safety equipment in the workplace. OSHA also requires that hazardous areas be identified with certain colors. CRC provides a range of OSHA colors for the correct application and safety.

LONG HANDLED MARKING WAND

Constructed of durable, rugged plastic and light weight steel. Equipped with a comfortable pistol grip for easy handling and marking. Long handle eliminates back pain.

Part Number	Units Per Case
18351	1

SHORT HANDLED MARKING WAND

Constructed of durable, rugged plastic and light weight steel. Equipped with a comfortable pistol grip for easy handling and marking. Perfect for job sites requiring occasional marking applications.

Part Number	Units Per Case
18353	1

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

REFLECTIVE SPRAY PAINTS & REFLECTIVE MINING PAINTS

These reflective and durable paints are formulated using glass microsphere technology. The water based polyurethane resin, extremely fade resistant pigments and reflective glass spheres ensure years of bright reflection.

These products are useful to mark safety hazards or objects which need to be located in low-light or dark areas: fire hydrants, industrial equipment, safety equipment, guard rails, electrical switch boxes, gas meters, boat piers, docking buoys, to name a few. They reflect brightly back to the source of light using a flashlight or headlights.



REFLECTIVE PAINTS

Part Number	Color	Container Size	Units Per Case
18015*	Aluminum Base Coat	16 oz aerosol	6
18016*	Yellow Top Coat	16 oz aerosol	6
18017*	Red Top Coat	16 oz aerosol	6
18018*	Clear Top Coat	16 oz aerosol	6



REFLECTIVE MINING PAINTS

Part Number	Color	Container Size	Units Per Case
18020*	Aluminum Base Coat	20 oz aerosol	6
18021*	Yellow Top Coat	20 oz aerosol	6
18022*	Red Top Coat	20 oz aerosol	6
18023*	Clear Top Coat	20 oz aerosol	6



AVIATION DEGREASER

A halogenated solvent-based degreaser that is chemically stable and extremely effective in heavy duty cleaning applications. It is fast acting, non-flammable and evaporates quickly leaving no residue. Meets performance requirements of Boeing D6-17487 and Douglas CSD-1, Category II with the exception of acrylic crazing.

Part Number	Container Size	Units Per Case
10900 ¹	20 oz aerosol	12



AVIATION QUICK DRY PRECISION CLEANER

Effectively removes contaminants from electrical and electronic components and contacts. Ideal for applications where rapid evaporation is desired and flammability is not an issue. Harmless to most sensitive plastics. Evaporates rapidly, leaves no residue. Displaces moisture. Meets performance requirements of Boeing D6-17487 and McDonnell Douglas CSD-1 specifications.

Part Number	Container Size	Units Per Case
10340	16 oz aerosol	12



AVIATION C.I.C. REMOVER

Revolutionary alternative to 1,1,1-Trichloroethane and other chlorinated solvents that effectively removes grease, oil, dirt and other contaminants from aircraft interior surfaces and equipment. Low odor compound. High flashpoint: 185°F. Chemically stable, non-conductive and non-corrosive. Controlled evaporation for enhanced cleaning action. Passes the performance tests of Boeing's Spec D6-17487, Rev. P-solvent degreasers.

Part Number	Container Size	Units Per Case
10480	20 oz aerosol	12



AVIATION T-FORCE[®] DEGREASER

Effective heavy duty, non-flammable degreaser. Evaporates quickly and leaves no residue. Airframe approved non-AAP degreaser. Meets performance requirements of Boeing D6-17487.

Part Number	Container Size	Units Per Case
10321 ¹	20 oz aerosol	12



NEW

AVIATION PRECISION PLUS[®] CONTACT CLEANER

A high purity HCFC/PFC-based precision cleaner that quickly and effectively cleans sensitive electrical and electronic components. Precision Plus[®] Contact Cleaner contains HCFC-225 which may only be sold to commercial users. Plastic safe, non-flammable. Evaporates quickly and leaves no residue. Non-staining and non-corrosive. Meets performance requirements of Boeing D617487, Rev L, Douglas CSD-1, ASTM F945 and PWA 36604 Appendix A. Approved by Pratt & Whitney for use in SPOP6.

Part Number	Container Size	Units Per Case
10310	16 oz aerosol	12



AVIATION 3-36[®] Corrosion Inhibitor

Meets MIL-C-81309E, Amendment 3, Type III, Class 1 & 2 – Listed on the Military QPL Since 12/1999. This versatile, petroleum-based formula protects all metal surfaces leaving behind a corrosion inhibiting film. The low viscosity of Aviation 3-36[®] allows it to cover a large surface area and penetrate deep into the surface of all metals including steel, copper, brass and aluminum alloys. It displaces and seals out moisture and prevents the return of wear and corrosion. For use in applications that require compliance to MIL-C-81309E.

Part Number	Container Size	Units Per Case
10200	16 oz aerosol	12



AVIATION XT-2000[™] PRECISION CLEANER

A non-flammable, low odor, rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment. No flash point. Evaporates rapidly leaving no residue. Chemically stable, non-conductive and non-corrosive. Safe on most plastics. Meets performance requirements of Boeing D6-17487. Approved by Pratt & Whitney for use in SPOP1&6.

Part Number	Container Size	Units Per Case
10315	16 oz aerosol	12



AVIATION NEXT GENERATION DEGREASER

Quickly dissolves grease, oil and sludge for efficient operation of mechanical equipment. No flash or fire point. Non-chlorinated, non-conductive, non-corrosive and non-staining. Meets performance requirements of Boeing D6-17487.

Part Number	Container Size	Units Per Case
10322 ¹	20 oz aerosol	12



NEW

AVIATION WINDOW DISPLAY CLEANER

A modern blend of detergents designed to safely clean aircraft glass and mirrors. Safe on electronic display panels. Removes grease, fingerprints, scum and smoke haze from surfaces. Contains no alcohol or ammonia. Meets the performance requirements of AMS-1534A.

Part Number	Container Size	Units Per Case
10420	16 oz aerosol	12



AVIATION MAINTENANCE

– 360° spray valve can be sprayed in the UP or DOWN position.
 1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions. *This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

CLEANERS

BRÄKLEEN®

Brake Parts Cleaner

Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads. Helps brakes last longer and perform more efficiently.

Part Number	Container Size	Units Per Case
05089 ¹	20 oz aerosol	12
05089T ¹	20 oz aerosol w/trigger	12
05090 ¹	1 gallon bottle	4
05091 ¹	5 gallon pail	1
05093 ¹	55 gallon drum	1



BRÄKLEEN®

Non-Chlorinated Brake Parts Cleaner

Use where compliance calls for a chlorine-free product. Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads.

Part Number	Container Size	Units Per Case
05088 ^{1*}	20 oz aerosol	12
05085 ^{1*}	1 gallon bottle	4
05186 ^{1*}	5 gallon pail	1
05087 ^{1*}	55 gallon drum	1

Less than 45% VOC[∞]

05084 ^{1*}	20 oz aerosol	12
05086 ^{1*}	5 gallon pail	1



BRÄKLEEN®

Brake Parts Cleaner, 50 State Formula

Removes brake fluid, grease, oil and other contaminants quickly & effectively. Non-chlorinated. Degreases instantly. Leaves no residue. Meets all state & federal consumer products VOC regulations. **Low VOC formula.**[∞]

Part Number	Container Size	Units Per Case
05050 ^{2*}	20 oz aerosol	12
05051 ^{2*}	1 gallon bottle	4
05052 ^{2*}	5 gallon pail	1
05053 ^{2*}	55 gallon drum	1



BRÄKLEEN®

Non-Chlorinated Brake Parts Cleaner

Cleans fast, dries fast, leaves no residue. Instantly removes brake fluid, grease & oil. SCAQMD Rule #1171 compliant. Contains no chlorinated solvents. **Ultra-Low VOC formula.**[∞]

Part Number	Container Size	Units Per Case
05151 [*]	20 oz aerosol	12



MASS AIR FLOW

Sensor Cleaner

Safely cleans and protects mass air flow sensors. Plastic safe, dries rapidly and leaves no residue. Increases horsepower, gain 4 to 10 horsepower after using. Reduces rough idle.

Part Number	Container Size	Units Per Case
05110 	16 oz aerosol	12



CITRUS ENGINE DEGREASER

Powerful citrus cleaning formula. Dissolves and lifts off the toughest grease and road grime. Low VOC formula.[∞]

Part Number	Container Size	Units Per Case
05027 	20 oz aerosol	12



GEL ENGINE DEGREASER

Penetrates fast and removes the most stubborn baked on engine greases and road grime. Formula clings to all surfaces allowing it to penetrate deep. High visibility yellow color shows where it has been applied. When rinsed with water it emulsifies and washes away the grease. Low VOC formula.[∞]


Part Number	Container Size	Units Per Case
05026	20 oz aerosol	12



ENGINE DEGREASER

Quickly lifts grease and grime off engines for cooler, more efficient running. Leaves no residue. Easy to use: spray on, rinse off.

Part Number	Container Size	Units Per Case
05025 ¹	20 oz aerosol	12
05025CA	20 oz aerosol	12



LECTRA-MOTIVE®

Electric Parts Cleaner for Energized Equipment

Provides fast, thorough cleaning for energized electrical equipment. Dissolves grease, oil, dirt and wax. Leaves no residue. Non-flammable. Not to be used for motorized vehicle maintenance.

Part Number	Container Size	Units Per Case
05018	20 oz aerosol	12
05019	1 gallon bottle	4
05024	55 gallon drum	1



 – 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions. 2 – Item restricted from sale in SCAQMD ∞ – As defined by Consumer Products VOC regulations. *This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

THROTTLE BODY & AIR-INTAKE CLEANER

Removes gum and varnish from throttle valves and throttle body for easier starting and smoother engine performance. Low VOC formula.[∞] Eliminates hesitation and rough idling.

Part Number	Container Size	Units Per Case
05078 	16 oz aerosol	12

CLEAN-R-CARB™ Carburetor Cleaner

Instantly dissolves deposits on venturies, linkages, butterflies and PCV systems. Improves fuel system performance. Harmless to catalytic converters and oxygen sensors.

Part Number	Container Size	Units Per Case
05379*	16 oz aerosol	12
05081**	20 oz aerosol	12
05381*	20 oz aerosol	12

LUBRICANTS

FREEZE-OFF® Super Penetrant

Freezes and cracks rust for deep penetration and fast results. Dissolves rust, gum and corrosion. Lubricating film residue displaces water and prevents corrosion. Low VOC formula.[∞]

Part Number	Container Size	Units Per Case
05002 	20 oz aerosol	12

DE-SQUEAK™ Brake Conditioning Treatment

Prevents brake noise. Contains aluminum and graphite to plate and protect metal surfaces up to temperatures of 1800°F. Prevents rust and oxidation on drums, rotors and lug nuts. For use on disc, drum and ABS systems.

Part Number	Container Size	Units Per Case
05070*	6 oz aerosol	6
05080*	20 oz aerosol	6

DISC BRAKE QUIET

Forms a water resistant, high temperature film that instantly absorbs noise and quiets disc brake squeaks and squeals. Easy to apply to new or previously installed pads.

Part Number	Container Size	Units Per Case
05016	4 oz bottle	12
05017*	12 oz aerosol	12
05115	2-.5 oz (carded)	12

 – 360° spray valve can be sprayed in the UP or DOWN position.
 1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions. [∞] – As defined by Consumer Products VOC regulations.
 *This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

FUEL ADDITIVES

MOTOR TREATMENT

Instantly cleans power-robbing carbon deposits, gums and varnish. Cleans and lubricates internal fuel and oil systems. Increases MPG and reduces emissions. Fuel stabilizer removes moisture from fuel and oil.

Part Number	Container Size	Units Per Case
05316	16 oz non-aerosol can	12

OCTANE BOOST Lead Substitute

Increases octane by 2.5%-5.5% for maximum horsepower and torque. One bottle is sufficient to treat up to 20 gallons of fuel. Contains a smoke suppressant. Decreases NOx and carbon monoxide emission.

Part Number	Container Size	Units Per Case
05077	12 oz bottle	12

FUEL INJECTOR & CARBURETOR CLEANER

Removes deposits from injectors, carburetor and intake system. Reduces engine demand for high octane fuel. Harmless to catalytic converters and oxygen sensors.

Part Number	Container Size	Units Per Case
05061	12 oz bottle	12

PREMIUM FUEL INJECTOR CLEANER

Prevents rust and corrosion. Meets BMW spec #88886900307 lifetime certificate for intake valve cleanliness. Controls deposits in port fuel injectors, intake valves, and fuel lines. Keeps injectors clean.

Part Number	Container Size	Units Per Case
05062	12 oz bottle	12

STOR-X™ Fuel Stabilizer

Stabilizes fuel by inhibiting formation of varnishes, peroxides and gum. Preserves gasoline and diesel fuel for up to 1 year. Treats up to 20 gallons. Does not contribute to induction system deposits. OK for Biodiesel.

Part Number	Container Size	Units Per Case
402815	8 oz bottle	12

GASOLINE 1-TANK POWER RENEW® with G2P® Technology

Concentrated one-tank cleanup for your dirty fuel system. Maximum power restoration and deposit control. Helps increase MPG. Boosts power instantly.

Part Number	Container Size	Units Per Case
05815	15 fl. oz.	6



DIESEL FUEL ADDITIVES

DIESEL FUEL THERAPY®

Diesel Injector Cleaner Plus

Cleans injectors, conditions and stabilizes fuel and lubricates fuel system for increased engine life. Increases power and fuel economy and reduces emissions. ULSD approved. OK for Biodiesel.

Part Number	Container Size	Units Per Case
05212	12 oz bottle	12
05232	1 quart bottle	12
05228	1 gallon bottle	4
05225	5 gallon pail	1
05255	55 gallon drum	1



DIESEL FUEL THERAPY®

Diesel Injector Cleaner with Anti-Gel

Prevents diesel fuel from gelling in cold temperatures. Lowers pour point, cleans injectors and helps restore spray pattern for more efficient combustion. ULSD approved. OK for Biodiesel.

Part Number	Container Size	Units Per Case
05412	12 oz bottle	12
05432	1 quart bottle	12
05428	1 gallon bottle	4
05425	5 gallon pail	1
05455	55 gallon drum	1



DIESEL DRY™

Diesel Water Remover

Dissipates water to minimize smoke and improve fuel economy. Prevents corrosion and harmful sludge sediment. ULSD approved. OK for Biodiesel.

Part Number	Container Size	Units Per Case
05670	12 oz bottle	12



BIO-CON™

Sludge Sediment Remover

Removes sludge and sediment from diesel fuel & furnace oils. Absorbs and disperses moisture. Improves storage stability of fuel.

Part Number	Container Size	Units Per Case
05557	12 oz bottle	12
05558	5 gallon pail	1



DIESEL 1-TANK POWER RENEW®

with G2P® Technology

Concentrated diesel and emissions system cleanup. Maximum power restoration and deposit control. Helps free sticky injectors and increases MPG. Works great in biodiesel blends.

Part Number	Container Size	Units Per Case
05832	1 quart bottle	12
05816	16 oz bottle	6



OIL ADDITIVES

SMOKE STOP™ with PBX2™

Engine Smoke Reducer

Reduces excessive oil burning caused by worn engine parts. Maintains optimum viscosity throughout engine temperature range.

Part Number	Container Size	Units Per Case
05334	12 oz bottle	12



FAST MOTOR FLUSH™

5-Minute Engine Cleaner

Rids engine of sludge, gum, rust and varnish prior to oil change. Non-acid, non-alkaline, non-corrosive.

Part Number	Container Size	Units Per Case
05336	1 quart can	12



ENGINESEAL™

Engine Gasket Sealer

Helps stop oil leaks in main bearing seals and other engine oil seals. Restores elasticity and compensates for shrinkage of seals. Improves seal-to-metal contact.

Part Number	Container Size	Units Per Case
05339	12 oz bottle	12



VALVE-KLEEN™

Engine Valve & Lifter Cleaner

Dissolves sludge, gum and varnish on valves, lifters and oil passages and prevents new deposits from forming. Quiets noisy operation.

Part Number	Container Size	Units Per Case
05331	12 oz bottle	12



COOLING SYSTEM ADDITIVES

ENGINKOOL™

Engine Cooling System

Prevents loss of heat conductivity to cooling system fluids, which causes overheating. Transfers heat from metal to coolant. Compatible with all anti-freeze solutions.

Part Number	Container Size	Units Per Case
05348	1 quart can	12



RADIATOR ANTI-RUST & WATER PUMP LUBRICANT

Lubricates all interior parts of the cooling system. Prevents rust formation and stops electrolytic corrosion.

Part Number	Container Size	Units Per Case
05335	12 oz bottle	12



10 MINUTE RADIATOR FLUSH

One-Step Cleaner

Works in 10 minutes. Effectively removes grease, oil, rust, scale, scum and sludge. Neutralizes acids formed in anti-freeze.

Part Number	Container Size	Units Per Case
05337	12 oz bottle	12



JUMP START®

Starting Fluid with Lubricity

Assures fast, economical starts in extremely cold or humid climates. Upper cylinder lubricant minimizes wear during cold starts. Effective to -65°F. For diesel and gasoline engines. ULSD approved.

Part Number	Container Size	Units Per Case
05671*	16 oz aerosol	12



TRANSMISSION/POWER STEERING ADDITIVES

TRANS-KLEEN™

Automatic Transmission Treatment

Replaces the essential additives in transmission fluid that are depleted during normal operation. Smooths uneven shift patterns. Eliminates hesitation.

Part Number	Container Size	Units Per Case
05332	12 oz bottle	12



COLD FLOW™

Anti-Gel with Lubricity

Prevents fuel gelling and waxing. Contains lubricity additive for low sulfur fuels. Formulated for cold weather use in all diesel equipment. ULSD approved. OK for Biodiesel.

Part Number	Container Size	Units Per Case
05612	12 oz bottle	12
05632	1 quart bottle	12
05655	55 gallon drum	1



STEER-AID™

Power Steering Conditioner and Leak Stop

Prolongs the life of the power steering unit by restoring elasticity of seals. Prevents foaming; non-clogging. Stops internal leaks.

Part Number	Container Size	Units Per Case
05345	12 oz bottle	12



QUICK FLOW™

Emergency Diesel-Gel Relief

Instantly works to dissolve gelled fuel and thaws frozen fuel filters. Lowers pour point by as much as 35°F. ULSD approved. OK for Biodiesel.

Part Number	Container Size	Units Per Case
05911	1 quart bottle	12
05928	1 gallon bottle	4



WINTER PRODUCTS

FOR GAS TANKS

Isopropanol Formula

Removes water from gasoline. Protects down to -50°F. Inhibits rust in gas tank. Prevents fuel line freezing.

Part Number	Container Size	Units Per Case
05343	12 oz bottle	12



ICE-OFF®

Windshield Spray De-Icer

Melts ice, snow and frost on contact. Harmless to car finish. Thaws frozen locks.

Part Number	Container Size	Units Per Case
05346	16 oz aerosol	12



DIESEL AIR BRAKE ANTI-FREEZE & CONDITIONER

Provides complete winter protection for air brake systems. Eliminates and prevents moisture accumulation and icing. Prevents damage to air brake seals. Anti-freeze and anti-rust.

Part Number	Container Size	Units Per Case
05532	32 oz bottle	12
05528	1 gallon bottle	4
05555	55 gallon drum	1



UNDERCOATING

RUBBERIZED UNDERCOATING

Provides a bubble-free, flexible shield against moisture, salt and road debris. Deadens outside road noise and will not crack or peel. Low VOC formula.∞

Part Number	Container Size	Units Per Case
05347*	20 oz aerosol	12



∞ – As defined by Consumer Products VOC regulations.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

LUBRICANTS

MARINE 6-56®

Multi-Purpose Lube

Clear, thin film lubricates and protects against wear and saltwater corrosion. Drives out moisture to help start wet engines. Loosens rusted parts. Will not harm oxygen sensors.

Part Number	Container Size	Units Per Case
06005 	6 oz aerosol	12
06006 	12 oz aerosol	12
06007 	16 oz aerosol	12
06008	1 gallon bottle	4
06010	5 gallon pail	1
06012	55 gallon drum	1



MARINE ENGINE STOR®

Fogging Oil

Protects electrical connections, outboard motors and marine engines to ensure longer life. Keeps engine components corrosion-free during seasonal storage. Preserves reels, tools, and metal surfaces subject to rust.

Part Number	Container Size	Units Per Case
06068	16 oz aerosol	12
06069	1 gallon bottle	4
06070	5 gallon pail	1
06072*	16 oz aerosol w/hose	12



MARINE 6-56®

Multi-Purpose Lube – Zero VOC[∞]

Odor-free, zero VOC[∞] alternative. Drives out moisture that can cause electrical failures and hard starting. Penetrates deep through rust and corrosion to loosen frozen parts. Will not harm oxygen sensors.

Part Number	Container Size	Units Per Case
06002 	11 oz aerosol	12



FUEL ADDITIVES

MARINE FUEL TREATMENT AND STABILIZER

Reduces octane requirement, combustion deposits, hydrocarbon emissions, knock and ping, valve seat wear. Improves fuel economy and stabilizes fuel up to 8 months. Reduces diesel smoke up to 40%.

Part Number	Container Size	Units Per Case
MK4908	8 oz bottle	12



MARINE HEAVY DUTY SILICONE LUBRICANT

Clean, odorless, highly water resistant; fights corrosion. Lubricates and protects wood, nylon, metal, canvas and leather. Eliminates squeaking and binding. Wide temperature range (-40°F to 400°F).

Part Number	Container Size	Units Per Case
06077*	16 oz aerosol	12



MARINE STOR & GO®

Ethanol Fuel Treatment & Stabilizer

Prevents phase separation and protects against corrosion. For all Gas-Powered 2 and 4-cycle engines. Improves fuel economy and stabilizes fuel up to 1 year. Cleans entire fuel system.

Part Number	Container Size	Units Per Case
06141	8 oz bottle	12
06142	16 oz bottle	12
06143	32 oz bottle	6



CORROSION INHIBITORS

SALT TERMINATOR®

Engine Flush, Cleaner & Corrosion Inhibitor

Dissolves destructive salt debris that can't be removed by water alone without leaving a residue. Leaves a protective coating, guarding against future corrosion. Biodegradable formula.

Part Number	Container Size	Units Per Case
SX10	12 fl oz pump bottle	12
SX22	22 fl oz bottle w/trigger	12
SX32	32 fl oz bottle	7
SX32M	32 fl oz bottle w/mixer	6
SX128	1 gallon bottle	6
SX55	55 gallon drum	1
SXMXR	mixer only	12



MARINE FUEL STABILIZER GASOLINE FORMULA

For all 2 and 4-cycle engines. Protects against corrosion during storage. Prevents gum and resin build-up; keeps filters and injectors clean. Non-staining.

Part Number	Container Size	Units Per Case
06161	8 oz bottle	12
06162	16 oz bottle	12
06163	1 quart bottle	12
06164	1 gallon bottle	4



 – 360° spray valve can be sprayed in the UP or DOWN position. [∞] – As defined by Consumer Products VOC regulations. *This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



MARINE FUEL STABILIZER DIESEL FORMULA

Protects against corrosion during storage. Prevents gum and resin build-up; keeps filters and injectors clean. Non-staining. 1 oz treats 10 gallons of diesel fuel.

Part Number	Container Size	Units Per Case
06171	8 oz bottle	12
06172	16 oz bottle	12



MARINE OCTANE BOOST

Increases octane rating of gasoline. Reduces or eliminates engine knock and ping. Improves starting. One bottle treats up to 20 gallons of fuel.

Part Number	Container Size	Units Per Case
06067	12 oz bottle	12



GREASES

MARINE ELECTRONICS GREASE

Seals, protects and insulates electrical contacts from moisture. Lubricates and seals rubber and plastic parts – including O-rings. Improves electrical performance during adverse conditions such as rain, fog and salt spray.

Part Number	Container Size	Units Per Case
06106	6 oz pressurized tube	12



CLEANERS

ON & OFF

Hull & Bottom Cleaner

Removes waterline stains, algae stains, rust and gas exhaust stains. Use on fiberglass only. Easy to use – brush it on, rinse it off.

Part Number	Container Size	Units Per Case
MK2032	1 quart bottle	12
MK20128	1 gallon bottle	4
MK20550	55 gallon drum	1



ON & OFF GEL

Hull & Bottom Cleaner

Unique viscous formula that clings to the surface to break down grease, oil and scum lines and stains. Blue color for easy visualization. Easy to use – brush it on and rinse it off.

Part Number	Container Size	Units Per Case
MK3532	1 quart bottle	12
MK35128	1 gallon bottle	4



BIG BULLY®

Natural Orange Bilge Cleaner

Works fast to emulsify oil, grease and scum. Leaves bilge areas clean and fresh. Self-cleaning formula is activated by the rolling action of the boat.

Part Number	Container Size	Units Per Case
MK2332	1 quart bottle	12
MK23128	1 gallon bottle	4



ALUMINEX™

Pontoon & Aluminum Hull Cleaner

Specially formulated for cleaning hulls & bottoms of aluminum & pontoon boats. Quickly removes waterline stains, lime deposits, algae stains and oxidation.

Part Number	Container Size	Units Per Case
MK3132	1 quart bottle	12
MK31128	1 gallon bottle	4



ALUMINEX™

CLEAN & SHINE

Aluminum Cleaner & Brightener

Dual-action formula specially designed to instantly clean and brighten aluminum hulls with Safe Acid Technology™. Best results on surfaces with light to medium oxidation. Safe on anodized and painted aluminum.

Part Number	Container Size	Units Per Case
MK3332	1 quart bottle	12



CLEANING DETAIL®

Non-Skid Deck Cleaner

Cleans and brightens fiberglass, stainless steel, chrome, brass and aluminum. Use on most surfaces above the waterline. Great for non-skid decks, shower stalls and tubs.

Part Number	Container Size	Units Per Case
MK2132	1 quart flip-top bottle	12



SPRAY AWAY™

All Purpose Cleaner

Cleans grease, grime, oil, rain stains, fish blood and more. Great on virtually any surface. Non-flammable.

Part Number	Container Size	Units Per Case
MK2832	1 quart spray bottle	12
MK28128	1 gallon bottle	4



MILDEW STAIN REMOVER

Quickly removes even the toughest mildew and mold stains. Fine mist spray won't run, even on vertical surfaces. No scrubbing necessary. Just spray on, wipe off. Use on any vinyl or hard surface. Safe on boat covers and marine fabrics.

Part Number	Container Size	Units Per Case
MK3732	1 quart spray bottle	12
MK37550	55 gallon drum	1



ROLL AWAY™

Boat Wash

Water activated to clean and leave a shine on fiberglass hulls and decks. Extra strong formula works great on vinyl, formica, metal hardware, fenders, canvas and sails. Contains no phosphates. Biodegradable formula.

Part Number	Container Size	Units Per Case
MK6532	1 quart spray bottle	12



SUPER SUDS™

Boat Soap

Highly concentrated synthetic detergent. Non-streaking. Leaves no residue. Cleans away dirt and grime, leaving surfaces sparkling clean. Will not strip wax. Biodegradable formula.

Part Number	Container Size	Units Per Case
MK2232	1 quart bottle	12
MK22128	1 gallon bottle	4



GLASS PLEX™

Glass Cleaner

Non-streaking formula. Contains no ammonia or alcohol. Use on glass, Plexiglas®, plastics, acrylics, isinglass, fiberglass, computer screens, counters, appliances, stainless steel and chrome.

Part Number	Container Size	Units Per Case
MK3918	1 quart spray bottle	12



INFLATABLE BOAT CLEANER

Effectively cleans PVC, vinyl, Hypalon, EVA, Nylon, plastic, Neoprene and Polyurethane materials. Helps prevent corrosion of metal hardware. Won't fade covers. Great for cleaning skis and wakeboards.

Part Number	Container Size	Units Per Case
MK3832	1 quart spray bottle	12



BLACK STREAK REMOVER

Instantly removes black streaks caused by water run off on fiberglass and metal surfaces. Test on plastic surfaces.

Part Number	Container Size	Units Per Case
MK6732	1 quart spray bottle	12



GREASE AWAY

Engine Degreaser

Heavy duty engine degreaser. Formulated for outboards, inboards, stern drives, machinery and more. Spray on/ rinse off. Contains no petroleum solvents.

Part Number	Container Size	Units Per Case
MK5232	1 quart spray bottle	12
MK52128	1 gallon bottle	4



CRYSTAL LAKES™

Hull & Bottom Cleaner

Cleans and brightens the hull and bottom while removing brown water stains, mold stains, algae stains, rust stains and more.

Part Number	Container Size	Units Per Case
MK7320	20 oz tub	12



Plexiglas® is a registered trademark of Arkena France Corporation

VINYL CARE

ULTRA VINYL CLEANER

Removes deeply embedded dirt, grease, grime and oil. Easy to use. Concentrated foam cleaner works fast. Excellent for all interior and exterior vinyl.

Part Number	Container Size	Units Per Case
MK2718	20 oz aerosol	12



WAXES/POLISHES

HIGHLIGHT™

Spray Wax

Instantly gives a high-gloss hand-rubbed look. Protects against sun, salt and weathering. Waxes and polishes fiberglass, stainless steel, chrome and brass.

Part Number	Container Size	Units Per Case
MK2618	20 oz aerosol	12



CLEAR VINYL

Cleaner & Polish

Cleans, polishes and protects all transparent clear vinyl in one easy step. Great for isinglass, clear vinyl enclosures, plastic windshields, hatches and instruments made of Plexiglas®, acrylic, and polycarbonates. Easy spray-on-buff-off formula.

Part Number	Container Size	Units Per Case
MK6414	16 oz aerosol	12



MARINE CLEANER WAX

Specially formulated paste wax for cleaning and polishing fiberglass. Buffs to a high gloss shine. Easy to use. May be applied by hand or electric buffer.

Part Number	Container Size	Units Per Case
MK8216	16 oz tub	12



TEAKWOOD CARE

NU-TEAK™

One Step Teak Cleaner

Cleans teak and other hardwoods. Removes stains and weathering. Contains no acids. Will not raise wood grain. Also great for decks, patios and outdoor furniture.

Part Number	Container Size	Units Per Case
MK2432	1 quart bottle	12



TREWAX®

Four Seasons Boat Wax

Contains Carnauba, the world's hardest natural wax. Leaves a hard, brilliant finish with long lasting durability. Designed specially for marine finishes; use on fiberglass, painted surfaces, aluminum, chrome, stainless steel. Protects against the adverse effects of sun, salt, rain, etc.

Part Number	Container Size	Units Per Case
MK66	12 oz tub	12



NU-TEAK™

Teak Oil

Seals, preserves and enhances the natural appearance of teak. One easy step; dries quickly. Provides long lasting protection. Contains UV inhibitors to resist weathering. Rich golden color. Use on decking, steps, rails, outdoor furniture and more.

Part Number	Container Size	Units Per Case
MK3616	16 oz bottle	12
MK3632	1 quart bottle	12



MAXI WAX™

Cleaner Wax

Cleans, protects and shines fiberglass and metals. High gloss formula. Provides long lasting protection against fading and oxidation. Detergent resistant. Contains ultraviolet inhibitors.

Part Number	Container Size	Units Per Case
MK2000	16 oz bottle	12
MK2001	1 quart bottle	12
MK20012	1 gallon bottle	4



Plexiglas® is a registered trademark of Arkena France Corporation

HEADS UP™

Liquid Holding Tank Deodorant

Works instantly to control odors. Long-lasting pleasant fragrance. Helps keep holding tanks and recirculating or portable toilets clean and breaks down waste and tissue. Non-formaldehyde formula.

Part Number	Container Size	Units Per Case
MK4532	1 quart bottle	12



FABRIC WATERPROOFER

Premium grade heavy duty water repellent solution. Restores water repellency of cotton and synthetic fabrics. Contains no color or dyes. Use on boat covers, bimini tops, convertible tops, awnings, tents, clothing, footwear and more. Safe on Sunbrella® and other marine grade fabrics.

Part Number	Container Size	Units Per Case
MK6332	1 quart spray bottle	12
MK63128	1 gallon bottle	4



LIQUID ROLLERS®

Trailer Bunk Boards Lubricant

Makes the loading and unloading of boats easy. Dramatically reduces friction to make bunk boards as slick as rollers. Long lasting, nongreasy, non-staining formula. Repels road dirt and grime.

Part Number	Container Size	Units Per Case
MK6810*	16 oz aerosol	12



MOISTURE CONTROL BAG

Absorbs dampness that leads to rust and musty odors. Soaks up moisture from the air like a sponge. Does not drip. Great for lockers, head, galley, bilge, cabin and rope storage. Also great for RV, home and apartment use. Reusable.

Part Number	Container Size	Units Per Case
MK7112	12 oz bag	12



MOISTURE ABSORBER

Dries air in cabins, lockers, bathrooms, closets, basements and other enclosed areas. Super dry concentrated pellet formula absorbs up to 50% more moisture than flake formulas. Package includes protective web lid.

Part Number	Container Size	Units Per Case
MK6912	12 oz tub	12



POLY TANK SPRAYER

A poly tank sprayer designed for professional use. Easy to use. Holds one gallon. High density polyethylene. Equipped with a 36" reinforced multi-layer PVC braided hose and adjustable nozzle. Replacement parts available.

Part Number	Container Size	Units Per Case
MK1991	1 gallon	1



Sunbrella® is a registered trademark of Glen Raven, Inc.

*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



BIODEGRADABLE

A substance that is capable of being broken down into harmless products by the action of living things. The rate at which compounds may be chemically broken down by bacteria and/or natural environmental factors.

BRITTLE POINT

Temperature at which a material breaks under defined conditions of deformation.

CLASS I OZONE DEPLETERS

Chlorinated solvents including Carbon Tetrachloride, 1, 1, 1-Trichloroethane and CFCs (Freon). Since 1993, these products have required special labeling and have been banned from manufacture by the EPA.

CLASS II OZONE DEPLETERS

Products that contain HCFCs like HCFC-141b and HCFC-225. The production and importation phase out date is January 1, 2003 and January 1, 2015 respectively.

DIELECTRIC STRENGTH

The minimum electrical gradient that a material can withstand without decomposition usually specified in volts per millimeter of thickness. Also known as the breakdown voltage.

ELONGATION PERCENT

Directly related to Tensile Strength. Elongation is the deformation that results from the application of a tensile force and is calculated as the change in length divided by the original length.

EMULSION

A mixture of water-soluble and water-insoluble groups held together by a surfactant. Emulsions are usually milky white.

EXTREMELY FLAMMABLE

As defined by the Consumer Products Safety Commission, a substance with a flashpoint at or below 20°F as determined by Tagliabue Open Cup Tester. Or, for an aerosol, if the flame travels back to the actuator and the flashpoint is at or below 20°F.

FALEX TEST

A method for determining the extreme pressure (EP) or anti-wear properties of oils and greases. Vee blocks (with large "V"-shaped notch) are placed on opposite sides of rotating steel shaft, and the apparatus is immersed in the test lubricant. Load is automatically increased until seizure occurs. Measurable wear scars are formed on the blocks.

FERROUS

Metals related to or containing iron.

FLAMMABLE

Capable of catching fire easily and burning rapidly. OSHA defines flammable liquids as having a flashpoint below 100°F.

FLASH POINT

The lowest temperature of a liquid or solid at which it gives off vapors that will ignite but not continue to burn when a small flame is periodically passed over the surface.

GALLING

Destructive wear of a metal surface characterized by large chunks of metal being removed.

KB VALUE

The Kauri Butanol (KB) value is a measure of the solvent power of a hydrocarbon liquid. Kauri gum is readily soluble in butanol but insoluble in hydrocarbons. The KB value is the measure of the volume of solvent required to produce turbidity in a standard solution containing kauri gum dissolved in butanol. The higher the KB value, the more powerful the solvent.

NLGI GRADE

National Lubricating Grease Institute. A numerical scale for classifying the consistency of a particular grease. The most common consistency number is #2. Softer grades, especially #0 and #1, are often used for improved pumpability or low-temperature service. High consistency numbers, #3 through #6 are used for certain high-speed bearings where leakage and sealing are particular concerns.

NSF RATING

National Sanitation Foundation Registration Program for Proprietary Substances and Nonfood Compounds. This program mirrors the prior USDA program. Product evaluation is based on formulation and label review. Approved products receive a Letter of Authorization and are included on the NSF White Book List of Proprietary Substances and Nonfood Compounds.

NON-FERROUS

Metals that contain no iron.

ODCs

Ozone Depleting Compounds. Substances that contribute to the deterioration of the ozone. There are two types of ODCs: Class I and Class II ozone depleters. Class I ODCs are the most harmful to the ozone. Currently listed as Class I ODCs are chlorofluorocarbons (CFCs), carbon tetrachloride, and 1,1,1-Trichloroethane. Class II ODCs are less harmful but still pose a threat. Currently listed as Class II ODCs are HCFCs.

OTC STATES

Ozone Transport Commission. As of August 1, 2012, the following states have adopted the OTC Model Rule regulating VOC's in consumer products: Connecticut, Delaware, District of Columbia, Illinois, Indiana, Maine, Maryland, Massachusetts, Michigan, New Hampshire, New Jersey, New York, Ohio, Pennsylvania, Rhode Island and Virginia.

PH

A scale ranging from 0 to 14 used to measure acidity and alkalinity. The lower the number the more acidic; the higher the number, the more alkaline; 7 is neutral.

PSI

Pound per Square Inch. A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square inch.

SAE

Society of Automotive Engineers.

SUBSTRATE

The surface being cleaned; the substrate may be metal, plastic, ceramic, etc.

SURFACTANT

A specialized molecule that connects water soluble and water-insoluble groups.

TENSILE STRENGTH

The strength of different metals to support different loads (masses) before going through the point at which they change from being elastic to being plastic. The tensile strength test measures the elastic and plastic properties of metal.

TIMKEN OK LOAD

The highest load than can be applied without abrasive wear to a rotating test cup containing a grease sample. The higher the OK number, the better protection a grease provides under severe service. The highest number typically given to any sample is 80.

VISCOSITY

The resistance to flow or degree of thickening fluid. Flow requires stress; liquids such as additive-free lubricating oils are known as Newtonian fluids in that shear rate is proportional to the pressure or stress applied. This proportion is the coefficient of viscosity.

VOCs

Volatile Organic Compounds. A class of chemicals that contain carbon and have the potential to form ground-level ozone (smog). Many common items including gasoline, oil-based paints and alcohols produce VOCs.

VISIT THE CRC STOPLIGHT™ WEB PAGE TO LEARN MORE ABOUT OUR FOOD SAFETY PROGRAM & NSF!




Need a QR code reader? Visit your app store today!

VISIT CRC ON THE WEB TO ACCESS CURRENT VOC INFORMATION!




Need a QR code reader? Visit your app store today!

Products that are used in and around food processing areas, but are not intended for direct food contact, or are not expected to become a component of a meat, poultry, or egg product, are defined as “nonfood compounds”. These include products such as maintenance and cleaning chemicals, sanitizers and pesticide chemicals, lubricants, water treatment compounds, shell egg cleaning, defoaming, destaining, and sanitizing compounds, and other miscellaneous products. The category codes directly affecting CRC products are listed and defined below:

CATEGORY CODE A1

This product is acceptable for use as a general cleaning agent on all surfaces, or for use with steam or mechanical cleaning devices in all departments. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. After using this compound, surfaces must be thoroughly rinsed with potable water. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

CATEGORY CODE C1

This product is acceptable for use as a general cleaner/degreaser in inedible product processing areas, and/or exterior areas of official establishments operating under the Federal Meat, Poultry, Shell Egg Grading, and Egg Products Inspection Programs provided that it is not used to mask odors resulting from unsanitary conditions, and that any characteristic odor or fragrance does not penetrate into an edible area. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

CATEGORY CODE D2

This product is acceptable for use as a sanitizer on all surfaces not always requiring a rinse in and around food processing areas. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. A potable water rinse is not required following the use of this compound on previously cleaned hard surfaces provided that the surfaces are adequately drained before contact with food so that little or no residue remains which can adulterate or have a deleterious effect on edible products. A potable water rinse is required following use of this compound under conditions other than stated above. The compound must always be used according to applicable label directions.

CATEGORY CODE H1

This product is acceptable as a lubricant with incidental food contact for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used on food processing equipment as a protective anti-rust film, as a release agent on gaskets or seals of tank closures, and as a lubricant for machine parts and equipment in locations in which there is potential exposure of lubricated part to food. The amount used should be the minimum required to accomplish the desired technical effect on the equipment. If used as an anti-rust film, the compound must be removed from the equipment surface by washing or wiping, as required to leave the surface effectively free of any substance, which could be transferred to food being processed. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE H2

This product is acceptable as a lubricant where there is no possibility of food contact in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used as lubricants, release agents, or anti-rust films on equipment and machine parts or in closed systems (ex. Hydraulic systems) in locations where there is no possibility of the lubricant or lubricated part contacting edible products. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE 3H

This product is acceptable for use as a Release Agent on grills, ovens, loaf pans, boning benches, chopping boards, or other hard surfaces in contact with meat and poultry food products to prevent food from adhering during processing.

CATEGORY CODE M1

This product is acceptable for use as a mold release agent on molds that are used to produce packaging materials that will contact food to prevent the finished product from adhering to the mold. The amount used on the equipment should be the minimum required to accomplish the effect.

CATEGORY CODE K1

This product is chemically acceptable as a solvent cleaner for use in non-processing areas of official establishments operating under the Federal Meat and Poultry Products Inspection Program. After using the product, equipment and utensils must be thoroughly washed with an acceptable detergent solution and rinsed with potable water to remove all traces of the cleaner before being returned to the processing area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE K2

This product is chemically acceptable as a solvent for cleaning electronic instruments and devices which will not tolerate aqueous cleaning solutions in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging material are re-exposed in the area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE K3

This product is acceptable for use as an adhesive or glue remover, for removing adhesive or glue from food packaging materials in and around food processing areas, where its use is not intended for direct food contact. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. After using these compounds, all surfaces must be thoroughly washed with an acceptable detergent solution, and rinsed with potable water. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging materials are re-exposed in the area.

CATEGORY CODE P1

This product is chemically acceptable for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. This compound must be used in a manner which prevents direct or indirect contamination of edible products or potable water. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

CATEGORY CODE C3

The product is acceptable for use in official establishments operating under the Federal Meats and Poultry Products Inspection Program. This compound may be acceptable in areas of food processing facilities where edible products are neither processed nor stored in open containers. This category also covers paint removers and snow and ice melting products intended for use in non-processing areas.

CATEGORY CODE E4

The product is acceptable for use as a hand cream, lotion or cleaner in non-processing areas. The use of such products is limited to toilets, dressing rooms and other non-processing areas. Employees who handle edible products may use such compounds only when leaving the plant.

O - 9

1 TANK POWER RENEW® Diesel	64
1 Tank Power Renew-Gasoline	63
2-26® Multi-Purpose Precision Lubricant	39, 40
3-36® Multi-Purpose Lubricant	18, 19

A

Aerosol Leak Detector	56
Air Tool Oil	48
Aluminex™ Pontoon & Aluminum Hull Cleaner	67
Aluminex™ Clean & Shine	67
Anti-Seize & Lubricating Compound, Copper	27, 29
Anti-Seize & Lubricating Compound, Food Grade	28, 29
Anti-Seize & Lubricating Compound, Nickel	28, 29
Anti-Seize & Lubricating Compound, Nuclear Grade	28, 29
Anti-Seize & Lubricating Compound Pure Nickel	27, 29
Aviation C.I.C Remover	61
Aviation Degreaser	61
Aviation Next Generation Degreaser	61
Aviation Precision Plus® Contact Cleaner	61
Aviation Quick Dry Precision Cleaner	61
Aviation T-Force Degreaser	61
Aviation 3-36®	61
Aviation Window Cleaner	61
Aviation XT-2000™ Precision Cleaner	61

B

Ball & Roller Bearing Hi-Temp Grease	51, 52
Bar & Chain Lubricant	48
Battery Cleaner	10, 11
Battery Terminal Protector	30, 31
Bee Blast® Wasp & Hornet Killer	55
Big Bully® Bilge Cleaner	67
Bio-Con™ Sludge Sediment Remover	64
Black Streak Remover	68
Bolt Lock Shock Resistant Threadlocker	47
Brake Caliper Synthetic Grease	50, 52
Brakleen® Brake Parts Cleaner	62
Brakleen® Brake Parts Cleaner, 50 State Formula	62

C

Cable Clean® Degreaser	37, 38
Cable Clean® HFT™	37, 38
Cable Clean® High Voltage Splice Cleaner	37, 38
Cable Clean® NT™ High Voltage Splice Cleaner	37, 38
Cable Clean® RD™	37, 38
Carb & Choke Cleaner	10, 11
CE™ Precision Cleaner	6, 8, 33, 34

Chain & Wire Rope Lubricant	26, 29
Chlor-Free® Degreaser	10, 11
Chute Lube® Silicone Lubricant	26, 29
Citrus Degreaser	9, 11, 35, 36
Citrus Engine Degreaser	62
Clean-R-Carb™ Carburetor Cleaner	63
Cleaning Detail® Non-Skid Deck Cleaner	67
Clear Vinyl Cleaner & Polish	69
CO® Contact Cleaner	32, 34
Coil Cleaner	10, 11
Cold Flow™ Anti-Gel w/Lubricity	65
Compressor Oil SAE 30	48
Constant Velocity (C.V.) Joint Grease	50, 52
Contact Cleaner	6, 8
Contact Cleaner & Protectant	7, 8
Contact Cleaner 2000® (Electrical)	32, 34
Contact Cleaner 2000® (Industrial)	6, 8
Contact Cleaner 2000® VC	32, 34
Crystal Lakes™ Hull & Bottom Cleaner	68
Cutting Oil	41, 42

D

De-Squeak™ Brake Treatment	63
Dielectric Grease	27, 29, 39, 40
Diesel Air Brake Anti-Freeze & Conditioner	65
Diesel Dry™ Diesel Water Remover	64
Diesel Fuel Therapy® Diesel Injector Cleaner Plus	64
Diesel Fuel Therapy® Plus w/Anti-Gel	64
Direct Food Contant White Oils	22, 24
Disc Brake Quiet	63
Driller Red Grease	50, 52
Dry Graphite Lube	27, 29
Dry Moly Lube	26, 29
Dry PTFE Lube	19
Duster™ Aerosol Dust Removal System	7, 8, 33, 34
Duster™ Moisture-Free Dust & Lint Remover	7, 8

E

Electrical Silicone Lubricant	39, 40
Electrical Parts Cleaner	35, 36
Electronic Component Cleaner (Electrical)	33, 34
Electronic Component Cleaner (Industrial)	6, 8
Empty Trigger Bottle	58
Engine Degreaser	62
EnginKool™ Engine Cooling System	64
Enginseal™ Engine Gasket Sealer	64
Extreme Duty Silicone	26, 29
Extreme Duty Open Gear & Chain Lube	26, 29
Extreme Duty Food Grade Grease	51, 52
Extreme Pressure Anti-Seize Engine Assembly Lube	50, 52

F

Fabric Waterproofer	70
Fast Dry Degreaser	35, 36
Fast Motor Flush™ 5-Minute Engine Cleaner	64
Fire Ant Killer	55
Fire Block Foam	45, 46
Fluid Oil Pump	58
Foam Minimal Expansion	45, 46
Foaming Coil Cleaner	10, 11
Food Grade Air Tool Oil	21, 23, 25, 48
Food Grade Anti-Seize	28, 29
Food Grade Belt Dressing	20, 21
Food Grade Chain Lube	20, 21, 22, 24, 25
Food Grade Synthetic Compressor Oil	23, 25
Food Grade Dielectric Grease	21
Food Grade Compressor Flush	22, 24
Food Grade Gear Oils	23, 24, 25
Food Grade Hydraulic Oils	23, 24, 25
Food Grade Synthetic PAG Chain Oils	24
Food Grade Machine Oil	20, 21
Food Grade Penetrating Oil	20, 21
Food Grade Refrigeration Compressor Oils	22, 24
Food Grade Silicone	20, 21
Food Grade White Grease	20, 21
Food Zone Silicone Sealant - White	44, 46
Food Zone Silicone Sealant - Clear	44, 46
Food Zone Silicone Sealant - Gray	44, 46
Food Zone Silicone Sealant - Aluminum	44, 46
For Gas Tanks Isopropanol Formula	65
FR Clothing Insect Repellent	55
Freeze-OFF® Super Penetrant	63
Freeze Spray	7, 8
Fuel Injector & Carburetor Cleaner	63

G

Gasket Remover	9, 11
Gel Engine Degreaser	62
GL-4 Multi-Purpose Gear Oil SAE 85W90	48, 49
GL-4 Multi-Purpose Gear Oil SAE 140	48, 49
GL-5* PLUS New Generation™ HD Limited Slip Gear Oil SAE 75W90	49
GL-5* PLUS New Generation™ Limited Slip Gear Oil SAE 80W90	49
GL-5* PLUS New Generation™ HD Limited Slip Gear Oil SAE 85W140	49
Glass-Plex™ Glass Cleaner	68
Graffiti Remover	10, 11
Grease Away Engine Degreaser	68
Grease Gun	58
Grease Gun Flex Hose	58
Green Force® Glass & Surface Cleaner	14, 15
Green Force® Heavy Duty Cleaner	14, 15
Green Force® Multi-Purpose Cleaner	14, 15

H

Hand Cleaner, Cherry	57
Hand Cleaner, Grape	57
Hand Cleaner, Lanolin Cream	57
Hand Cleaner, Lanolin Pumice	57
Hand Cleaner, Mechanix Orange™	57
Hand Cleaner Towels	43
Hand Cleaner, Wall Mount	57
Heads Up™ Liquid Holding Tank Deodorant	70
Heavy Duty Clear Penetrating Grease	26, 29
Heavy Duty Degreaser	9, 11
Heavy Duty Degreaser II	10, 11
Heavy Duty Drum Brake Wheel Bearing Grease	51, 52
Heavy Duty Lever Grease Gun	58
HFT™ Contact Cleaner (Electrical)	33, 34
HFT™ Contact Cleaner (Industrial)	7, 8
Highlight™ Spray Wax	69
Hi-Temp Disc Brake Wheel Bearing Grease	51, 52
Honing & Cutting Oil	41, 42
Hot Line Tool Cleaner Wipes	33, 34, 39, 40, 43
HV Switchgear Lubricant	39, 40
Hydraulic & Jack Oil	48
HydroForce® All Purpose Degreaser	12, 15
HydroForce® Butyl-Free Cleaner	12, 15
HydroForce® Drain Maintainer	14, 15
HydroForce® Drain Re-Nu™	14, 15
HydroForce® Foaming Citrus All Purpose Cleaner	13, 15
HydroForce® Foaming Degreaser	13, 15
HydroForce® Germicidal Foam Cleaner	13, 15
HydroForce® Glass Cleaner Professional Strength	12, 15
HydroForce® Industrial Strength Degreaser	12, 15
HydroForce® Stainless Steel Cleaner & Polish	13, 15
HydroForce® Super Citrus™ Heavy Duty Degreaser	13, 15
HydroForce® Surface Sanitizer	13, 15
HydroForce® Zero VOC General Purpose Cleaner	12, 15
Ice-Off® Windshield Spray De-Icer	65
Industrial Adhesive Remover	10, 11
Industrial Silicone	18, 19
Inflatable Boat Cleaner	68
Inner Slide Lube	27, 29
Insect Repellent	55
Insta-Solv® Degreaser	10, 11
Instant Cooling System Stop Leak w/Nanotechnology	65
Isopropyl Alcohol Precision Cleaner	7, 8

J	Jump Start® Starting Fluid /Lubricity65	N	Natural Degreaser™ Citrus Based Degreaser9, 11, 35, 36	Q	QD® Contact Cleaner (Electrical)32, 34	Stud Lock High Strength Threadlocker47
K	Knock'er Loose® Penetrating Solvent18		New Generation™ Wheel Bearing Grease50, 52	QD® Contact Cleaner (Industrial)6, 8	Quick Clean™ Safety Solvent9, 11	Sun Screen Towel43
	Knock'er Loose® Plus18		Non-Chlorinated Formula Brakleen® Brake Parts Cleaner62	Quick Dry Moly Lube26, 29	Quick Flow™ Emergency Diesel-Gel Relief65	Super Degreaser™4, 9, 11
L	Large Diameter High Strength Threadlocker47		Non-Chlorinated Brakleen® Brake Parts Cleaner, SCAQMD #1171 compliant62	R	Radiator Anti-Rust & Water Pump Lubricant64	Super Suds™ Boat Soap68
	Layout Fluid, Blue41, 42		NT™ Precision Cleaner (Electrical)32, 34	Radiator Flush65	Roll Away™ Boat Wash68	Super Soy™ Degreaser10, 11
	Layout Fluid Remover41, 42		NT™ Precision Cleaner (Industrial)6, 8	Red Grease27, 29	Roll-Up Door Lubricant19	Super White™ Multi-Purpose Grease50, 52
	Lectra Clean® Heavy Duty Electrical Parts Degreaser5, 35, 36		Nu-Teak™ One Step Teak Cleaner69	RTV Silicone Sealant – Black44, 46	RTV Silicone Sealant – Blue44, 46	Sure Shot® Reusable Sprayer58
	Lectra Clean® II Non-Chlorinated Heavy Duty Degreaser5, 35, 36		Nu-Teak™ Teak Oil69	RTV Silicone Sealant – Clear44, 46	RTV Silicone Sealant – Red44, 46	Syn-Go® (OEM Grade) Synthetic Gear Oil SAE 75W14049
	Lectra Force™35, 36		Nut Lock Medium Strength Threadlocker47	RTV Silicone Sealant – White44, 46	Rubberized Spray Undercoating65	Syntha-Tech™ Lubricant with PTFE20, 21
	Lectra Lube™51, 52	O	Octane Boost Lead Substitute63	Rust Converter30, 31	Rust Remover30, 31	Synthetic Food Grade Grease51, 52
	Lectra-Motive® Electric Parts Cleaner62		On & Off Hull & Bottom Cleaner67	S	Salt Terminator®66	T
	Lectra Shield™ Long Term Corrosion Inhibitor39, 40		On & Off Gel67	Screwloose® Super Penetrant18	Sea Coat® Urethane Coating30, 31	T-Force® Degreaser4, 9, 11
	Liquid Rollers® Trailer Bunk Boards Lubricant70		Ozzy Booster™17	Seal Coat® Urethane Coating30, 31	Short Handled Marking Wand58, 60	Tac 2®27, 29
	Lithium General Purpose Grease50, 52		OzzyJuice® SW-8 Aircraft & Weapons Degreasing Solution17	Silaramic® Brake System Grease50, 52	Siliconized Acrylic Latex Caulk44, 46	Technical Grade 3-36®19
	Long Handled Marking Wand58, 60		OzzyJuice® SW-1 Degreasing Solution17	SmartWasher® Combo Brake/Parts Washer16	SmartWasher® Mobile Heavyweight Parts Washer16	Thread Lubricant28, 29
M	Magic Oil27, 29		OzzyJuice® SW-4 Heavy Duty Degreasing Solution17	SmartWasher® Mobile Parts/Brake Washer16	SmartWasher® Signature Parts Washer16	Throttle Body Air Intake Cleaner63
	Marine Cleaner Wax69		OzzyJuice® SW-7 Parts/Brake Cleaning Solution17	SmartWasher® Start-Up Kits17	SmartWasher® SuperSink Parts Washer16	Trans-Kleen™ Automatic Transmission Treatment65
	Marine Electronics Grease67		OzzyJuice® SW-6 Select Metals Degreasing Solution17	SmartWasher® SuperSink XE Parts Washer16	Smoke Stop™ Engine Smoke Reducer64	Trewax® Four Season Boat Wax69
	Marine Engine Stor® Fogging Fluid66		OzzyJuice® SW-3 Truck Grade Degreasing Solution17	Smoke Test® Smoke Detector Tester56	Soluble Oil41, 42	TrueTap® Aqua Cutting Fluid41, 42
	Marine Fuel Stabilizer Diesel Formula67		OzzyJuice® SW-LF Low Foam Solution17	SP-250™ Corrosion Inhibitor30, 31	SP-300™ Corrosion Inhibitor30, 31	TrueTap® EV Cutting Fluid41, 42
	Marine Fuel Stabilizer Gasoline Formula66		OzzyMat® Single-Layer17	SP-350™ Corrosion Inhibitor30, 31	SP-400™ Corrosion Inhibitor30, 31	TrueTap® Foamy Cutting Fluid41, 42
	Marine Fuel Treatment & Stabilizer66		OzzyMat® Multi-Layer17	Spray Adhesive45, 46	Spray Away™ All Purpose Cleaner67	TrueTap® HD Cutting Fluid41, 42
	Marine Grease for Boat Trailer Wheel Bearings51, 52	P	Paints – All Purpose Enamel Spray Paint & Primer59	Stor & Lube® Corrosion Inhibitor39, 40	Stor-X® Fuel Stabilizer63	TrueTap® Wax Stick Lubricant41, 42
	Marine Heavy Duty Silicone Lubricant66		Paints-Reflective Mining60	U	Ultra-Lite 3-36®18, 19	Ultra Vinyl Cleaner69
	Marine Octane Boost67		Paints-Reflective Spray60	Universal 2-Cycle Oil48	V	Valve-Kleen™ Engine Valve & Lifter Cleaner64
	Marine 6-56® Zero VOC66		Paints – Rust Proof Enamel Spray Paint & Primer59	W	Wasp & Hornet Killer Plus™ Insecticide55	Water Based Silicone20, 21
	Marine 6-56® Multi-Purpose Lubricant66		Paints – Upside Down Marking60	Weld Check® Cleaner & Penetrant Remover56	Weld Check® Developer56	Weld Check® Penetrant56
	Marine Stor & Go®66		Pan Divider Oil Direct Food Contact ISO 1522, 24	Welder's Anti-Spatter Spray27, 29	White Lithium Grease27, 29	X, Y
	Mass Air Flow Sensor Cleaner62		Parcel Glide® Silicone Lubricant26, 29	Z	Zinc-It® Bright Instant Cold Galvanize30, 31	Zinc-It® Instant Cold Galvanize30, 31
	Maxi Wax™ Cleaner Wax69		Perma-Mend™45, 46			
	Mech Force™ Industrial Degreaser9, 11		Permatherm™ Synthetic Grease50, 52			
	Mildew Stain Remover68		PF Precision Cleaner (Electrical)32, 34			
	Minute Mend™ Epoxy Putty45, 46		PF Precision Cleaner (Industrial)6, 8			
	Moisture Absorber70		Phaseguard 4® Ethanol Fuel Treatment66			
	Moisture Control Bag70		Pipe Thread Sealant45, 46			
	Mold Cleaner, Heavy Duty53, 54		Poly Tank Sprayer58, 70			
	Mold Release, Boron Nitride53, 54		Power Lube® High Performance Lubricant26, 29			
	Mold Release, Food Grade Silicone53, 54		Power Steering Fluid65			
	Mold Release, Food Grade WO53, 54		Precision Plus® Cleaner32, 34			
	Mold Release, General Purpose Silicone53, 54		Premium Fuel Injector Cleaner63			
	Mold Release, Heavy Duty Silicone53, 54					
	Mold Release, Lecithin53, 54					
	Moly-Graph® Extreme Pressure Multi-Purpose Grease50, 52					
	Motor Treatment63					
	Multi-Purpose Food Grade Grease51, 52					

CRC Offers Chemical Management Solutions Through Our Programs.



- RISK REDUCTION PARTNERSHIP PLAN™
- STOPLIGHT® FOOD SAFETY PROGRAM
- ENVIRONMENTALLY PREFERRED PROGRAM
- SAFETY SHORTS – TRAINING

RISK REDUCTION PARTNERSHIP PLAN™

CRC's commitment to providing our customers with value-added services has prompted the creation of the Risk Reduction Partnership Plan™. Much more than just a chemical use guide, this plan is a presentation piece that highlights CRC's value-added services. CRC, together with distribution, works with our key end-users to improve the overall management of their MRO chemicals and provide them with documented cost savings.

STOPLIGHT® FOOD SAFETY PROGRAM

Developed in response to a growing need within the industry to minimize the risk of food contamination from maintenance chemicals across all food processing areas, the StopLight® Program helps to insure proper product usage, minimum risk and cost, and helps you meet the FSMA (Food Safety Modernization Act).

ENVIRONMENTALLY PREFERRED PROGRAM

To address the growing need to improve Environmental, Health and Safety issues surrounding maintenance chemicals, CRC offers Environmentally Preferred Products in key categories. These products have been specially formulated to help reduce hazardous waste generation and hazardous air emissions and help provide a cleaner, safer, healthier work environment. Our focus is on reducing the environmental impact of MRO chemicals while continuing to provide consistent, high performance CRC products.

SAFETY SHORTS – TRAINING

CRC will conduct Safety Shorts Training for groups of any size in your facility. Our training presentations cover a variety of topics including Chemical Handling, Fire Safety, General Aerosol & Chemical Safety, Hazardous Waste, Personal Protective Equipment, Safety Data Sheets and Ventilation. Each presentation is 20-30 minutes in length and attendees receive a certificate upon completion. A sign-in sheet records who attended training which is required by many companies to satisfy training objectives.

manufacturing • food & beverage • utility & electrical
oil & gas • healthcare • mining



Customer Care: 800-272-4620
Technical Assistance: 800-521-3168
www.crcindustries.com

