

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.5A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 150VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input leads are 18 AWG output leads are 12 AWG. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 20A circuit breaker on the secondary side.
9. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors.
10. The wiring compartment cover hinged with rivets and opens vertically from bottom to top.
11. The enclosure is stainless steel NEMA 3R rated.
12. The Transformer is UL listed. UL file number: E194005. model C-150
13. The label contains Technomagnet's catalog number and electrical rating.

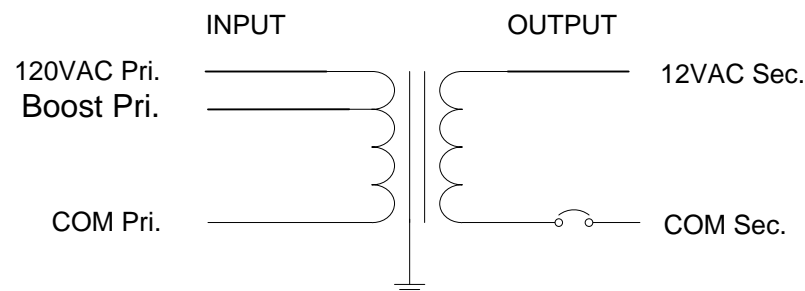



Table 1.

Output Volts	
120AC	Boost
11.8	12.8

				15547 Cabrito Road Unit A Van Nuys, CA 91406	
Interactive Lighting Servers				PAGE ____ OF ____	SCALE no scale TOLERANCE ±
DRW.				DESCRIPTION: Compact outdoor 12V 150VA Low voltage Transformer.	
CHK.					
APV.					
PART No. SSC150S REV. A					