

RemPhos LEDBIAX Tube

PRODUCT, INSTALLATION AND SAFETY INSTRUCTIONS



Only Qualified Personnel Should Perform Installation of this Product.

Please Read and Save all Instructions and Warnings for Future Use.

- **WARNING** – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- **WARNING** – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
- **WARNING** – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- **WARNING** – LEDBIAX is **not** intended for use with emergency exit lights or emergency lights.

INSTALLATION:

1. Assure the branch electrical circuit breaker is off before installing LEDBIAX tube.
2. Remove the existing CFL 2G11 lamp.
3. Remove or bypass the existing ballast including magnetic ballast, electronic ballast etc.,
4. Connect the AC line voltage to the 2G11 socket as showing below:

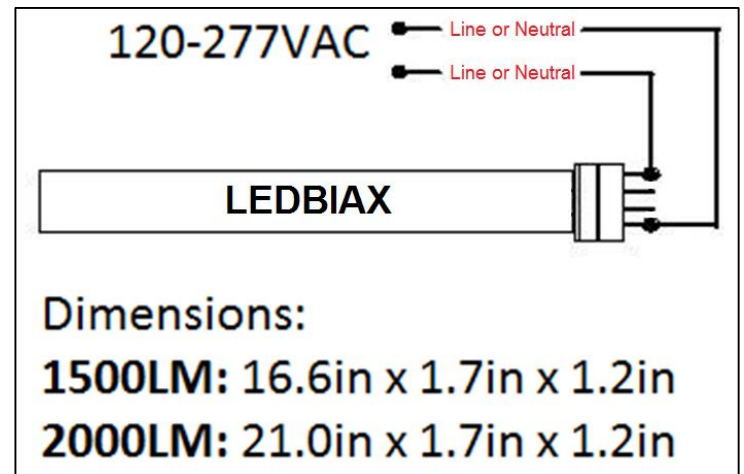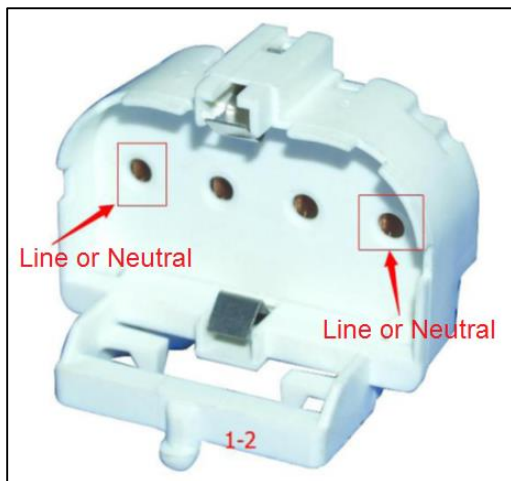

5. Install the LEDBIAX tube into the fixture.
6. Install the provided warning labels close to the appropriate lamp holder.



Please install this CAUTION label to ensure that the fixture retains its UL rating.



www.remphos.com

Our #1 priority is "Personalized Customer Service", if you have any questions or need help during your installation, please call us at (877) 99-REMPHOS or (877) 997-3674. One of our experienced technical support staff will be happy to assist you.

