

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (1) 25W Maximum G9 Xenon clear bulb

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Do not touch the bulb with bare hands use a cloth or glove.


Package Contents

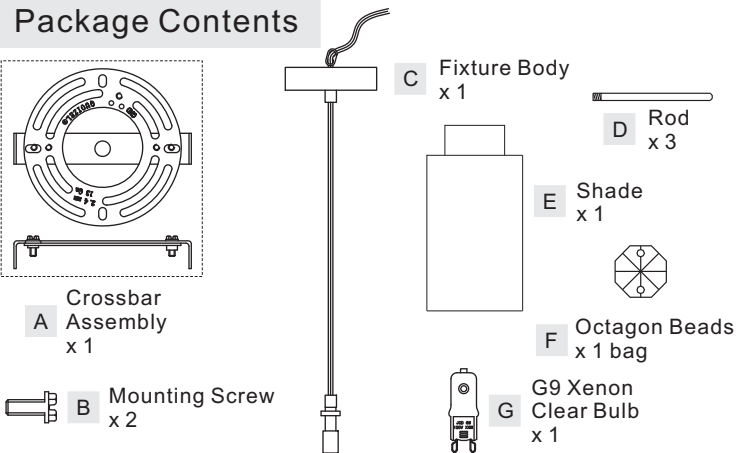

(Step 2 Continued)

need to identify the "L" line wire, the "N" wire and the "G" ground line before you cut the excess wire off. One wire is labeled with an N, another wire with L and the rest wire is labeled with and G. Strip back the wire covering to the length you desire. This will expose each fixture wire individually. Separate the L wire, the N wire and the G wire. Remove the L label from the end of the wire and replace it near where the wire will be cut. Be sure to place the label on the wire below where the cut will be made. Do this for each wire, L, N and G.

Leave approximately 10" of wire extending from the ceiling canopy and strip back the wire covering about 4" to allow for wire connections.

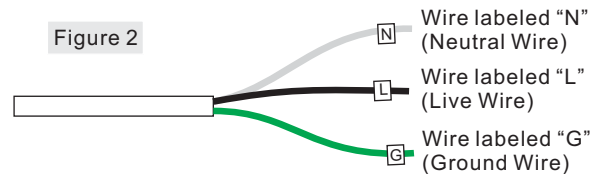

STEP 1 – Adjust Fixture Height

- With a screwdriver, unlock the Set Screw on the Coupling underside of the Ceiling Canopy. Pull the Wire in or out of the Ceiling Canopy to achieve your desired hanging height. The Minimum hanging height should be 4"H from bottom edge of the Socket to the top edge of the Ceiling Canopy. Once your desired hanging height is achieved, tighten the Set Screw on the Coupling to secure the Wire.
- Move the Wire Clasp closed to hex nut inside of the Ceiling Canopy.

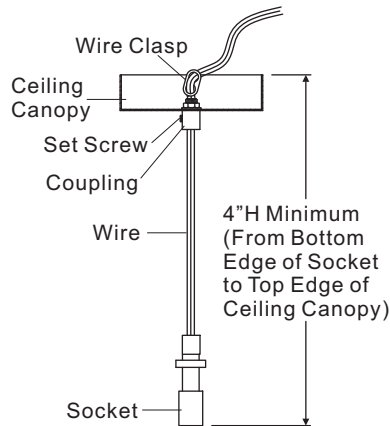


Figure 1

STEP 2 – Handle Excess Wires

- If excess wires from ceiling canopy are not going to be cut, fit wires in the ceiling canopy properly. If excess wires from ceiling canopy are going to be cut, please refer to B.
- IMPORTANT:** Please pay attention to the wire identification before cutting the fixture wire.

If the electrical wire is going to be cut shorter than provided you will

STEP 3 – Attach Crossbar Assembly to Outlet Box

- Attach the Crossbar Assembly (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.




Figure 3

STEP 4 - Wire Connections

- Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

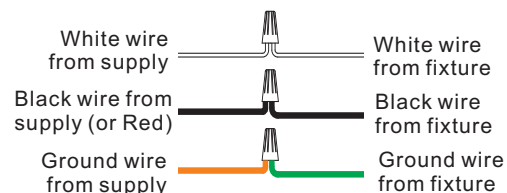


Figure 4

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

STEP 5 - Install Fixture Body to Ceiling

- A. Place ceiling canopy on the Fixture Body (C) over the Crossbar Assembly (A). Line up Holes on the side of ceiling canopy and the Mounting Hole on the Crossbar Assembly (A). Secure by threading Mounting Screws (B) into the Crossbar Assembly (A). Tighten until snug.




Figure 5

STEP 6 - Install Bulb, Shade and Octagon Beads

- A. This fixture uses G9 Xenon clear bulb (G). Maximum 25 watts. Insert bulb and push snugly into place.

IMPORTANT: Do not touch the bulb with bare hands use a cloth or glove.

- B. Place the Shade (E) over the Socket and line up the holes on the Shade (E) to the mounting holes on the Fixture Body (C) as shown. Pass Rods (D) through holes on the Shade (E) and thread Rods (D) into mounting holes to secure the Shade (E). Hand tighten until snug.
- C. Fill up the slot on the Shade (E) with Octagon Beads (F).

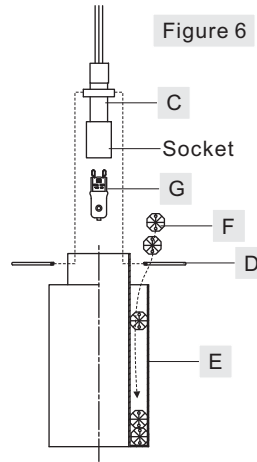


Figure 6



Your fixture is now assembled and ready to use. Enjoy!

CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

PCTS1503C


FINISH: POLISHED CHROME



(1) 25W Maximum
G9 Xenon Clear
Bulb (Supplied)

NO.	PART NUMBER	REPLACEMENT PART	QTY.
1	I833SC	BULB XENON 25W G9 CLEAR	1
2	G12128SH	SHADE	1

4.75" Dia.



NOTE: ALL DIMENSIONS ARE
ROUNDED UP TO THE NEAREST 1/4"

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com