

Assembly Instruction Sheet #IS-BRX2818C_R2 For Style BRX2818C

 $Please go to {\color{red} www.quoizel.com} for product cleaning tips. Go to the {\color{red} Care+Maintenance} selection.$

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (5) Clear G9 Xenon Bulbs 40W Maximum (Supplied)

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


▲ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Do not touch the bulb with bare hands use a cloth or glove.

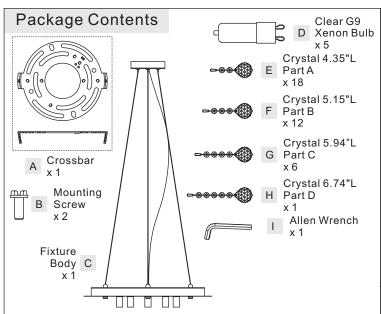


(Step 2 Continued)

Wire to achieve your desired fixture height. Secure by reinstalling the Screw, Loosen Clasp B prior to Step A if Necessary.

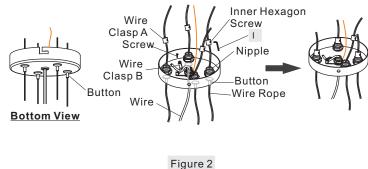

STEP 3 - Install the Crossbar to the junction box


A. Attach the Crossbar (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included), tighten until snug.



STEP 1 - Remove Protective Film

A. Remove Protective Film from Ceiling Canopy.

Note: Gloves are required to avoid leaving fingerprints or scratches on Ceiling Canopy.



STEP 2 - Adjust the Fixture Body

- A. Push the Button (Refer to <u>Bottom View</u>) and pull the Wire Rope to adjust the length of Wire Rope to achieve your desired fixture height. Then adjust the Wire Clasp A touch the Nipple in the Canopy, secure by using Allen Wrench (I) thread the Inner Hexagon Screw into the Wire Clasp A, tighten until sung.
- B. Remove the Screw to open the Wire Clasp B. adjust the length of

STEP 4 - Make Wire Connections


- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.
- B. If the electrical wire is going to be cut shorter than provided, strip back the clear wire covering the 3 fixture wires as far as you need to.

Thank you for purchasing a Quoizel product. Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184 or visit us on-line at www.quoizel.com

Revised Date: 2017-06-24

(Step 4 Continued)


This will expose each fixture wire individually. Strip each end of 3 fixture wires.



ū

STEP 5 - Attach Ceiling Canopy to Crossbar


A. Place Ceiling Canopy over the Crossbar. Line up the hole on the Ceiling and the mounting hole on the Crossbar, secure by threading Mounting Screw (B) into the Crossbar (A), tighten until sung.



STEP 6 - Install Bulbs

A. Insert bulbs (D) onto sockets and push snugly into place.


IMPORTANT: Do not touch the bulb with bare hands use a cloth or glove.



A. Insert Crystal 6.74"L Part D (H) to the hole on the center of Ceiling Canopy, Crystal 5.94"L Part C (G) to the hole on the ring C of Ceiling Canopy, Crystal 5.15"L Part B (F) to the hole on the ring C of Ceiling Canopy, Crystal 4.35"L Part A (E) to the hole on the outside ring of Ceiling Canopy. Your fixture is now assembled and ready to use. Enjoy!

CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Prevent the bulb from contacting liquid or combustible materials.

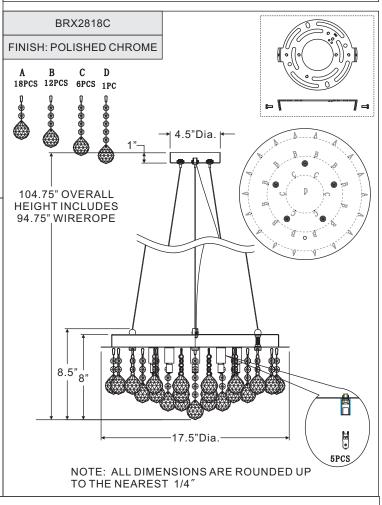

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184

or visit us on-line at www.guoizel.com

© 2017 Quoizel Inc.

Revised Date: 2017-06-24