

Assembly Instruction Sheet #IS-ERN8603IB_R1 For Style ERN8603IBLED

Please go to www.quoizel.com for product cleaning tips. Go to the Care + Maintenance selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

LightSource: (3) LEDG94.5WBulbs

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


Please go to Quoizel.com to see the G9 LED bulb specifications provided with your fixture.

A Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

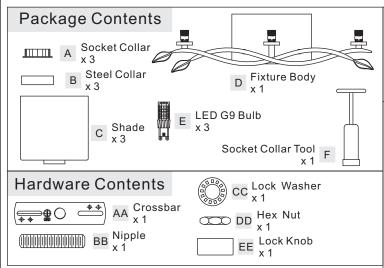


STEP 1 - Install Crossbar and Nipple

- A. Secure the Crossbar (AA) to the Outlet Box with Outlet Box Screws. Tighten until snug.
- * Pliers is required on this step.
- B. Thread the Hex Nut (DD) onto one end of the Nipple (BB). Place the Lock Washer (CC) over the Hex Nut end of the Nipple (BB) and then thread the Nipple (BB) into the center lock hole of the Crossbar (AA). Using pliers, thread the Hex Nut (DD) against the Crossbar (AA) and hand tighten until snug.



STEP 2 – Fit Fixture Body to Crossbar Assembly

A. Fit the Fixture Body (D) over the Nipple (BB) on the Crossbar (AA) and secure with the Lock Knob (EE). The Backplate of the Fixture Body (D) should be snug against the wall and the Lock Knob (EE). If not, adjust the length of the Nipple (BB) on the




(Step 2 Continued)

Crossbar (AA) by unscrewing the Hex Nut (DD) and the Lock Washer (CC) and then screwing the Nipple (BB) in or out of the Crossbar (AA) until the correct length is achieved. Once the backplate of Fixture Body (D) is secure, remove the Lock Knob (EE) and Fixture Body (D) and proceed to step 3.


STEP 3 - Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.




STEP 4 - Install Fixture Body

A. Carefully tuck all wires into the outlet box and position the backplate of the Fixture Body (D) over the outlet box. Attach the backplate of the Fixture Body (D) over the Nipple (BB) and secure with the Lock Knob (EE). Hand tighten until snug.



STEP 5 - Install Shade and Bulb

A. Place the Shade (C)
and the Steel Collar (B)
over the Socket as
shown. By using the
Socket Collar Tool (F),
thread the Socket
Collar (A) onto the
Socket to secure them
together. Hand tighten
until snug.



Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184

or visit us on-line at www.quoizel.com

© 2016 Quoizel Inc.

Revised Date: 2016-06-08

(Step 5 Continued)

B. Install either the G9 Xenon bulb as specified (not provided) or install the G9 LED bulbs (provided) if the fixture purchased is the LED model.

Note: This fixture is rated to use 60W maximum G9 Xenon bulbs. You may use a lower wattage G9 Xenon or if you purchased the LED model it is supplied with G9 LED bulbs.

Your fixture is now assembled and ready to use. Enjoy!

