



Standard

STANDARD H1B13TPWI

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Rated Lamp Power	13 W
Lamp Type	CFQ13W/GX23	Wiring	
Number Of Lamps	1 piece/unit	Wire Striplength	0.50/0.375 mm
Lamp Footage	-	Lamp Connection	Series
Ballast Type	Magnetic Fluorescent	Wire Length By Color	See data sheet
Base Model	H1B13TPWI	Wire Gauge (Nom)	18AWG mm
Suitable For Outdoor Use	Yes	Wire Type	Solid
Automatic Restart	Yes	Remote Wiring Configuration Allowed	Yes
Operating and Electrical		Tandem Wiring Configuration Allowed	No
Input Voltage	120 V	Through Wiring Configuration Allowed	No
Input Frequency	60 Hz	Max Ballast-Lamp Distance Remote Wiring	30'
Total Harmonic Distortion USA	25 %	Max Ballast-Lamp Distance Tandem Wiring	-
Ignition Method	Preheat	Max Ballast-Lamp Distance Through Wiring	-
Crestfactor (Nom)	1.5	Mechanical and Housing	
Ignition Time (Nom)	1 s	Housing Material	Metal
Input Current (Open Circuit)	0.22	Housing	R1
Input Current (Starting)	0.36	Housing Dimensions	4.25" x 2.0" x 1.44"
Ballast Factor (Nom)	0.91	Approval and Application	
Power Factor (Nom)	0.95	EMC Immunity Standard	FCC Non-Consumer
Input Current (Nom)	0.14 A	Approval Marks	CSA certificate UL certificate RoHS Compliant
Input Power (Nom)	16 W		

Standard

Hum And Noise Level	A
UL Recognized	No
Product Data	
Order product name	STANDARD H1B13TPWI
EAN/UPC - Product	781087066850
Order code	913710304401

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913710304401
Net Weight (Piece)	386.000 g

Dimensional drawing

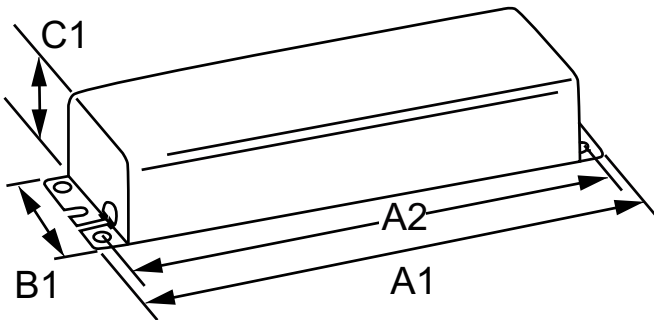

Product	A1	A2	B1	C1
STANDARD H1B13TPWI	4.25 in	3.56 in	2 in	1.44 in

MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

