

| | |
|------------------|--|
| Specified Item # | |
| Project | |
| Location | |



Dimmable



Dry/Wet Location



SPECIFICATIONS (12V MODELS)

| | | DI-TD-12V-60W | DI-TD-12V-80W | DI-TD-12V-120W |
|------------------------|------------------------------------|--|---------------|-----------------------------------|
| Input | Voltage / Frequency | 90~135VAC at ~50/60Hz | | |
| | Current (Full Load) | 0.61A (~110VAC) | | |
| | Efficiency / Power Factor (max) | >85% / >0.95 (~110VAC) | | |
| | Wire or Terminal Connection | 18AWG 3C leads w/ framed ground connection. H05RN-F cable, 300/500V. | | |
| Output | Voltage (Full Load) | 12VDC ±0.5V | | |
| | Max Current (Full Load) | 5.00A | 6.67A | 10A |
| | Power (Wattage) | 60W | 80W | 120W |
| | Wire or Terminal Connection | 18AWG 2C leads. H05RN-F cable, 300/500V. | | |
| | # Output Connections | 1 | | |
| Environment | Ambient Temperature ¹ | -40 ~ +140°F (-40 ~ +60°C) | | |
| | Operating Temperature ² | -40 ~ +176°F (-40 ~ +80°C) | | |
| | Location | Suitable for outdoor/wet location / IP67 | | |
| | Working Humidity | 20~90% RH, non-condensing. | | |
| | Class 2 Compliant | Yes | No | |
| | Housing / Cooling | Cooling by free-air convection. | | |
| Additional Information | Safety Standards | cULus (US & Canada) Listed, UL # E467524. ANSI/UL 1310 Class 2 Power Unit. CAN/CSA-C22.2 No. 223. EN-60950-1, EN-61347-1/-2/-13. | | |
| | Protections | Hiccup mode, recovers automatically after fault condition is removed. Short circuit and over current protection. | | |
| | Dimmable | Yes. Install a compatible TRIAC dimmer listed on the 'OMNIDRIVE / Dimming Control Compatibility List'. Not compatible with PWM controls. | | |
| | Minimum Load | Load at least 60% labeled load (dimmable installations only). | | |
| | Maximum Load ³ | See 'Derating Curve' | | |
| | Dimensions | 7.9 x 2.7 x 1.8 in. (L x W x H) | | 9.1 x 2.7 x 1.8 in. (L x W x H) |
| | Weight | 2 lbs. 3 oz. | | 3 lbs. |
| | Warranty | 3 years | | |

Note ¹ Do not install product in an environment outside the listed ambient temperature. Ensure adequate airflow and heatsinking is considered when mounting/installing. Exceeding the maximum ambient temperature may damage LED chips by reducing the total lamp life, lumen output, and/or adversely impact color consistency.

Note ² Operating temperature is measured according to the minimum and maximum ambient temperature environment.

Note ³ When installing in ambient temperatures that may reach over 100°F, refer to the 'Derating Curve' to avoid overheating and damage to the driver.

SPECIFICATIONS (24V MODELS)

| | | DI-TD-24V-60W | DI-TD-24V-80W | DI-TD-24V-120W |
|------------------------|------------------------------------|--|---------------|-----------------------------------|
| Input | Voltage / Frequency | 90~135VAC at ~50/60Hz | | |
| | Current (Full Load) | 0.61A (~110VAC) | | |
| | Efficiency / Power Factor (max) | >85% / >0.95 (~110VAC) | | |
| | Wire or Terminal Connection | 18AWG 3C leads w/ framed ground connection. H05RN-F cable, 300/500V. | | |
| Output | Voltage (Full Load) | 24VDC ±0.5V | | |
| | Max Current (Full Load) | 2.5A | 3.33A | 5A |
| | Power (Wattage) | 60W | 80W | 120W |
| | Wire or Terminal Connection | 18AWG 2C leads. H05RN-F cable, 300/500V. | | |
| | # Output Connections | 1 | | |
| Environment | Ambient Temperature ¹ | -40 ~ +140°F (-40 ~ +60°C) | | |
| | Operating Temperature ² | -40 ~ +176°F (-40 ~ +80°C) | | |
| | Location | Suitable for outdoor/wet location / IP67 | | |
| | Working Humidity | 20~90% RH, non-condensing. | | |
| | Class 2 Compliant | Yes | No | |
| | Housing / Cooling | Cooling by free-air convection. | | |
| Additional Information | Safety Standards | cULus (US & Canada) Listed, UL # E467524. ANSI/UL 1310 Class 2 Power Unit. CAN/CSA-C22.2 No. 223. EN-60950-1, EN-61347-1/-2/-13. | | |
| | Protections | Hiccup mode, recovers automatically after fault condition is removed. Short circuit and over current protection. | | |
| | Dimmable | Yes. Install a compatible TRIAC dimmer listed on the 'OMNIDRIVE / Dimming Control Compatibility List'. Not compatible with PWM controls. | | |
| | Minimum Load | Load at least 60% labeled load (dimnable installations only). | | |
| | Maximum Load ³ | See 'Derating Curve' | | |
| | Dimensions | 7.9 x 2.7 x 1.8 in. (L x W x H) | | 9.1 x 2.7 x 1.8 in. (L x W x H) |
| | Weight | 2 lbs. 3 oz. | | 3 lbs. |
| | Warranty | 3 years | | |


Note ¹ Do not install product in an environment outside the listed ambient temperature. Ensure adequate airflow and heatsinking is considered when mounting/installing. Exceeding the maximum ambient temperature may damage LED chips by reducing the total lamp life, lumen output, and/or adversely impact color consistency.

Note ² Operating temperature is measured according to the minimum and maximum ambient temperature environment.

Note ³ When installing in ambient temperatures that may reach over 100°F, refer to the 'Derating Curve' to avoid overheating and damage to the driver.

ACCESSORY


When installing in wet locations ensure waterproof connections on both AC input and DC output wire tails.

| Item # | Item Name | Description | |
|-------------|---|--|---|
| DI-JBOX-OUT | Commercial-Grade Wet Location Mini Junction Box | Wire boxes (junction boxes) allow for safe wire connections and are ideal for installations that will be inspected for electrical codes requiring two conductor connections within an enclosure. |  |

MECHANICAL DIAGRAM


Models

- DI-TD-12V-60W • DI-TD-12V-80W
- DI-TD-24V-60W • DI-TD-24V-80W

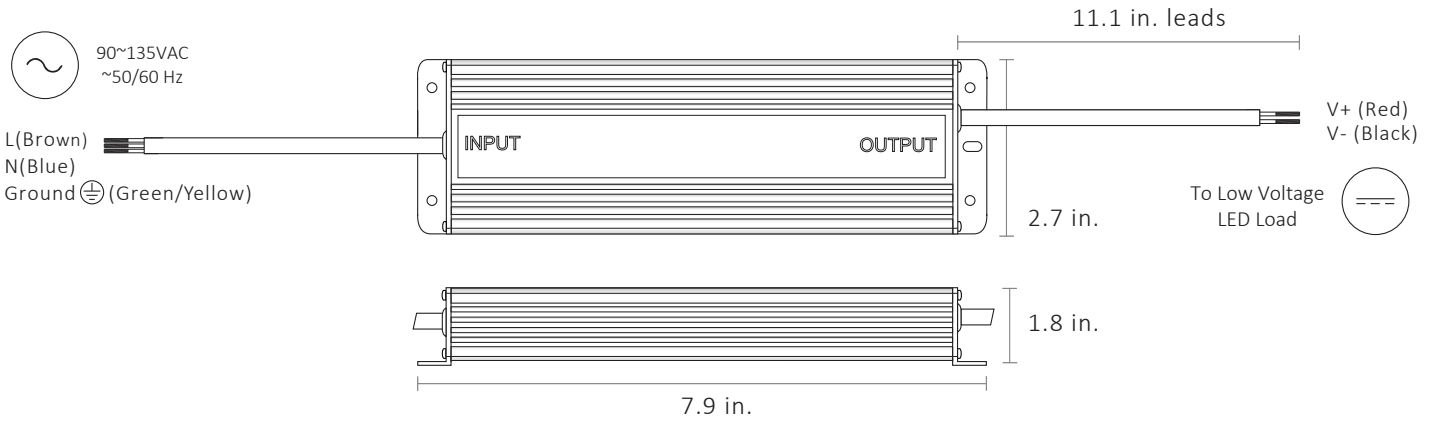


Model

- DI-TD-12V-120W
- DI-TD-24V-120W

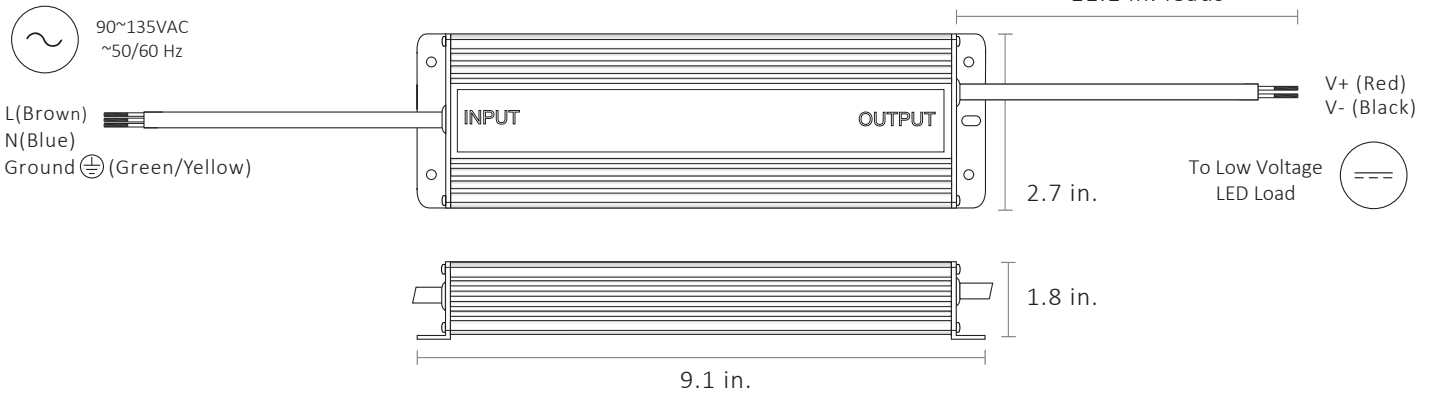

DERATING CURVE

When installing in ambient temperatures that may reach over 100°F, refer to the 'Derating Curve' to avoid overheating and damage to the driver.

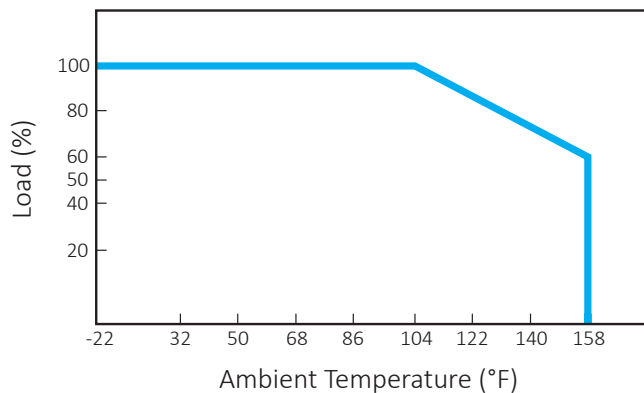

ADDITIONAL RESOURCES

Visit the online product page at www.DiodeLED.com for additional resources including:

- **OMNIDRIVE® Installation Guide**
For system diagrams and full installation instructions.
- **OMNIDRIVE® / Control Compatibility List**
For compatible dimming controls.
- **COMMERCIAL GRADE WET LOCATION JUNCTION BOX Specification Sheet**
For full specifications.
- **Voltage Drop Charts**
Use to specify appropriate wire gauge for installation. Available at the 'Tools & Resources' page at www.DiodeLED.com

SAFETY & WARNINGS

- Install in accordance with the National Electric Code, and local regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- Only install compatible LED fixtures & controls. Only use copper wiring.
- Proper heat dissipation will prolong the working lifespan of this product. Install in a well-ventilated area free from explosive gases and vapors.
- Ensure applicable wire is installed between driver, fixture, and any controls in between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause a fire.
- Do not install if product has any visible damage.
- Do not modify or disassemble this product beyond instructions or the warranty will be void.

WARRANTY

Limited Warranty

This product has a three (3) year limited warranty from the date of shipment. This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.DiodeLED.com under the 'Tools & Resources' tab. For warranty related questions, please contact customer service.

Consumer's Acknowledgment

Diode LED stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and in-field adjustments can have a significant impact on an entire system. Choosing the right components is essential. Diode LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Diode LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Diode LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgement that the products purchased are designed and configured correctly. The purchaser agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Diode LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Diode LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Diode LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.