


Model No.	VE232MVHIPE
Family	Elite
Ballast Type	Electronic
Lamp Operation	Parallel
Input Voltage	120/277V
Starting Method	Instant Start

PRODUCT SPECIFICATION

ELECTRONIC BALLASTS

Lamp Type	No. of Lamps	Input Voltage (V)	Input Current (A)	Input Power (W)	Power Factor	MAX THD (%)	Ballast Factor	Min. Starting Temp.(F/C)	Lamp Current Crest Factor	B.E.F.
F32T8 32W	2	120/277	0.46/0.20	55/54	0.98	10	0.89	0	1.7	1.59/1.60
F32T8/ES 30W	2	120/277	0.43/0.19	51	0.98	10/15	0.89	0	1.7	1.74/1.70
F32T8/ES 28W	2	120/277	0.41/0.18	49/47	0.98	10	0.89	0	1.7	1.82/1.70
F17T8 17W	1	120/277	0.17/0.08	19	0.98	10	1.06	0	1.7	
F17T8 17W	2	120/277	0.26/0.11	30	0.98	10	0.90	0	1.7	
F25T8 25W	1	120/277	0.23/0.10	28	0.98	10	1.05	0	1.7	
F25T8 25W	2	120/277	0.37/0.16	43	0.98	10	0.88	0	1.7	
F32T8/ES 25W	1	120/277	0.23/0.10	27	0.98	10	1.05	0	1.7	
F32T8/ES 25W	2	120/277	0.39/0.17	44	0.98	10	0.89	0	1.7	
F32T8/ES 28W	1	120/277	0.26/0.11	31	0.98	10	1.05	0	1.7	
F32T8/ES 30W	1	120/277	0.28/0.12	33	0.98	10	1.05	0	1.7	
F32T8 32W	1	120/277	0.30/0.13	35	0.98	10	1.05	0	1.7	
F40T8 40W	1	120/277	0.35/0.15	41	0.98	10	1.01	0	1.7	

Physical Parameters

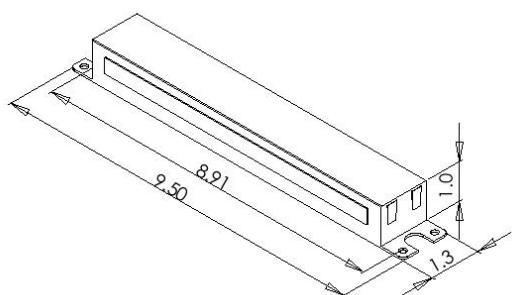

Enclosure	(in)
Length	9.5
Width	1.3
Height	1.0
Mounting	8.91

Lead Length	in.(+/-1.0)
Black	12
White	12
Red	36
Blue	24
Yellow	N/A

Wiring Diagram

