


Model No.	VE432MVHIPE
Family	Elite
Ballast Type	Electronic
Lamp Operation	Parallel
Input Voltage	120/277V
Starting Method	Instant Start

PRODUCT SPECIFICATION

ELECTRONIC BALLASTS

Lamp Type	No. of Lamps	Input Voltage (V)	Input Current (A)	Input Power (W)	Power Factor	MAX THD (%)	Ballast Factor	Min. Starting Temp.(F/C)	Lamp Current Crest Factor	B.E.F.
F32T8 32W	4	120/277	0.94/0.40	110/108	0.99/0.98	10	0.88	0	1.7	0.80/0.81
F17T8	3	120/277	0.42/0.19	50	0.98	15	1.01	0	1.7	
F17T8 17W	4	120/277	0.50/0.22	59	0.98	10	0.91	0	1.7	
F25T8 25W	3	120/277	0.60/0.27	72	0.98	10	0.98	0	1.7	
F25T8 25W	4	120/277	0.73/0.32	86	0.98	10	0.89	0	1.7	
F32T8/ES 25W	3	120/277	0.60/0.27	72	0.98	10	0.98	0	1.7	
F32T8/ES 25W	4	120/277	0.74/0.32	87	0.98	10	0.88	0	1.7	
F32T8/ES 28W	3	120/277	0.67/0.29	80	0.98	10	0.98	0	1.7	
F32T8/ES 28W	4	120/277	0.82/0.36	97/96	0.98	10	0.88	0	1.7	
F32T8/ES 30W	3	120/277	0.71/0.31	84	0.98	10	0.98	0	1.7	
F32T8/ES 30W	4	120/277	0.89/0.39	105	0.98	10	0.88	0	1.7	
F32T8 32w	3	120/277	0.76/0.33	91/90	0.98	10	0.98	0	1.7	
F40T8 40W	3	120/277	0.93/0.39	110	0.98	10	0.94	32	1.7	

Physical Parameters

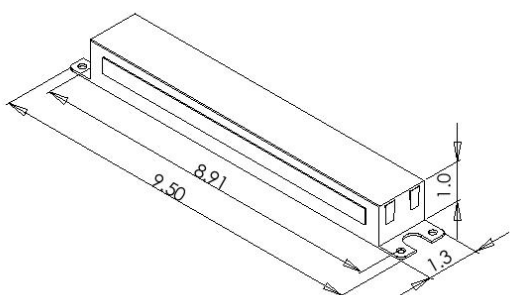

Enclosure	(in)
Length	9.5
Width	1.3
Height	1.0
Mounting	8.91

Lead Length	in.(+/-1.0)
Black	12
White	12
Red	24
Blue	24
Yellow	36

Wiring Diagram

