

Reversing motor starter Size 0 Three phase full voltage Solid-state overload relay OLRelay amp range 3-12A 110-120/220-240VAC 60HZ coil Non-combination type Enclosure type (open)



Figure similar

| General technical data   |                                     |
|--|-------------------------------------|
| Weight [lb]  | 6 lb                                |
| Height x Width x Depth [in]  | 7.69 × 10.5 × 3.92 in               |
| Protection against electrical shock  | Not finger-safe                     |
| Installation altitude [ft] at height above sea level maximum   | 6560 ft                             |
| Ambient temperature [°F] during storage  | -22 ... +149 °F                     |
| Ambient temperature [°F] during operation  | -4 ... +104 °F                      |
| Ambient temperature during storage   | -30 ... +65 °C                      |
| Ambient temperature during operation   | -20 ... +40 °C                      |
| Country of origin  | Mexico                              |
| Horsepower ratings   |                                     |
| Yielded mechanical performance [hp] for three-phase AC motor   |                                     |
| <ul style="list-style-type: none"> <li>• at 200/208 V rated value</li> <li>• at 220/230 V rated value</li> <li>• at 460/480 V rated value</li> </ul> | <p>2 hp</p> <p>2 hp</p> <p>5 hp</p> |

- at 575/600 V rated value

5 hp

### Contactors

|   |          |
|---|----------|
| Number of NO contacts for main contacts                                 | 3        |
| Operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V    |
| Operating current at AC at 600 V rated value                            | 18 A     |
| Mechanical service life (switching cycles) of the main contacts typical | 10000000 |

### Auxiliary contact

|   |                                     |
|---|-------------------------------------|
| Number of NC contacts at contactor for auxiliary contacts         | 0                                   |
| Number of NO contacts at contactor for auxiliary contacts         | 1                                   |
| Number of total auxiliary contacts maximum                        | 8                                   |
| Contact rating of auxiliary contacts of contactor according to UL | 10A@600VAC (A600), 5A@600VDC (P600) |

### Coil

|  |               |
|--|---------------|
| Type of voltage of the control supply voltage                                  | AC            |
| Control supply voltage   |               |
| <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>          | 0 ... 0 V     |
| <ul style="list-style-type: none"> <li>• at AC at 60 Hz rated value</li> </ul> | 110 ... 240 V |
| <ul style="list-style-type: none"> <li>• at AC at 50 Hz rated value</li> </ul> | 0 ... 0 V     |
| Holding power at AC minimum  | 8.6 W         |
| Apparent pick-up power of magnet coil at AC                                    | 218 V·A       |
| Apparent holding power of magnet coil at AC                                    | 25 V·A        |
| Operating range factor control supply voltage rated value of magnet coil       | 0.85 ... 1.1  |
| Percental drop-out voltage of magnet coil related to the input voltage         | 50 %          |
| Switch-on delay time   | 19 ... 29 ms  |
| Off-delay time   | 10 ... 24 ms  |

### Overload relay

|  |  |
|--|--|
| Product function   |  |
| <ul style="list-style-type: none"> <li>• Overload protection</li> <li>• Phase failure detection</li> <li>• Phase unbalance</li> <li>• Ground fault detection</li> <li>• Test function</li> <li>• External reset</li> </ul> | <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>No</p> |
| Reset function   | Manual, automatic and remote                                     |
| Trip class   | Class 5 / 10 / 20 (factory set) / 30                             |

|  |                                    |
|--|------------------------------------|
| Adjustable pick-up value current of the current-dependent overload release | 3 ... 12 A                         |
| Make time with automatic start after power failure maximum                 | 3 s                                |
| Relative repeat accuracy   | 1 %                                |
| Product feature Protective coating on printed-circuit board                | Yes                                |
| Number of NC contacts of auxiliary contacts of overload relay              | 1                                  |
| Number of NO contacts of auxiliary contacts of overload relay              | 1                                  |
| Operating current of auxiliary contacts of overload relay                  |                                    |
| • at AC at 600 V   | 5 A                                |
| • at DC at 250 V   | 1 A                                |
| Contact rating of auxiliary contacts of overload relay according to UL     | 5A@600VAC (B600), 1A@250VDC (R300) |
| Insulation voltage   |                                    |
| • with single-phase operation at AC rated value                            | 600 V                              |
| • with multi-phase operation at AC rated value                             | 300 V                              |

#### Enclosure



|   |                            |
|---|----------------------------|
| Degree of protection NEMA rating of the enclosure | Open device (no enclosure) |
| Design of the housing                             | NA                         |



#### Mounting/wiring

|   |                                   |
|---|-----------------------------------|
| Mounting position   | Vertical                          |
| Mounting type   | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side  | Screw-type terminals              |
| Tightening torque [lbf·in] for supply   | 20 ... 20 lbf·in                  |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded                  | 1x (14 ... 2 AWG)                 |
| Temperature of the conductor for supply maximum permissible   | 75 °C                             |
| Material of the conductor for supply  | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder   | Screw-type terminals              |
| Tightening torque [lbf·in] for load-side outgoing feeder  | 20 ... 20 lbf·in                  |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (14 ... 2 AWG)                 |
| Temperature of the conductor for load-side outgoing feeder maximum permissible  | 75 °C                             |
| Material of the conductor for load-side outgoing feeder   | AL or CU                          |

|  |   |
|--|---|
| Type of electrical connection of magnet coil   | Screw-type terminals                                |
| Tightening torque [lbf-in] at magnet coil  | 5 ... 12 lbf-in                                     |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                           | 2x (16 ... 12 AWG)                                  |
| Temperature of the conductor at magnet coil maximum permissible  | 75 °C   |
| Material of the conductor at magnet coil   | CU  |
| Type of electrical connection for auxiliary contacts   | screw-type terminals                                |
| Tightening torque [lbf-in] at contactor for auxiliary contacts   | 10 ... 15 lbf-in                                    |
| Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded      | 1x (12 AWG), 2x (16 ... 14 AWG), 2x (18 ... 16 AWG) |
| Temperature of the conductor at contactor for auxiliary contacts maximum permissible   | 75 °C   |
| Material of the conductor at contactor for auxiliary contacts  | CU  |
| Type of electrical connection at overload relay for auxiliary contacts   | Screw-type terminals                                |
| Tightening torque [lbf-in] at overload relay for auxiliary contacts  | 7 ... 10 lbf-in                                     |
| Type of connectable conductor cross-sections at overload relay at AWG conductors for auxiliary contacts single or multi-stranded | 2x (20 ... 14 AWG)                                  |
| Temperature of the conductor at overload relay for auxiliary contacts maximum permissible  | 75 °C   |
| Material of the conductor at overload relay for auxiliary contacts   | CU  |

| Short-circuit current rating   |   |
|--|---|
| Design of the fuse link for short-circuit protection of the main circuit required                    | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
| Design of the short-circuit trip   | Thermal magnetic circuit breaker                    |
| Maximum short-circuit current breaking capacity (Icu)  |   |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 480 V</li> <li>• at 600 V</li> </ul> | 14 kA<br>10 kA<br>10 kA                             |

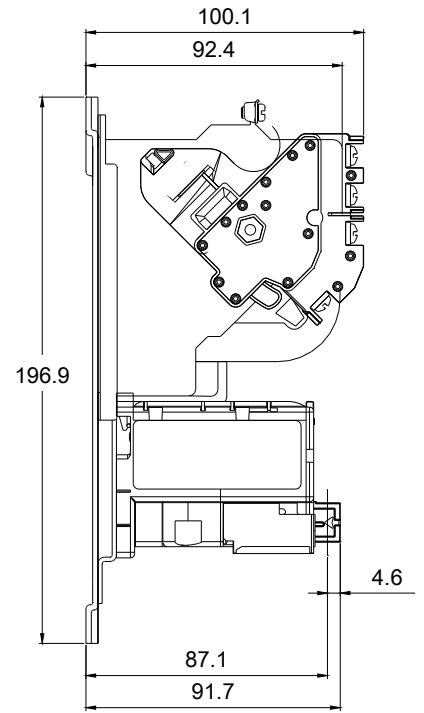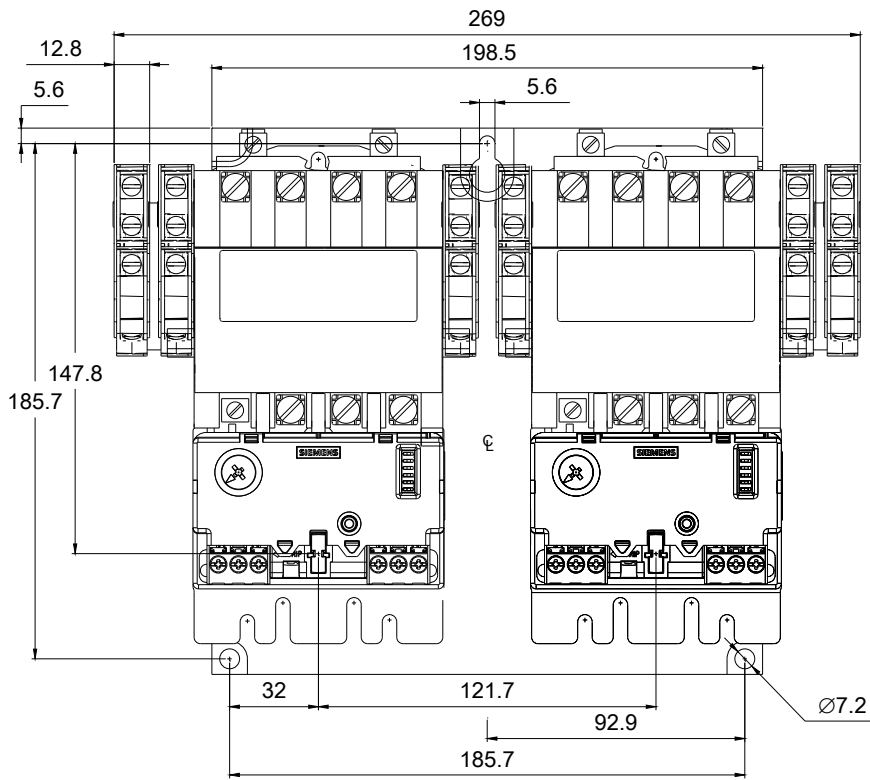

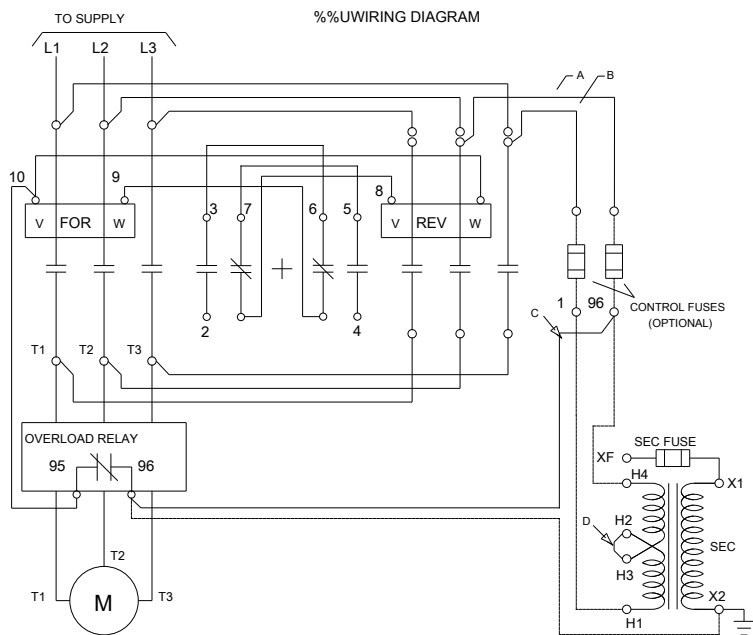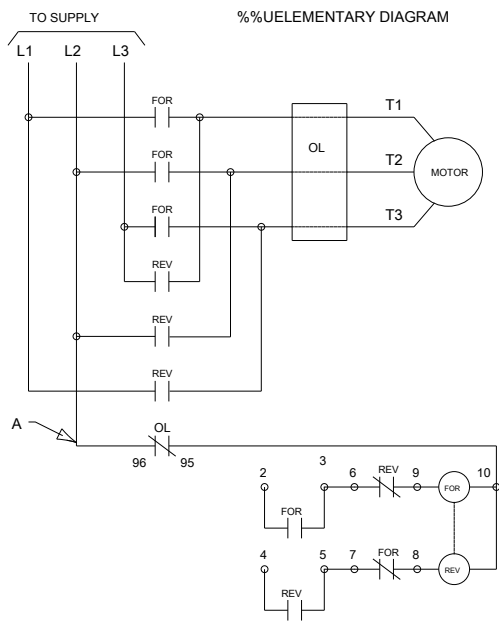

D46590003

last modified:

02/27/2017