



DL-PS-xx/24-JB-DIM

LED POWER SUPPLIES & ACCESSORIES
24V DC Hard Wire with Junction Box Series

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |

FEATURES


- c-UL-us Class 2 Recognized
- Dimmable with TRIAC dimmer
- Auto-reset protection short circuit, over-voltage and over-temperature
- IP 67 – designed to withstand wet and salty conditions
- Lightweight and compact aluminum case
- Built in junction box - includes 2 knock-outs in the case



SPECIFICATIONS

| Part Number | DL-PS-40/24-JB-DIM | DL-PS-60/24-JB-DIM | DL-PS-100/24-JB-DIM |
|---|-------------------------------|--------------------|---------------------|
| Input Voltage | 120V AC | | |
| Input Frequency | 60Hz | | |
| Efficiency | >90% | >90% | >90% |
| Input Current (max load) | 410mA | 610mA | 1000mA |
| Output Voltage | 24V DC | 24V DC | 24V DC |
| Output Power (max) | 40W | 60W | 96W |
| Output Current (max load) | 1.75A | 2.63A | 4.2A |
| Power Factor | 0.95 | 0.95 | 0.95 |
| Operating Temp | -20°C to 70°C (-4°F to 158°F) | | |
| Auto-Reset Protection | YES | | |
| Dimensions (L*W*H) | 6.77" x 2.67" x 1.26" | | |
| Weight | 17 oz | | |
| <i>Note: Driver requires a minimum of 8W of load for proper dimming</i> | | | |

WIRING INFORMATION & DIMENSIONS

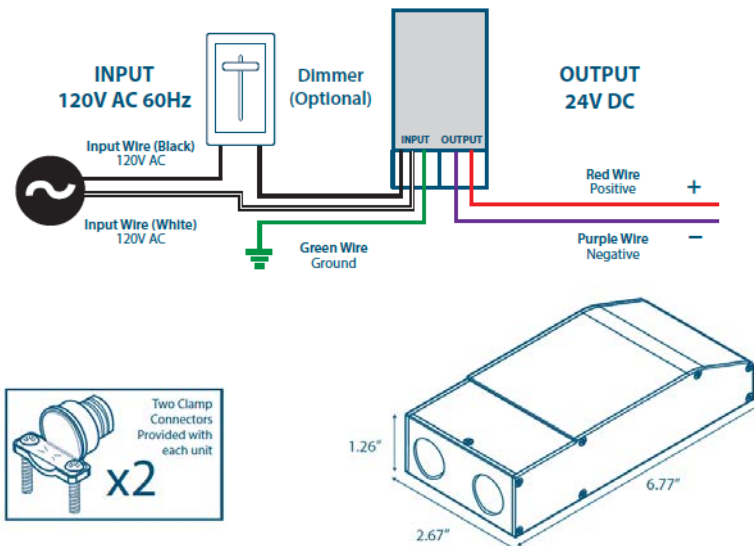

www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 1
5/20/2015

Specifications subject to change without notice.



DL-PS-xx/24-JB-DIM

LED POWER SUPPLIES & ACCESSORIES
24V DC Hard Wire with Junction Box Series

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |

RECOMMENDED DIMMERS

LUTRON Incandescent Dimmers

Lutron Skylark

S-103P, S-103PNL, S-603P, S-603PNL, S-10P, S-10PNL, S-600P, S-600PNL

Lutron Rotary

D-603P, DNG-603PH-DK, D-600, DNG-603P, DNG-600P, D-600R

Lutron Maestro

MA-1000, MA-600, MSC-1000M, MSC-600M

Lutron Nova Dimmer

N-1500, N-1503P, N-2000, N-2003P, N-1000, N-1003P, N-600, N-603P

Lutron Diva

DVCL-153PH, DVCL-153P, DVCL-253P, DVSCCL-153P, DVSCCL-253P, DV-103P, DVSC-103P, DVSC-603P

LUTRON MLV Dimmers

Lutron Vareo Dimmer

V-1000, VETN-1000, V-600, VETS-1000, V-1000-S, VETS-1000-CSA, V-600-S, VETN-1000-S, VETS-1000-S, VETS-R, VETS-R-S, VETS-1000-SL, VETS-1000-SL-S, VETS-A-S, VETS-A-SL-S

Lutron Ariadni Dimmer

AYLV-603P, AYLV-600P-CSA, AYLV-603P-CSA, AYLV-600P-S, AYLV-603P-S, AYLV-600P

Lutron Lyneo Dimmer

LXLV-103PL, LXLV-603PL, LXLV-10PL, LXLV-600PL

Lutron Nova T Dimmer

NTLV-1500, NTLV-600-277, NTLV-1000, NTLV-1000-277, NTLV-600

Lutron Aycl Dimmer

153-PH

Lutron Nova Dimmer

NTLV-1000, NTLV-1500, NTLV-600, NTLV-1500-S, NTLV-600-S, NTLV-1000-S, NTLV-1503P, NTLV-2003P, NTLV-1003P, NTLV-603P, NTLV-1503P-CSA, NTLV-1003P-CSA, NTLV-603P-CSA, NTLV-1503P-S, NTLV-2003P-S, NT-3PS, NT-3PS-CSA, NT-3PS-S, NTLV-1003P-S, NTLV-603P-S, NT-4PS, NT-4PS-CSA, NT-4PS-S, NT-1PS, NT-1PS-CSA, NT-1PS-S

Lutron Diva Dimmer

DVLV-103P, DVLV-603P, DVSCLV-103P, DVSCLV-603P, DVLV-103P-CSA, DVLV-603P-CSA, DVLV-103P-S, DVLV-603P-S, DVLV-103PH-S, DVLV-603PH-S, DVSCLV-103P-L, DVSCLV-603P-L, DVLV-600P, DVLV-10P, DVSCLV-10P, DVSCLV-600P, DVLV-10P-CSA, DVLV-10P-S, DVLV-10PH-S, DVSCLV-10P-L, SC-3PS, SC-3PS SC-4PS, SC-4PS, SC-1PS, SC-1PS, SC-3PSNL, SC-4PSNL, SC-1PSNL

Lutron Ceana Dimmer

CNLV-603P, CNLV-600P

Lutron Glyder Dimmer

GLV-600, GLV-600-CSA

Lutron Skylark Dimmer

SLV-603P, SLV-603P-CSA, SLV-603PH-CSA, SLV-600P, SLV-600P-CSA, SLV-600PH-CSA

LEVITON

Leviton Incandescent Dimmer

OC5504, 1C3005

Leviton Illumatech Dimmer

IPM06-1LZ, IPM06-1LX, IPM10-1LZ

Leviton Vizia Dimmer

VPM06-1LZ

Leviton Mural Dimmer

MDM06-1LI, MDM06-1LW, MDM06-1LA, MDM10-1LI, MDM10-1LW, MDM10-1LA

Leviton SureSlide Dimmer

6613-PLT, 6613-PLI, 6613-PLW, 6613-PLA

Leviton ToggleTouch Dimmer

TGM10-1LI, TGM10-1LI, TGM10-1LA, TGM10-1LT

LEGRAND

Pass and Seymour

HLV1103PW, CDLV1103-PW, HLV703PTC, WSLV703PW, H703PTUTC, CDLV703-PW, H703P, LSLV600-pw, LSLV600-W

*Dimmer performance may vary within the same model or with different LED load types.
Additional dimmers may be compatible, please contact JESCO support for more information.
List of Recommended Dimmers may change without prior notice.*



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Rev 1
5/20/2015

Specifications subject to change without notice.