PHILIPS Day-Brite <i>CFI</i>	
Recessed	Project: Location:
	Cat.No:
	Туре:
FluxGrid 2x4	Lumens: Qty:
	Notes:
3800, 4200, 4300, 4800, 5400. or 7400 lumens	The Philips Day-Brite / Philips CFI FluxGrid LED recessed offers

The Philips Day-Brite / Philips CFI FluxGrid LED recessed offers architectural appeal with "must have" features. Two different lens styles, discrete air handling, integral emergency, and access to the boards and driver from below make FluxGrid an ideal solution for a wide range of applications.

Ordering guide - Standard configurations available with all choices, unless otherwise noted. Base configurations selections indicated by blue.

### Example: 2FGG42B840-4-D-UNV-DIM

Width	Family	Ceiling Type	Air Function	Lumens	Color	Length	Center Diffuser	Voltage	Driver	Options
2	FG	G				4				
2 2'	FG FluxGrid	G Grid	Blank Static H Air return	<ul> <li>Standard Configurations</li> <li>38L 3800 nominal delivered lumens</li> <li>43L 4300 nominal delivered lumens</li> <li>48L 4800 nominal delivered lumens</li> <li>54L 5400 nominal delivered lumens</li> <li>54L 7400 nominal delivered lumens</li> <li>Base Configurations</li> <li>42B 4200 nominal delivered lumens</li> </ul>	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K	4 4'	D Diffuse (ribbed) DS Diffuse (smooth)	UNV Universal voltage 120-277V 120' 120V 277' 277V 347 347V	DIM <sup>2.3</sup> Dimming SDIM <sup>4</sup> Step dimming to 40% input power XDIM <sup>1</sup> MarkX phase dimming L3D <sup>5</sup> Lutron Hi-lume A 1% dimming LDE Lutron LDE5 5% dimming DALI DALI	F1       3/8" flex, 3 wire 18 gauge 6'         F2       3/8" flex, 4 wire 18 gauge 6'         F1/D       3/8" twin flex, 3 wire 18 gauge 6'         for dimmable luminaires         F2/5W       3/8" single flex, 5 wire 18 gauge 6'         for dimmable luminaires         F2/6W       3/8" single flex, 6 wire 18 gauge 6' for dimmable and EMLED         luminaires         GLR       Fusing, fast blow         EMLED <sup>6</sup> Bodine BSL310 10W battery pack         IAP'       Integral Interact Pro RF sensor, enables network lighting control         SWZDT'       Integral sensor, daylighting and occupancy, advanced grouping with dwell time         DAYOCC'       Integral sensor, daylighting and occupancy, basic grouping         CHIC       Chicago Plenum rated

### Footnotes

- 1 XDIM requires 120V or 277V specification. Not available on 30L package.
- 2 Integral IAP, SWZDT and DAYOCC options dimmable to 5% via wireless wall switch. See p. 2.
- 3 Non-controls configurations are 0-10V dimmable to 1% for standard configurations. Base configurations are 0-10V dimmable to 10%.
- 4 Consult factory for SDIM on 74L package.
- 5 Specify up to 43L package. Consult factory for higher lumen packages.
- 6 Philips Bodine BSL310, 1100lm nominal delivered
- 7 Specify DIM driver option only.

### Accessories (order separately)

- FMA24 2'x4' "F" mounting frame for NEMA "F" mounting
- FGD4L FG 4' ribbed replacement lens
- FGDS4L FG 4' smooth replacement lens
- $\cdot$  FGHD4L FG 4' air return ribbed replacement lens
- FGHDS4L FG 4' air return smooth replacement lens
- FSK24 2'x4' surface mount field installation kit (factory welded seams)
- FSF24 2'x4' surface mount field assembly kit (field assembled)

FluxGrid\_LED\_2x4wIAR v02 10/18 page 1 of 5

### Energy data

Luminaire	Catalog Number	Input Power	Efficacy
	2FGG38L840	31.8	120
	2FGG43L840	36.2	119
2x4 Standard	2FGG48L840	41.5	116
	2FGG54L840	48.9	114
	2FGG74L840	69.2	106
2x4 Base	2FGG42B840	33.9	124





### 3800, 4200, 4300, 4800, 5400, or 7400 lumens

### Application

- 3" deep low profile configuration provides minimal penetration into the plenum space.
- Acrylic diffuser available in ribbed and smooth configurations provides even illumination with comfortable appeal.
- Standard and base configurations available in multiple lumen packages to suit the needs of various applications.
- Lambertian distribution creates uniform horizontal and vertical illuminance on the work plane and reduces scalloping on the walls.
- CRI 80 minimum color rendering with balanced spectrum.
- LEDs coupled with standard dimming provide prolonged lumen maintenance. Optional integral sensors contribute further to LED lumen maintenance.
- Designed for use with standard 15/16" wide Grid (NEMA "G") T-bars. Drywall or plaster applications require use with the FMA24 "F" mounting frame accessory (sold and shipped separately).
- Continuous row mounting is possible with a 1" gap between fixtures accommodated by others.

### Enclosure

- Opal acrylic diffuser provides visually comfortable lumenance without compromise to luminaire efficacy.
- Diffuser requires no frames or fasteners and can be easily removed from below without the use of tools.

### **Construction/Finish**

- Uncomplicated design is 3" deep with minimal material overlap creating several benefits:
- Less material required
- Less packaging required
- Reduced weight for ease of handling and transit
- Less energy required for construction and assembly
- More luminaires can be shipped per truck to reduce fuel consumption
- Metal side covers are die formed with a conical shape to enhance light distribution and visual aesthetic.
- Injection molded lens retainers allow for easy, tool-free access to the LED boards and driver from below, and provide positive lens retention,
- Luminaire finish is matte white polyester powder coat for high quality, durable finish.
- T-bar grid clips are integral to the body.

- Air return option provides air flow through a unique lens retainer design. Air passes through architectural forms in the lens retainers (each end), and through the end plate of the luminaire. A cover plate is provided to control air flow through the luminaire, or make it static as required.
- Integral controls options include sensor mounted in one lens retainer. Controls are commissioned via intuitive Philips app on a Droid smartphone either through NFC or an IR blaster.
- EMLED option requires the emergency battery pack be installed with a top side cover. Access from above.
- To estimate lumen output in emergency mode, multiply emergency pack wattage by efficacy, then by 1.10.

#### **General notes**

- · All options are factory installed.
- All accessories are field installed.
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, pertroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.

### Electrical

- Integral sensor options for occupancy sensing and/or daylight harvesting are available for additional energy savings with no reduction of life or increase in installation labor.
- Standard configurations provide up to 120 lumens per watt and are available with 5 lumen packages and 3000, 3500, 4000, and 5000K color temperatures.
- Base configurations provide up to 124 lumens per watt and are available in 4200 lumen flux and 3500K and 4000K color temperatures.
- LED boards are accessible from below by removal of the lens. Lens removal is tool-free by compressing the sides and pushing to one end.
- LED driver is accessible from below by removal of the lens and integral wireway cover. The wireway cover is easily removed with a flat head screwdriver.
- Other driver options including step dimming (SDIM, 100%/40%), DALI, phase dimming (XDIM), and Lutron are available.
- Five year limited luminaire warranty includes LED boards and driver. Visit www.philips. com/warranties for complete warranty information.

- TM-21 predicted L70 lumen maintenance up to 70,000 hours.
- cETLus listed to UL and CSA standards, suitable for damp locations.
- FluxGrid luminaires are DesignLights Consortium qualified. Please see the DLC QPL list for exact catalog numbers (http://www.designlights.org/QPL).

### DAYOCC & SpaceWise DT (SWZDT)

- Commissioning via compatible Android phone and Philips Field App
- Dimming via compatible wireless wall switch only (see below)
- Register for the commissioning app at http:// registration.componentcloud.philips.com/ appregistration/
- Integral sensing options (DAYOCC, SWZG2, SWZDT) may not be combined
- For more information including recommended switches, refer to the following –

DAYOCC – www.lightingproducts.philips. com/documents/webdb2/DayBrite/pdf/ DAYOCC\_sensor.pdf


**SWZDT** – www.lightingproducts.philips.com/ documents/webdb2/DayBrite/pdf/SWZDT\_ sensor.pdf


### Interact Pro (IAP)

- Interact Pro brings the power of connected lighting to small and medium businesses without the complexity usually associated with connected lighting.
- Interact Pro includes an app, a portal and a broad portfolio of wireless Luminaires, lamps and retrofit kits all working on the same system.
- Commissioning via Interact Pro App (Android or iPhone)
- Prepare commissioning remotely via Interact Pro portal
- Requires compatible Interact Pro Gateway
   and internet connectivity for commissioning
- Compatible with UID8451/10 ZigBee Greenpower wireless dimmer switch
- Compatible with wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) or wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1)
- For more information on Interact Pro visit: www.interact-lighting.com/pro
- For more information on Interact Ready visit: www.philips.com/interactready

3800, 4200, 4300, 4800, 5400, or 7400 lumens


### **Dimensions**

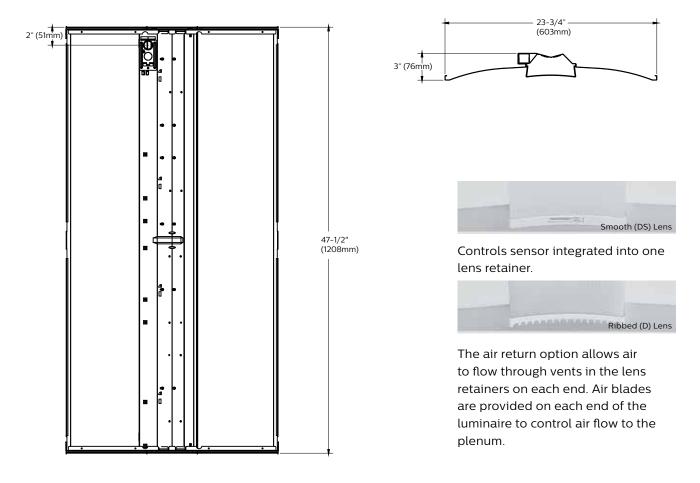

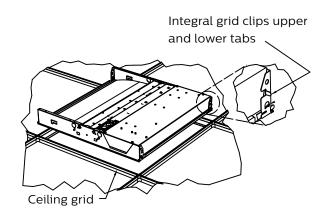

3800, 4200, 4300, 4800, 5400, or 7400 lumens

### Air return

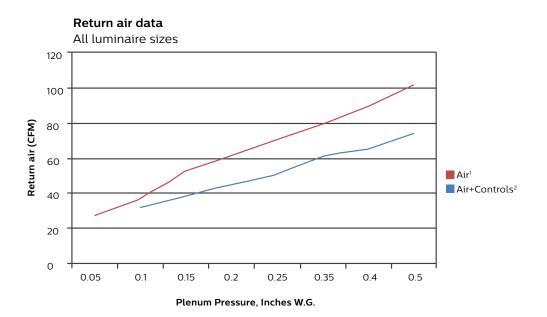

Return air - noise criteria

All luminaire sizes

					CF	м			
Mode		27	37	53	62	71	80	90	102
Air <sup>1</sup>	NC (dB)	<15	24	25	29	33	35	38	40

	CFM												
Mode			31	38	45	51	61	65	74				
Air+Controls <sup>2</sup>	NC (dB)		<15	19	21	25	28	30	34				

1. Air-only option includes air return lens retainers and pattern control blades on both ends of luminaire. 2. Air+Controls includes the air return lens retainer and pattern control blade on one end of the luminaire.

Control lens retainer on the other with matching width.

### 3800, 4200, 4300, 4800, 5400, or 7400 lumens

### Photometry

### 2x4 FluxGrid recessed LED, base configuration, 4200 nominal delivered lumens

### LER - 124

							Light	Distrib	oution			Av	erage	Lumina	ance
Catalog No.	2FGG42B840-4-D-UNV-DIM						Degree	es L	umens	% Lum	inaire	Zo	ne End	45°	Cross
Test No.	36564						0-30		176	27.9		45	8102		8845
S/MH	1.2						0-40		893 273	44.9		<u>55</u> 65	7349		8685 8890
	LED	Candl	epowe	r			0-90	4	215	100		75	502	5 7991	9014
Lamp Type							0-180	4	216	100		85	3186	7597	7905
Lumens	4212	Angle	End	45	Cross	Back-45	Cooff	cionto	of Liti	lizatio	2				
Input Watts	34	0	1567	1567	1567	1567	Coem	cients		lizatioi	1				
•		5	1541	1556	1559	1556	FEFEC		OPCAVE	TY REFLE	CTANCE	D DEP (	fc=0 20)		
Comparative year	rly lighting energy cost per 1000	15	1467	1473	1476	1473	pfc =	20					/(-0.20)		
	ased on 3000 hrs. and \$.08 pwr	25	1323	1330	1339	1330	Ceil				70			50	
KWH.	ased on sooo his. and \$.00 pwi	35	1124	1147	1165	1147	Wall	70	50	30	70	50	30	50	30
		45	896	949	978	949	RCR 0	118	118	118	115	115	115	111	111
The photometric	results were obtained in the	55	659	737	779	737	1	108	103	98	106	101	96	96	93
Philips Day-Brite	laboratory which is NVLAP	65	404	534	587	534	2	97	90	82	95	88	81	84	79
	National Institute of Standards	75	203	323	365	323	3 4	90 81	79 69	70 60	86 80	77 68	69 59	73 66	68 58
and Technology.		85	43	104	108	104	5	76	63	54	72	60	53	58	52
Photometric value	es based on test performed in						6	69	56	46	68	55	46	54	46
compliance with							7	65 59	51 46	41 38	63 58	50 46	41 38	48	40 36
							9	59	46	38	55	46	38	45	36
							10	53	40	32	52	39	32	38	30

### 2x4 FluxGrid recessed LED, standard configuration, 4300 nominal delivered lumens

### LER - 119

		L					Light Distribution					Av	Average Luminance				
Catalog No.	2FGG43L840-4-D-UNV-DIM						Degree	s Lu	umens	% Lun	inaire	Zo	ne End	45°	Cross		
Test No.	36563						0-30	12	210	28.0		45	834		9099		
S/MH	1.2						0-40		948 367	45.1		<u>55</u> 65	756		8924 9152		
3/ IVIT	1.2	Candl	epowe	~			0-80		320	100		75	5161		9321		
Lamp Type	LED	Canul	epowe	1			0-180		321	100		85	325		8155		
Lumens	4318	Angle	End	45	Cross	Back-45	0.10										
Input Watts	36	0	1613	1613	1613	1613	Coefficients of Utilization										
•		5	1587	1602	1604	1602											
<u> </u>	15	1511	1517	1520	1517	EFFECTIVE FLOOR CAVITY REFLECTANCE 20					20 PER (	0 PER (pfc=0.20)					
Comparative yearly lighting energy cost per 1000		25	1362	1369	1380	1369	<u>_pfc = 20</u> Ceil 80				70	70		50			
iumens – <b>\$2.02</b> i KWH.	based on 3000 hrs. and \$.08 pwr	35	1157	1182	1199	1182	Wall	70	50	30	70	50	30	50	30		
NVVI.		45	922	978	1006	978	RCR										
The photometric	results were obtained in the	55	679	759	800	759	0	118 108	118 103	118 98	115 106	115	115 96	111 96	93		
	a laboratory which is NVLAP	65	416	514	605	514	2	97	90	82	95	88	81	84	79		
	e National Institute of Standards	75	209	332	377	332	3	90	79	70	86	78	69	75	68		
and Technology.		85	44	106	111	106	4	81	69	60	80	68	60	66	58		
			1	1.00	1	1.00	5	76 69	63 56	54 47	73 68	61 56	53 46	58 54	52 46		
	ues based on test performed in						7	65	51	47	63	51	40	48	40		
compliance with	LM-79.						8	59	46	38	58	46	38	45	36		
							9	56	42	34	55	41	34	40	34		
							10	53	40	32	52	39	32	38	30		

© 2018 Signify Holding. All rights reserved. Signify reserves the right to make changes in specifications and/ or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Philips Lighting North America Corporation 200 Franklin Square Drive, Somerset, NJ 08873 Tel. 855-486-2216

Philips Lighting Canada Ltd. 281 Hillmount Rd, Markham, ON, Canada L6C 2S3 Tel. 800-668-9008